



THREE PHASES



50 HZ

POWER	PRP		ESP		PRIME
VOLTAGE(V)	kW	kVA	kW	kVA	Amps
380/220	184	230	200	250	349.5
400/230	184	230	200	250	332.0
415/240	184	230	200	250	320.0

RENTAL RAGE

LKENERGY with quality certification ISO 9001, ISO 14001, ISO 45001

LKENERGY is compliant with EC mark which includes the following directives:

Verification to standard:

BS EN ISO 12100:2010, BS EN ISO 8528-13:2016, BS EN 60204-1:2018, BS EN IEC 61000-6-2:2019, BS EN IEC 61000-6-4:2019

Related to GRB regulation:

Supply of Machinery (Safety) Regulations 2008
Electromagnetic Compatibility Regulations 2016

Verification to standard:

EN ISO 3744:2010

Related to CE directive(s):

2000/14/EC (Noise)

European Directives:

The EMC Directive 2014/30/EU
EN 55012:2007+A1:2009



DEEPSEA DSE6120

**DIESEL ENGINE
WATER COOLED
ELECTRICAL SYSTEM**

**AIR FILTER
RADIATOR
GOVERNOR**

**HOT PROTECTION
MOVING PARTS PROTECTION
RADIATOR WATER LEVEL SENS (OPT)**

ENGINE-BAUDOUIN

Model	6M16G250/5	50% (Prime power)	25.8L/h
Aspiration	Turbocharged&Aftercooled	Oil capacity high	22L
Fuel system	Mechanical Pump+RSUV	Maximum Oil Temperature	105°C
No. cylinders	6	Oil pressure	1.3-5.8Bar
Displacement	9.726L	Air intake restriction-dirty filter	≤70mBar
Bore*Stroke	126*130mm	Air intake restriction-clean filter	≤35mBar
Compression ratio	17:1	Intake air flow	14.4m³/min
Rated speed	1500r/min	Exhaust gas flow	39.6m³/min
Gross Engine Output	216Kw	Exhaust gas temp	600°C
Governor type	Electronic	Max back pressure	60mBar
Start motor	24V	Coolant capacity	13L
100% (Prime power)	50.9L/h	Thermostat operating range	71-82°C
75% (Prime power)	38L/h	Max top tank temperature	105°C

ALTERNATOR

Wiring type	3 Phase 4 Pole, Y type	Exciter type	Brushless, self-excitation
Bearing	1	Voltage regulation	± (0.25%~1%)
Power factor	0.8	Protection grade	IP 23
Frequency	50Hz	Insulation class	H
Overspeed	2250	Altitude(m)	≤1000

PROTECTIVE FUNCTIONS

Low oil pressure

High water temperature

High/low voltage

High Engine Temperature and Overspeed.

Voltage regulator frequency regulator


Emergency stop

Start failure

Baudouin Engine 12 months from date of purchase and and 1000 hours

Generator 12 months from date of purchase or 1000 hours (whichever occurs first)

DIMENSIONS

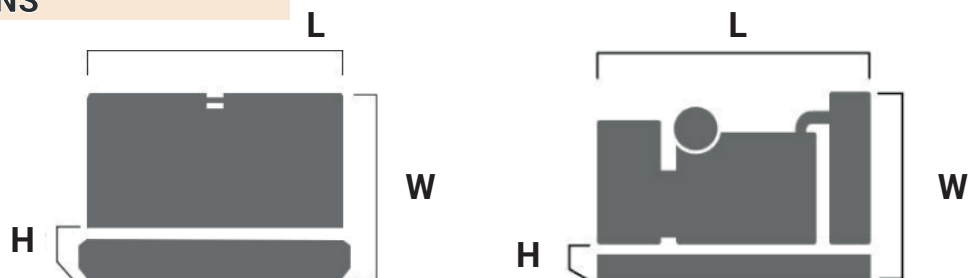

WEIGHT AND DIMENSIONS

	Length	Width	Height	Weight	Fuel tank	sound level
	mm	mm	mm	kg	L	(dB(@7m))
Open Type	2850	1040	1580	--	--	≤87
SDF Type	3920	1180	1900	2750	450	≤75
SA Type	3958	1280	2150	--	400	≤75
SL Type	4050	1280	2150	--	--	≤75

Standard Features

Engine(Baudouin)



Radiator 50°C max,fans are driven by belt



Alternator: single bearing alternator IP23,insulation class H/H



Standard auto control system



One set of air filter, fuel filter, oil filter, MCCB



Fuel tank



Batteries, rack and cable



Exhaust system(Ripple flex exhaust pipe, flange, muffler)



User manual



Water oil separato



Options

Battery charge



Engine heater. Alternator heater PMG



Daily fuel tank



Remote control panel



Automatic transfer switch/ATS



Switch box



STANDARD ●

OPTIONAL ○