


NOT RELEASED - INSPECTION / FIT REVIEW ONLY

pickup_sideplate

6061-T6 provisional | quantity 2 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01	-140.000	34.000	D 32.000
02	-136.000	262.000	D 32.000
03	-9.000	287.000	D 32.000
04	110.000	210.000	D 32.000
05	-160.000	14.000	D 5.500
06	-160.000	54.000	D 5.500
07	-120.000	14.000	D 5.500
08	-120.000	54.000	D 5.500
09	-156.000	242.000	D 5.500
10	-156.000	282.000	D 5.500
11	-116.000	242.000	D 5.500
12	-116.000	282.000	D 5.500
13	-29.000	267.000	D 5.500
14	-29.000	307.000	D 5.500
15	11.000	267.000	D 5.500
16	11.000	307.000	D 5.500
17	90.000	190.000	D 5.500
18	90.000	230.000	D 5.500
19	130.000	190.000	D 5.500
20	130.000	230.000	D 5.500
21	-310.000	44.000	D 5.500
22	-330.000	211.000	D 5.500

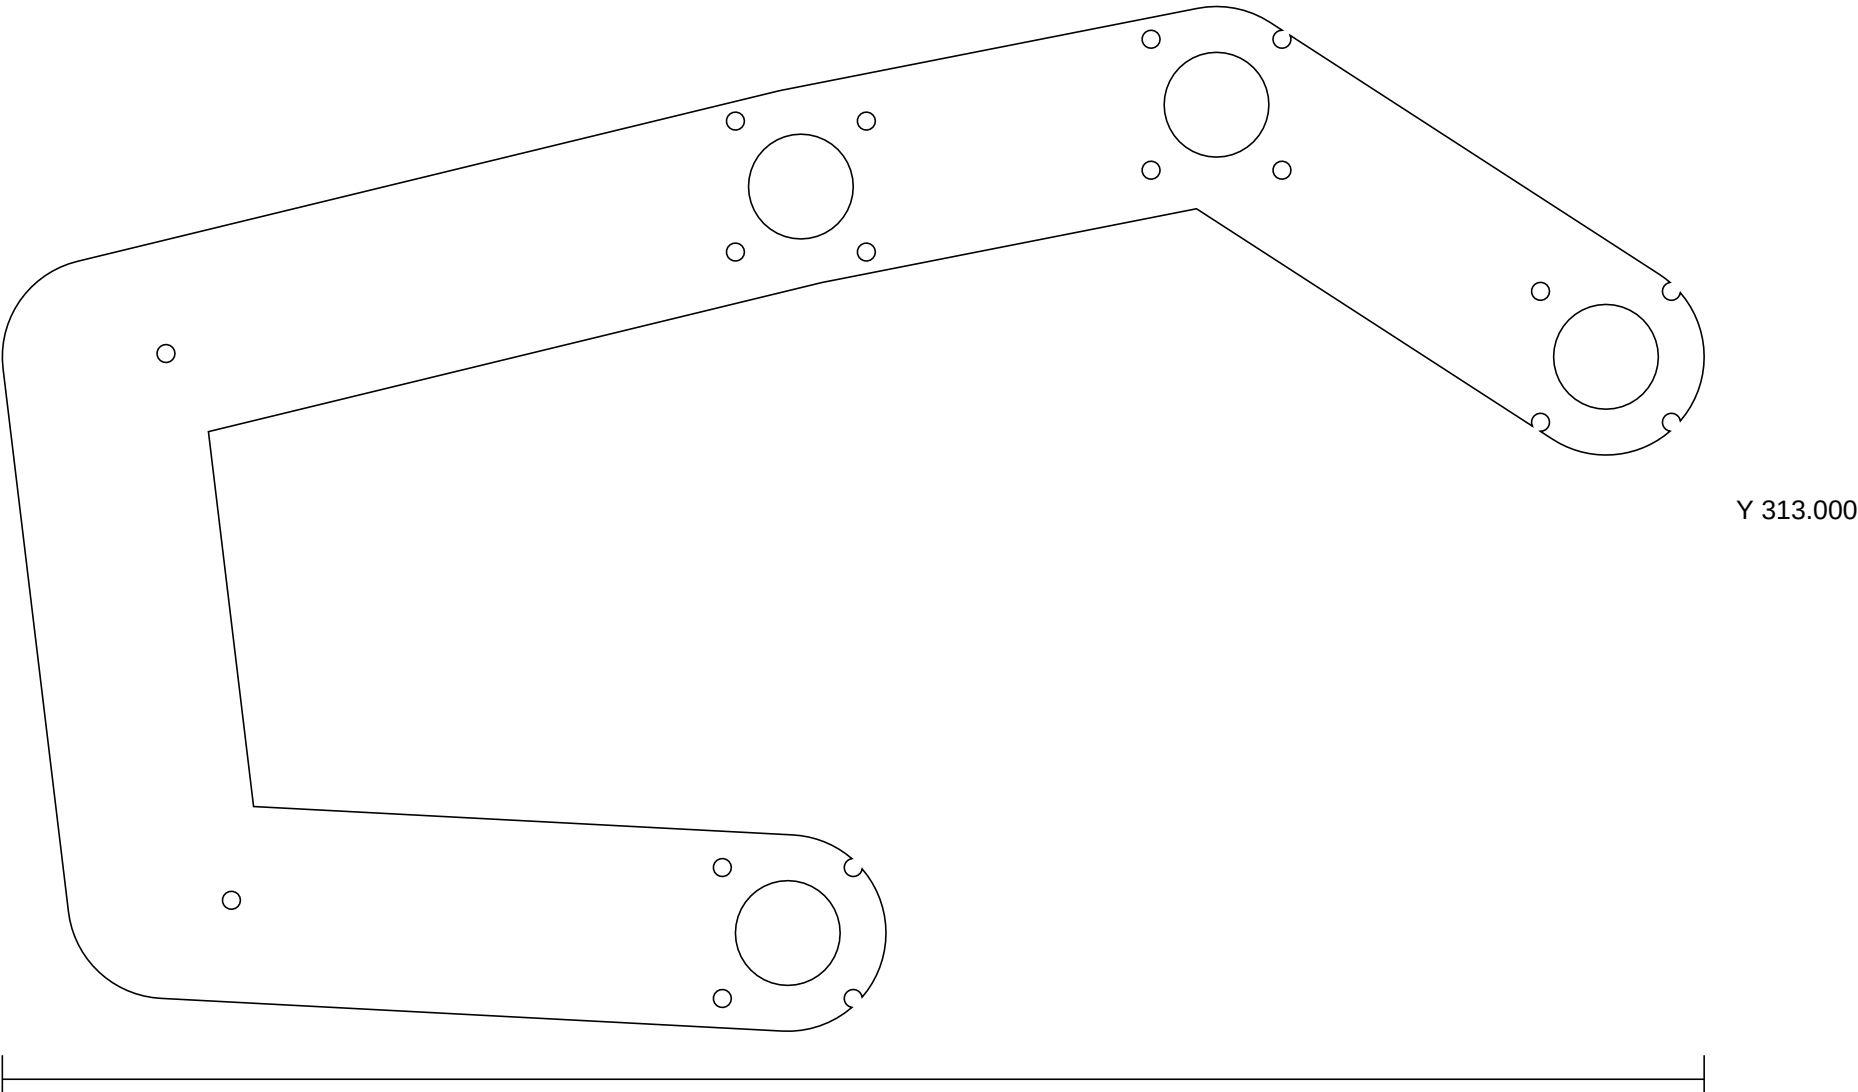


Overall X = 520.000
Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.

NOT RELEASED - INSPECTION / FIT REVIEW ONLY

axle_cassette

6061-T6 provisional | quantity 10 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

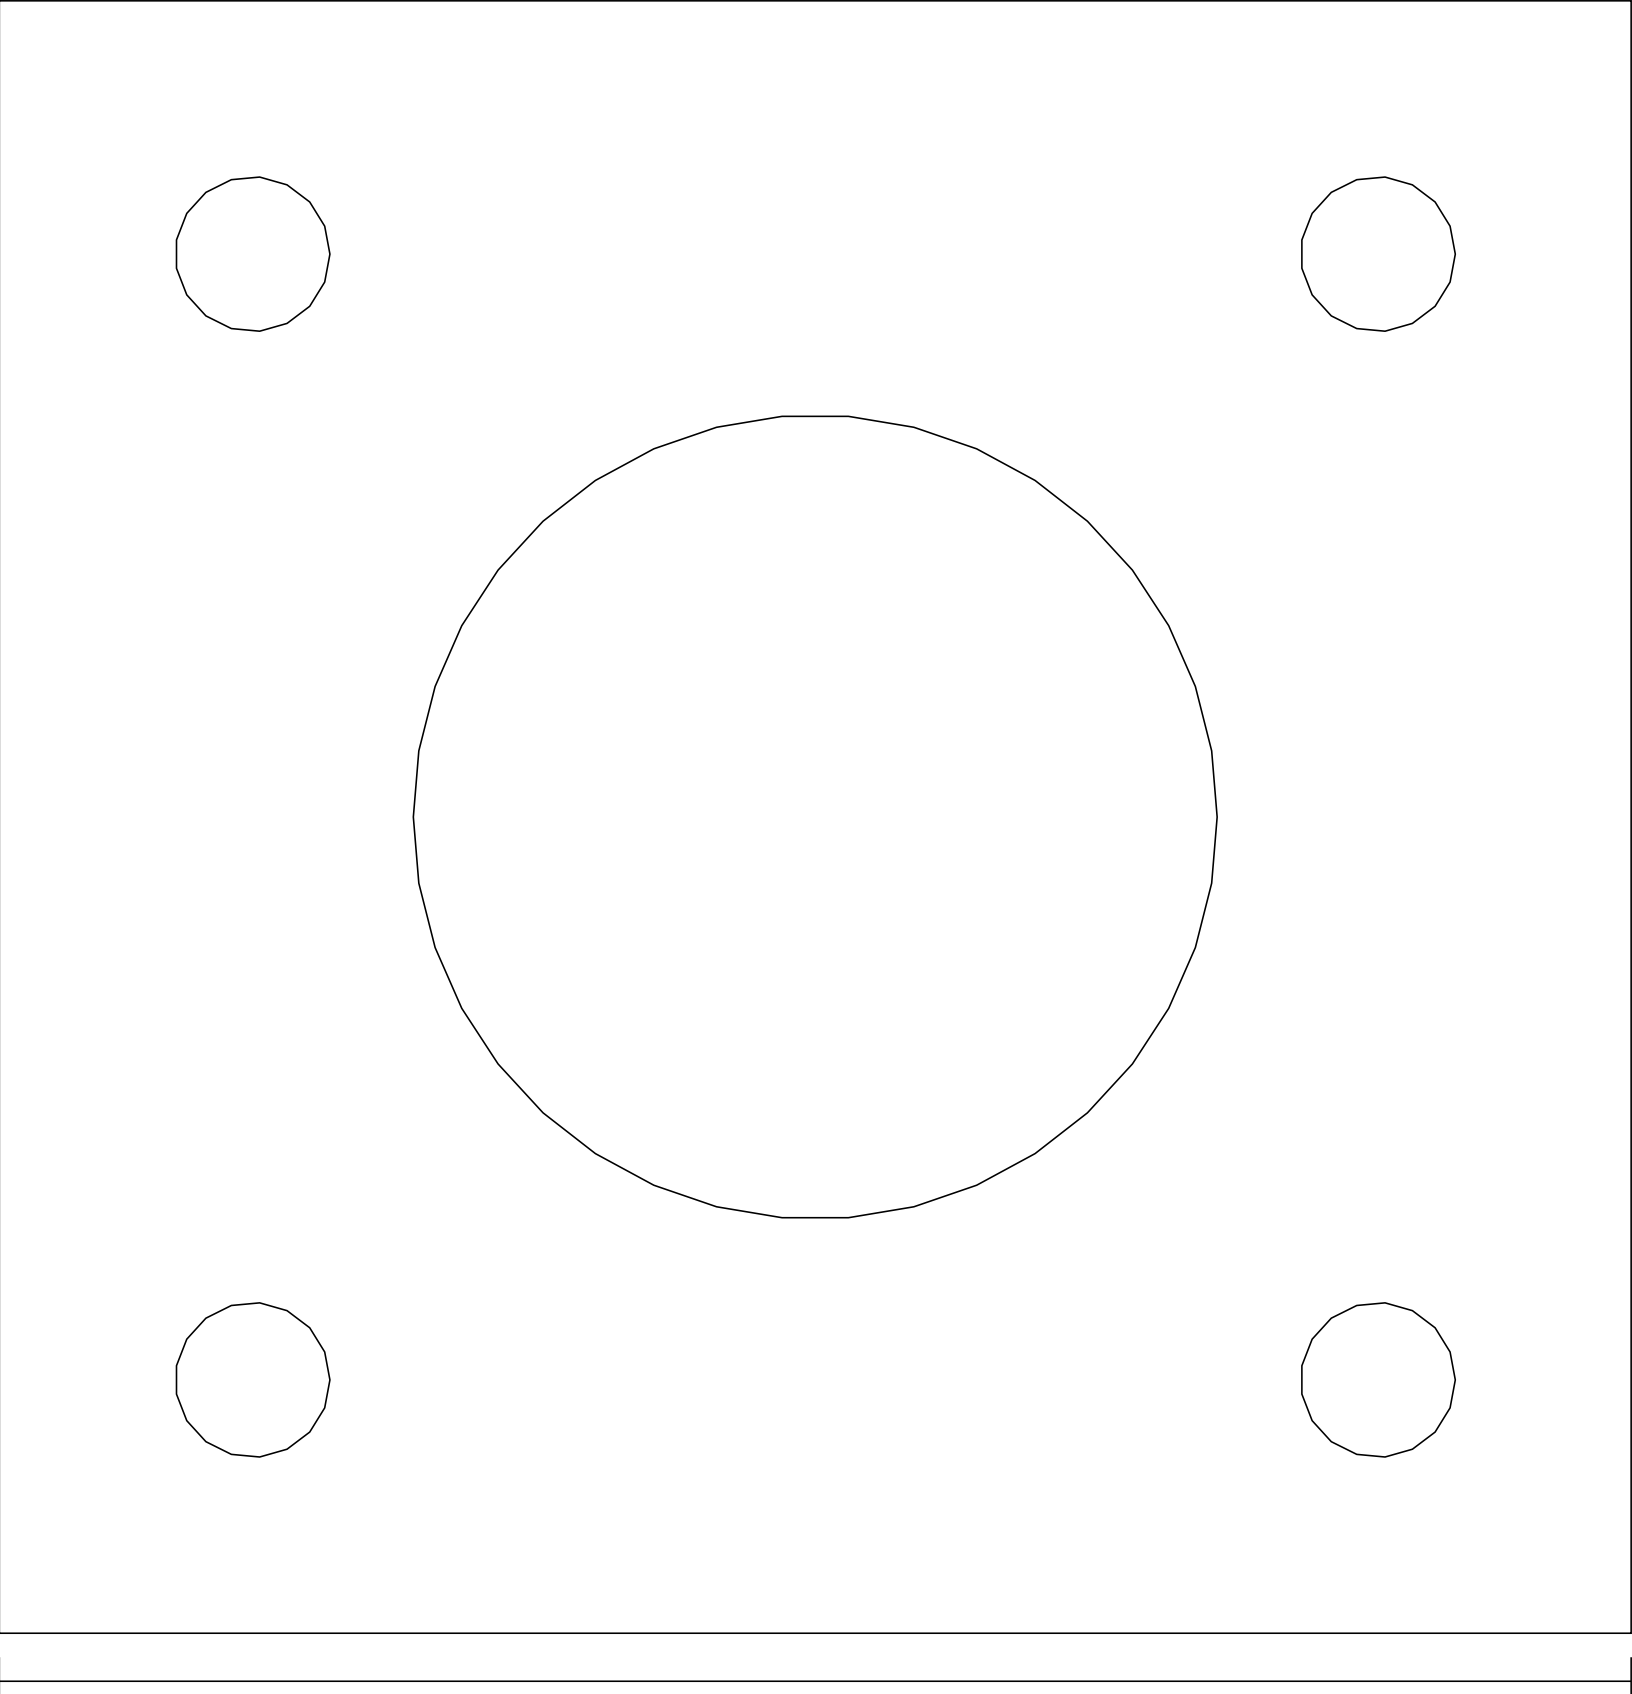

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01	0.000	0.000	D	28.570
02	-20.000	-20.000	D	5.500
03	-20.000	20.000	D	5.500
04	20.000	-20.000	D	5.500
05	20.000	20.000	D	5.500

Y 58.000

Overall X = 58.000

Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.


NOT RELEASED - INSPECTION / FIT REVIEW ONLY

floating_arm

6061-T6 provisional | quantity 2 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01	0.000	0.000	D	30.100
02	-125.000	-101.000	D	32.000
03	-145.000	-121.000	D	5.500
04	-145.000	-81.000	D	5.500
05	-105.000	-121.000	D	5.500
06	-105.000	-81.000	D	5.500

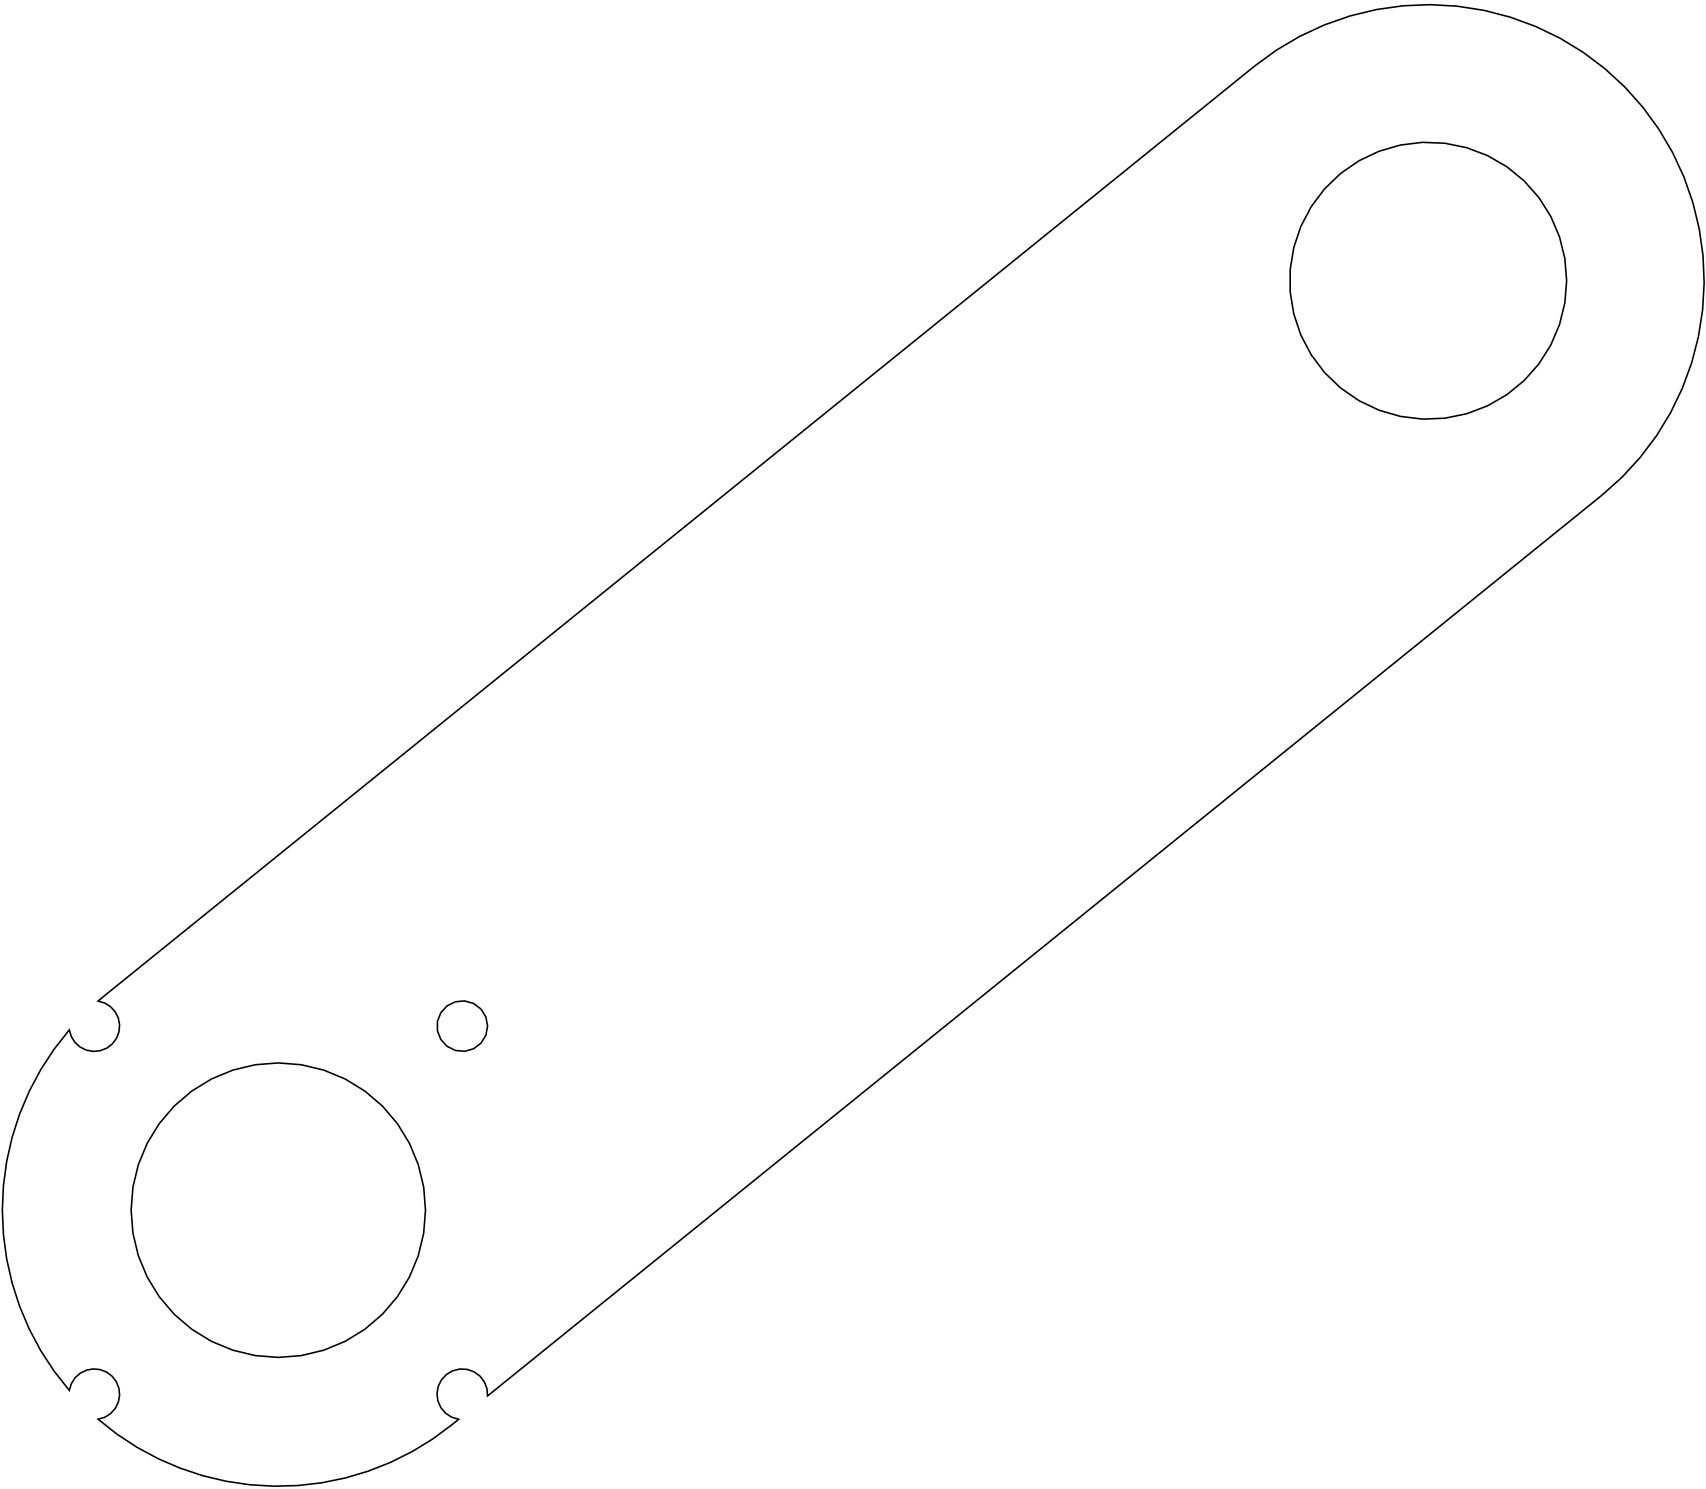

Y 161.000

Overall X = 185.000

Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.


NOT RELEASED - INSPECTION / FIT REVIEW ONLY

stop_mount_0

6061-T6 provisional | quantity 2 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01 -220.300 251.111 D 8.200

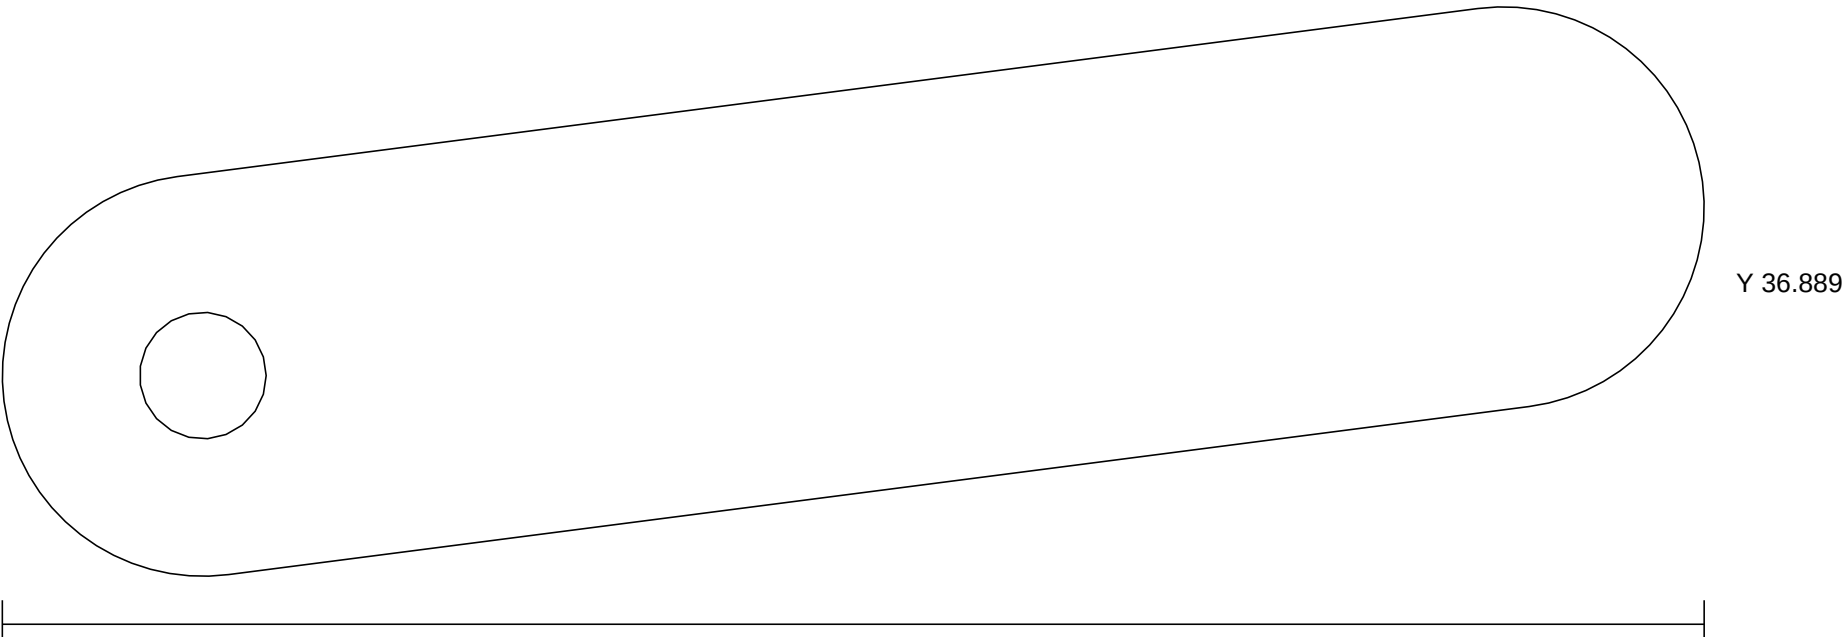

Overall X = 110.300
Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.


NOT RELEASED - INSPECTION / FIT REVIEW ONLY

stop_mount_1

6061-T6 provisional | quantity 2 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01 -175.227 186.593 D 8.200

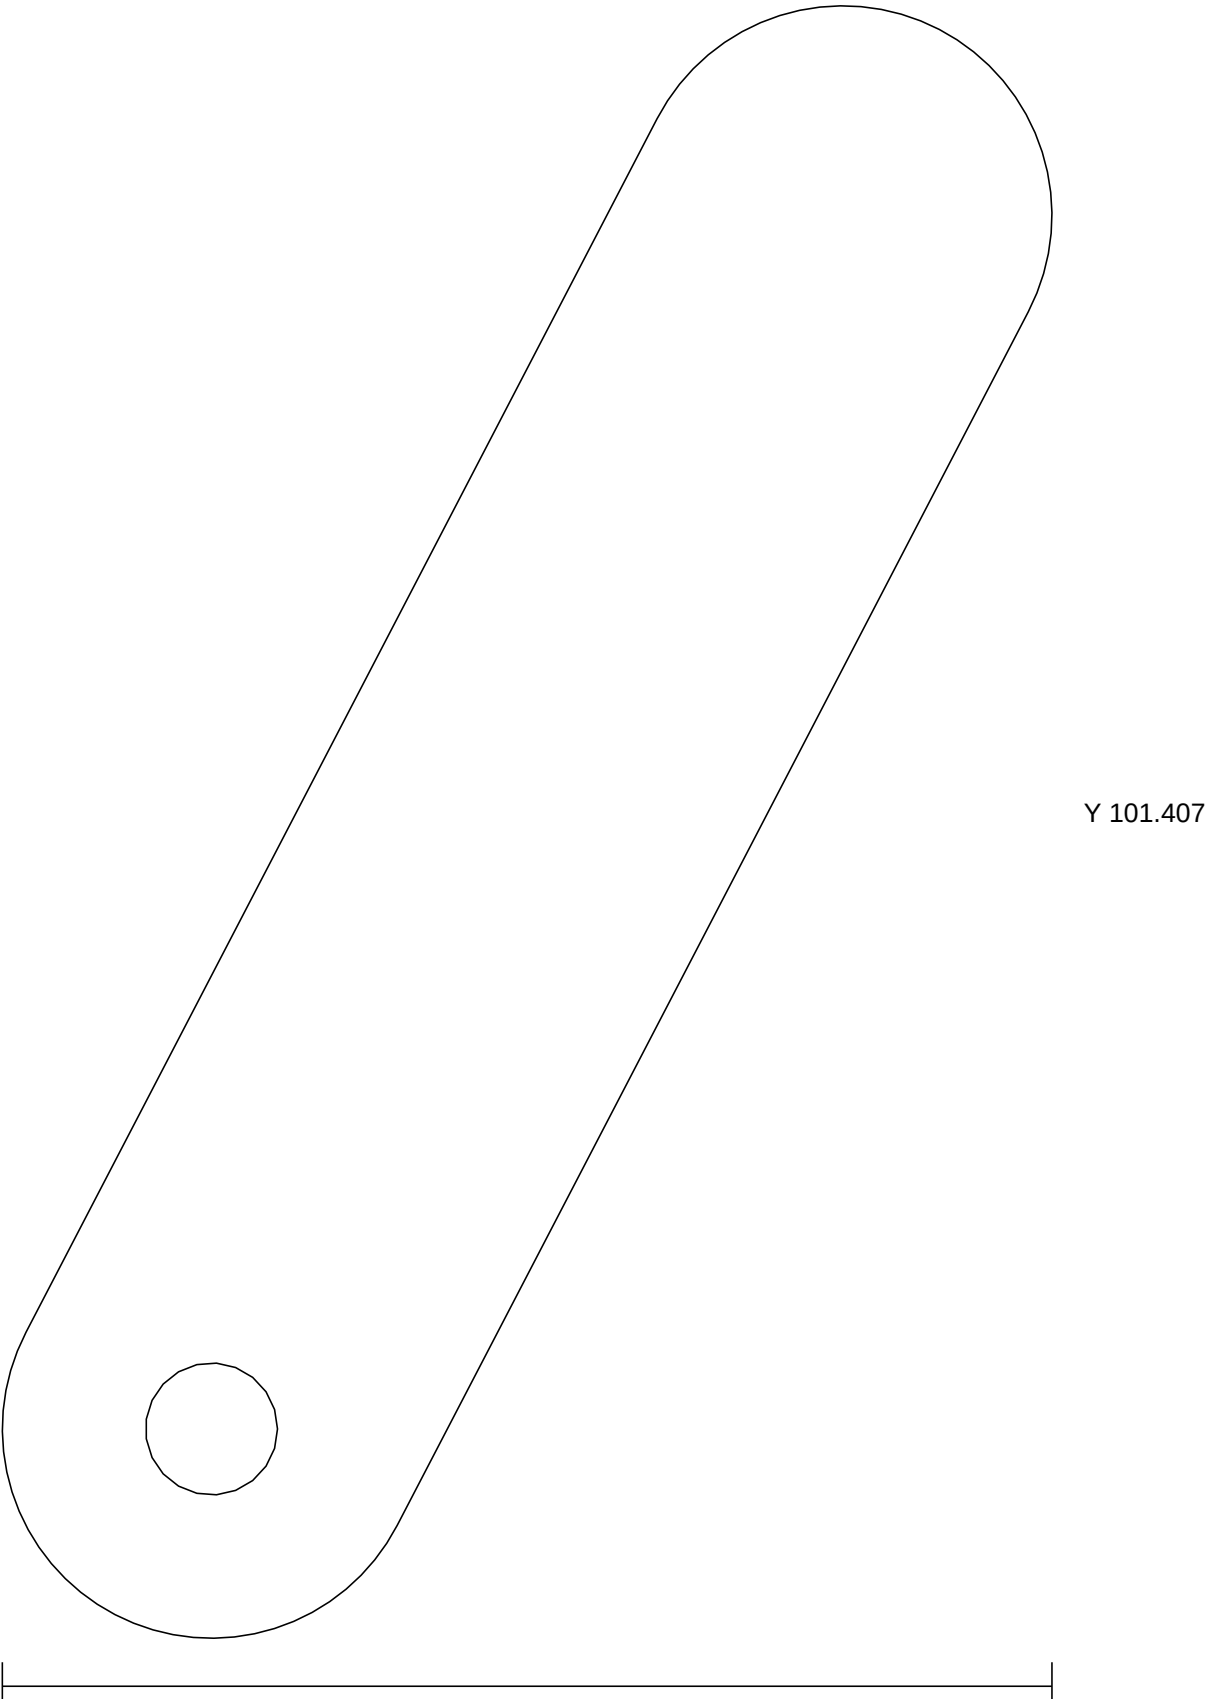

Overall X = 65.227
Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.


NOT RELEASED - INSPECTION / FIT REVIEW ONLY

pickup_drive_mount

6061-T6 provisional | quantity 1 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01	36.720	287.000	D 19.100
02	-9.000	287.000	D 28.570
03	19.258	287.000	D 5.200
04	54.182	287.000	D 5.200
05	-36.000	259.000	D 5.500
06	18.000	259.000	D 5.500

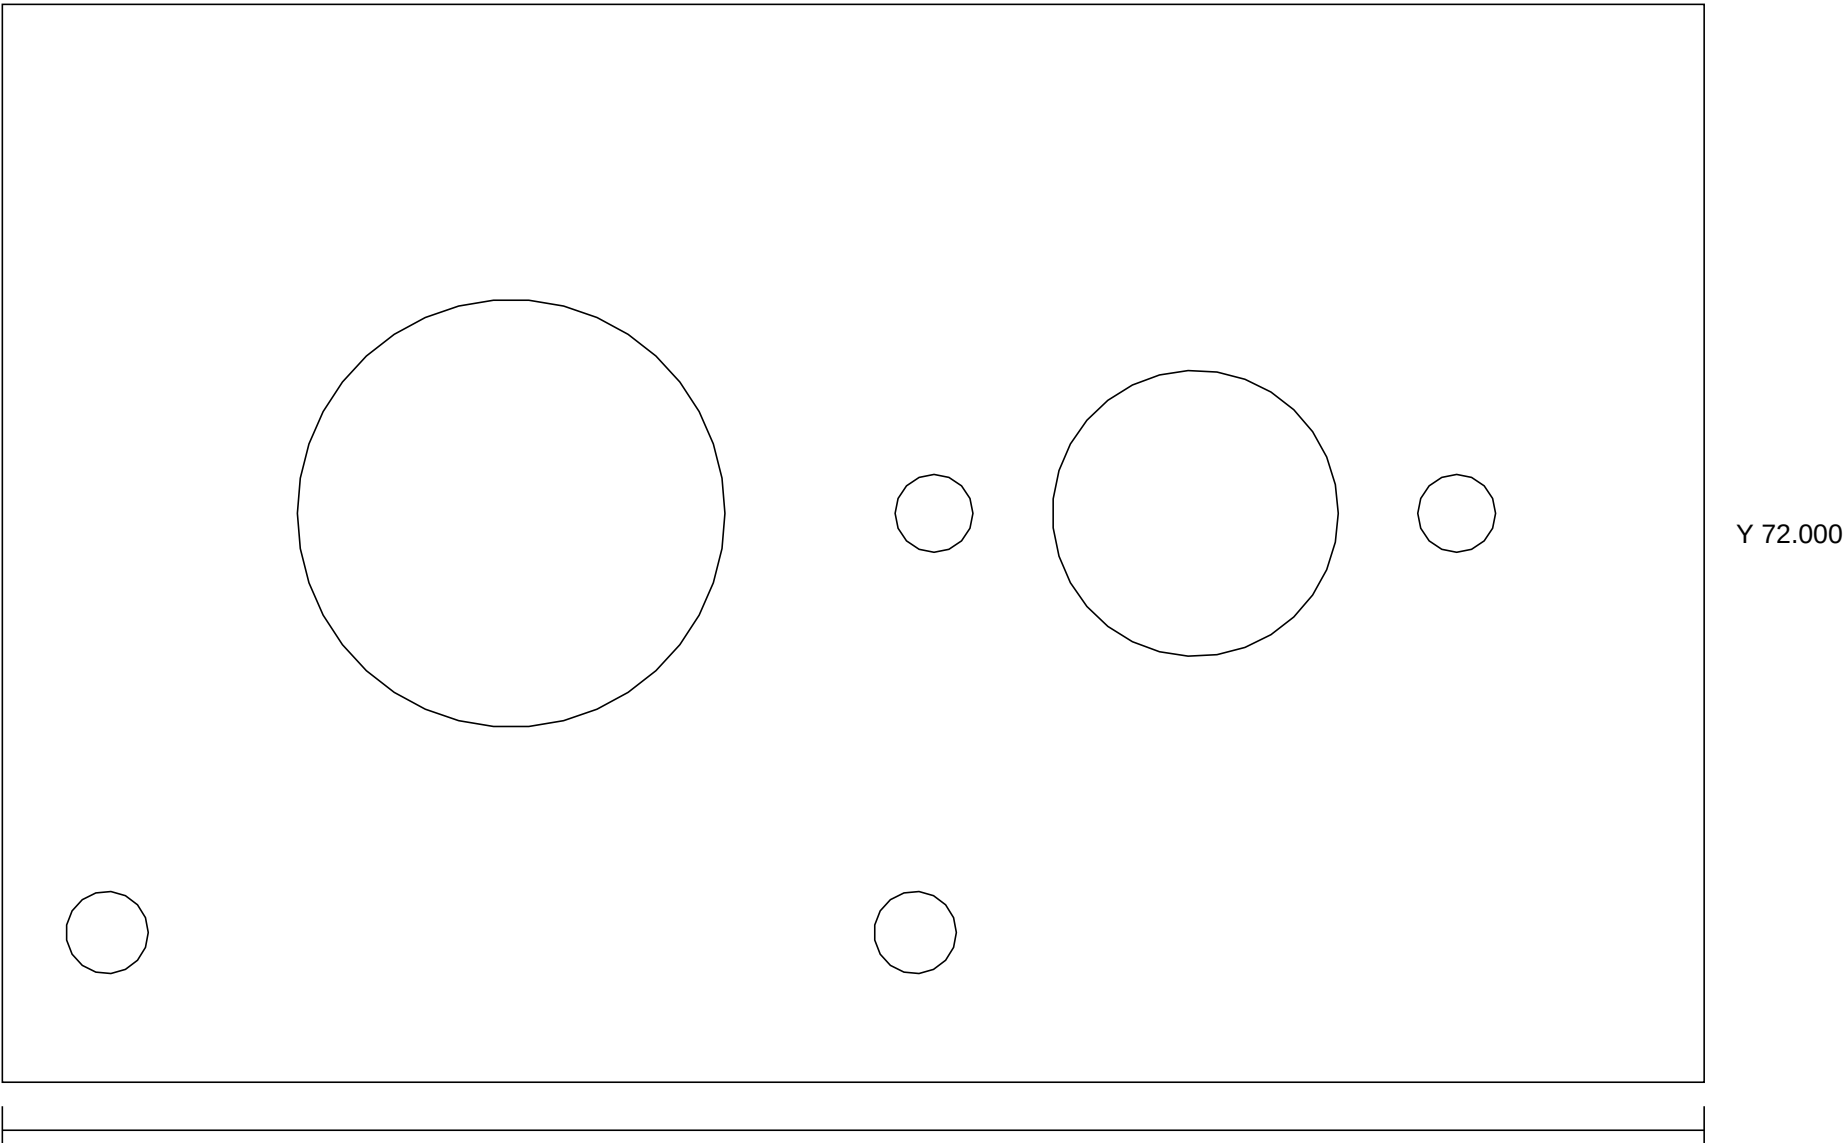


Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.

NOT RELEASED - INSPECTION / FIT REVIEW ONLY

frame_pivot_cheek

6061-T6 provisional | quantity 2 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

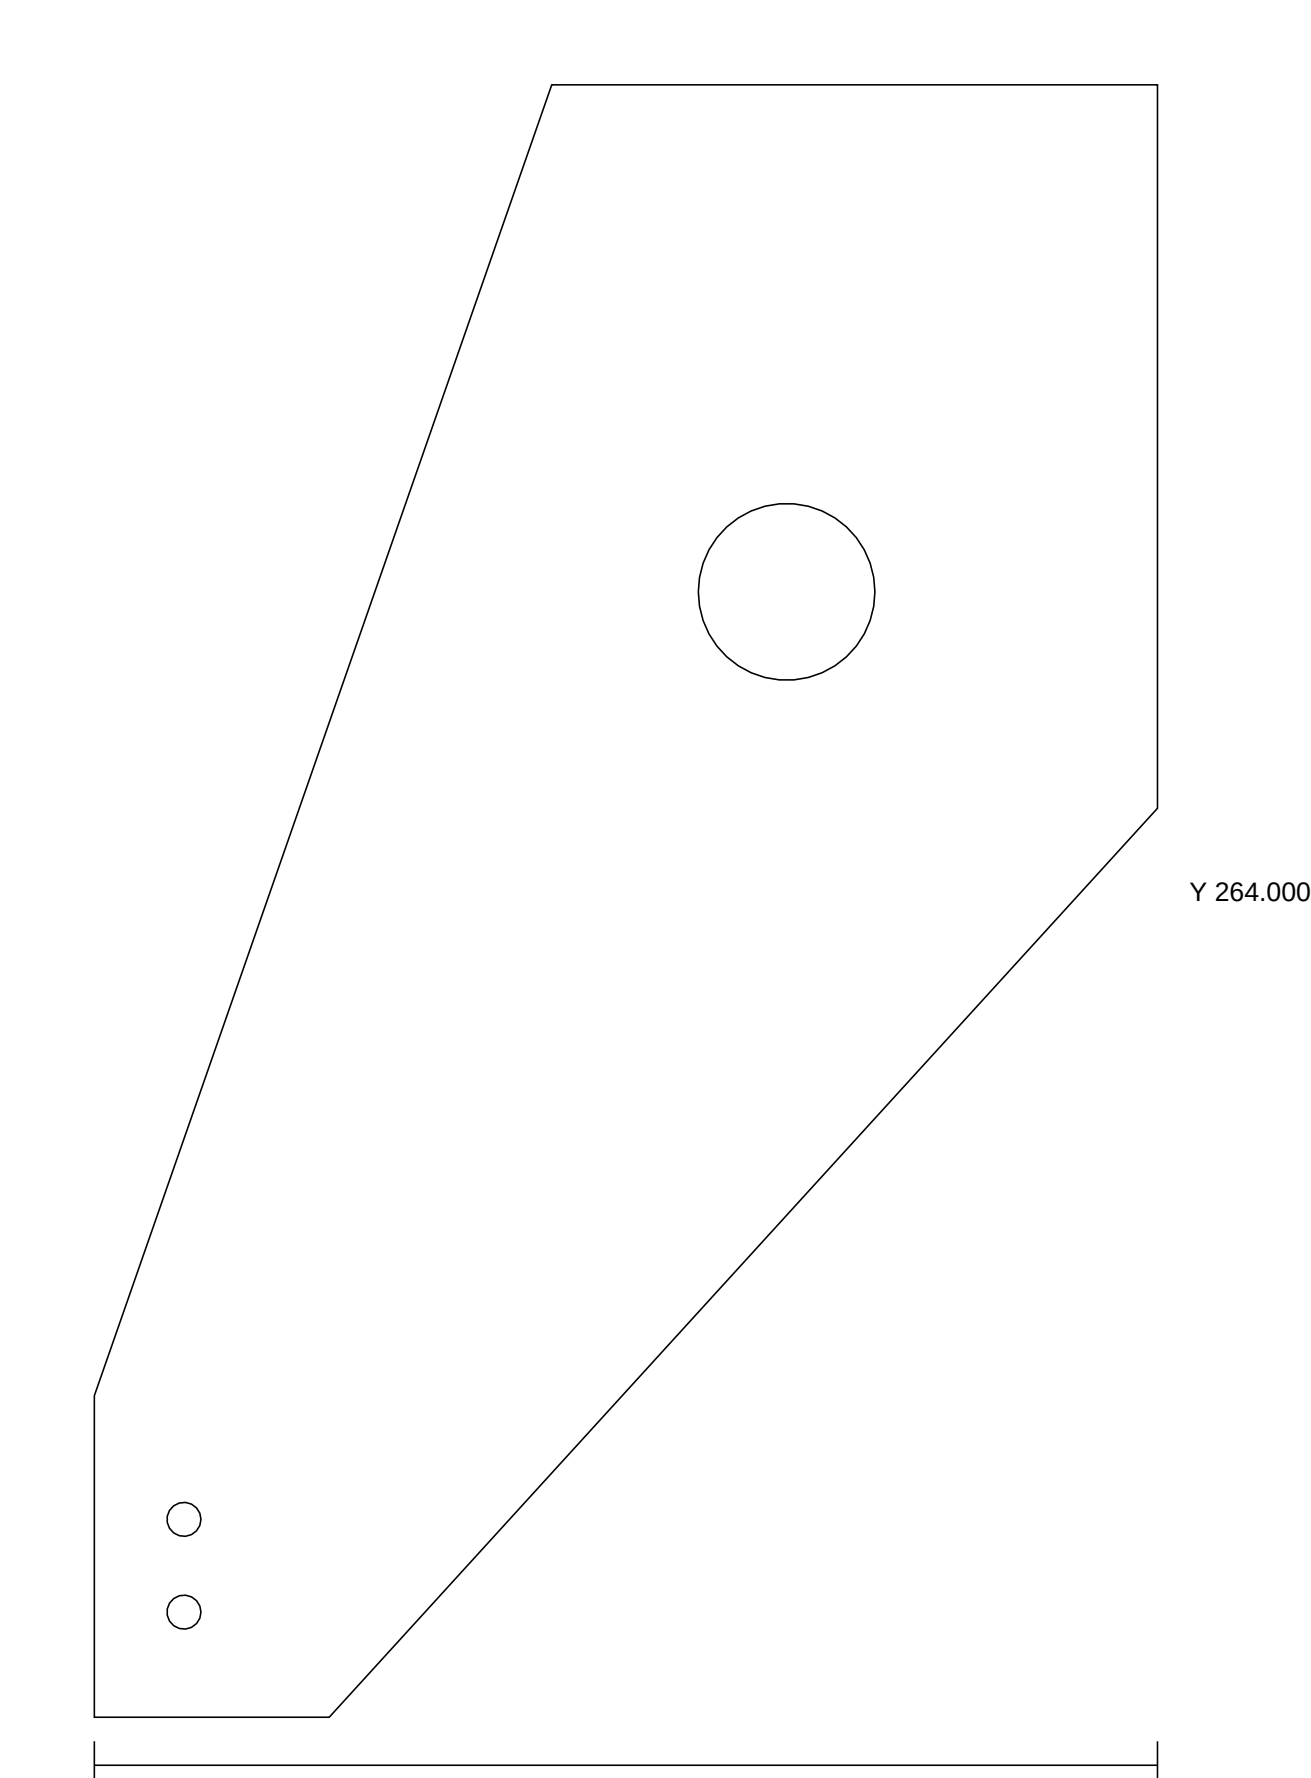

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)


01	110.000	210.000	D	28.570
02	12.500	45.000	D	5.500
03	12.500	60.000	D	5.500

Overall X = 172.000
Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.

NOT RELEASED - INSPECTION / FIT REVIEW ONLY

fold_drive_mount

6061-T6 provisional | quantity 1 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

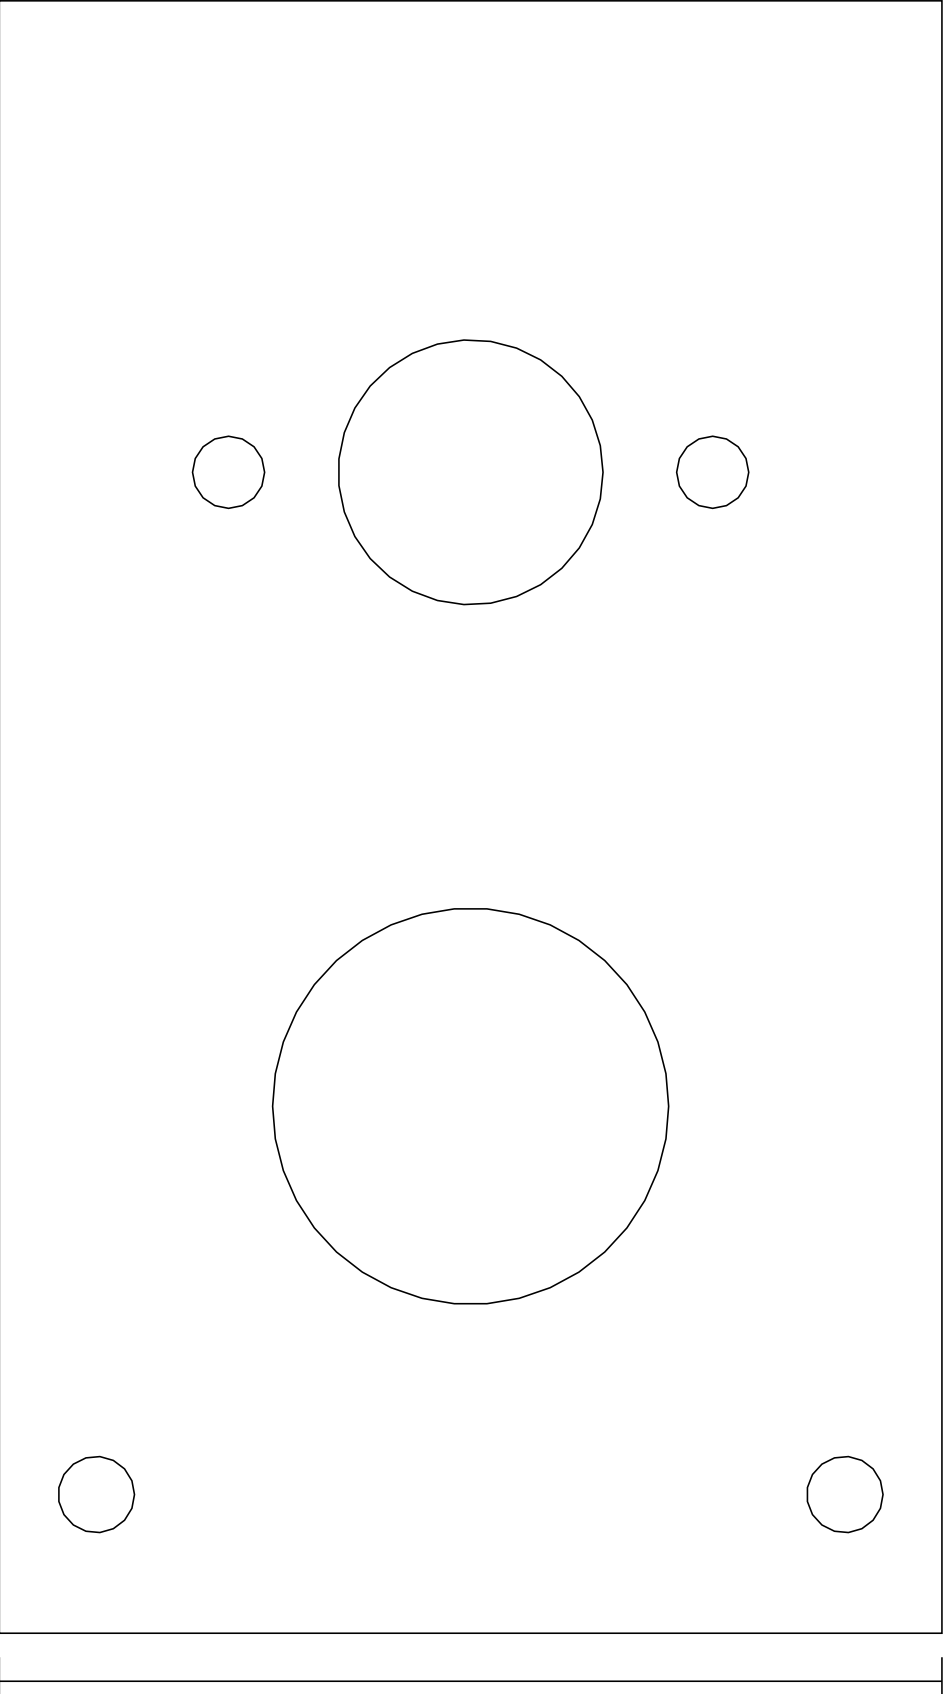

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)


01	110.000	255.720	D 19.100
02	110.000	210.000	D 28.570
03	92.537	255.720	D 5.200
04	127.463	255.720	D 5.200
05	83.000	182.000	D 5.500
06	137.000	182.000	D 5.500

Overall X = 68.000
Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.

NOT RELEASED - INSPECTION / FIT REVIEW ONLY

indexer_bank_plate_L

6061-T6 provisional | quantity 2 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

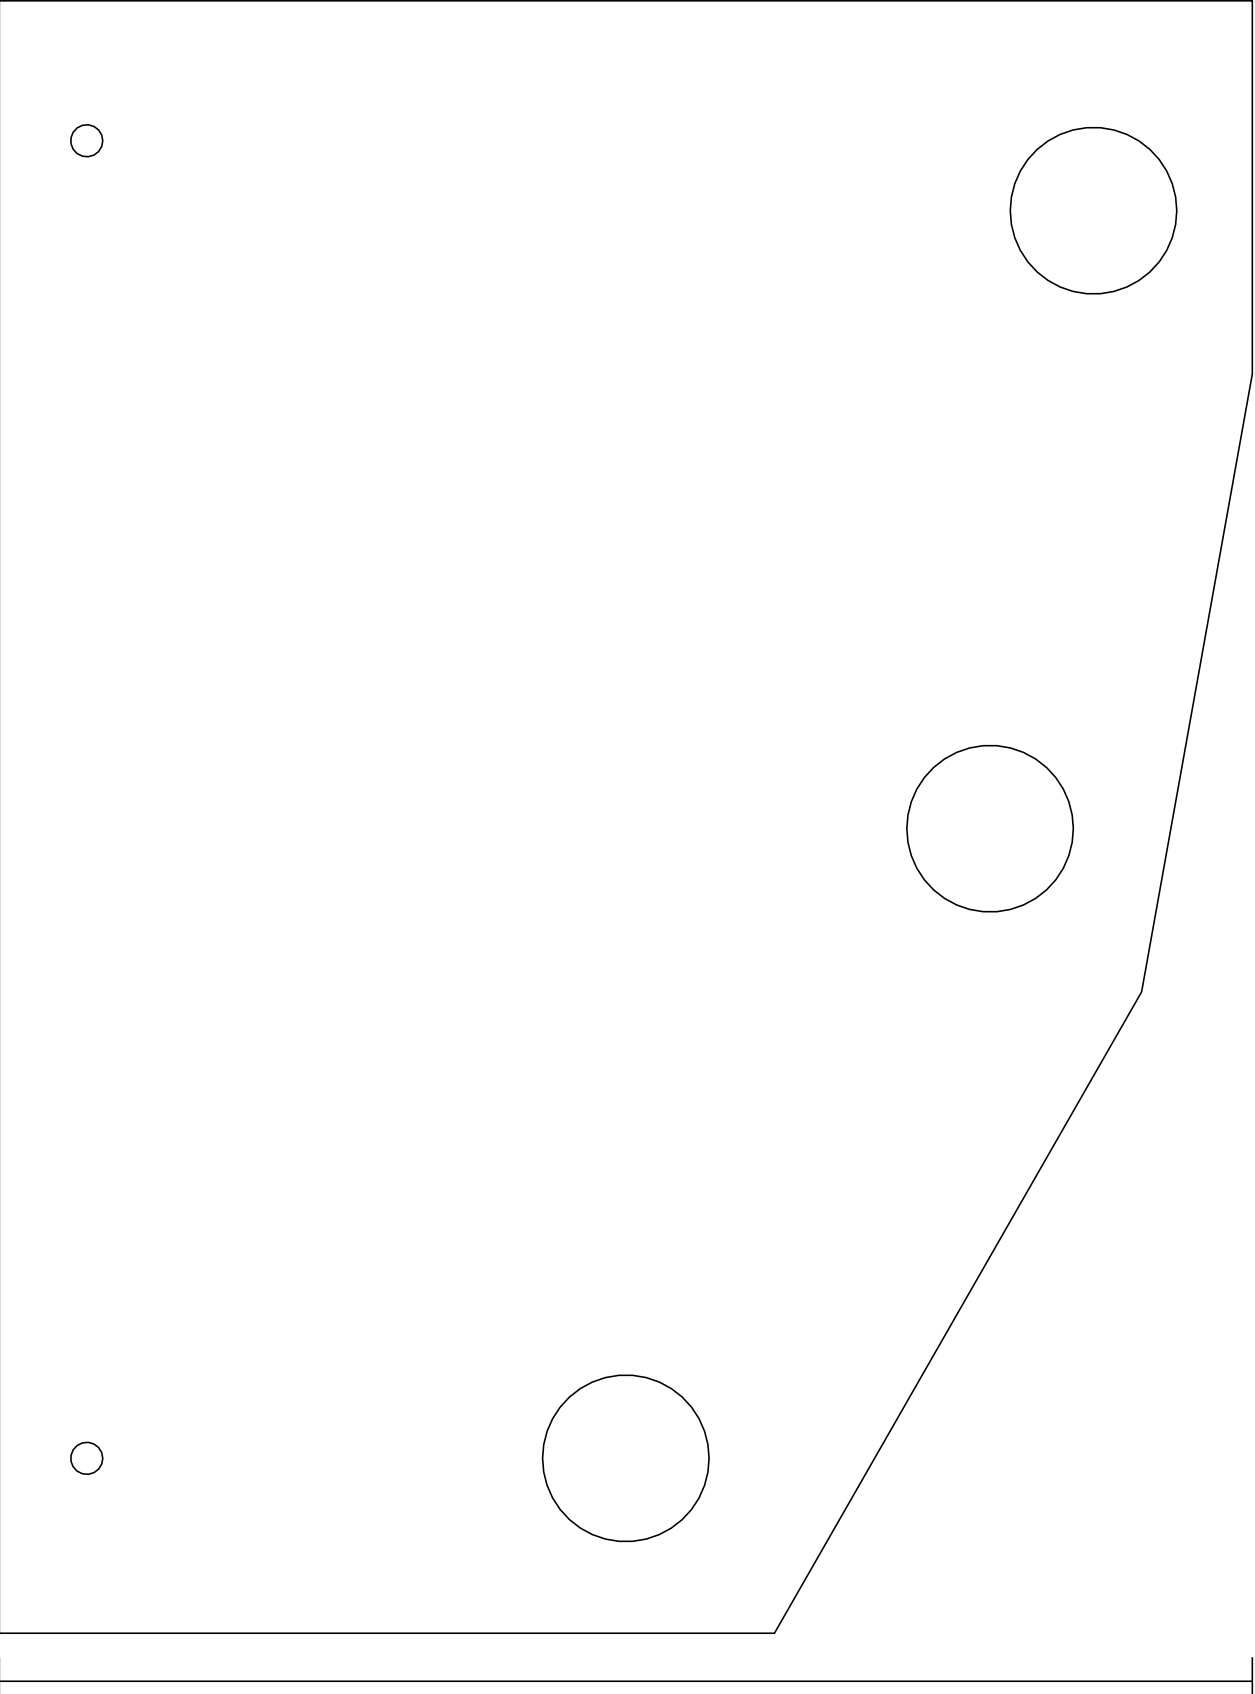

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01	-172.500	74.000	D 28.570
02	-110.000	182.000	D 28.570
03	-92.250	288.000	D 28.570
04	-265.000	74.000	D 5.500
05	-265.000	300.000	D 5.500

Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.


NOT RELEASED - INSPECTION / FIT REVIEW ONLY

indexer_drive_L_mount

6061-T6 provisional | quantity 1 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01	-218.220	74.000	D	19.100
02	-172.500	74.000	D	28.570
03	-235.683	74.000	D	5.200
04	-200.757	74.000	D	5.200
05	-199.500	46.000	D	5.500
06	-145.500	46.000	D	5.500

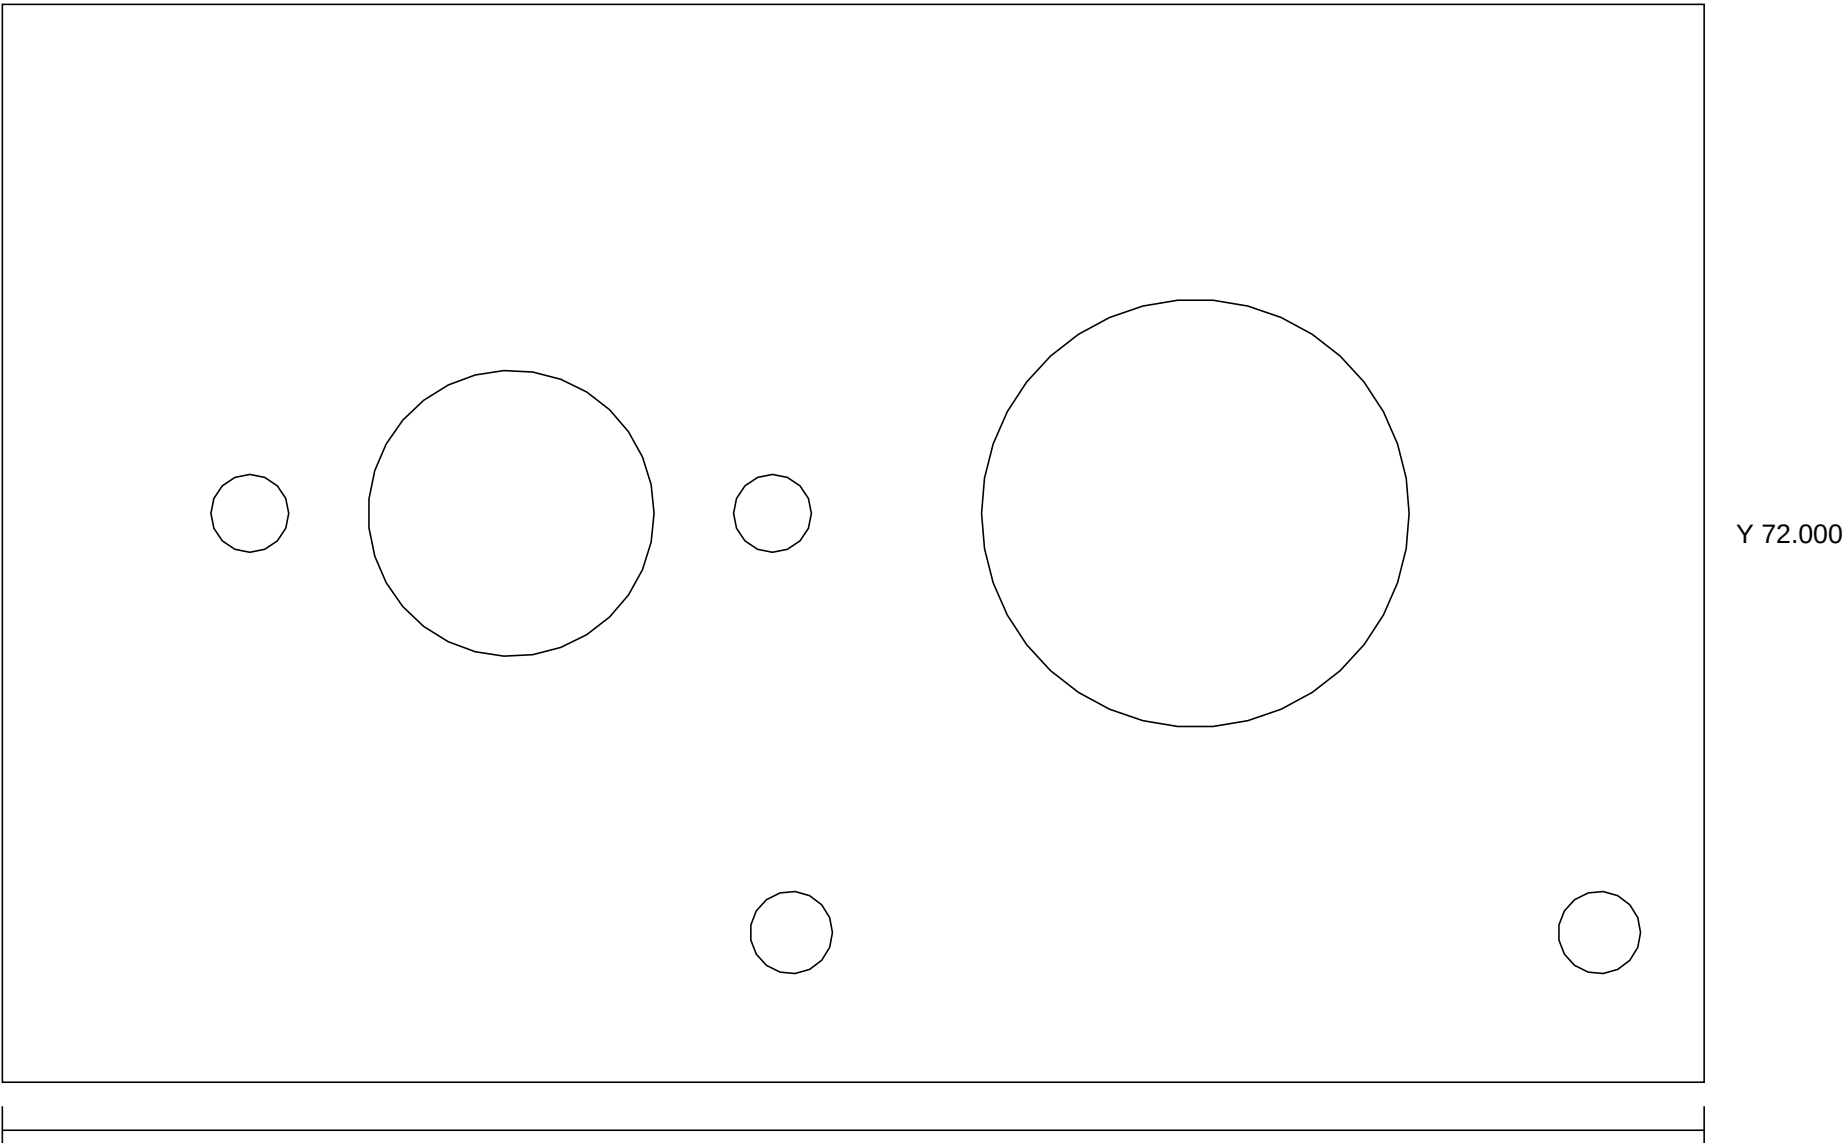


Overall X = 113.720

Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.

NOT RELEASED - INSPECTION / FIT REVIEW ONLY

indexer_bank_plate_R

6061-T6 provisional | quantity 2 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

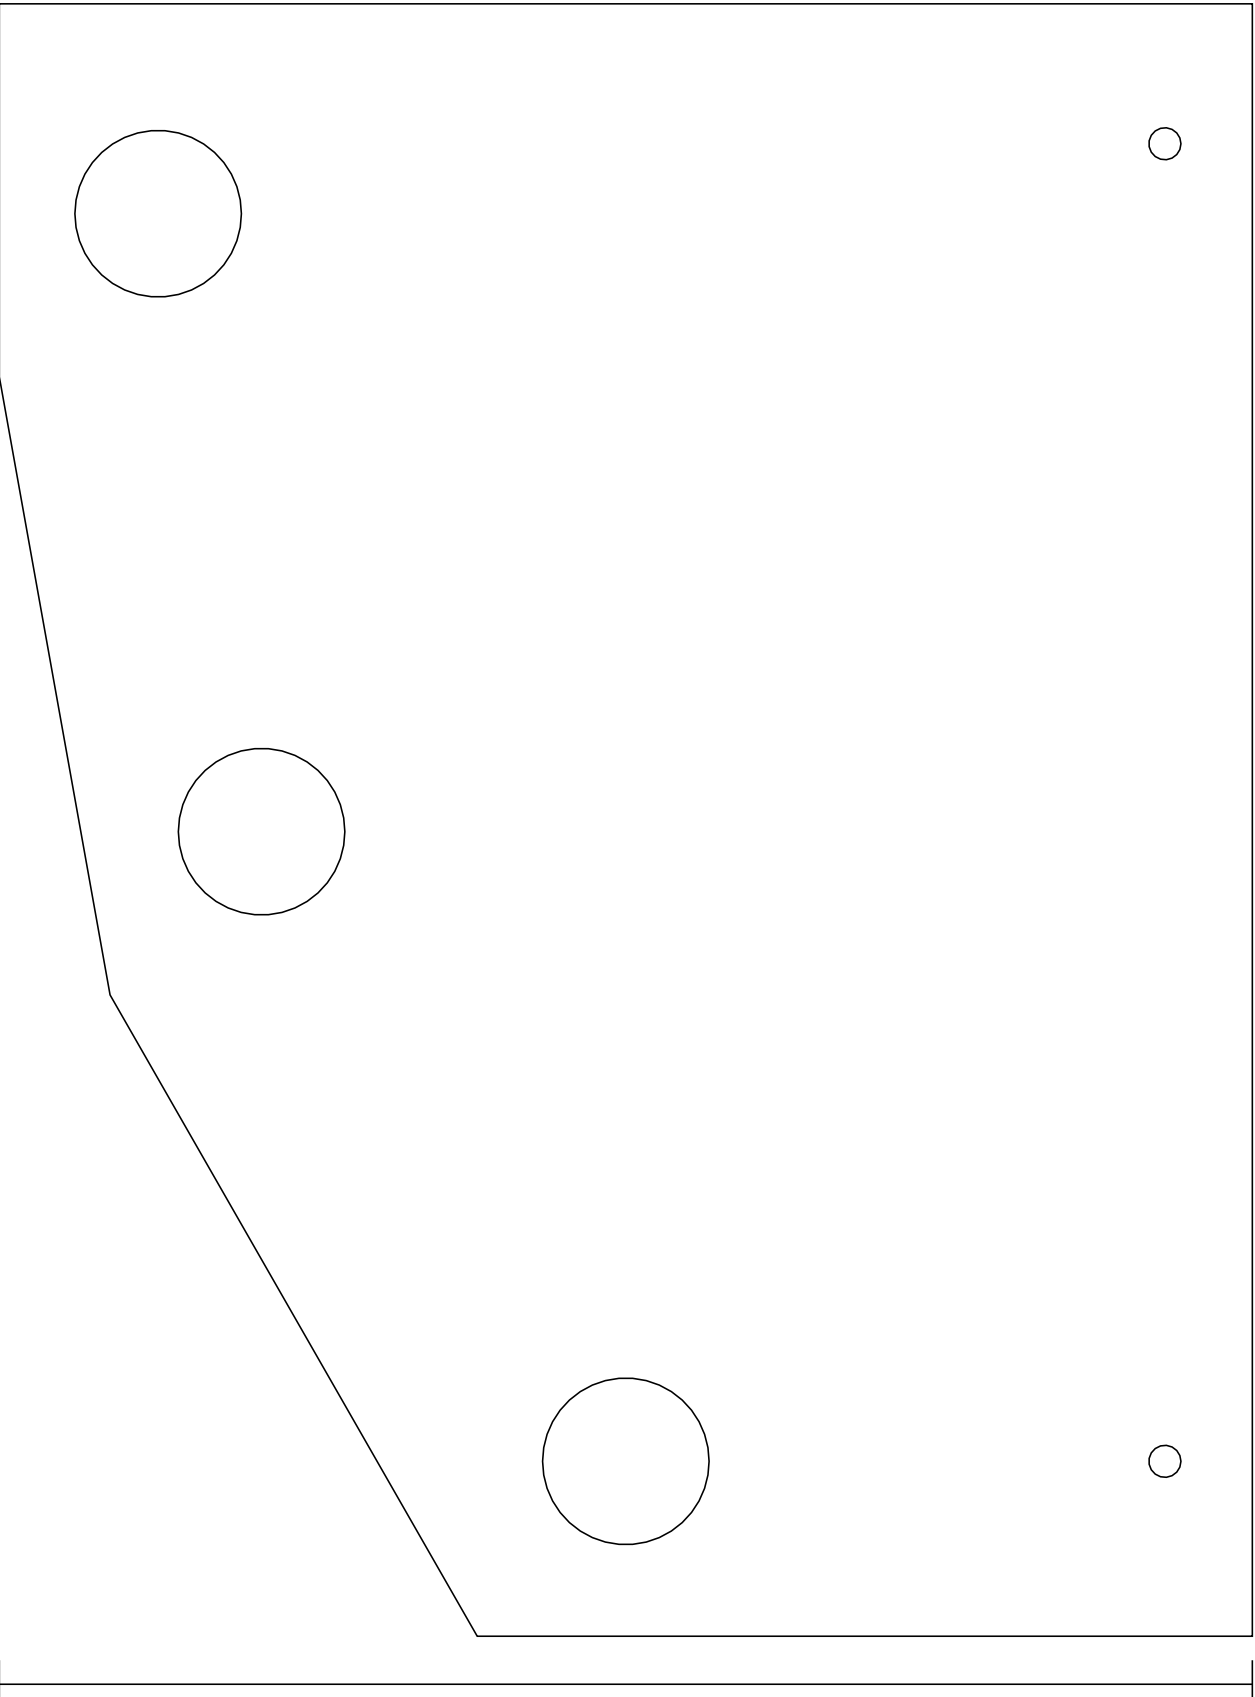

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01	172.500	74.000	D 28.570
02	110.000	182.000	D 28.570
03	92.250	288.000	D 28.570
04	265.000	74.000	D 5.500
05	265.000	300.000	D 5.500

Overall X = 215.000
Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.


NOT RELEASED - INSPECTION / FIT REVIEW ONLY

indexer_drive_R_mount

6061-T6 provisional | quantity 1 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01	218.220	74.000	D	19.100
02	172.500	74.000	D	28.570
03	200.757	74.000	D	5.200
04	235.683	74.000	D	5.200
05	145.500	46.000	D	5.500
06	199.500	46.000	D	5.500

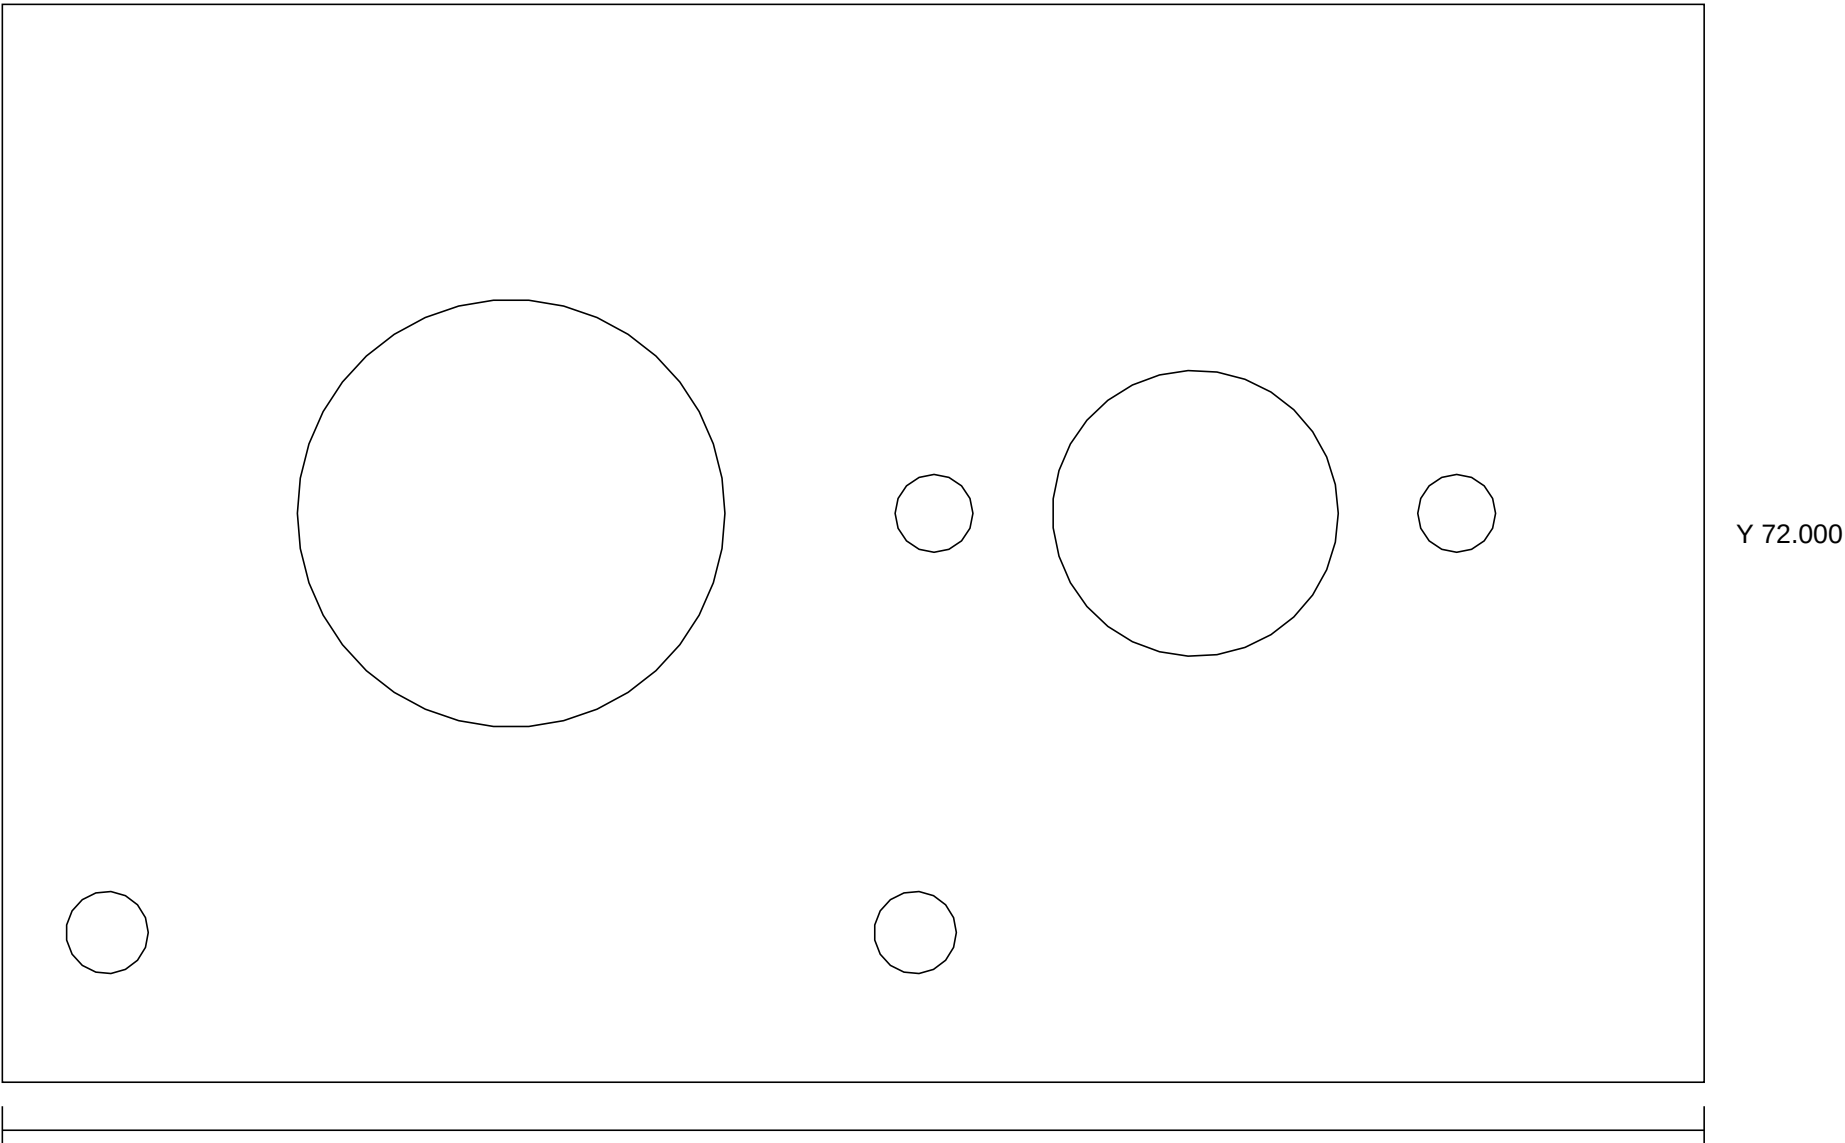


Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.

NOT RELEASED - INSPECTION / FIT REVIEW ONLY

detachable_tray

polycarbonate | quantity 1 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.



HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01	-65.000	245.000	D	5.500
02	-65.000	525.000	D	5.500
03	65.000	245.000	D	5.500
04	65.000	525.000	D	5.500

Overall X = 160.000
Thickness 3.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.


NOT RELEASED - INSPECTION / FIT REVIEW ONLY

coral_stop

6061-T6 provisional | quantity 1 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01	-65.000	8.000	D	5.500
02	65.000	8.000	D	5.500

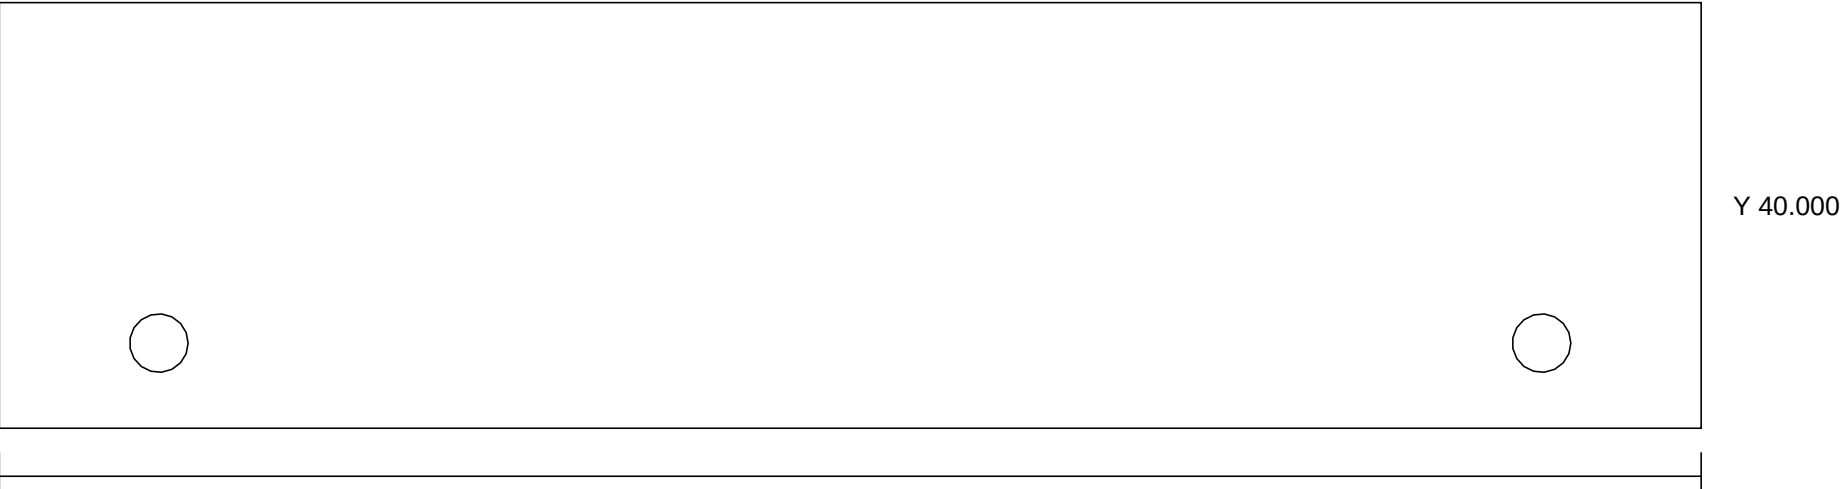

Thickness 6.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.


NOT RELEASED - INSPECTION / FIT REVIEW ONLY

sensor_adapter

polycarbonate | quantity 2 | mm; no assumed drawing tolerance
DXF polylines sampled from actual B-rep wires at 0.05 mm deflection. Finish bores from dimensions, not tessellation.

HOLE CENTERS: LOCAL X / Y / DIAMETER (mm)

01	-10.000	-7.500	D	3.400
02	10.000	-7.500	D	3.400
03	-10.000	7.500	D	3.400
04	10.000	7.500	D	3.400
05	0.000	-20.000	D	5.500

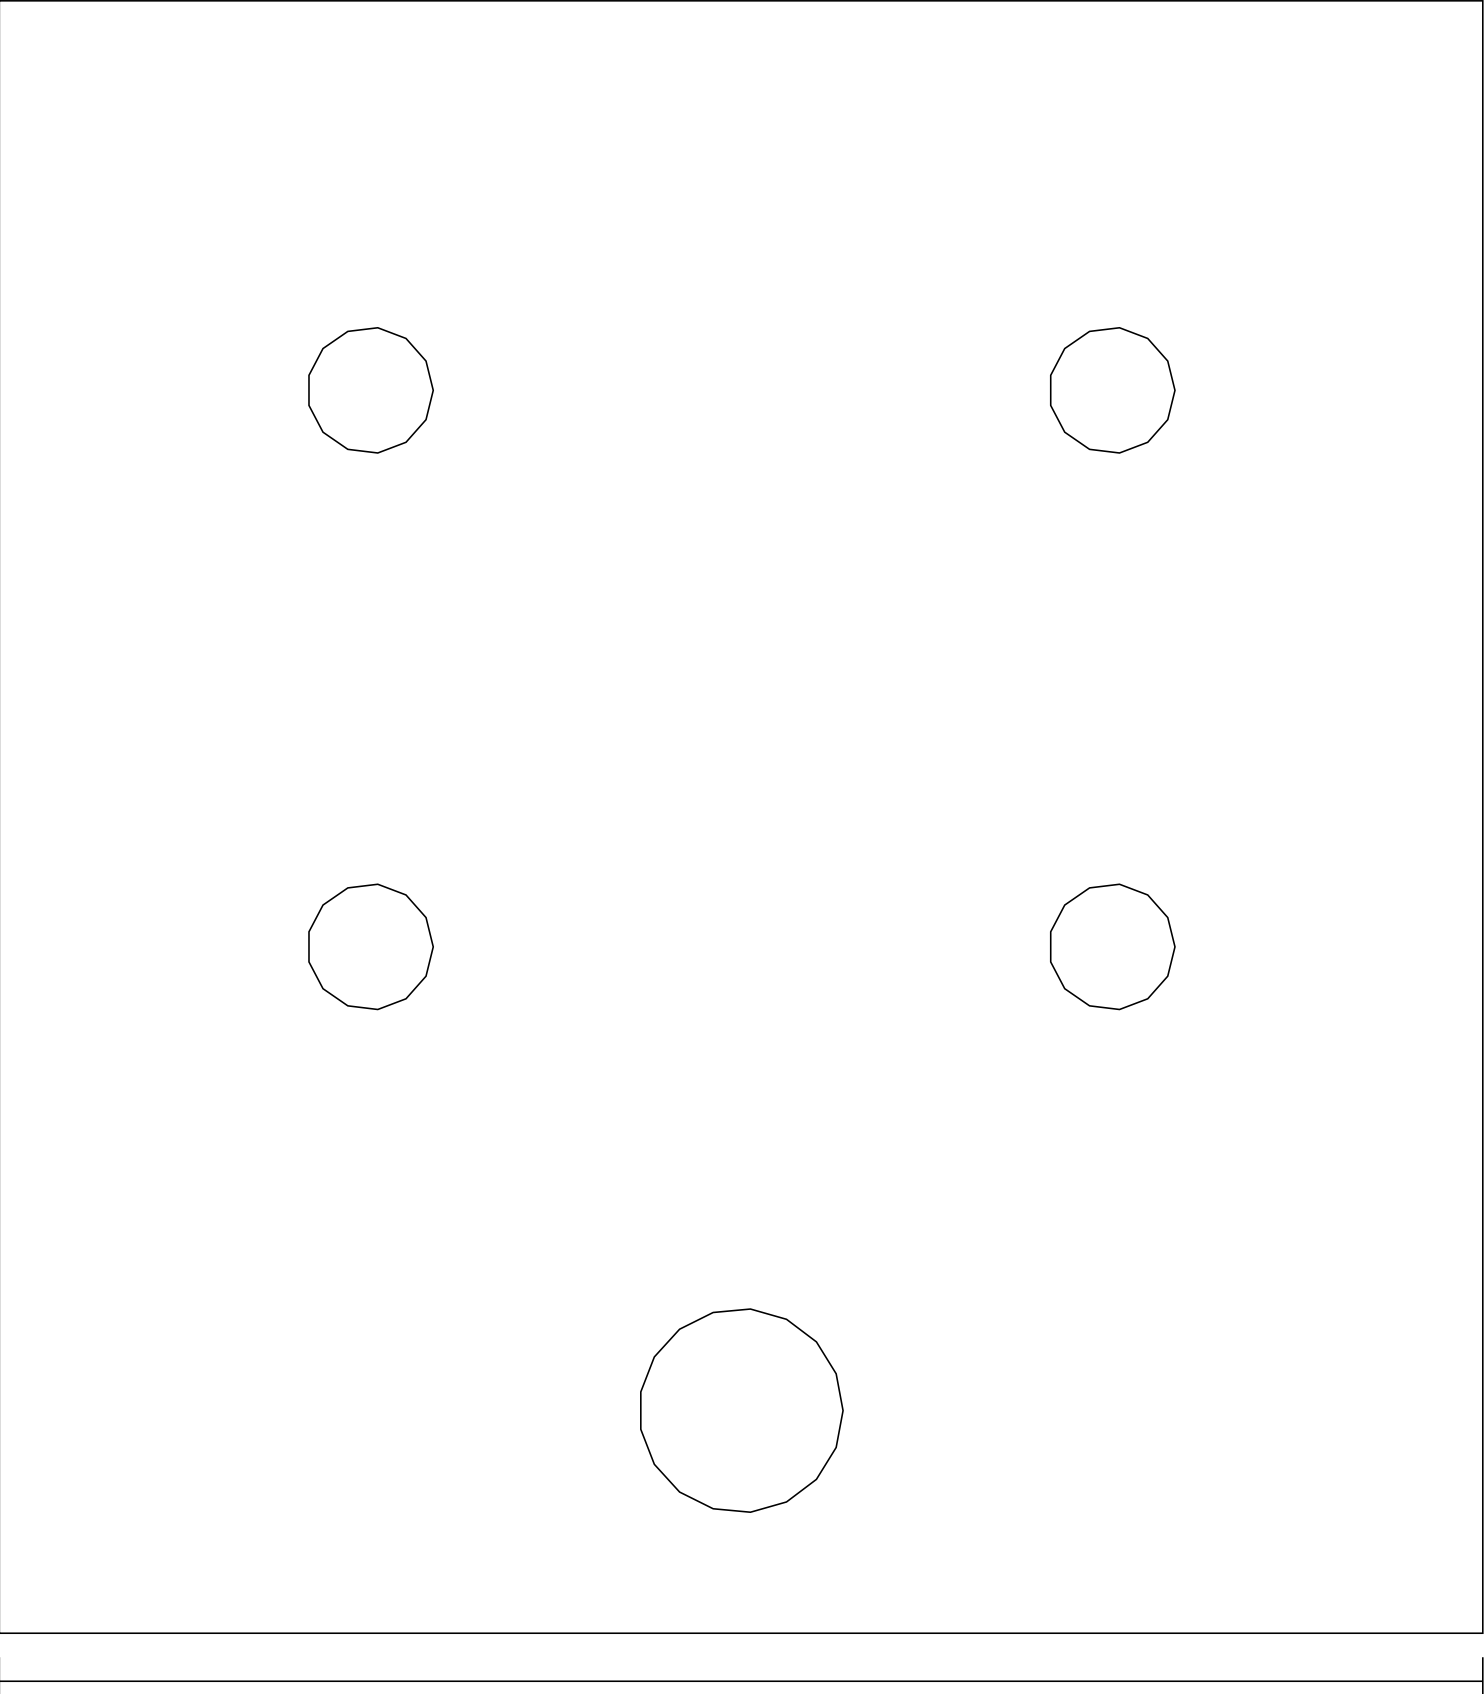

Thickness 3.000 mm | all hole axes normal to sheet | no bends | datums local model origin
Assembly geometry FAIL / unresolved interfaces. No cutting authorization. Check machine, stock, fit, edge distances and tool access.