



EXPERIMENT - NOT FOR MANUFACTURE

ONSHAPE SNAPSHOT | ENGINEERING REVIEW REQUIRED

PRINCIPAL VIEW - looking along -X
THIRD-ANGLE ORTHOGRAPHIC PROJECTION | SCALE 1:2

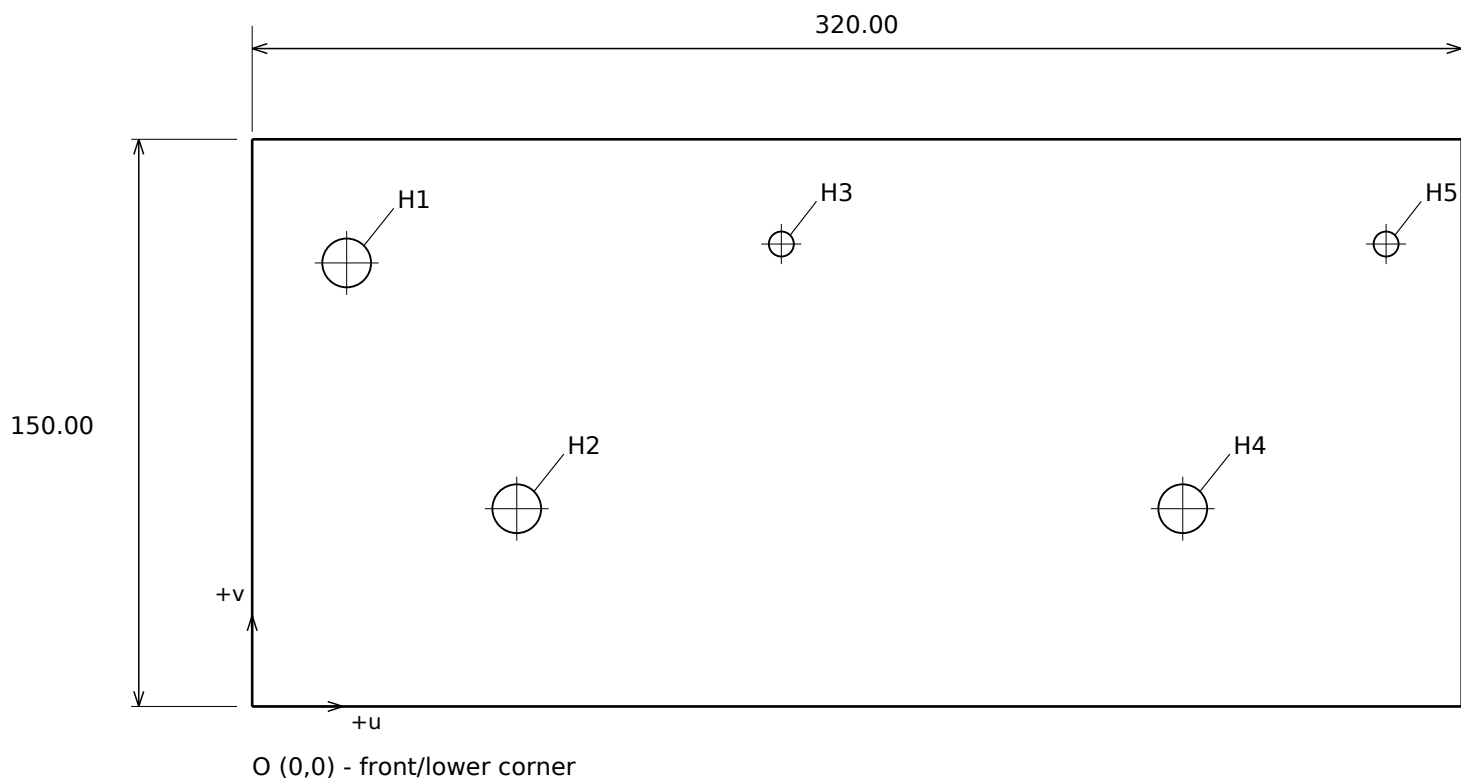

RIGHT SIDE
+Y toward -Y



HOLE TABLE - ALL THRU

KEY	u (mm)	v (mm)	ø (mm)
H1	25.00	117.30	12.90
H2	70.00	52.30	12.90
H3	140.00	122.30	6.60
H4	246.20	52.30	12.90
H5	300.00	122.30	6.60

Coordinates from O; +u right, +v up
u = world Y; v = world Z - 12.7 mm

TEST-ONLY MANUFACTURING ASSUMPTIONS

- Material: 6061-T6 aluminum; quantity: 1
- Outer size: +/-0.2 mm; stock thickness: +/-0.13 mm
- Hole diameter: +/-0.05 mm; hole coordinates: +/-0.1 mm
- Bare; remove burrs and break sharp edges 0.2 mm maximum
- No kerf compensation. DXF modelspace 1:1 mm. Print PDF at 100%; do not scale to fit.
- Fits, strength, stock, machining process and interfaces require engineering/manufacturer review.

TEST-INTAKE-LP

Synthetic intake left side plate

REVISION A | TEST_ONLY | Approval: UNVERIFIED

Geometry package only; not a toolpath or an associative Onshape drawing

A3 LANDSCAPE | SCALE 1:2 | UNITS mm | SHEET 1 OF 1

Date: 2026-09-11 | Quantity: 1

Stock thickness: 6.35 mm | 5 through-holes

No approval signature assigned. EXPERIMENT - NOT FOR MANUFACTURE