

BONE EYES

talking skull · assembly



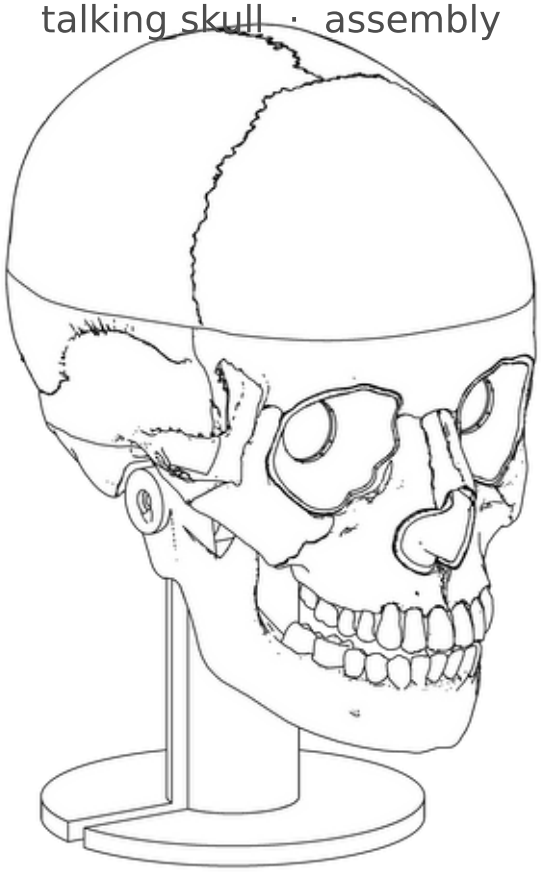


1× face




1× back cover



1× cap



1× jaw



1× stand




1× servo bracket



2× eye liner



1× nose liner




1× eye bar




2× LCD module



1× servo + horn



1× radar



1× ESP32





1× USB cable

Hardware · 1:1

Print at 100 % · "Actual size" · no "fit to page"



= 50 mm (check with a ruler)


4×	**M2×8**		
2×	**M2×16**	 self-tapping	
3×	**M3×8**		
3×	**M3×12**		
1×	**M3×20**		
1×	**washer Ø9**		 eye bar slot
1×	**washer M3**		jaw pivot
7×	**M3 insert**		 heat-set (soldering iron)

In the servo bag: 2× tab screw · 1× horn screw


Also: glue · hot glue · double-sided foam tape · soldering iron

1 Inserts · M3 ×7


Heat-set, flush, square to the hole.

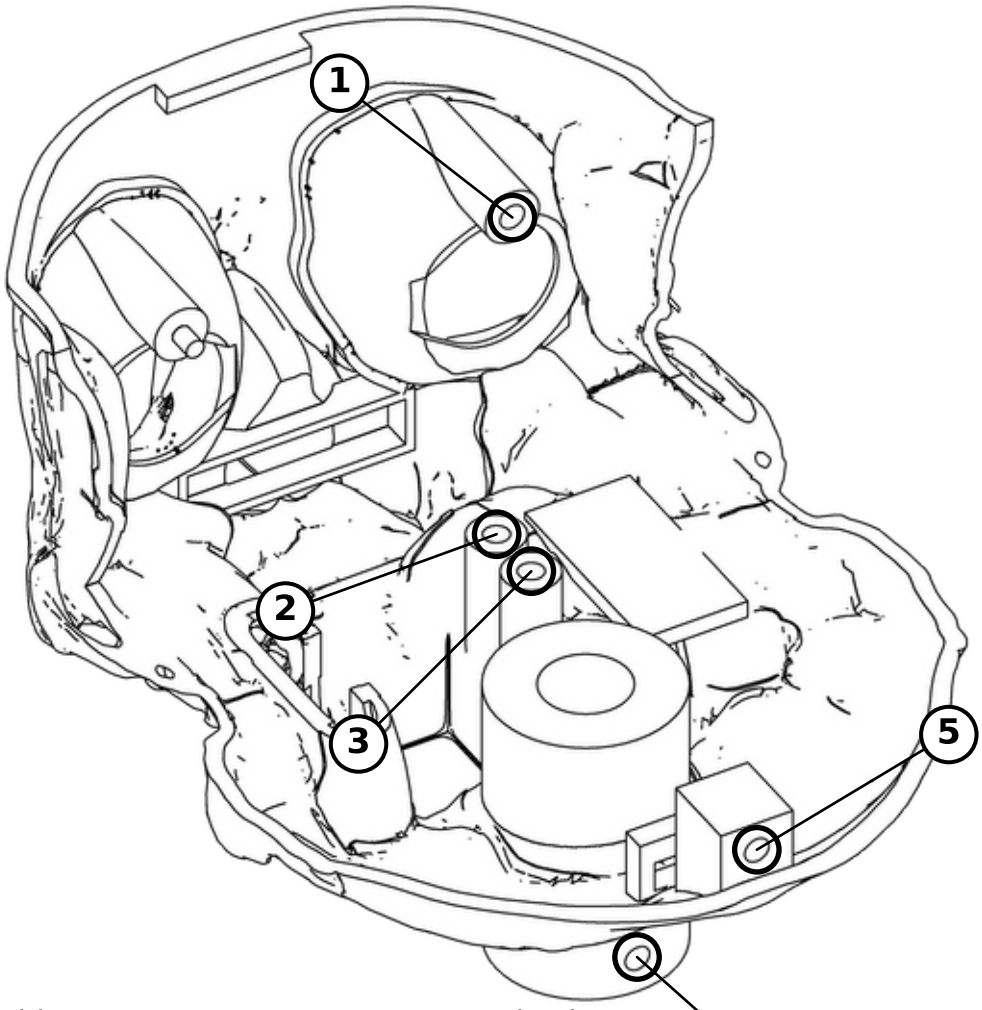


face, from the side

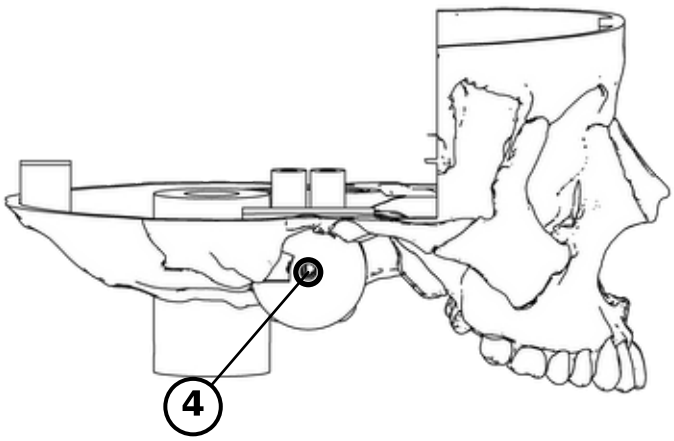


back cover

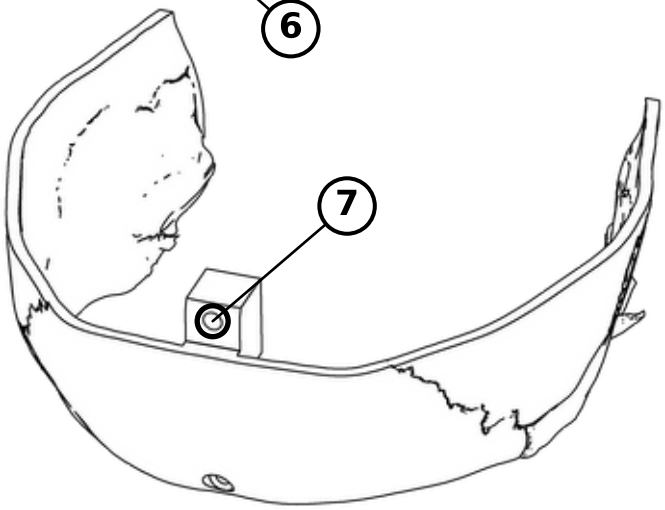

1 Servo + bracket

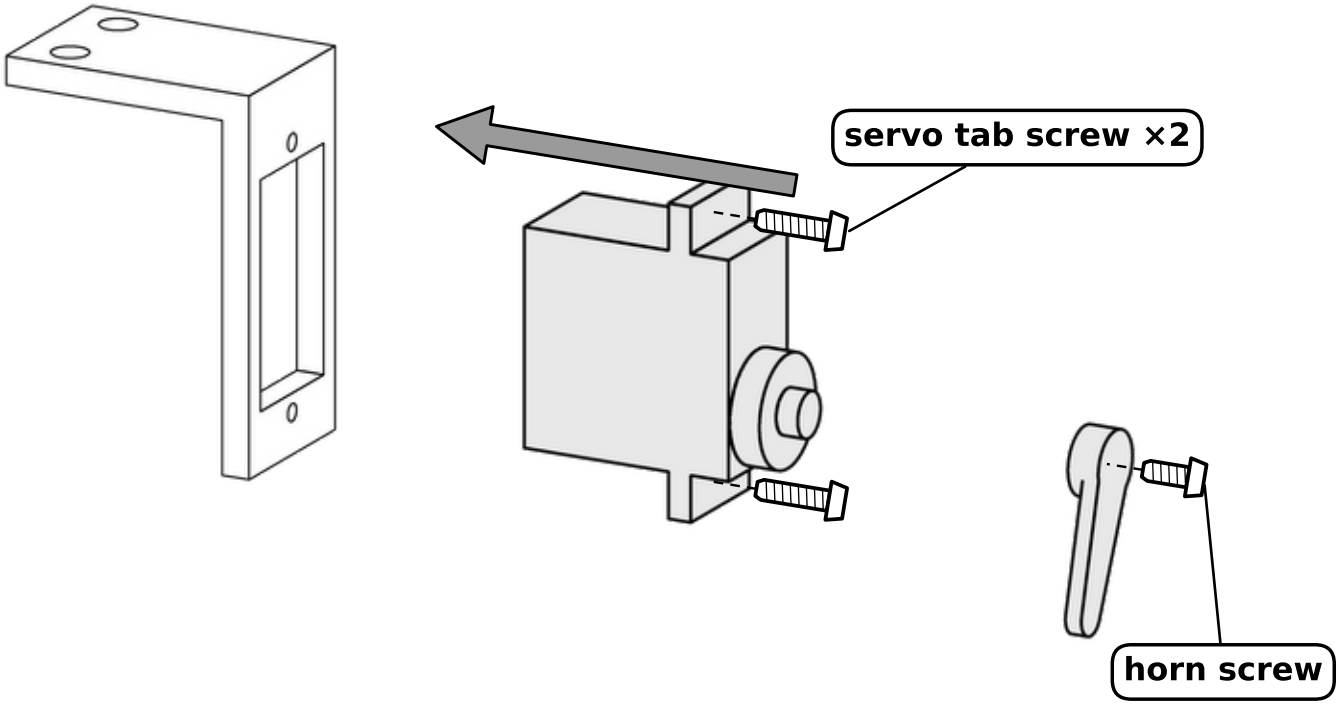


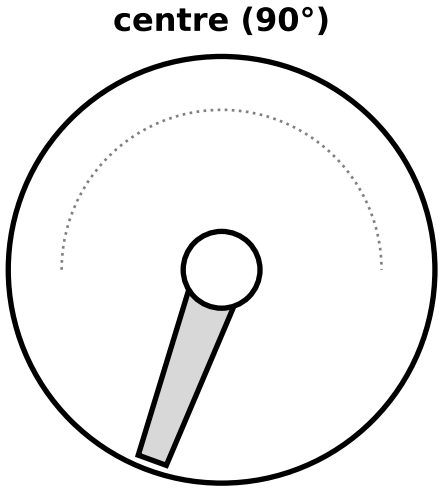


horn points down the jaw arm

1. Tab screws
2. Centre the servo
3. Horn on, pointing down


2 Liners

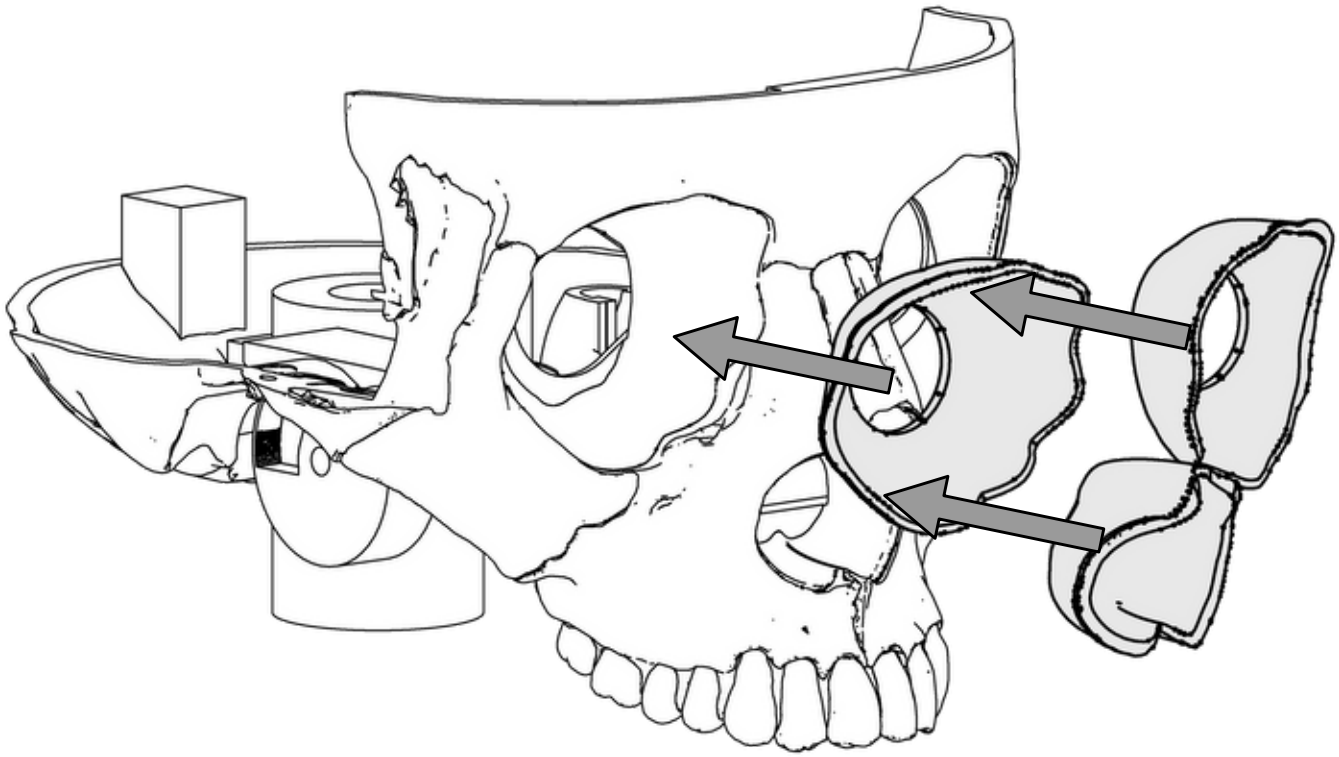

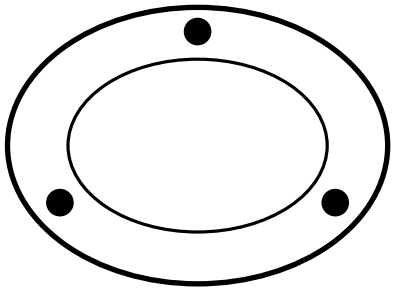

glue 2–3 dabs on the seat
push in from the front, lip flush

3 Eyes

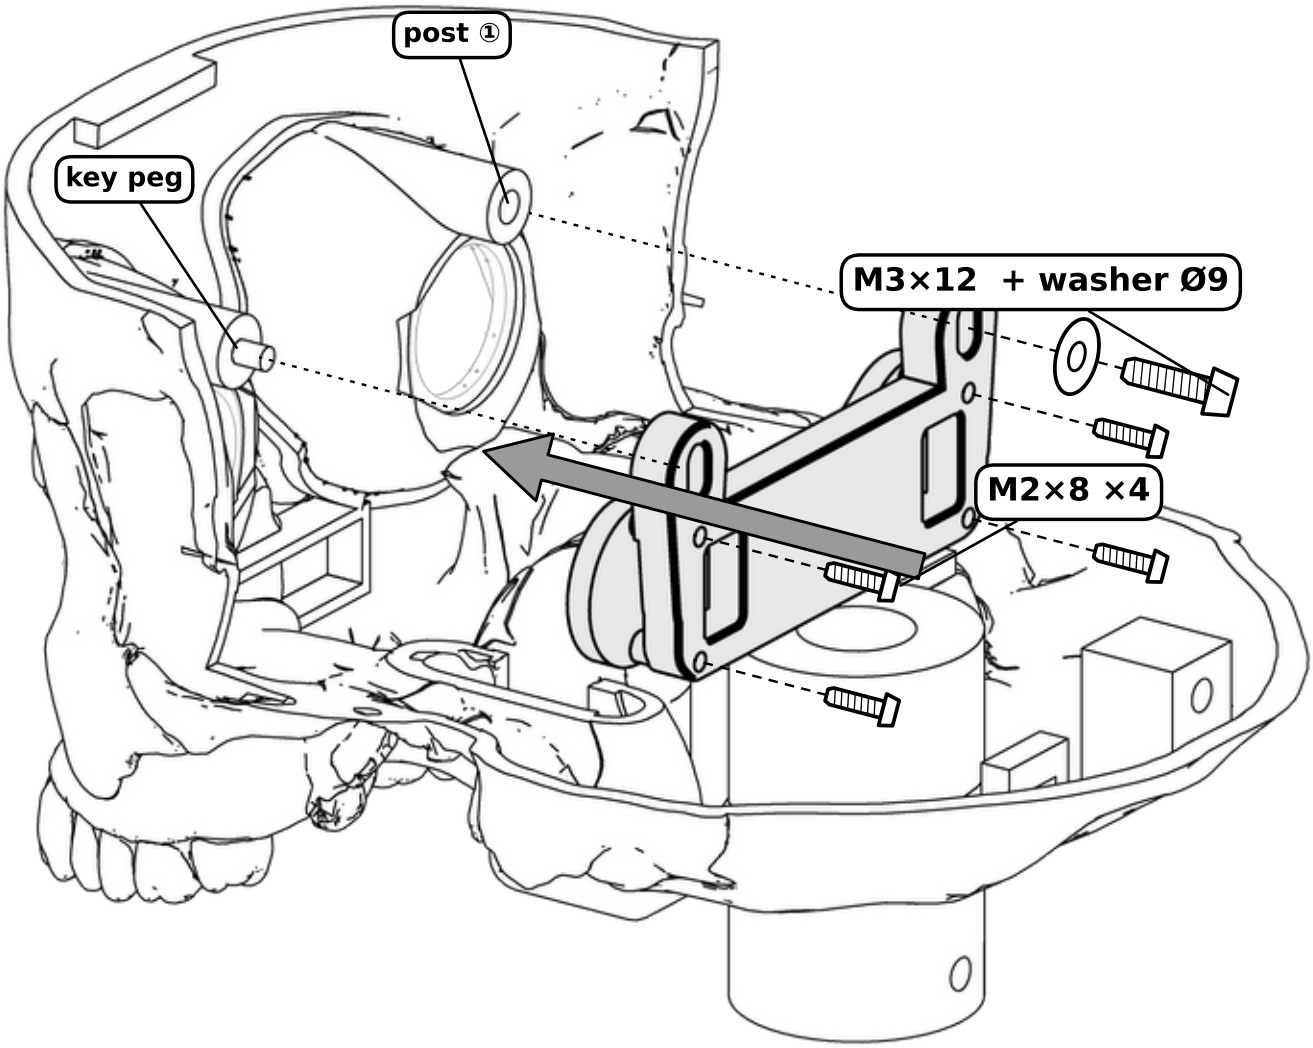


Plug the cables into the LCDs first.

Bolt hole → post (insert ①) · other hole → key peg.


Centre the screens.

4 Radar

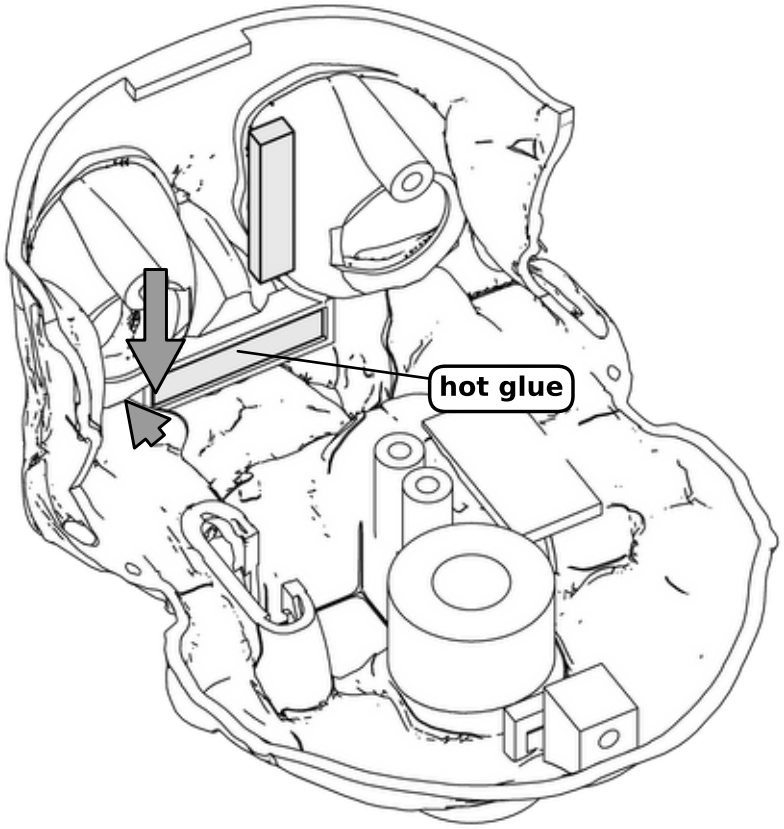


on edge down the slot, then flat and forward · dab of hot glue

5 USB cable

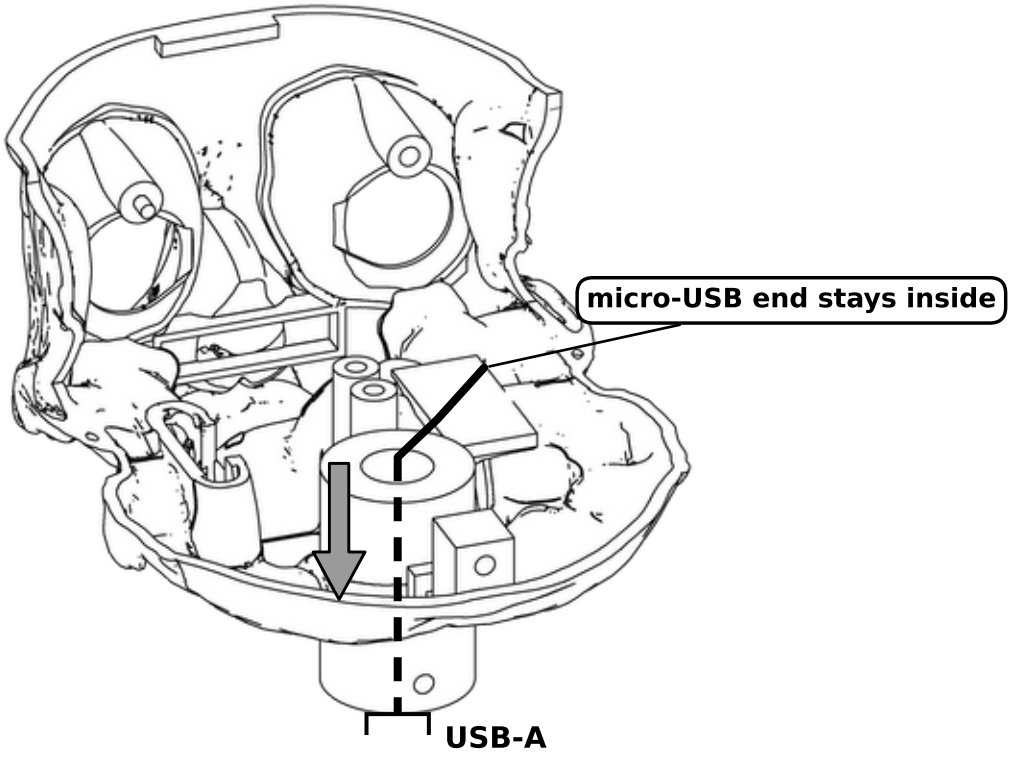


6 Servo

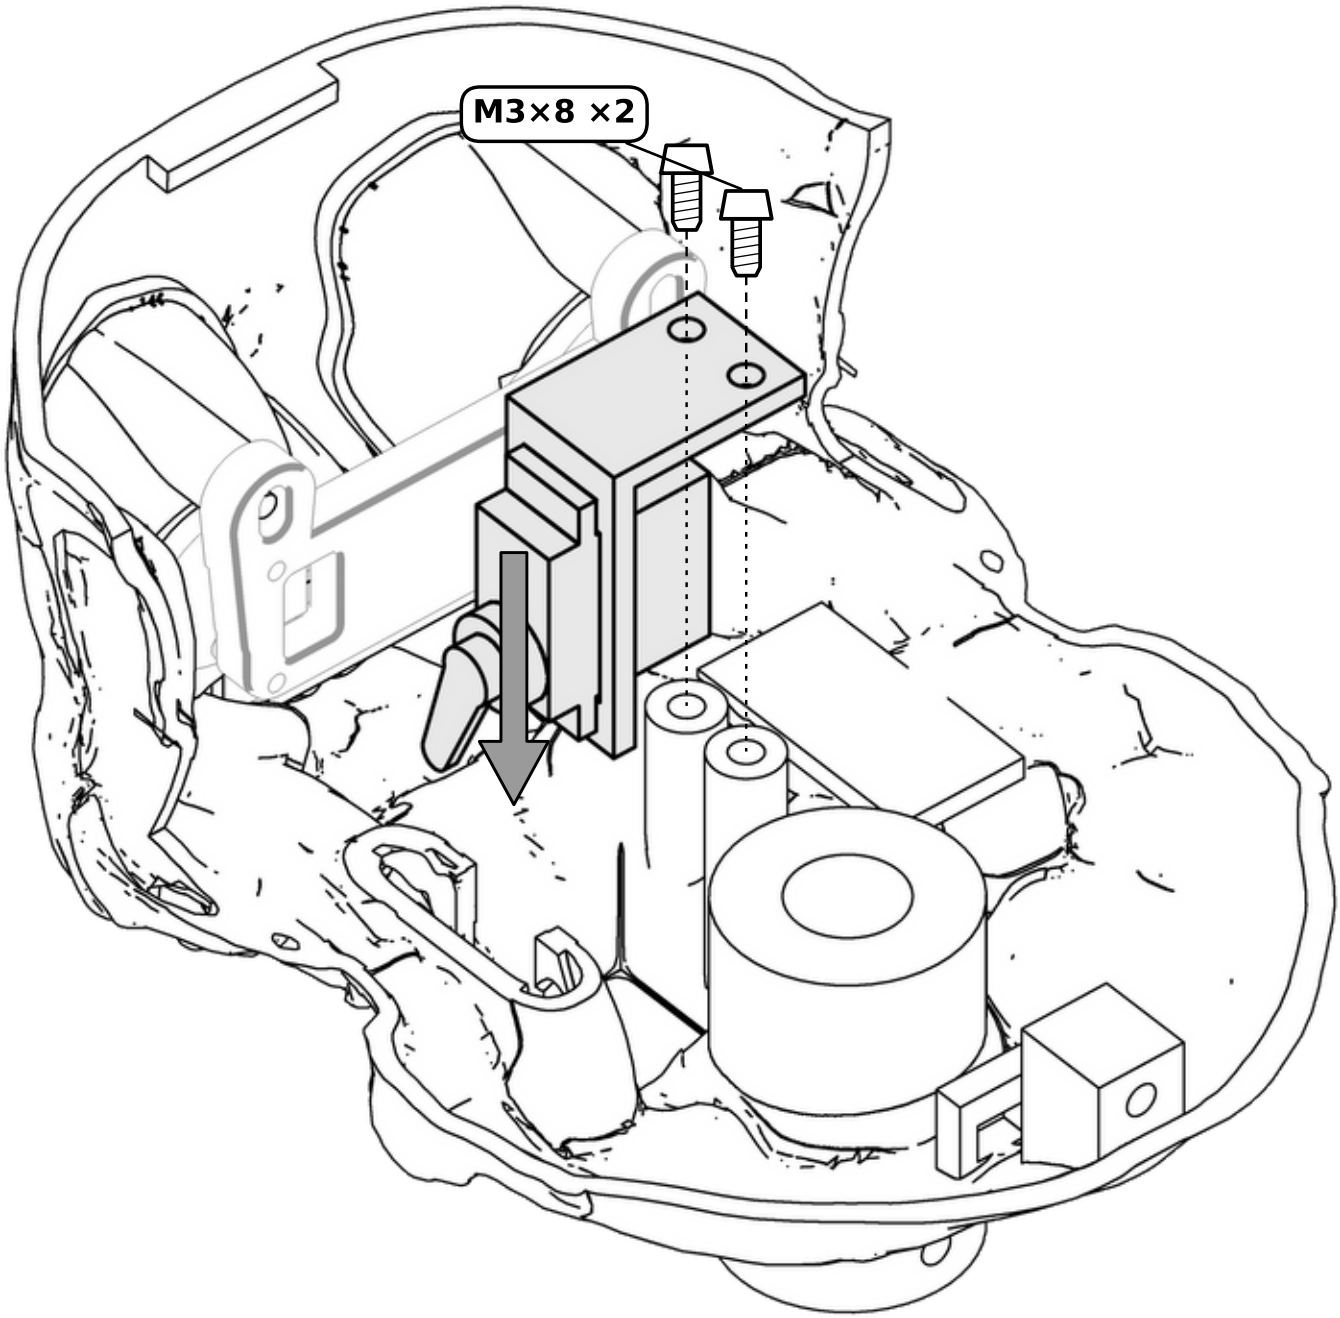

gear tower down the slot in the cup wall


7 ESP32

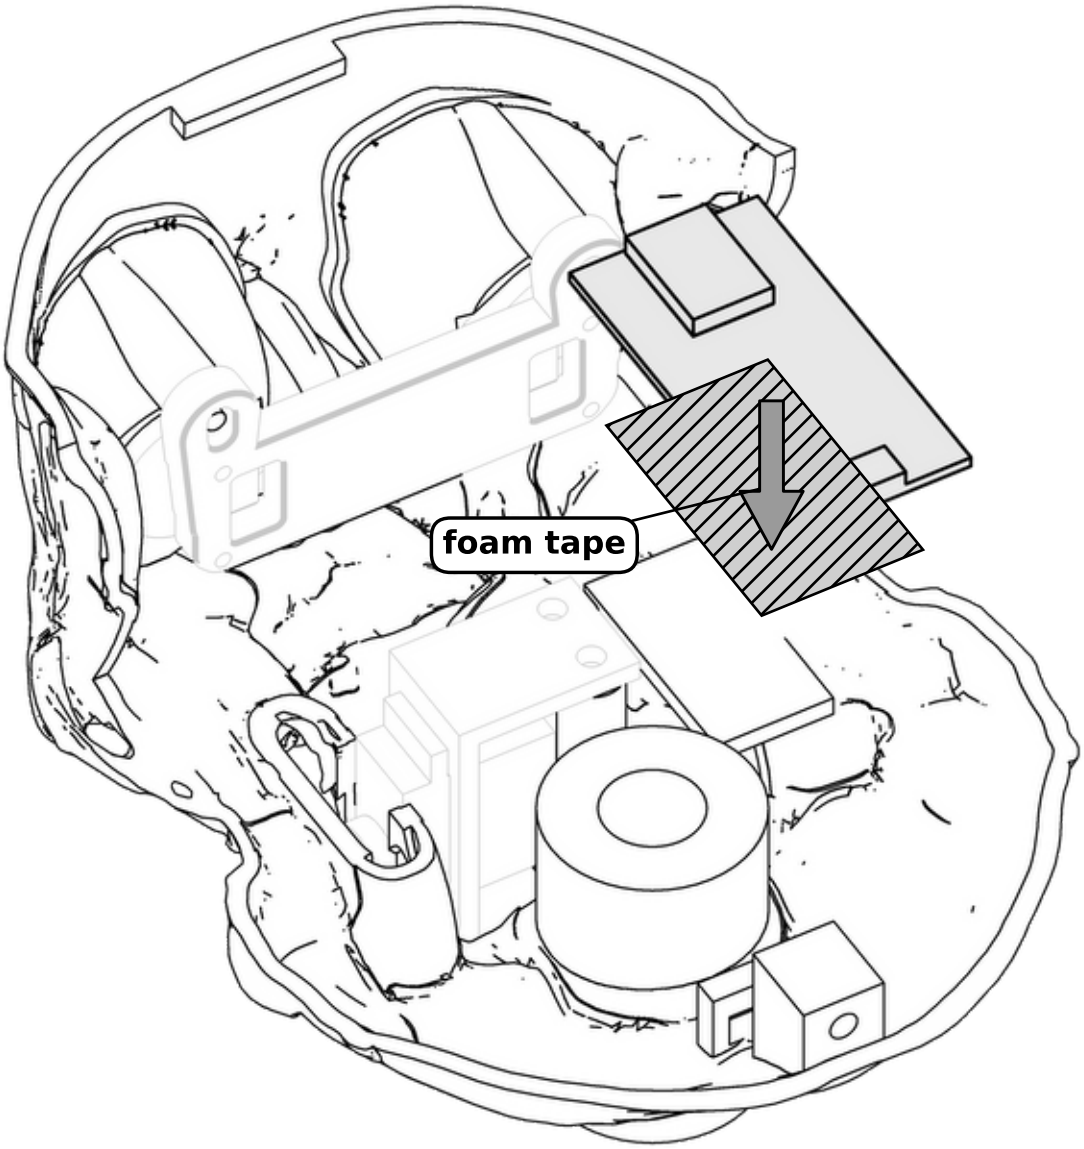


No tray: tape it flat just behind the eye bar
(solder side covered).

Plug in: LCD ×2 · radar · servo · USB

8 Jaw

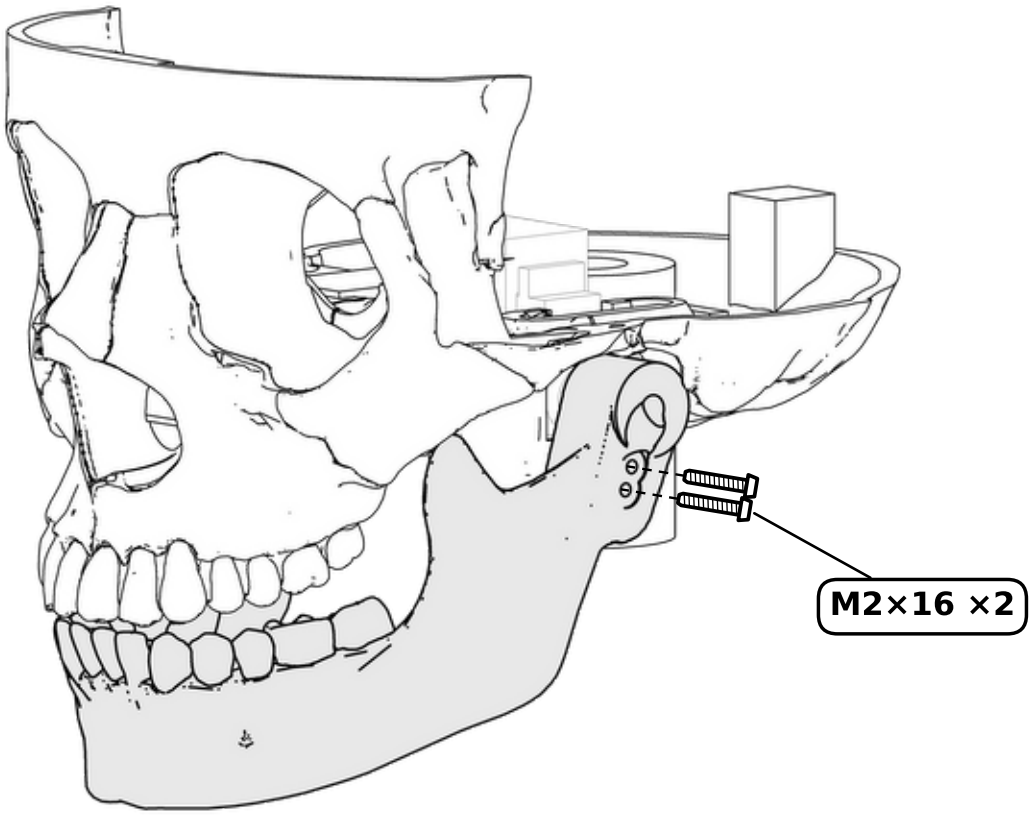

from outside, into the horn arm

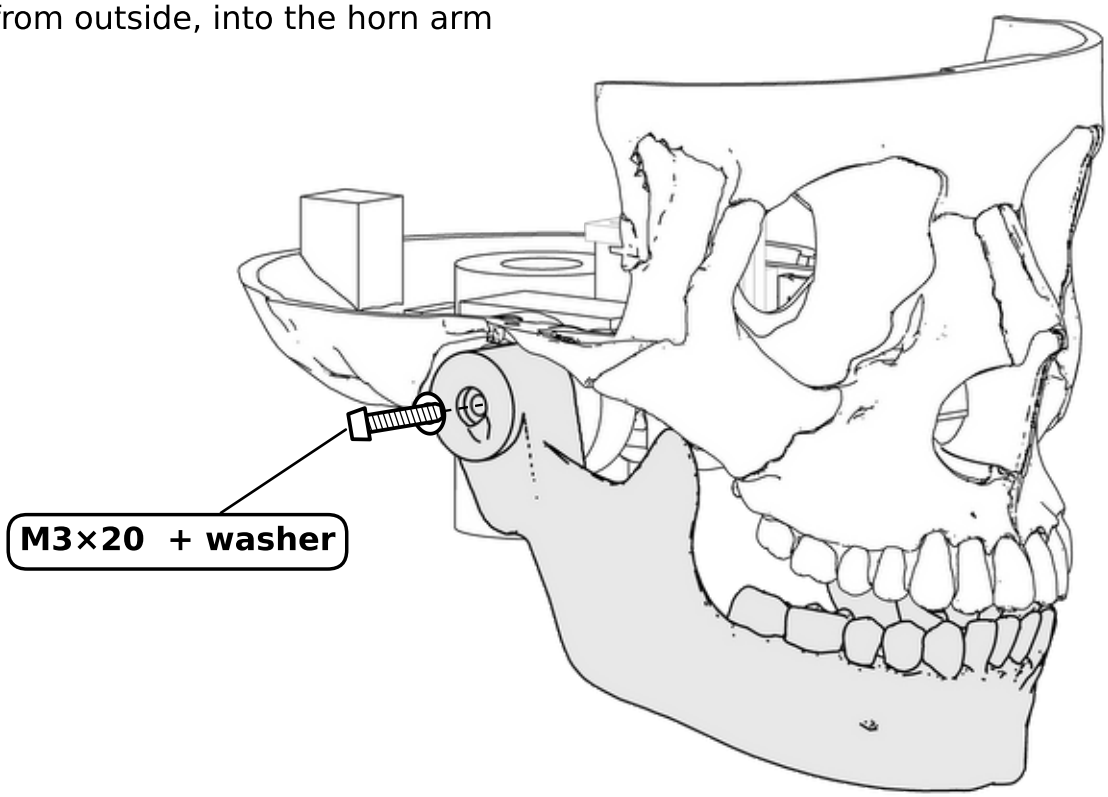


into insert ④ · snug, free to swing

9 Test


- ☐ eyes
- ☐ jaw
- ☐ radar
- ☐ sound

10 Back cover

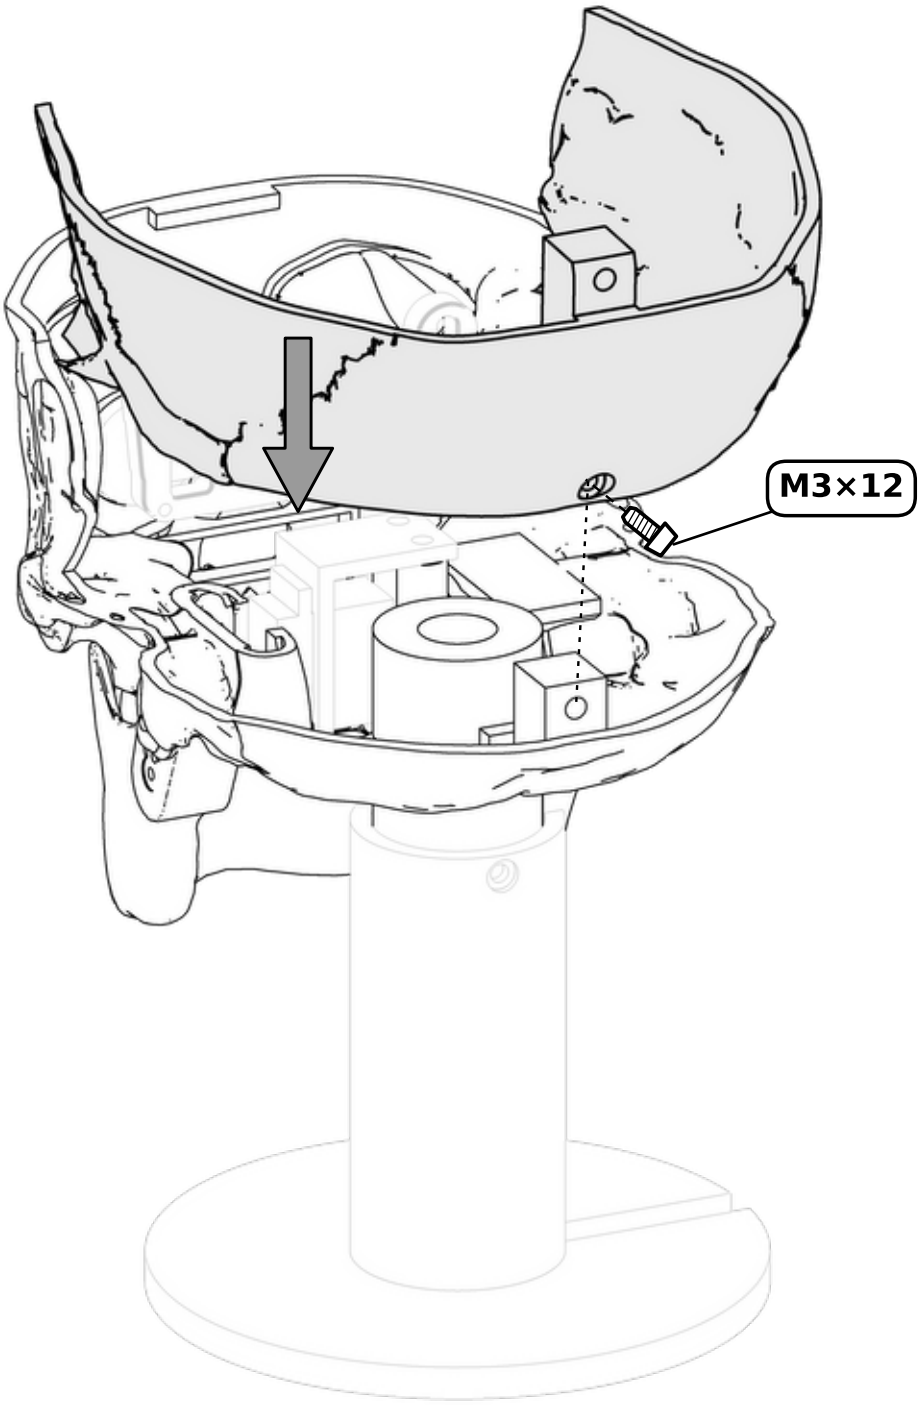


drop onto the floor lip, screw low at the back

11 Cap

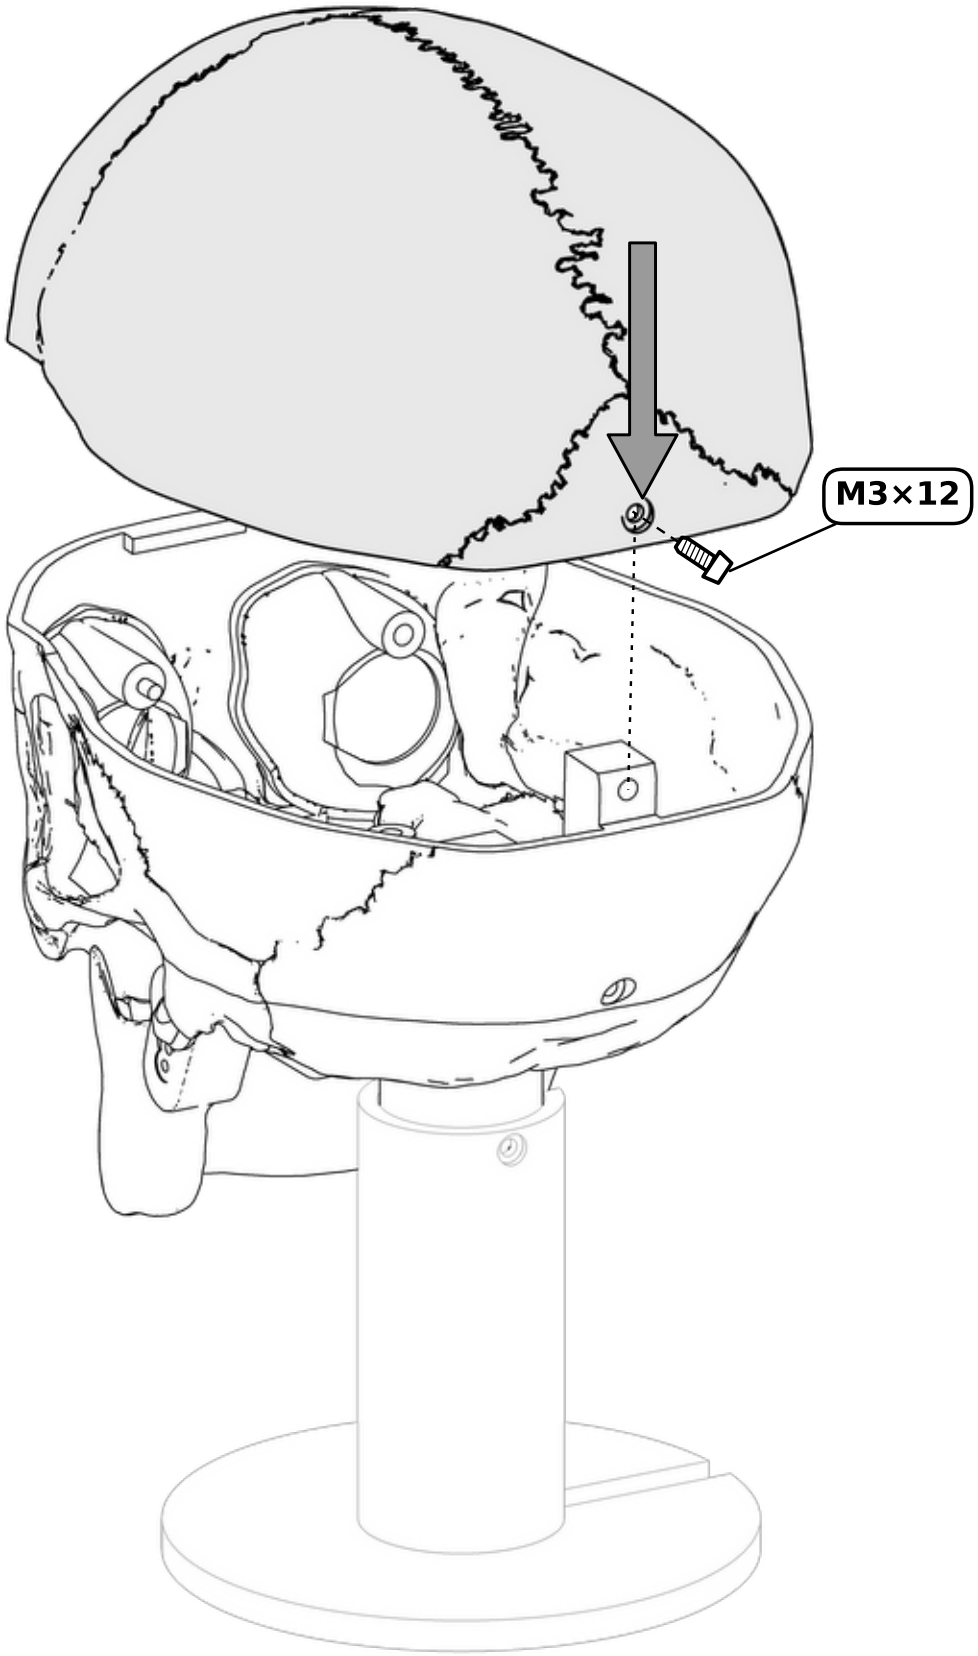

straight down onto the cut · screw high at the back

12 Stand

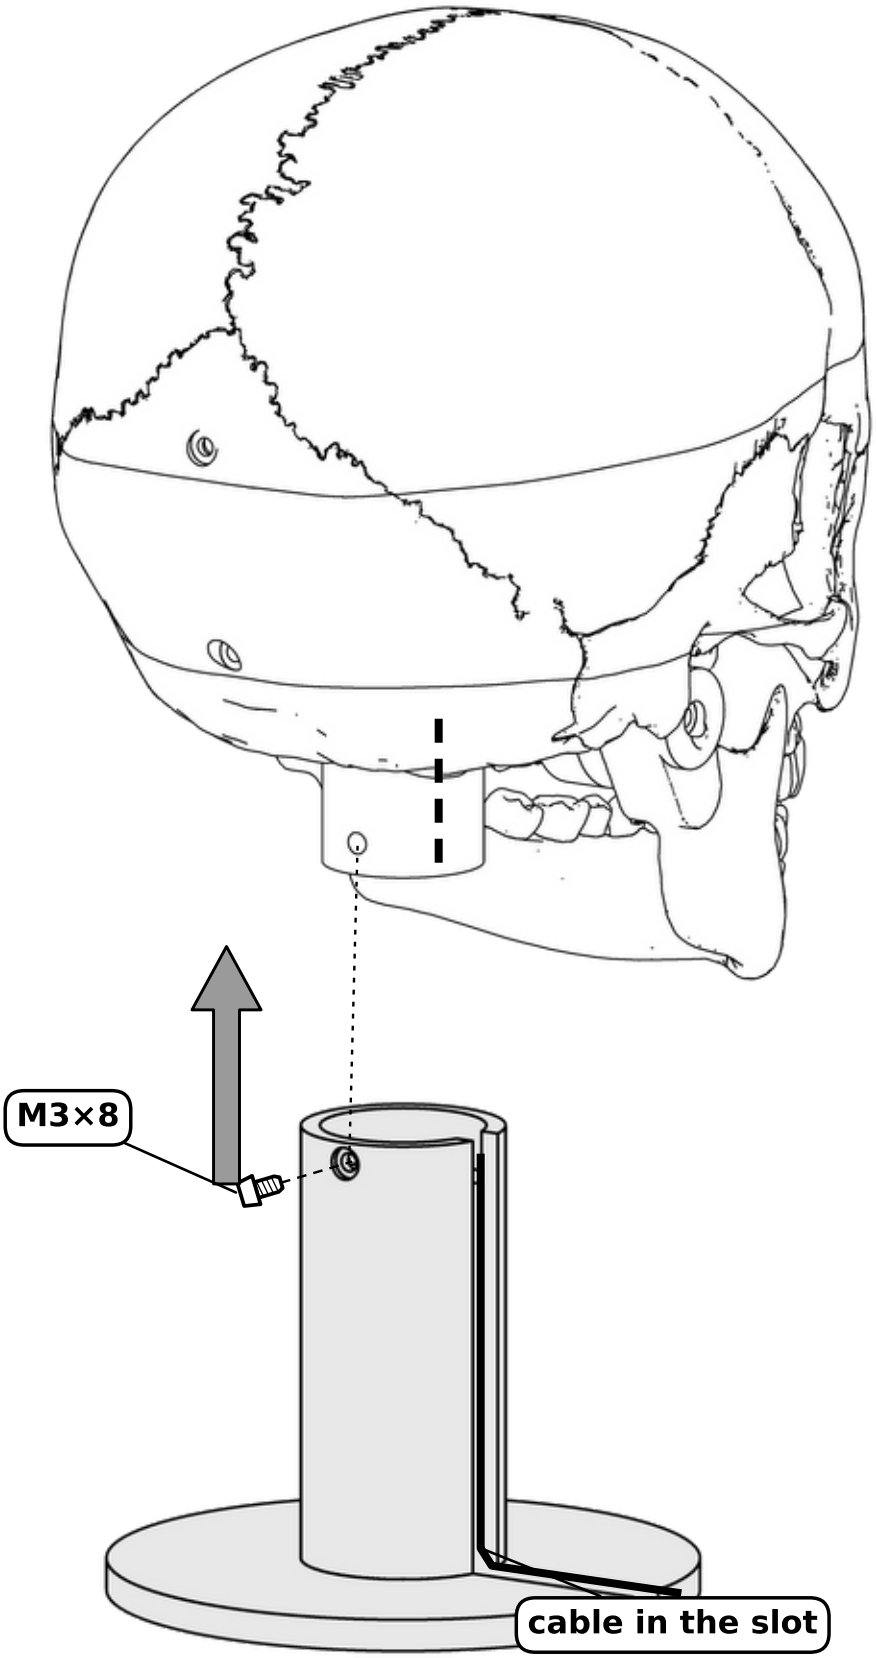

push the stand onto the neck · screw from behind