

ITT-216- Port Security Configuration

Professor: Tim Collins
Course: ITT-216 Enterprise Route & Switch
Student: Liela Pressley
Date: 4/11/2023
Title: Port Security Configuration


Successfully added mac-address sticky to switch 2 for admin vlan

The screenshot shows the Cisco Packet Tracer interface. The main window displays a network diagram with various devices including switches, routers, and PCs. A specific configuration window for Switch-02 is open, showing the CLI interface with commands for port security. The configuration includes setting the mode to 'prst', enabling 'spanning-tree extend system-id', and configuring 'mac-address sticky' on several interfaces (FastEthernet0/1, FastEthernet1/1, FastEthernet2/1, FastEthernet3/1). The configuration also shows a trunk port (GigabitEthernet9/1) and a VLAN interface (Vlan1). The bottom status bar shows the time as 00:53:24 and the simulation is running.


```
Switch-02
Physical Config CLI Attributes
IOS Command Line Interface

!
spanning-tree mode prst
spanning-tree extend system-id
!
interface FastEthernet0/1
switchport access vlan 20
switchport mode access
switchport port-security mac-address sticky
!
interface FastEthernet1/1
switchport access vlan 15
switchport mode access
switchport port-security mac-address sticky
!
interface FastEthernet2/1
switchport port-security mac-address sticky
!
interface FastEthernet3/1
switchport port-security mac-address sticky
!
interface GigabitEthernet9/1
switchport trunk allowed vlan 1,20
switchport mode trunk
!
interface Vlan1
no ip address
!
Ctrl+F6 to exit CLI focus
Copy Paste
```


Successfully added mac-address sticky and restriction to accesspoint from switch 1 on vlan 25

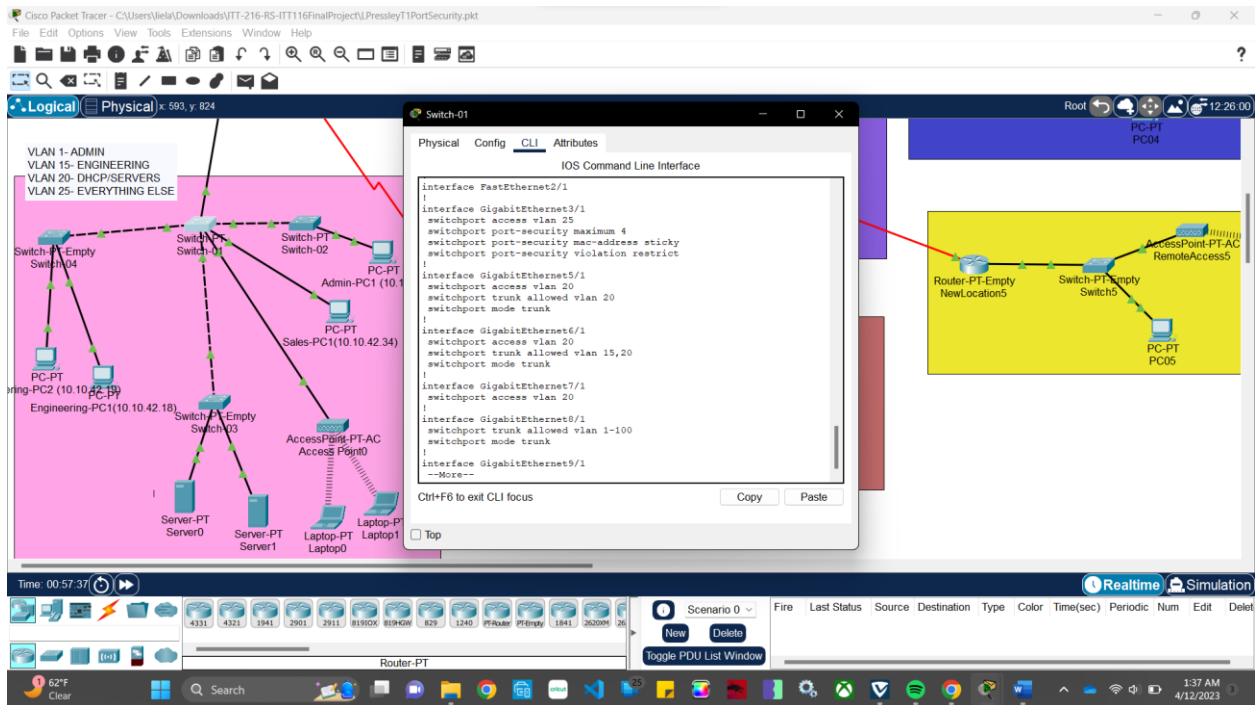


Successfully ping default gateway on servers from admin PC

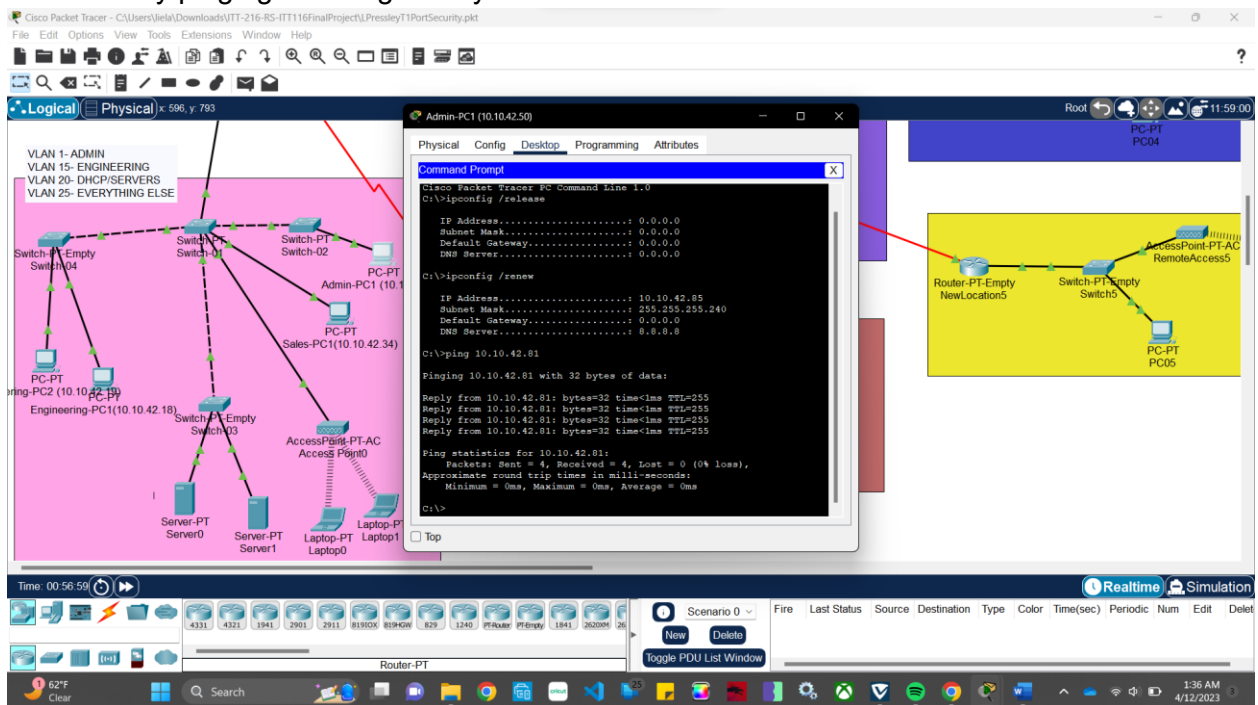

Laptop successfully ping default gateway

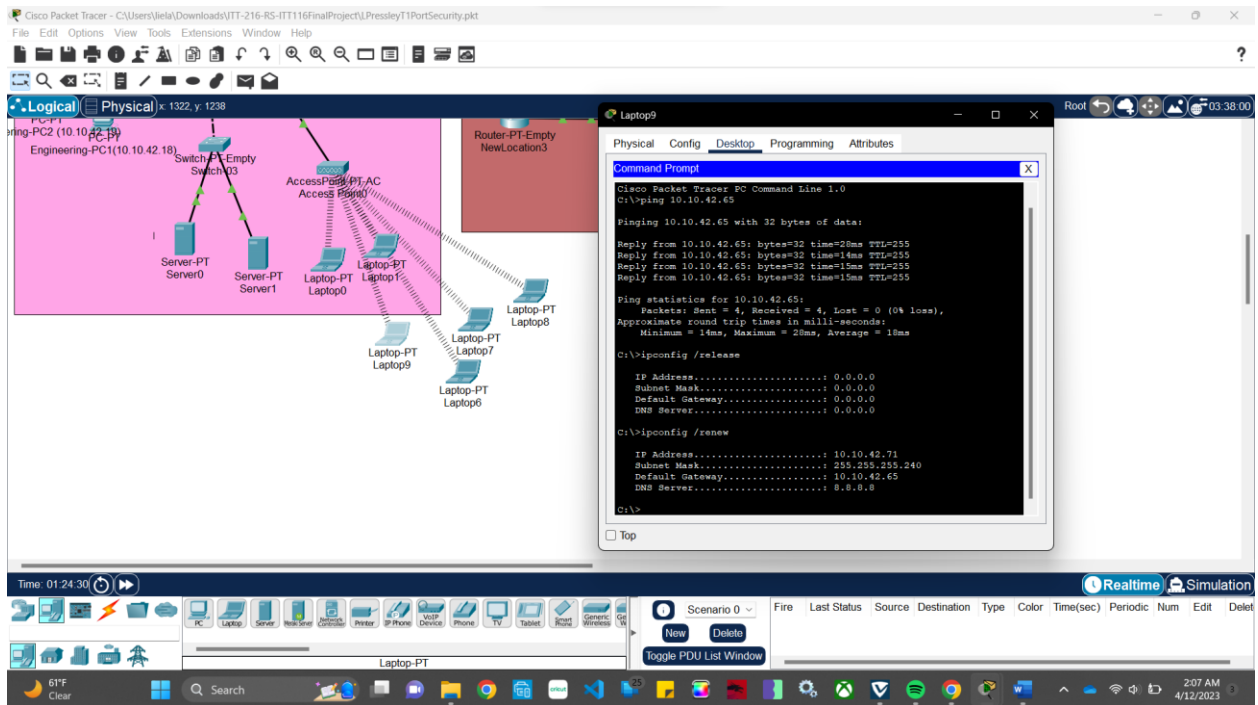


Successfully ping DHCP Server from newly added laptop

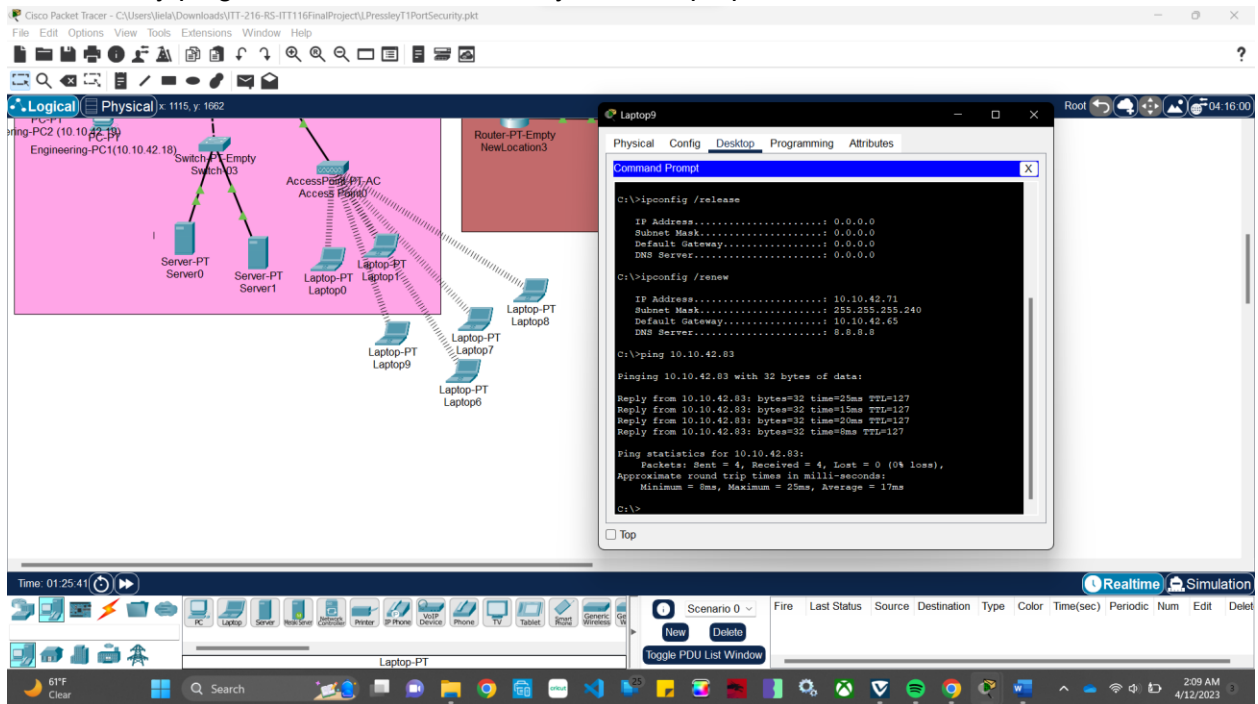

Successfully pinging laptop6 from laptop9.

Successfully pinging DHCP server from all laptops

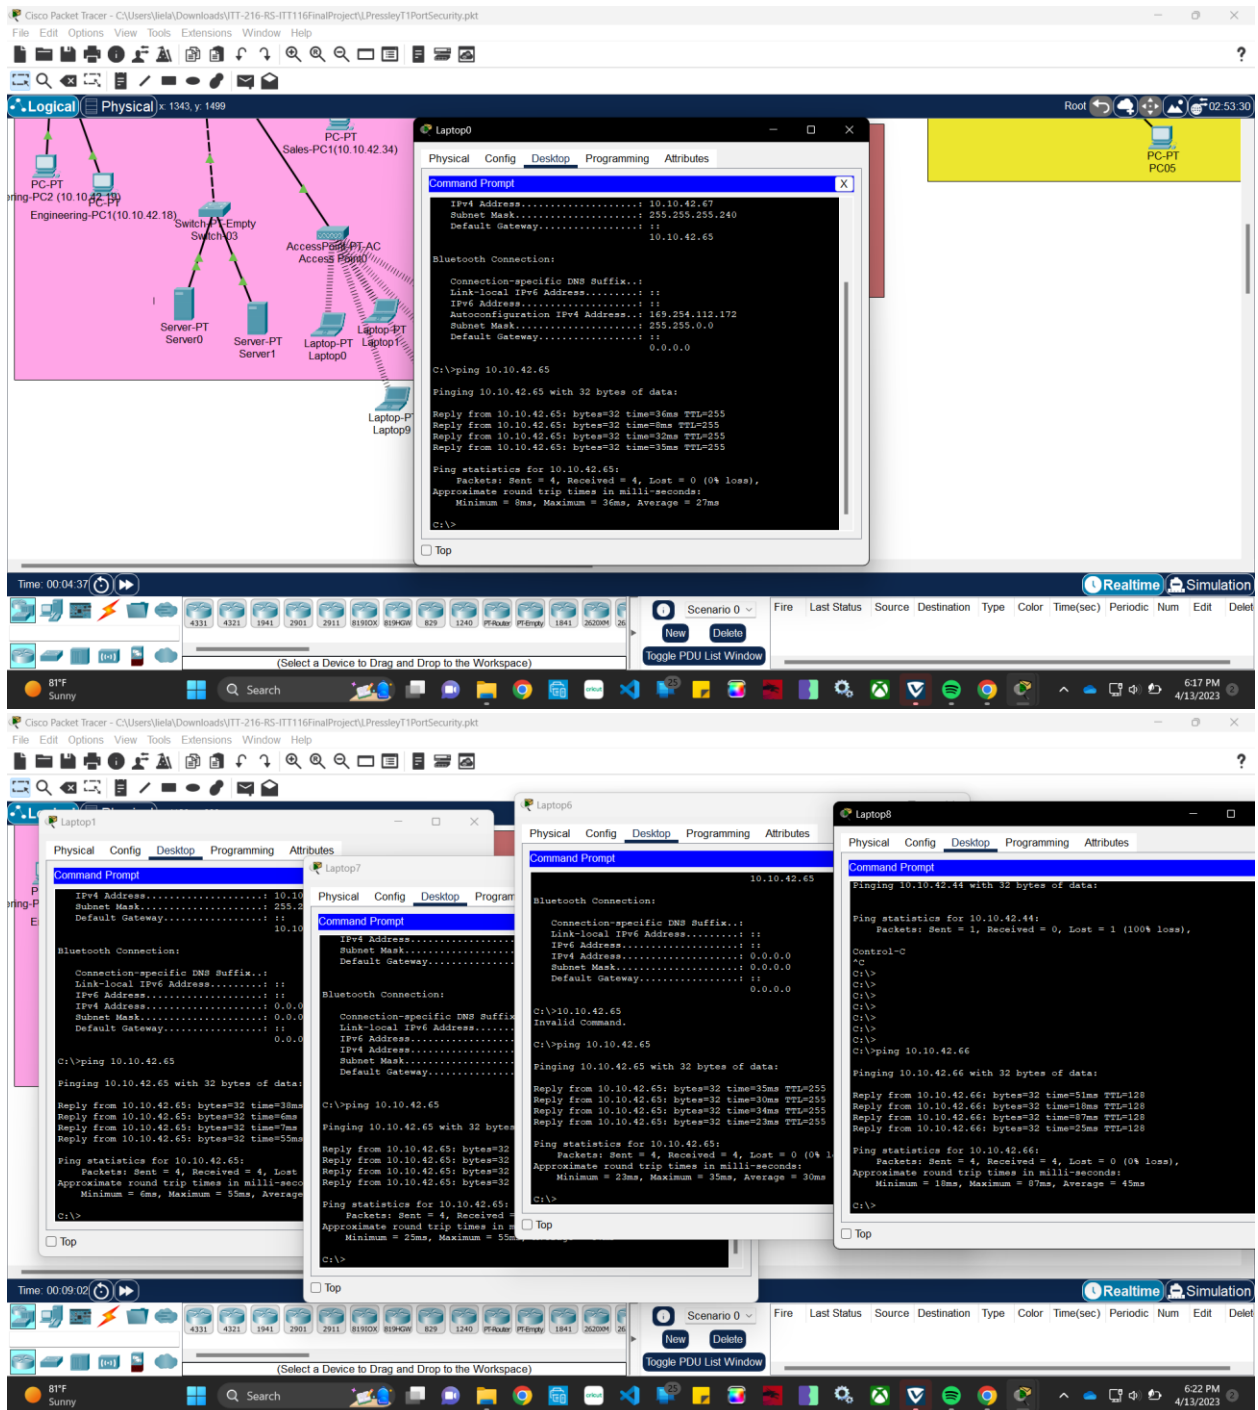

Adjusted switch-01 G3/1 port to allow port-security and to keep track of MAC-addresses after the pinging.

Cisco Packet Tracer - C:\Users\iela\Downloads\ITT-216-RS-ITT116FinalProject\PresleyT1PortSecurity.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x: 1609, y: 1121

VLAN 1- ADMIN
VLAN 15- ENGINEERING
VLAN 20- DHCP/SERVERS
VLAN 25- EVERYTHING ELSE

Switch-PT-Empty Switch-04
Switch-PT-Empty Switch-01
Switch-PT-Empty Switch-02
Switch-PT-Empty Switch-03
PC-PT Admin-PC1 (10.10.42.56)
PC-PT Sales-PC1 (10.10.42.34)
PC-PT Engineering-PC1 (10.10.42.18)
PC-PT Engineering-PC2 (10.10.42.19)
AccessPoint-PT-AC Access-Point
Router-PT-Empty NewLocation2
Router-PT-Empty NewLocation3
AccessPoint-PT-AC RemoteAccess5
Switch-PT-Empty Switch-05
PC-PT PC04
PC-PT PC05

Switch-01

Physical Config CLI Attributes

IOS Command Line Interface

```
switchport access vlan 10
switchport mode access
!
interface FastEthernet1/1
switchport access vlan 15
switchport mode access
!
interface FastEthernet2/1
!
interface GigabitEthernet3/1
switchport access vlan 25
switchport mode access
switchport port-security
switchport port-security maximum 4
switchport port-security violation restrict
switchport port-security mac-address sticky 0001.966E.D08B
switchport port-security mac-address sticky 0060.7054.B81C
switchport port-security mac-address sticky 0090.0C37.5857
switchport port-security mac-address sticky 00D0.8C31.3AD3
!
interface GigabitEthernet5/1
switchport access vlan 20
switchport trunk allowed vlan 20
switchport mode trunk
!
--More--
```

Ctrl+F6 to exit CLI focus

Copy Paste

Top

Time: 00:17:30

Realtime Simulation

Scenario 0

New Delete

Toggle PDU List Window

Show hidden icons

81°F Sunny

6:33 PM 4/13/2023