

ITT-216- Access Control List Configuration

Professor: Tim Collins
Course: ITT-216 Enterprise Route & Switch
Student: Liela Pressley
Date: 4/23/2023
Title: Access Control List Configuration

1. Ensure that admin PC successfully pings DHCP server

The screenshot displays the Cisco Packet Tracer interface. The main workspace shows a network topology with several switches (Switch-PT-Empty, Switch-PT-01, Switch-PT-02, Switch-PT-03, Switch-PT-04) and various end devices including PCs (Admin-PC1, Engineering-PC1, Engineering-PC2, Sales-PC1), servers (Server-PT, Server1), and laptops (Laptop-PT, Laptop0, Laptop1). A text box in the workspace lists VLAN configurations: VLAN 1- ADMIN, VLAN 15- ENGINEERING, VLAN 20- DHCP/SERVERS, and VLAN 25- EVERYTHING ELSE. A red arrow points from the Admin-PC1 icon to the Command Prompt window.

The Command Prompt window for Admin-PC1 (10.10.42.50) shows the following output:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.10.42.81

Pinging 10.10.42.81 with 32 bytes of data:


Reply from 10.10.42.81: bytes=32 time<1ms TTL=255
Reply from 10.10.42.81: bytes=32 time<1ms TTL=255
Reply from 10.10.42.81: bytes=32 time<1ms TTL=255
Reply from 10.10.42.81: bytes=32 time<1ms TTL=255

Ping statistics for 10.10.42.81:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms


C:\>
```

The bottom status bar shows the time as 00:17:50 and a list of available devices including various routers, switches, and end devices.



2. Ping -t to DHCP server to have it ping continuously

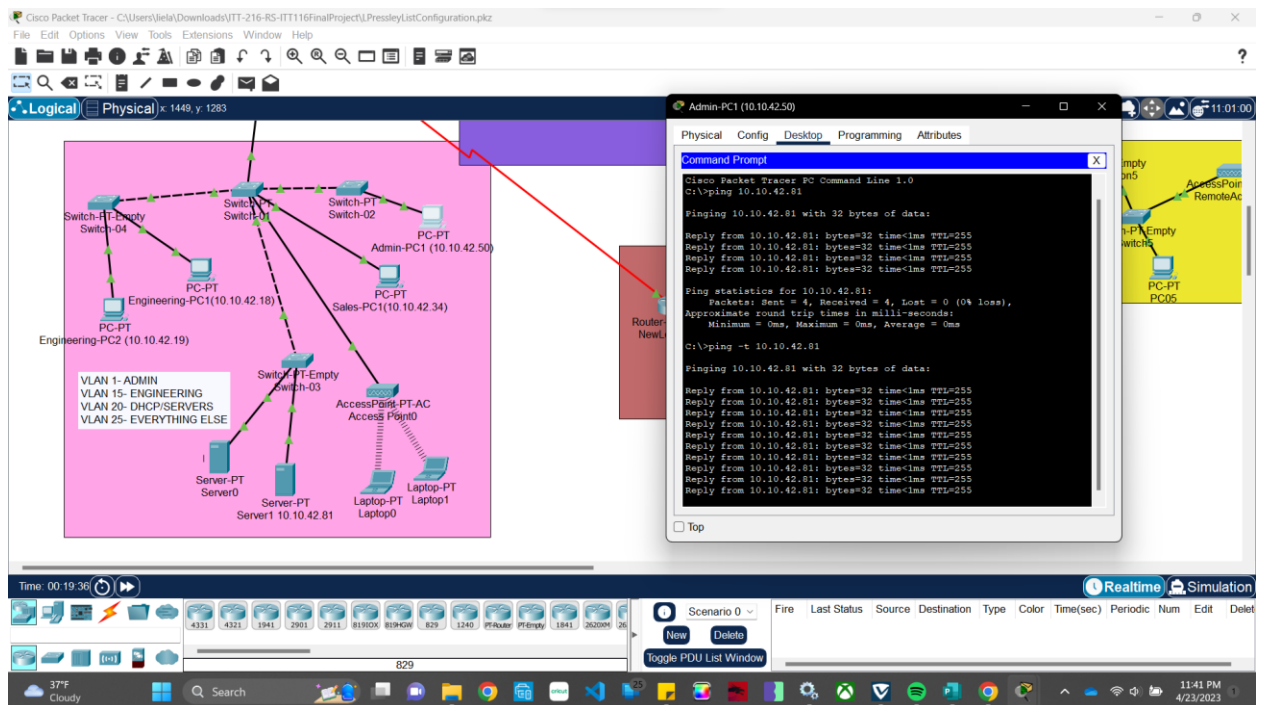

3. First configuration commands and still didn't break the ping

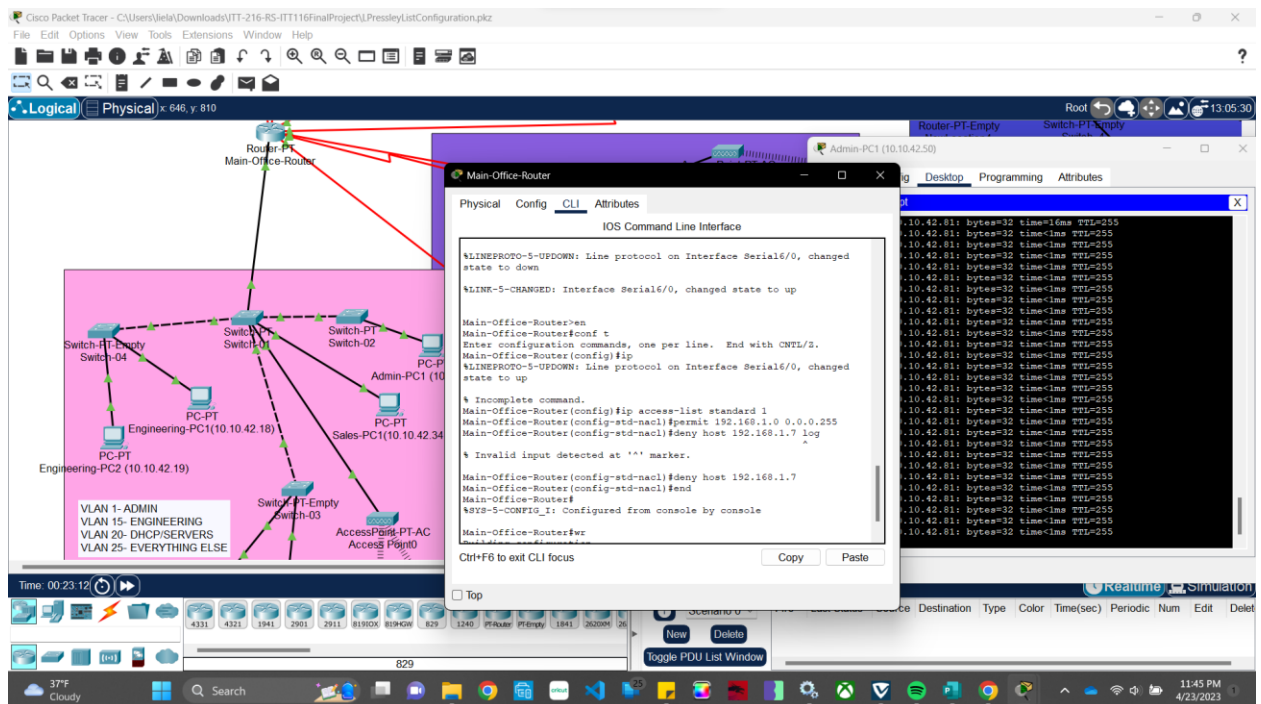

4. Pinging successfully after creating an extended ACL list but not applying it yet.

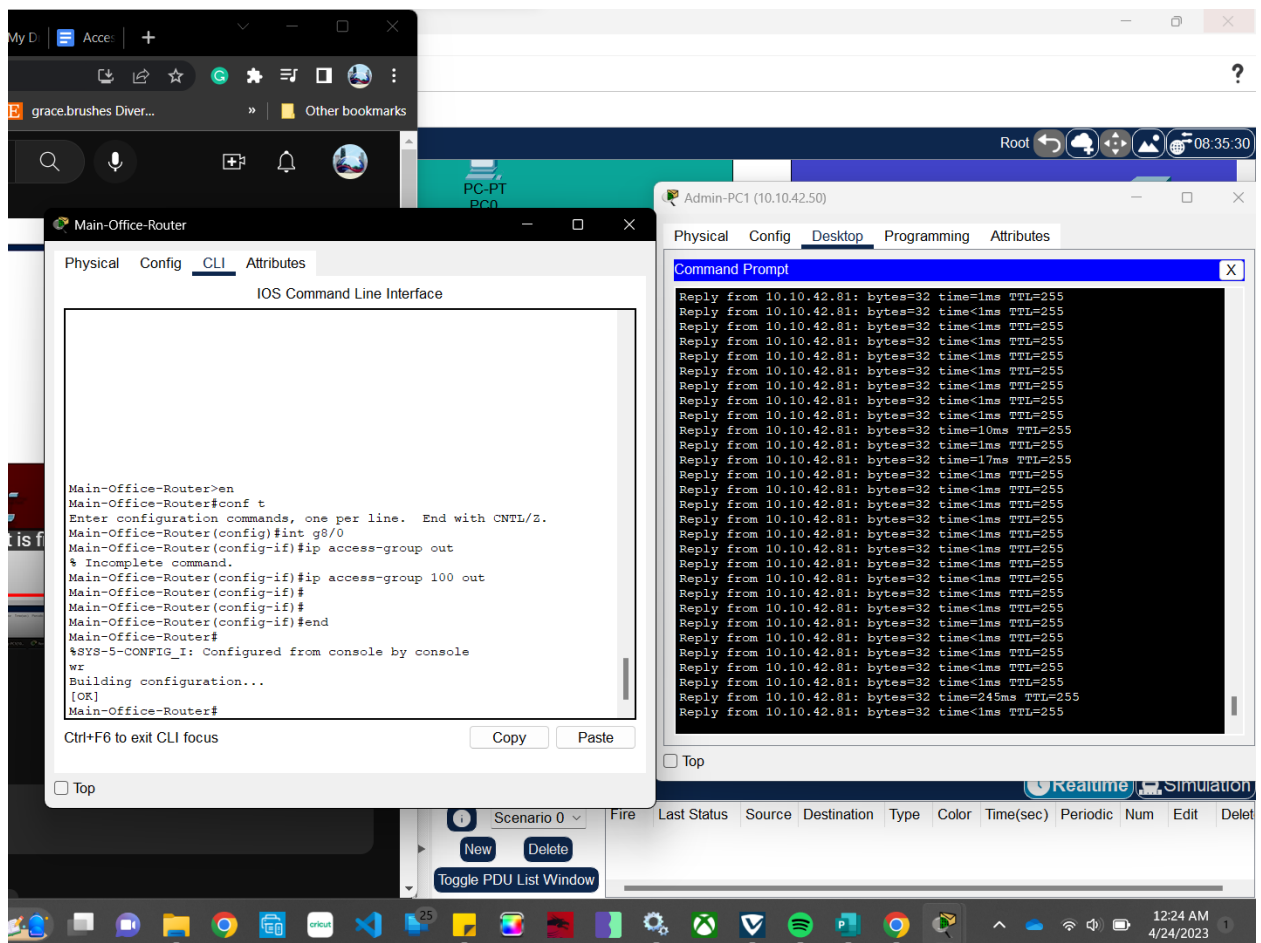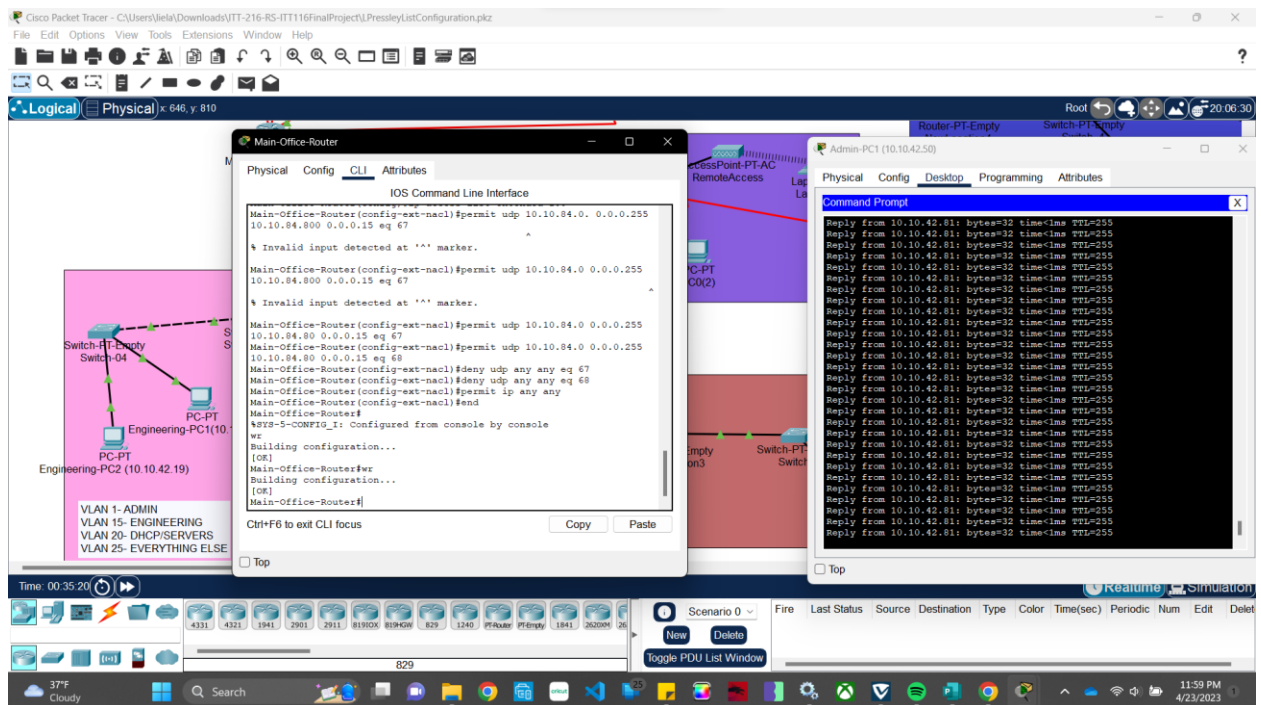

5.

-
- The screenshot displays a network simulation interface with two primary windows in the foreground:
- Main-Office-Router (CLI):** This window shows the configuration of an IP access group named 'g8/0' on interface 'g8/0'. The configuration steps include:
 - Entering configuration mode: `Main-Office-Router(config)#`
 - Creating the access group: `Main-Office-Router(config-if)#ip access-group out`
 - Applying the access group to the interface: `Main-Office-Router(config-if)#ip access-group 100 out`
 - Verifying the configuration: `Main-Office-Router#show ip access-group`
 - Building the configuration: `Main-Office-Router#`
 - Admin-PC1 (10.10.42.50) (Command Prompt):** This window shows the results of a ping test. The output consists of multiple lines of 'Reply from 10.10.42.81: bytes=32 time<1ms TTL=255', indicating a successful connection to the destination IP address.
- The background shows a network diagram with various devices and a taskbar at the bottom with various application icons.