


## ITT-216- Add Locations


**Professor:** Tim Collins  
**Course:** ITT-216 Enterprise Route & Switch  
**Student:** Liela Pressley  
**Date:** 4/5/2023  
**Title:** Benchmark-Host Hardening

**Overview:** After over-viewing the configuration process, decided to configure a basic version of the added locations. Adding a mesh topology would have created more room for error in designating interconnection ports amongst the different routers. But I was able to successfully configure each LAN and their connectivity to the WAN as a whole as seen in the successful pings of each workstation within the added locations.


## Location1Workstation Successfully Pinging Default Gateway(Switch) and NewLocation1 Router Interface

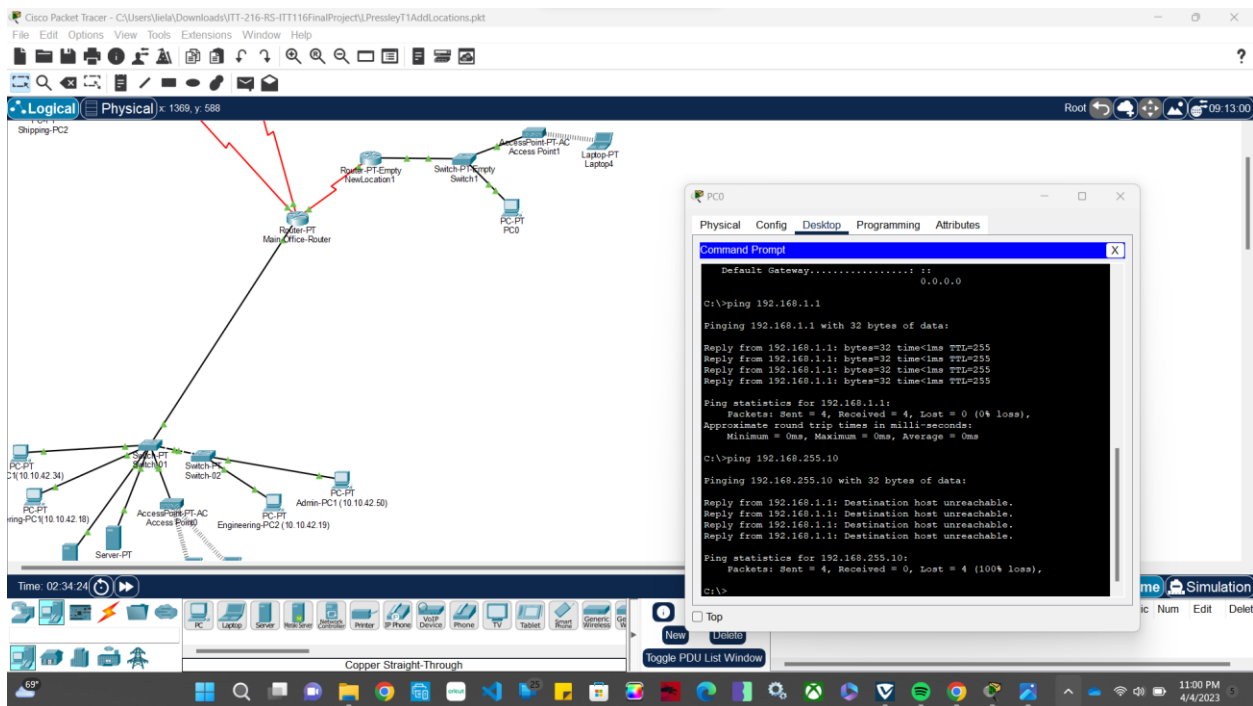


### Successfully pinging Engineering workstation from PC0

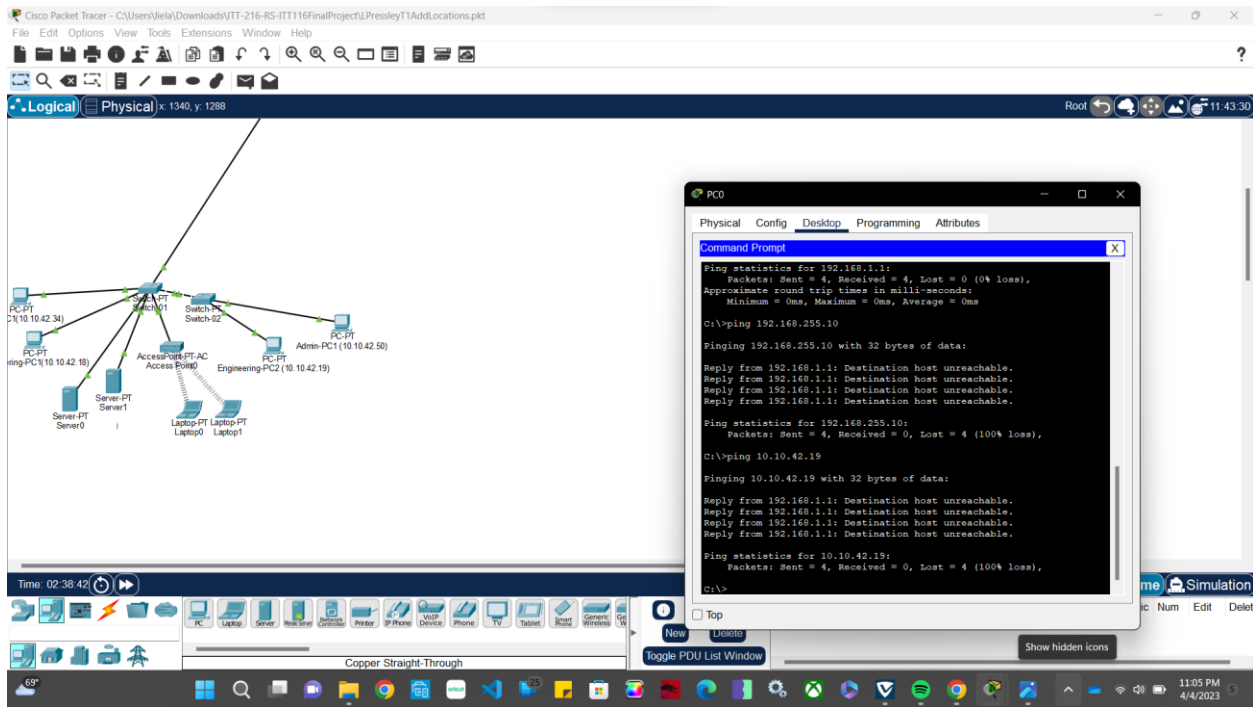


## Location2Workstation successfully pinging its LAN router and Engineering PC2

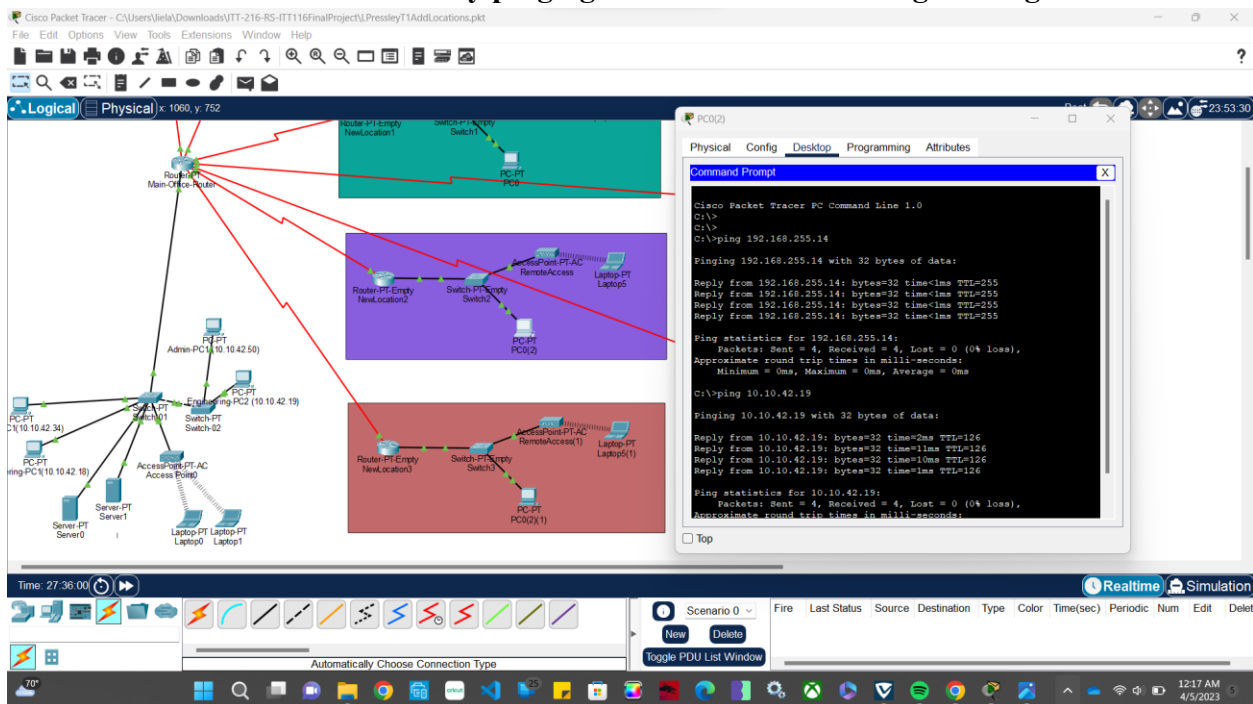

## Location3Workstation Successfully ping LAN Router

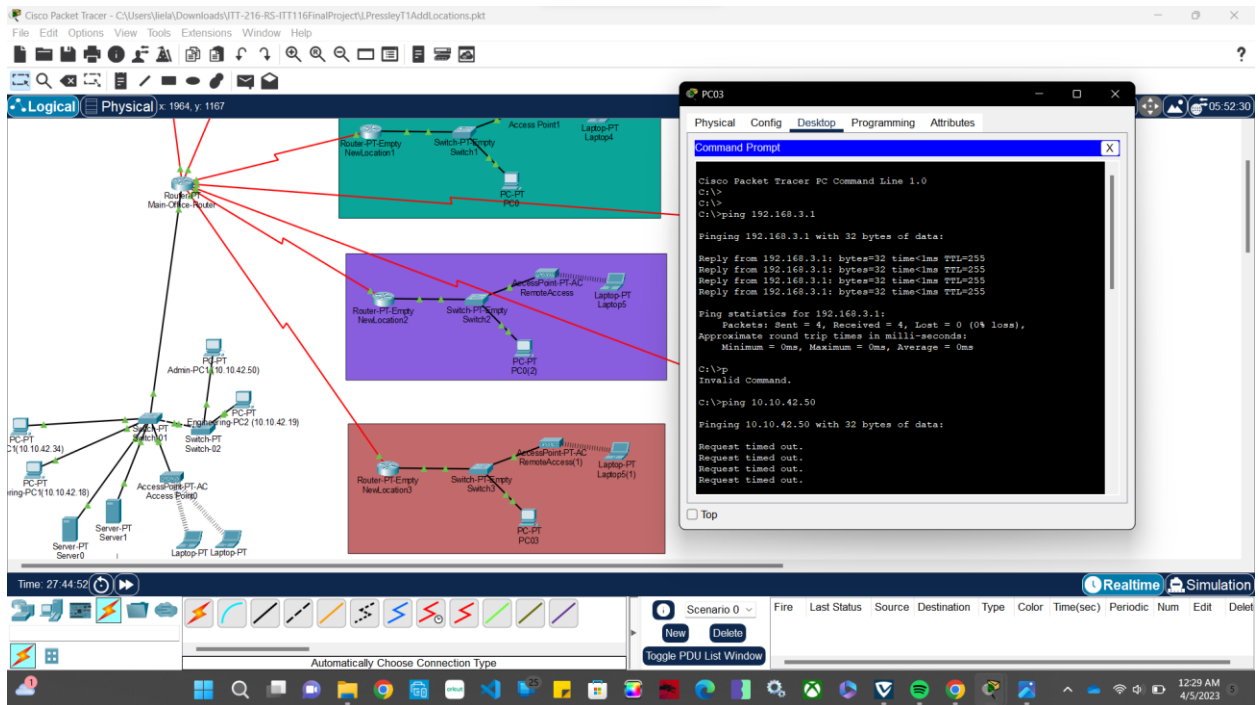

## Location4Workstation Successfully ping its LAN router

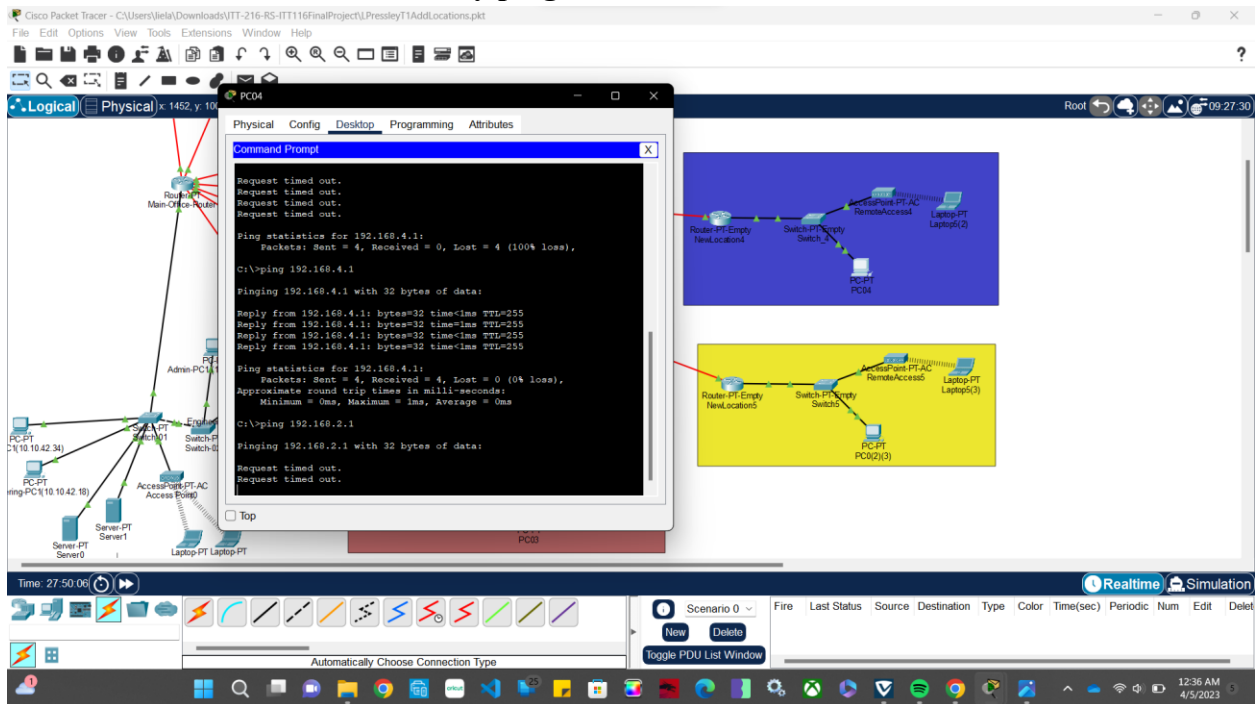

## Location5Workstation Successfully ping LAN router via 2 different ports

Cisco Packet Tracer - C:\Users\iela\Downloads\ITT-216-RS-ITT116FinalProject\PresleyT1AddLocations.pkt

File Edit Options View Tools Extensions Window Help

Logical Physical x 1764 v. 895

Root 11:07:30

PC05

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.5.1

Pinging 192.168.5.1 with 32 bytes of data:
Reply from 192.168.5.1: bytes=32 time=1ms TTL=255
Reply from 192.168.5.1: bytes=32 time=1ms TTL=255
Reply from 192.168.5.1: bytes=32 time=1ms TTL=255
Reply from 192.168.5.1: bytes=32 time=1ms TTL=255

Ping statistics for 192.168.5.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>ping 192.168.255.21

Pinging 192.168.255.21 with 32 bytes of data:
Reply from 192.168.255.21: bytes=32 time=1ms TTL=255
Reply from 192.168.255.21: bytes=32 time=1ms TTL=255
Reply from 192.168.255.21: bytes=32 time=1ms TTL=255
Reply from 192.168.255.21: bytes=32 time=1ms TTL=255

Ping statistics for 192.168.255.21:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

PC05

Router-PT-Empty NewLocation0

Switch-PT-Empty Switch0

AccessPoint-PT-AC RemoteAccess0

Laptop-PT Laptop0(2)

PC-PT PC04

Router-PT-Empty NewLocation0

Switch-PT-Empty Switch0

AccessPoint-PT-AC RemoteAccess0

Laptop-PT Laptop0(3)

PC-PT PC05

Time: 27:52:30

Realtime Simulation

Scenario 0

New Delete

Toggle PDU List Window

Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete

Automatically Choose Connection Type

12:40 AM 4/5/2023