


COLOUR, IMAGES, TEXT & LINE

COLOUR

1. Apply only **CMYK** while selecting colour mode for your artwork.
Using colour mode such as Pantone or RGB might lead to colour inaccuracy during output of your prints.
2. **Do not depend entirely** on the colour displayed on your screen.
Do make some allowance for the discrepancy between the printed jobs and the colour shown on your screen. It may have a slight difference as each type of paper surface has different effect on the colour.
3. Please avoid colour tone of **below 10%**
Light colour shades are usually printed way much lighter compared to the colour you see in your screen. To prevent such issue, please avoid low toned colour on your prints.

	C = 20 M = 5 Y = 5 K = 0			C = 5 M = 5 Y = 5 K = 0			C = 1 M = 9 Y = 6 K = 0	
--	-----------------------------------	---	---	----------------------------------	---	---	----------------------------------	---



4. **Avoid setting Black colour as (C=100, M=100, Y=100, and K=100)**
When there is too much ink printed on that surface, it may cause sheets sticking to each other as it takes way longer time for it to dry. It will be damaged as the images may be blurred. Kindly refer to the appropriate setting below for Black:

	C = 100 M = 100 Y = 100 K = 100			C = 40 M = 30 Y = 30 K = 100			C = 40 M = 0 Y = 0 K = 100	
--	--	---	---	---------------------------------------	---	---	-------------------------------------	---

**However, avoid using SUPER BLACK on small text as due to ink spread.*

5. For Offset or Long Run Orders, do **avoid a ink percentage of 240%** on your artwork.
Same goes to other colours, a thick ink printing may also cause sheets sticking to each other and blurred image. For example:

	C = 70 M = 20 Y = 90 K = 50			C = 90 M = 30 Y = 100 K = 50	
Total ink coverage = 230%			Total ink coverage = 270%		

6. To enhance the effect of toning, we suggest to apply at least 10% difference on the colour. For example:

	C = 80 M = 100			C = 95 M = 100	
--	-------------------	---	---	-------------------	---

LINE

1. **Do not set any Line at the weight below 0.25pts.**
(Not applicable for Pre-linked Stamp, Spot UV & Hot-Stamping - refer to *Pre-linked Stamp, Spot UC & Hot-Stamping* section for the details)

	0.1 pts	
	0.25 pts	
	0.5 pts	
	1.0 pts	

IMAGES

1. Make sure you are applying the colour mode of **CMYK** only on your images.
2. Kindly make sure your images are set to **300dpi** or more for a better image print quality. For scanned line art or black and white images, do make sure its set at **1200dpi** or more.
3. **Avoid manipulating your images using a layout program.**
When you are enlarging an image, its resolution will be decreased. Hence, we advice you to use Adobe Photoshop to make such manipulation on your images.

	Resolution = 300 dpi			Resolution = 72 dpi	
--	----------------------	---	---	---------------------	---

Resample from 72 dpi to 300 dpi in layout program*:



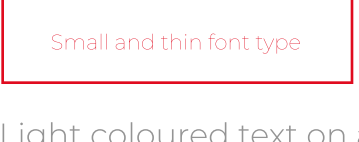
	Resolution = 72 dpi			Resolution = 300 dpi	
--	---------------------	---	---	----------------------	---

Enlarging image in layout program*:

	Resolution = 300 dpi			Resolution = 150 dpi	
--	----------------------	---	---	----------------------	---

TEXT

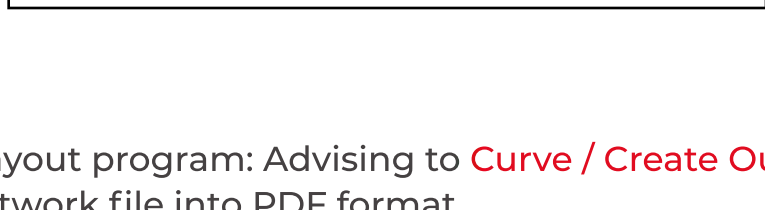
1. **Minimal Font Sizes of 4pts.**
During our production, whenever there is a small and tiny misalignment, it may lead to blurry words as the CMYK layers are overlapped imperfectly. So, as words are too small, it may look like shadows. Whenever you are working out on small text, kindly be aware on the following:
- a) Avoid white texts on a coloured background
b) Avoid light coloured text on white background
c) Avoid thin lined font types

	Small and thin font type		Small and thin font type		Small and thin font type
White text on a coloured or black background			Light coloured text on a white background		

- d) Avoid choosing a background with a colour that is made up of 2 or more CMYK colours to reduce the issue of blur text, we suggest that you can use a font size of at least 5pts AND add an outline for your texts.

			
<i>Attention: Printoka shall not bear any consequences on any print defects resulted from small font sizes.</i>			

- e) Apply only **K=100** for black texts and lines.


--

2. Layout program: Advising to **Curve / Create Outline / Path** all the fonts before converting your artwork file into PDF format.

Adobe Photoshop: Adjust the resolutions to **300dpi and above** and **Rasterize Type** it before converting your artwork file into PDF format.

We advice not to use Adobe Photoshop in setting text as the result might not be as clear as setting it using a layout program.