

EMBOSSING ARTWORK SPECIFICATION

LIMITATIONS:

General


- Emboss is not applicable on gluing area
- Embossed area are not to be overlapped with Spot UV artwork.
- Important elements such as text, images, logo, and etc must be kept within safe zones.
- Emboss is only applicable from at least 3mm from the creasing line.

Font

- With referring to Arial font types, the minimal size of fonts is 11.0pts, including words inside any logo.
- Any font that is smaller than 11.0pts will be embossed as a whole block instead of individual letter.

Line

- The minimal thickness of lines is 1.0pts.
- Do not leave any gap between embossed lines in a distance of 2.0mm
- Do not apply embossing on outlines, as it shall make misalignment more obvious.

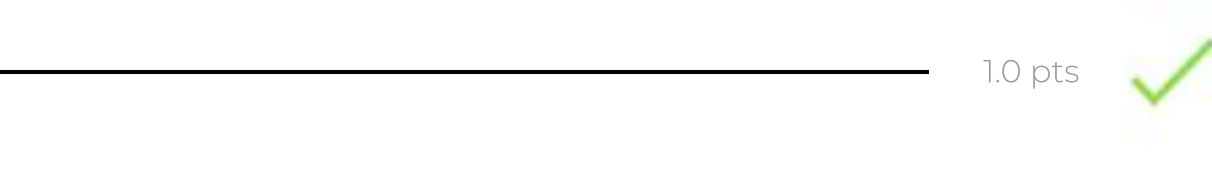

Dot

- Dot thickness are not to be smaller than 2.0pt.
- Keep the gap between embossed at 1.0mm at least.
- Any other symbol may also be represented as Dot such as Comma(,), Full Stop(.), Colon(:), Semi Colon(;), Apostrophes ('), Quotation Marks(") and etc.

Quality Tolerance

- Registration accuracy for Embossed Job is approximately +-0.25mm

ARTWORK PREPARATION

1. Embossed Artwork can be either a vector graphic, text, shape, or solid colour.
2. Embossed Artwork shall be prepared in C=100 as a representation with no tinting or toning.
3. Embossed Artwork must be accurately aligned with printing artwork. You might need to double check to ensure the position is fit to place in the Embossing Artwork page.
4. Convert the file into PDF format before submission.
5. You need to prepare two PDF file for any print job with embossing.
File 1: This is the artwork for offset printing.
File 2: This is the artwork for Embossed image area only.

Refer to illustration below:

File 1: Offset Colourful Artwork



File 2: Embossed Image or Area Artwork.




EMBOSSING ON CREASING LINE IS NOT ADVISED.


Embossing on a Booklet Cover (Saddle Stitching)



Embossing on a Booklet Cover (Perfect Binding)

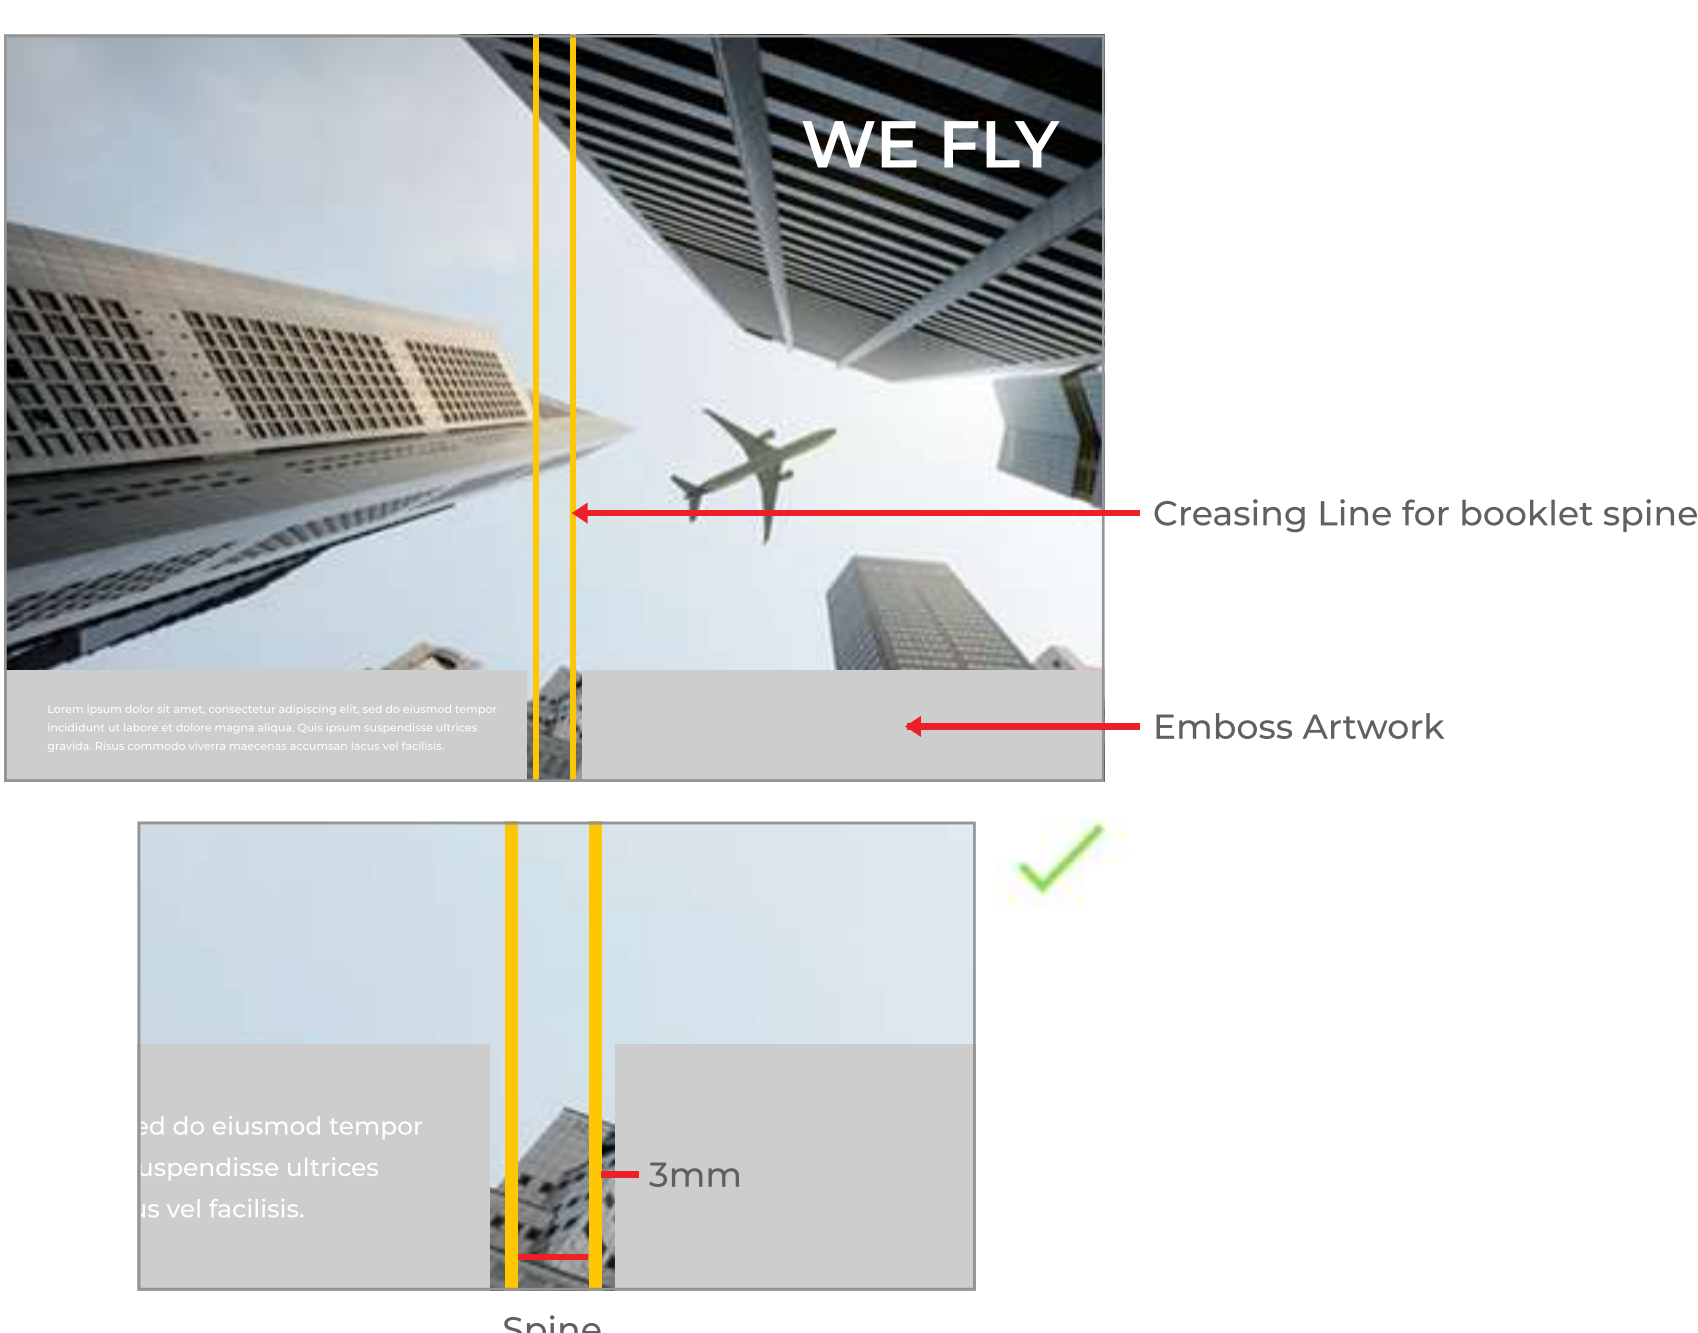

Embossing on a Packaging with Creasing Line demonstrated.

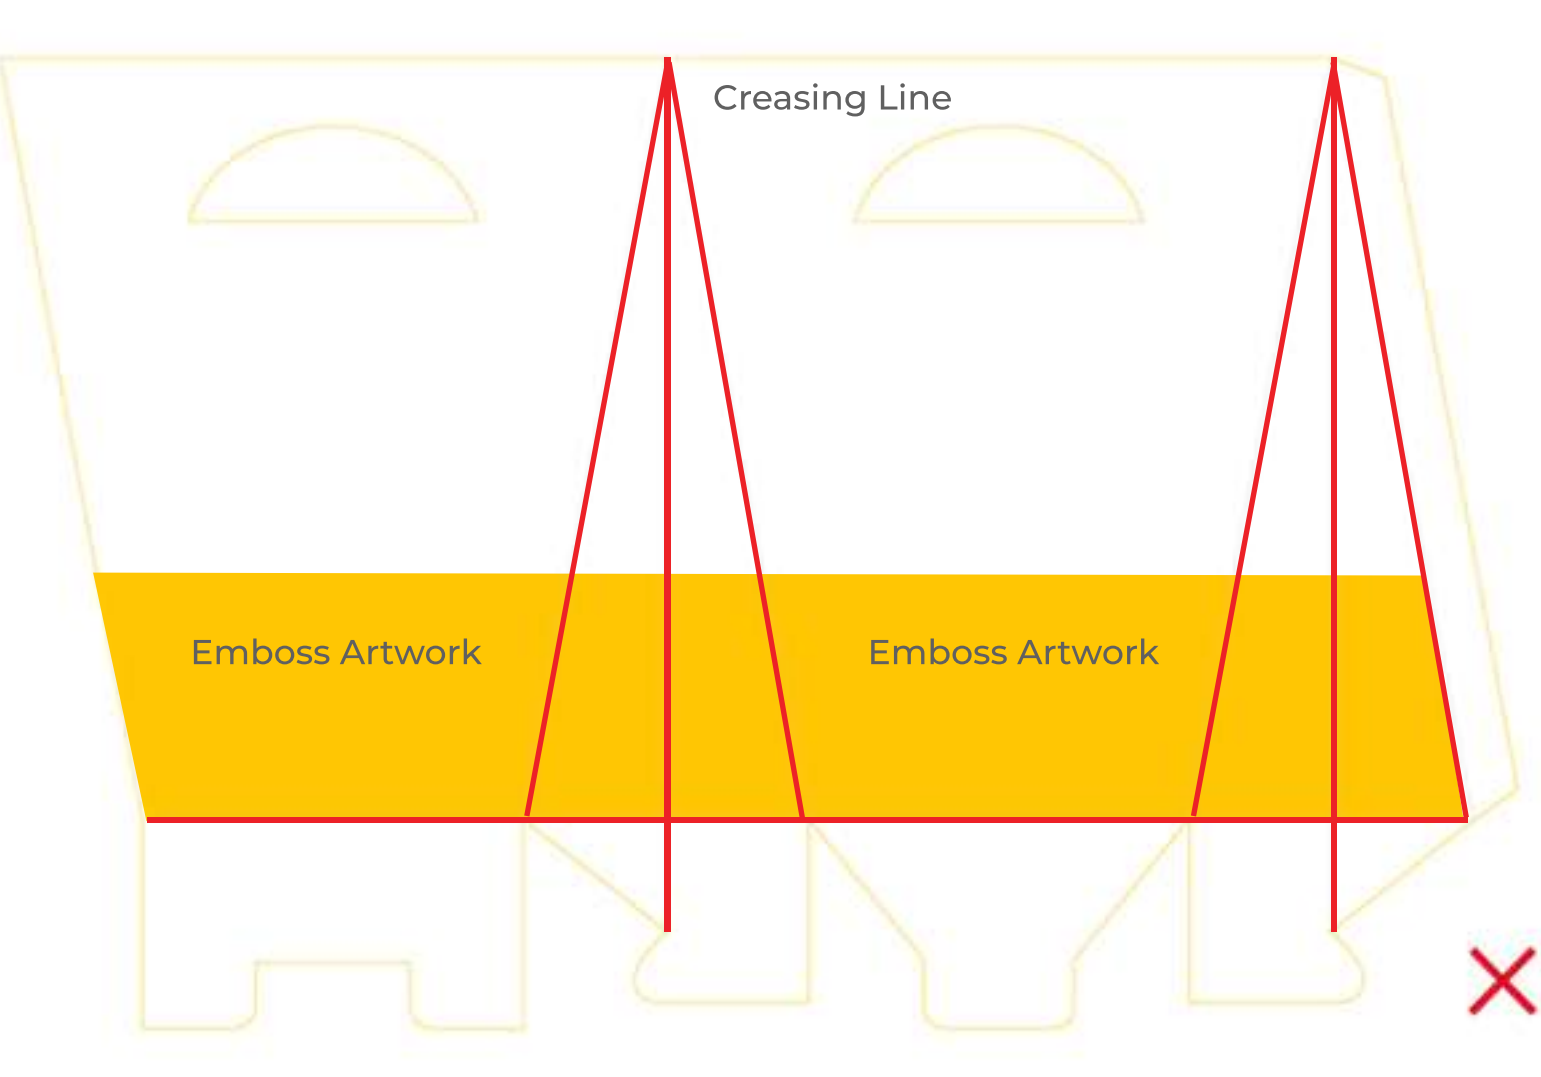

Embossing Line Gap Limitation

- The distance or gap between Embossed Lines shall be at a minimum of 2mm.
- Keep embossed image at minimum 3mm distance away from the creasing line.

