

Introduction to Computer Graphics

GAMES101, Lingqi Yan, UC Santa Barbara

Lecture 6: Rasterization 2 (Antialiasing and Z-Buffering)



Announcements

- Homework 1
 - Already 49 submissions so far!
 - In general, start early
- Today's topics are not easy
 - Having knowledge on Signal Processing is appreciated
 - But no worries if you don't


Last Lectures

- Viewing
 - View + Projection + Viewport
- Rasterizing triangles
 - Point-in-triangle test
 - Aliasing


Today

- Antialiasing 抗锯齿
 - Sampling theory
 - Antialiasing in practice
- Visibility / occlusion
 - Z-buffering


Recap: Testing in/out Δ at pixels' centers

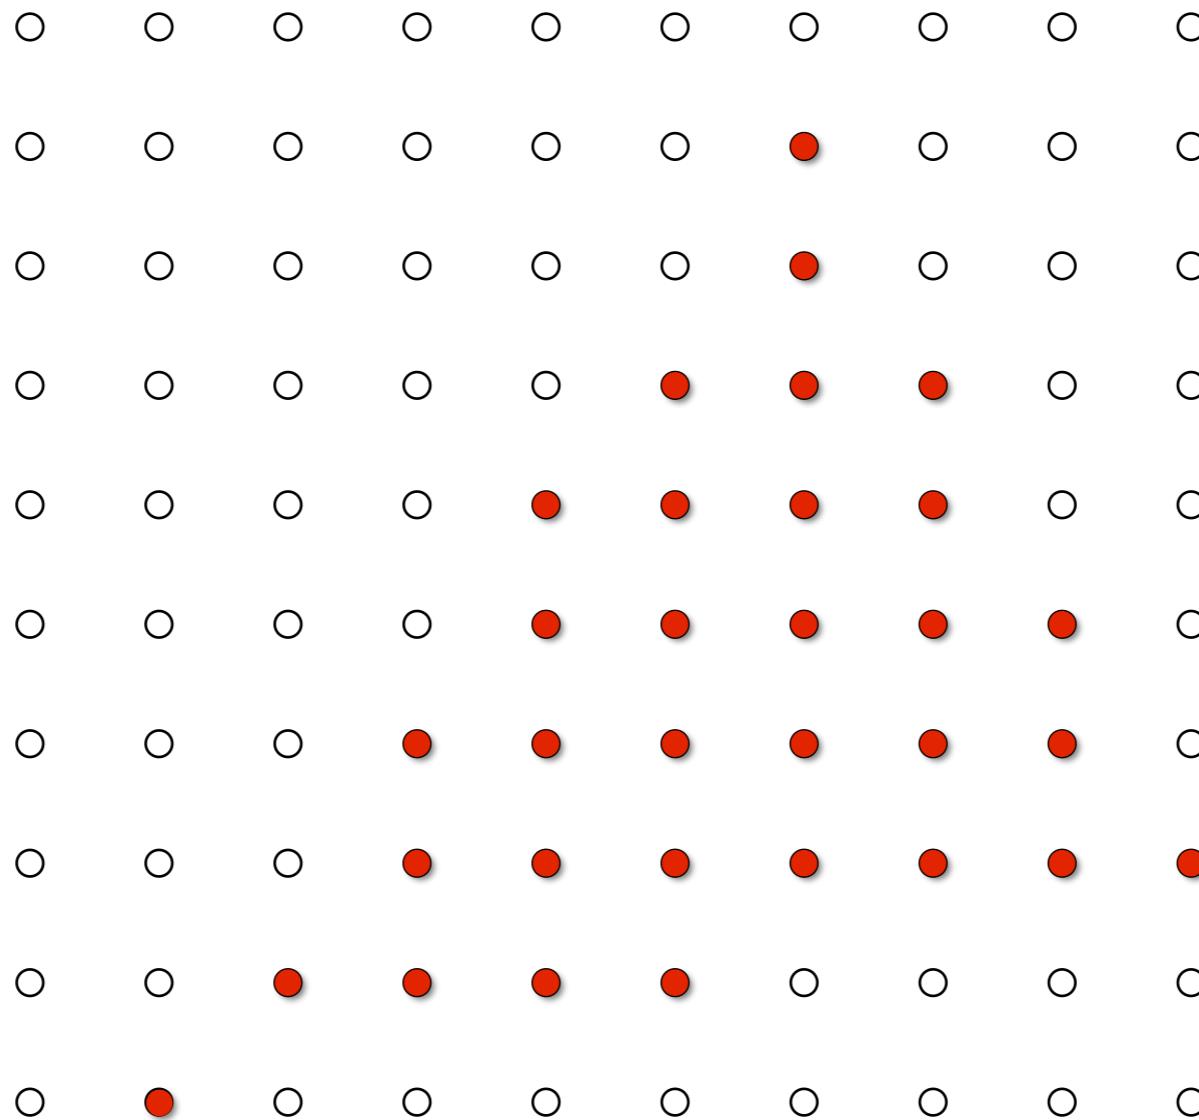


Pixels are uniformly-colored squares

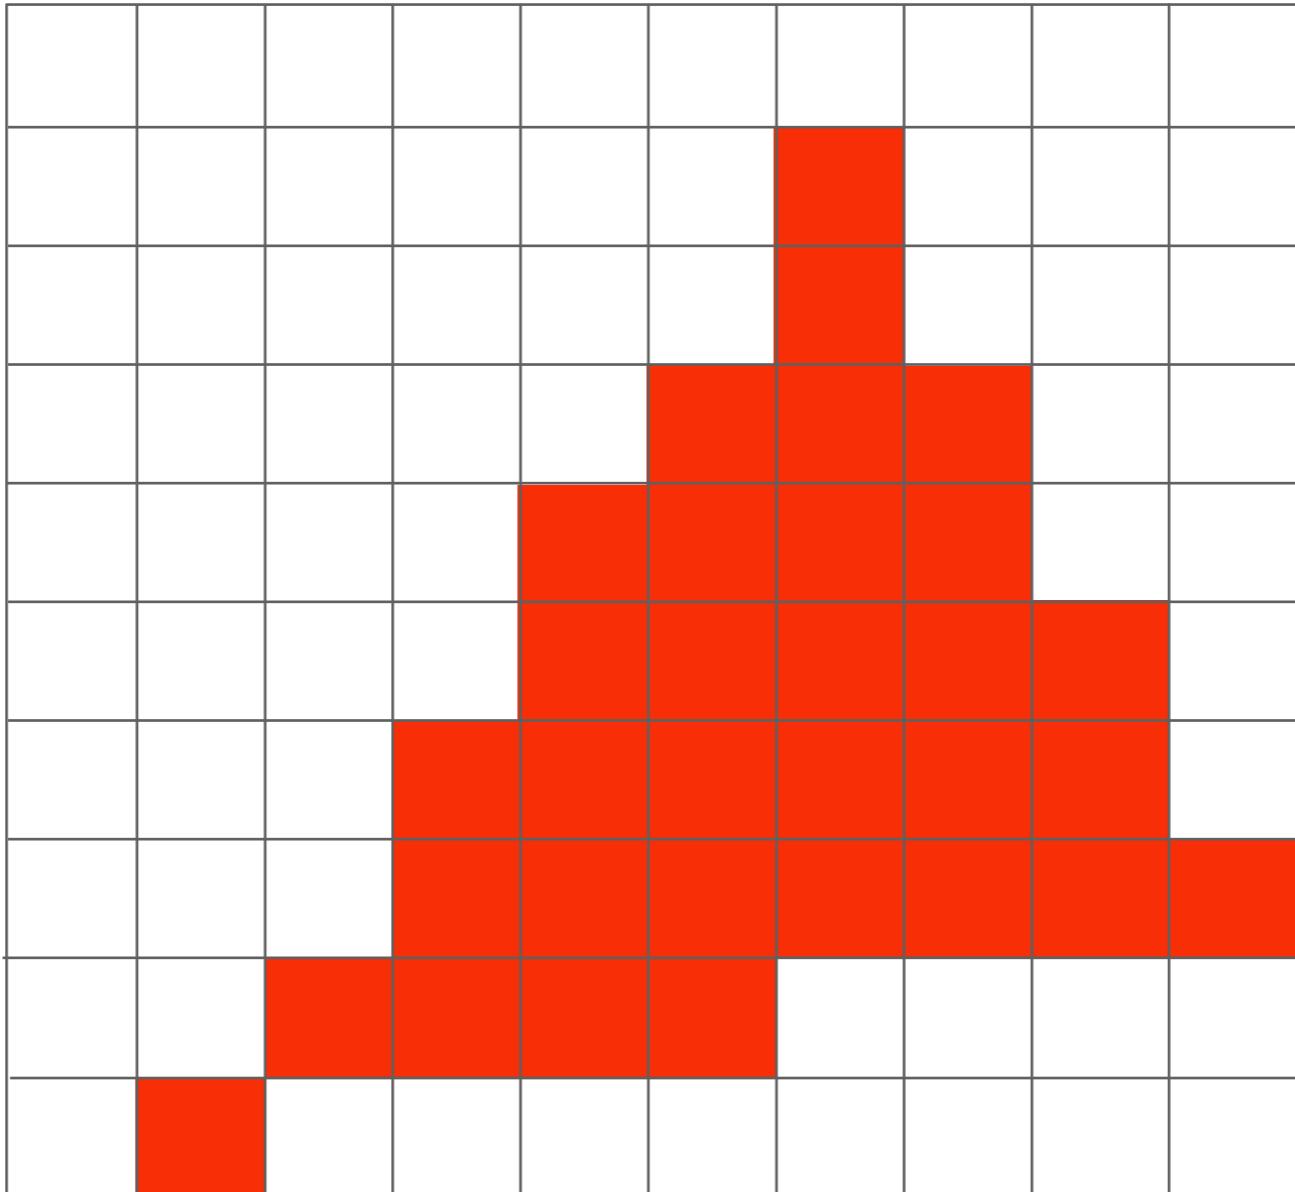

Compare: The Continuous Triangle Function


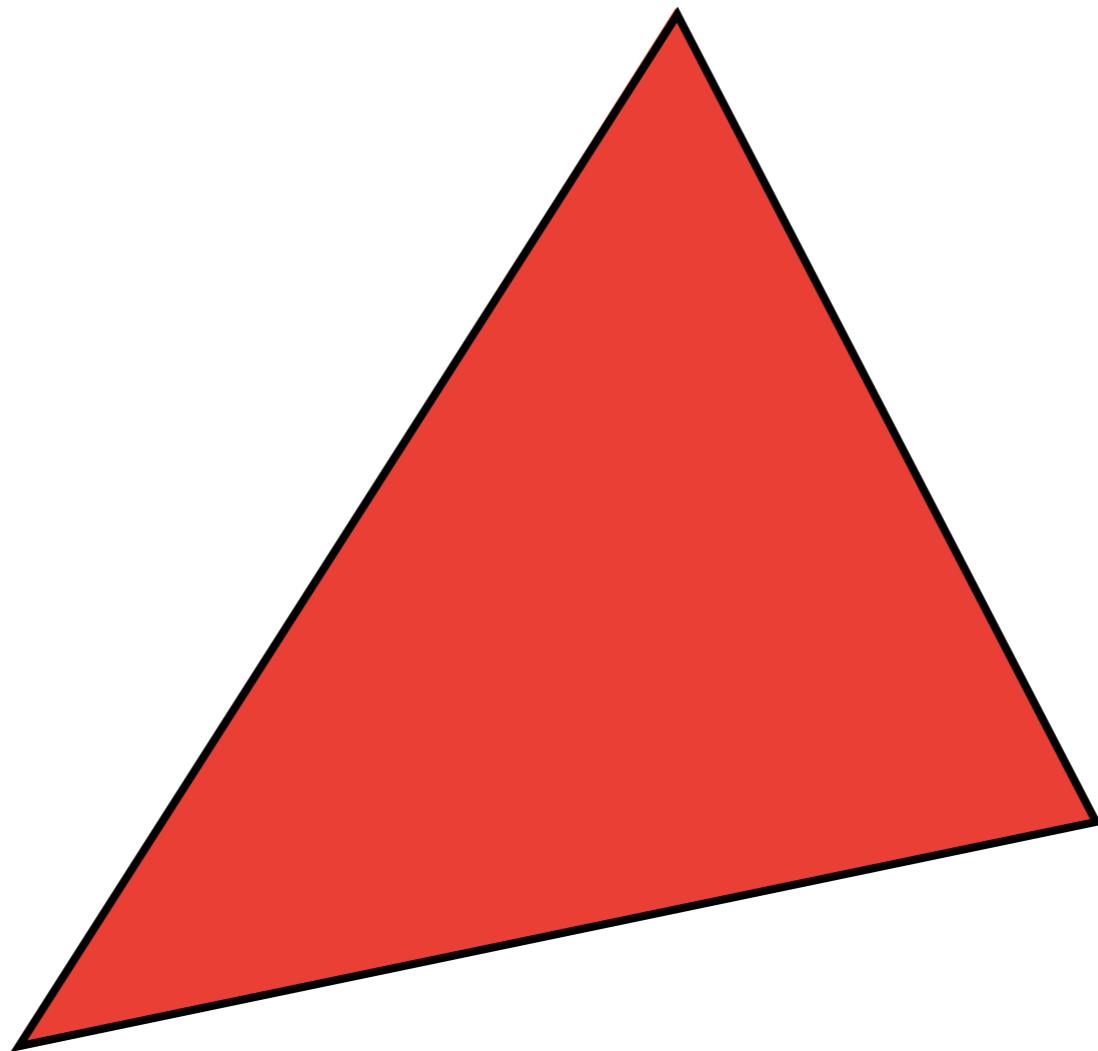


What's Wrong With This Picture?

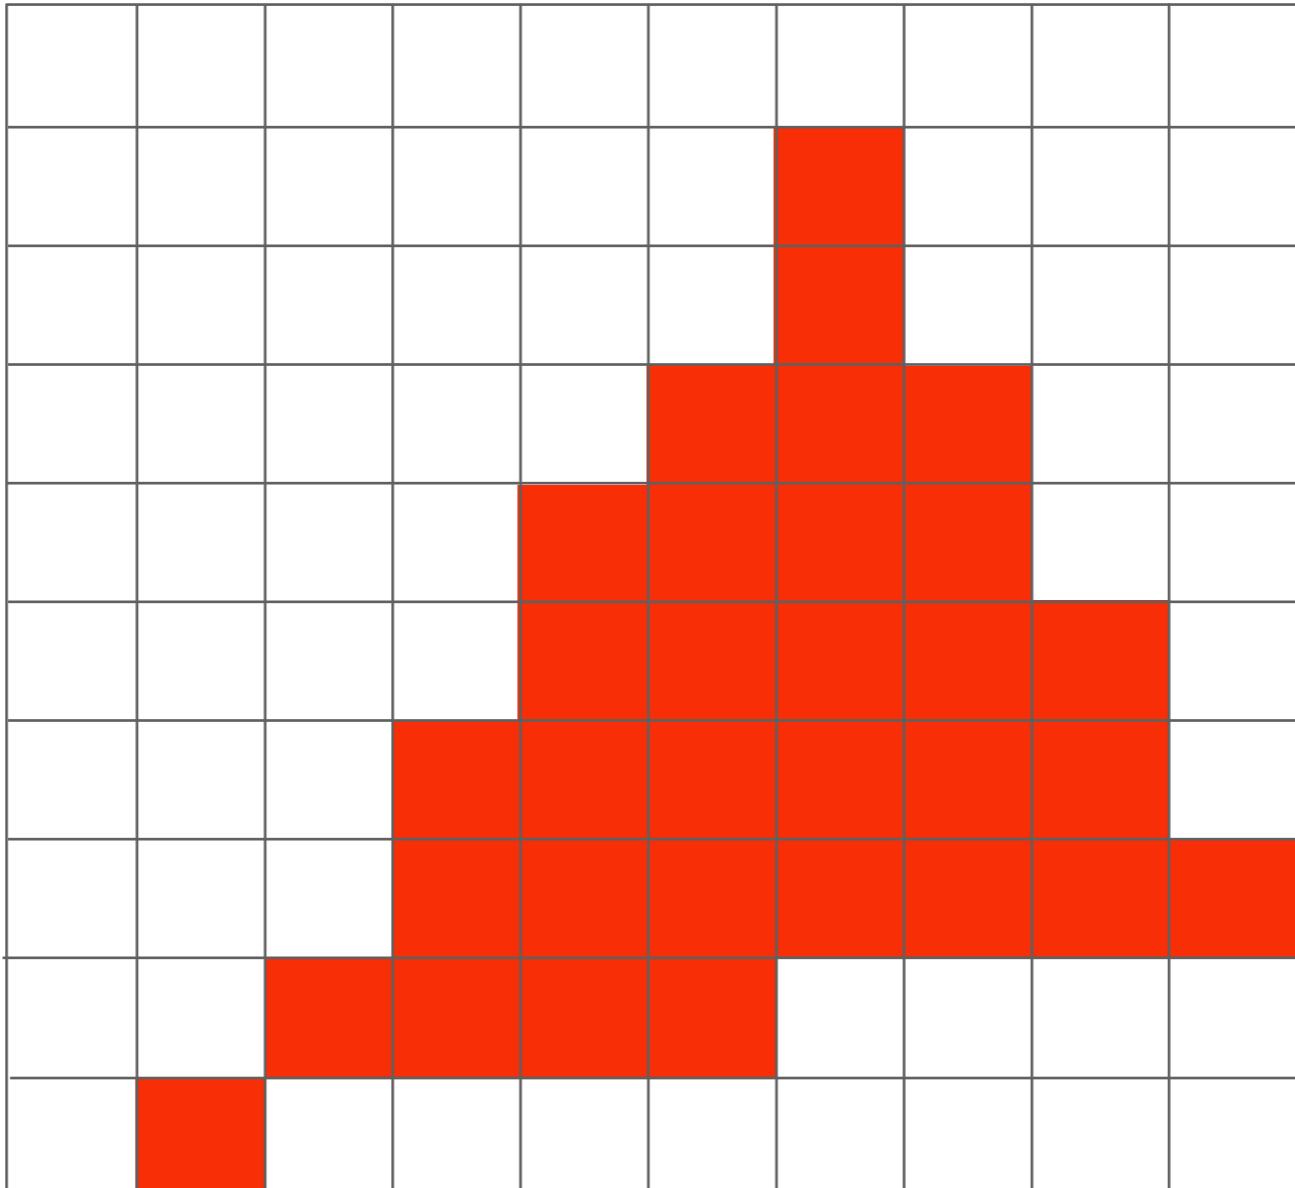

Jaggies!

Aliasing

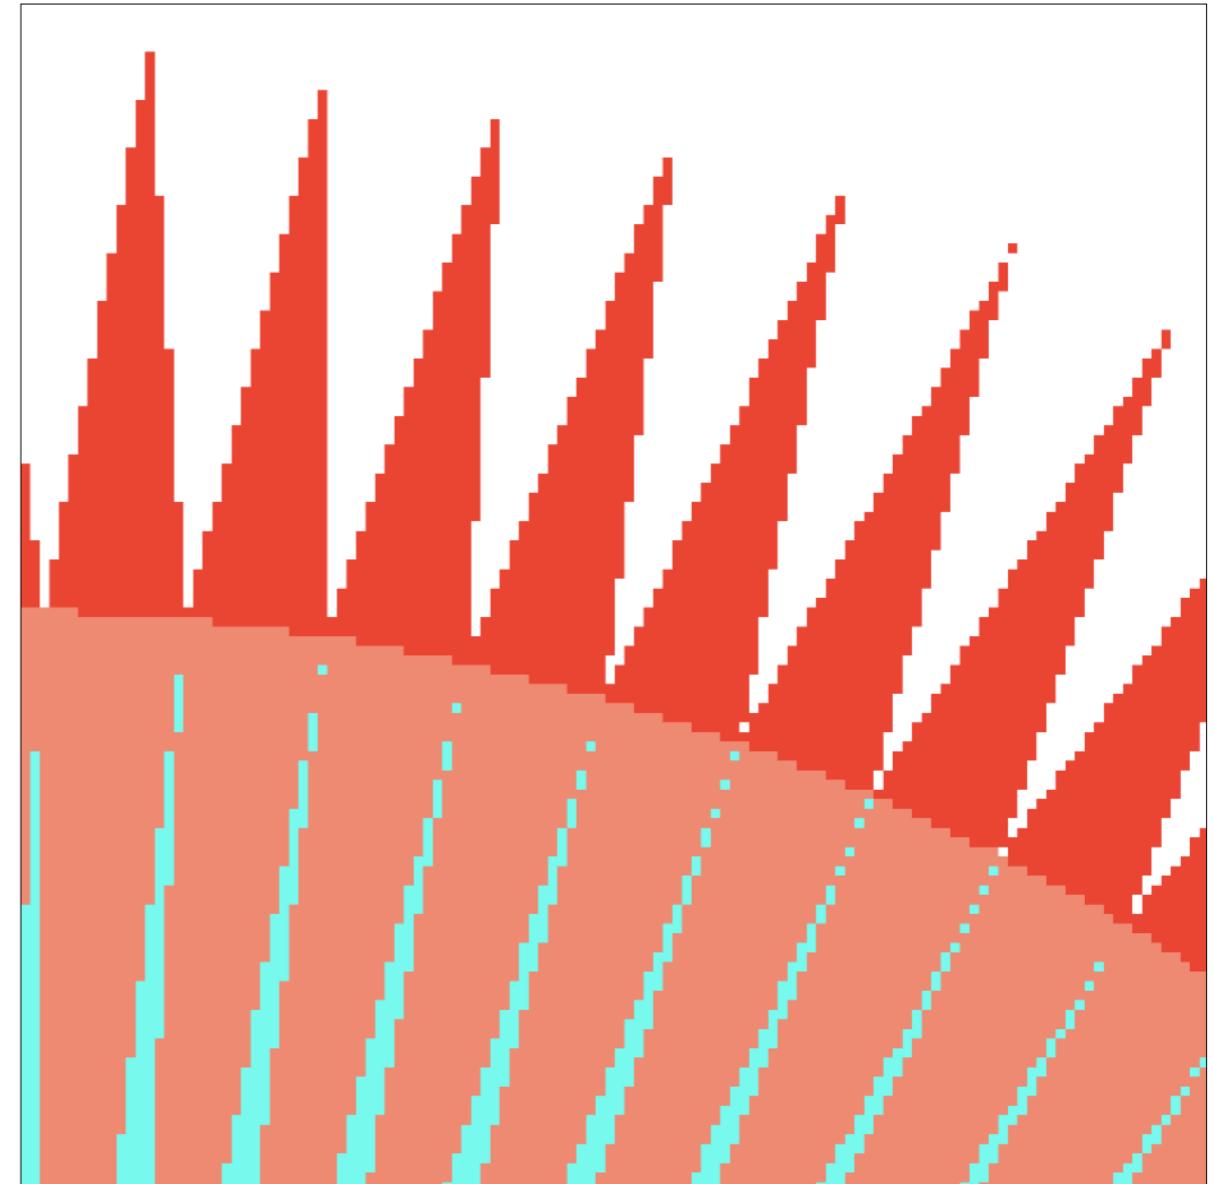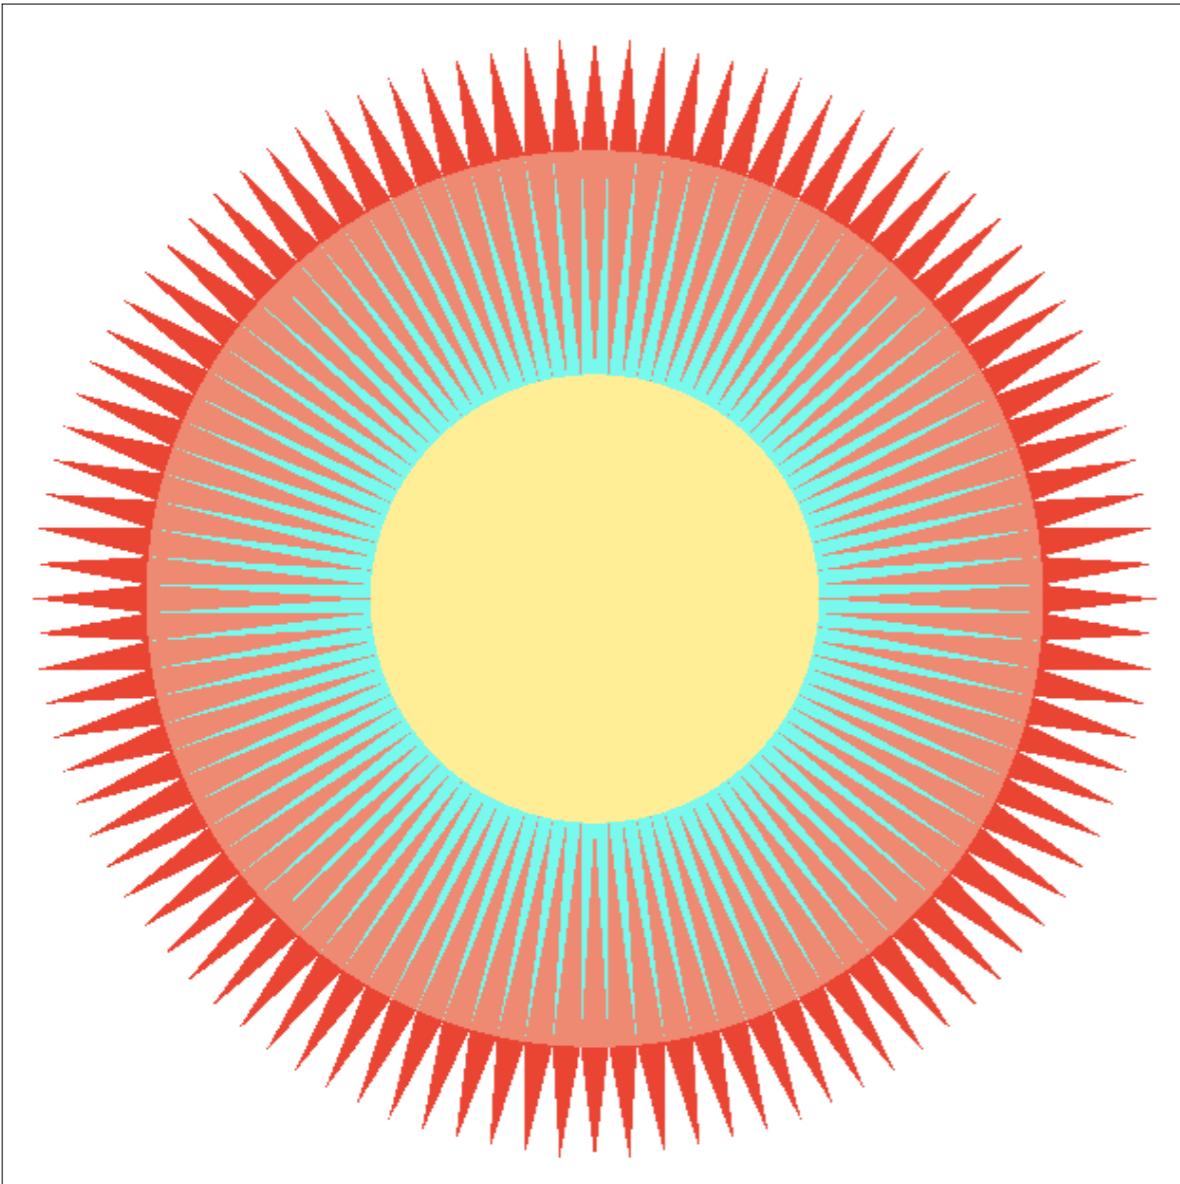


Is this the best we can do?

Slide courtesy of Prof. Ren Ng, UC Berkeley

Sampling is Ubiquitous in
Computer Graphics

Rasterization = Sample 2D Positions


光栅化

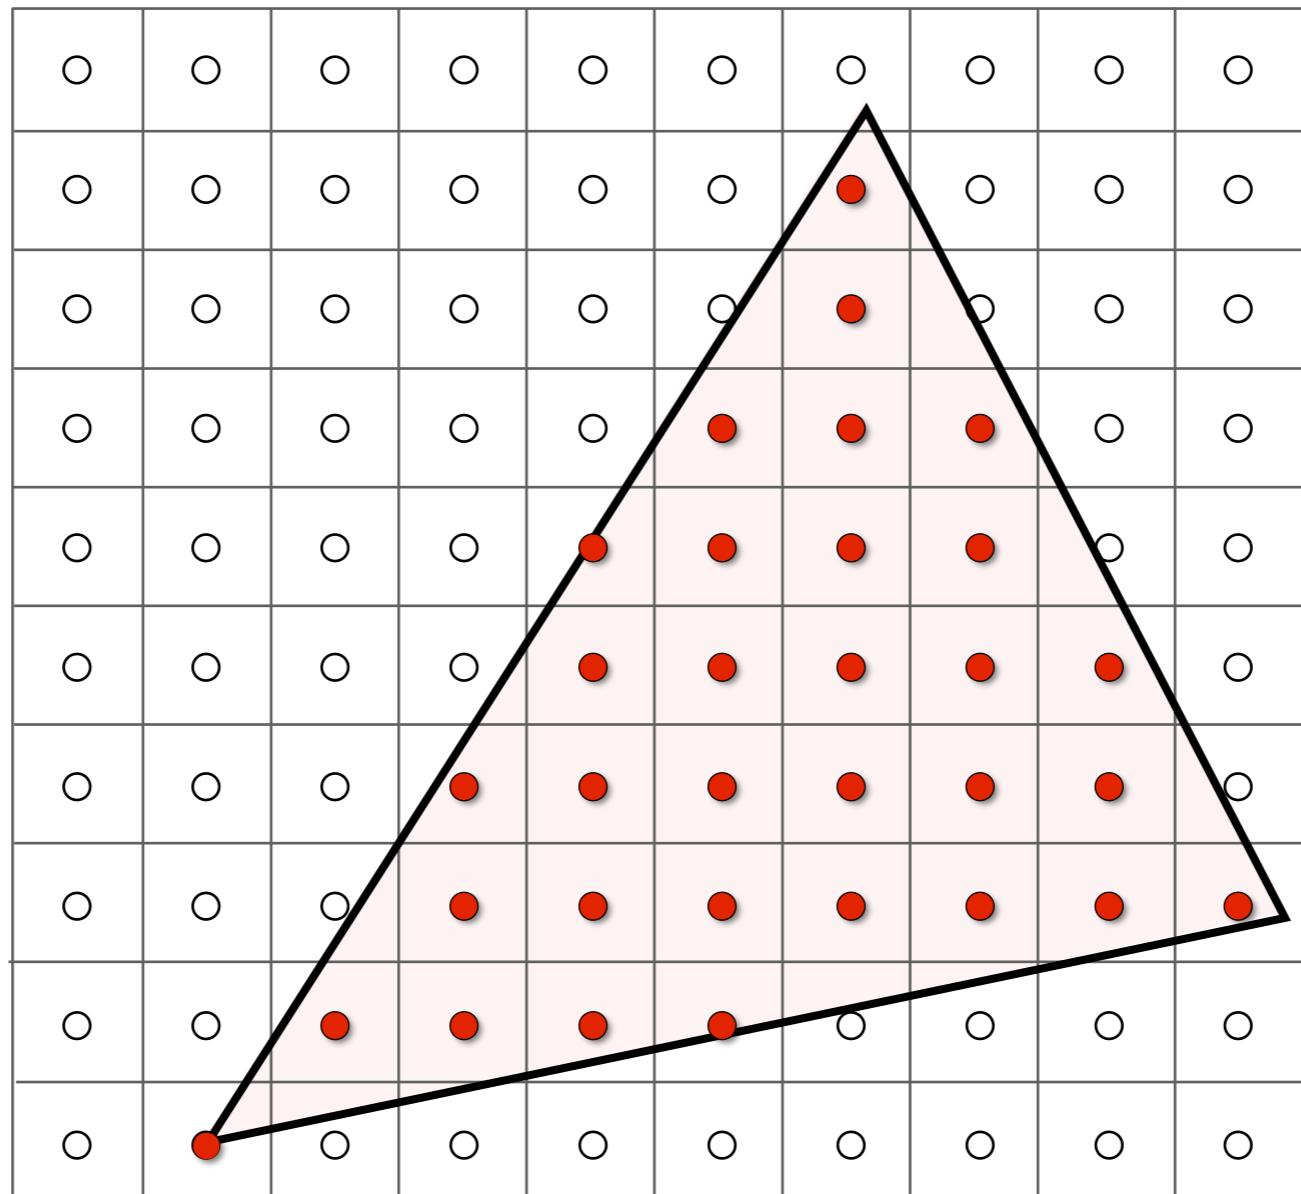

Photograph = Sample Image Sensor Plane



Video = Sample Time


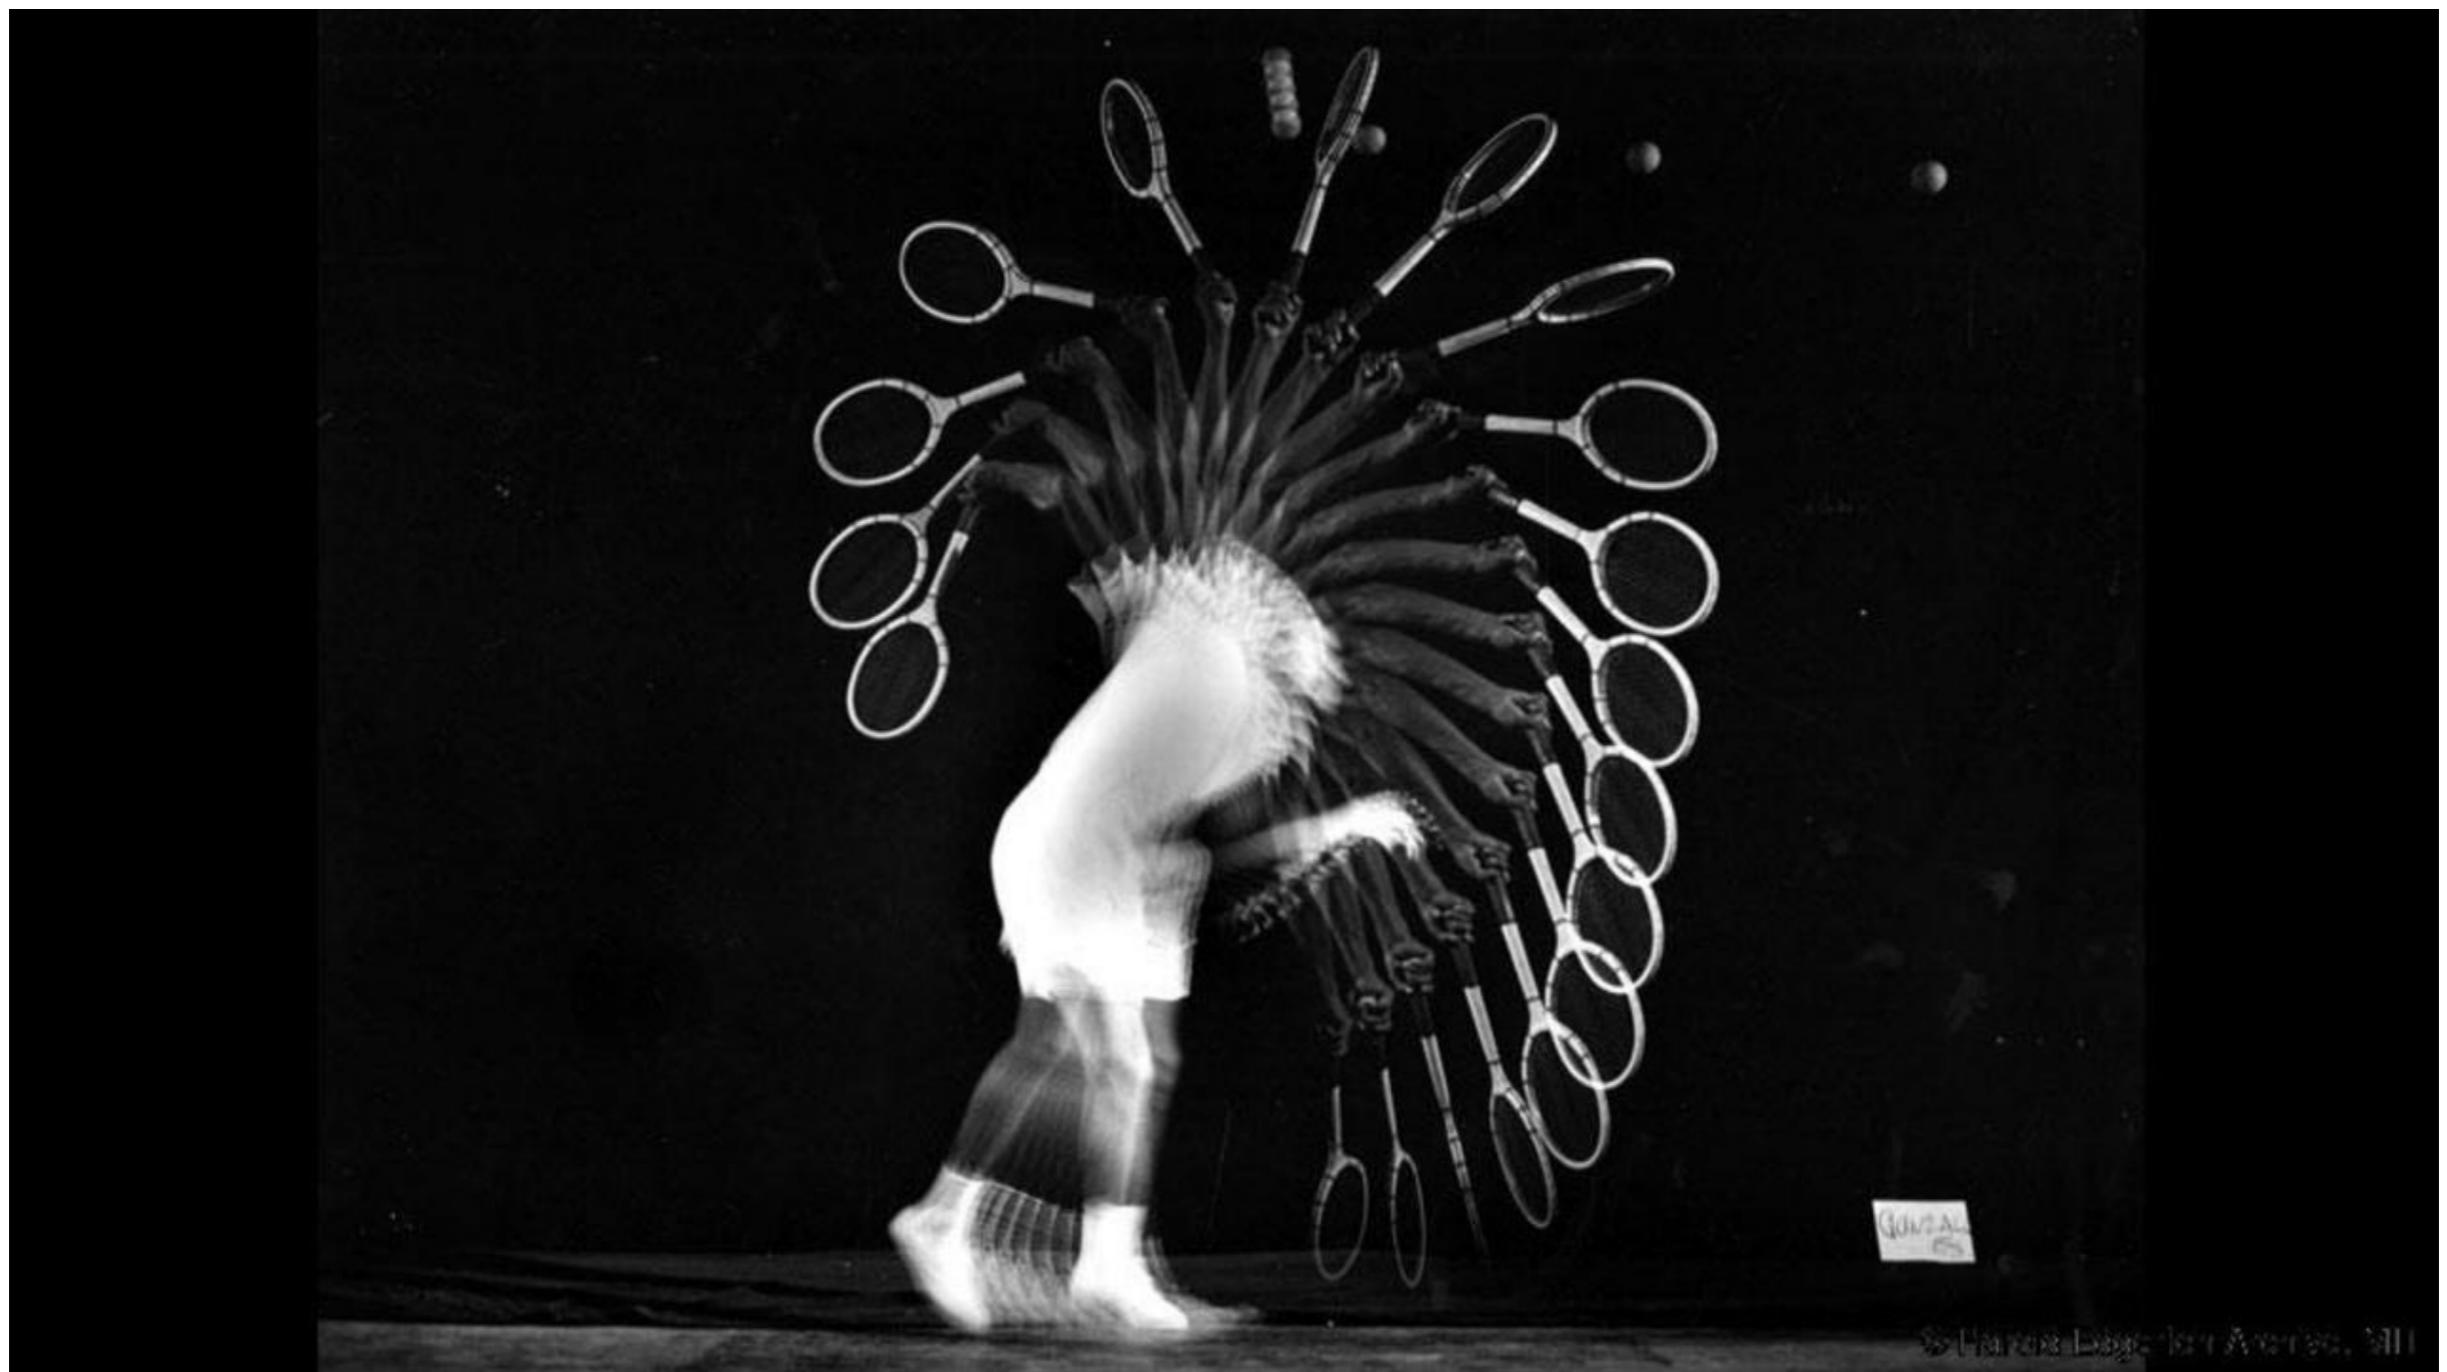


Harold Edgerton Archive, MIT

Sampling Artifacts 不好的结果，失败的案例

(Errors / Mistakes / Inaccuracies) in Computer Graphics

Jaggies (Staircase Pattern)

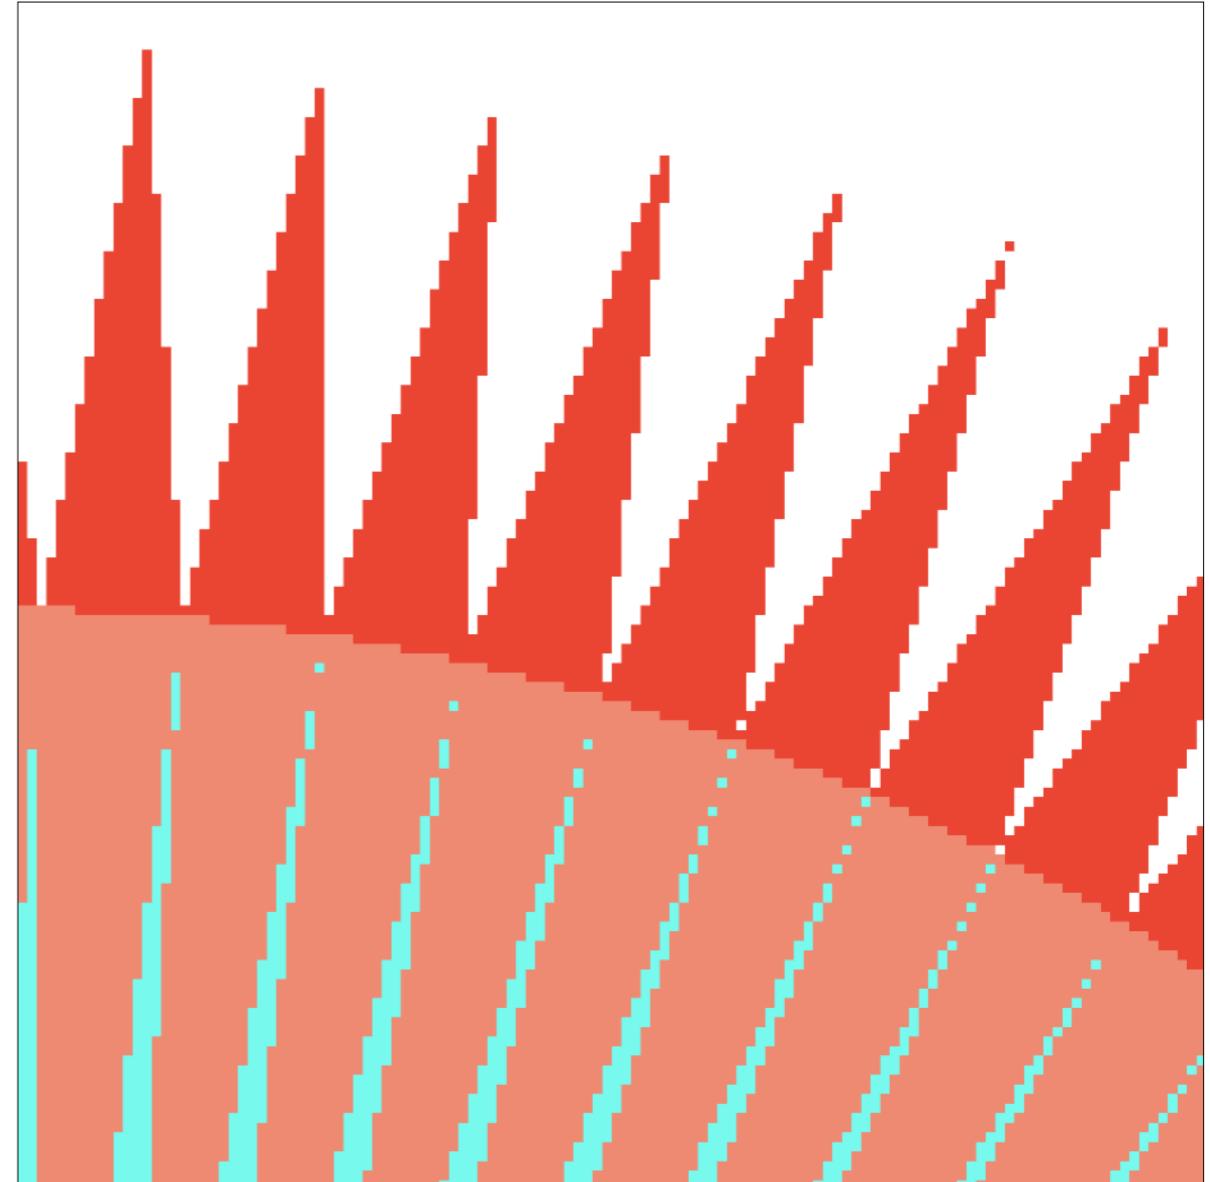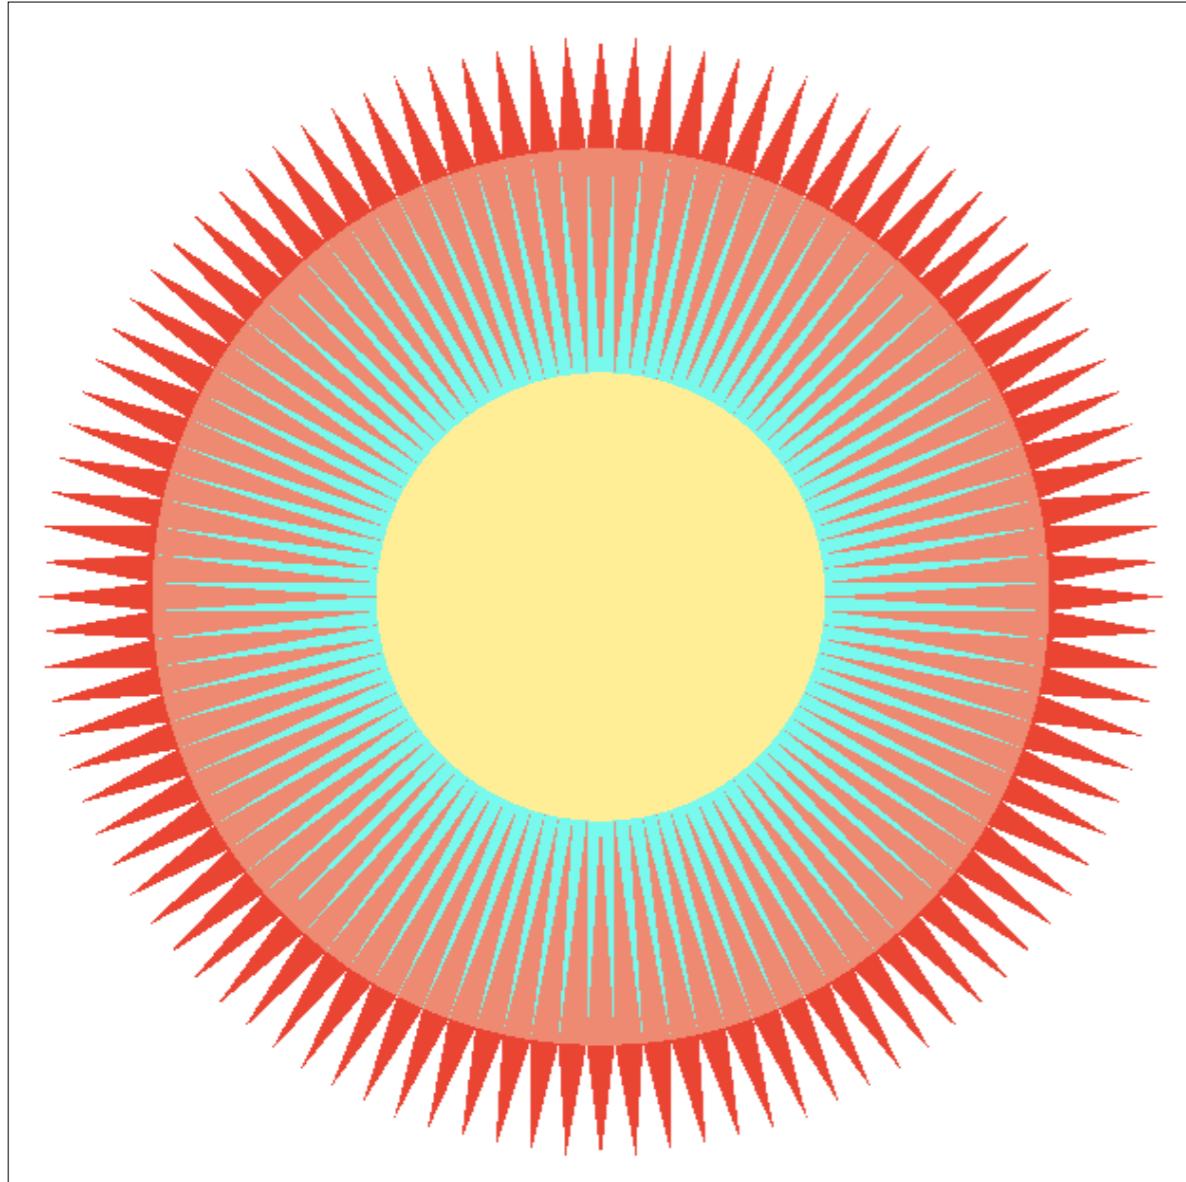

This is also an example of “aliasing” – a sampling error

Moiré Patterns in Imaging

[mwa:]



Skip odd rows and columns

摩尔纹

Wagon Wheel Illusion (False Motion)



Sampling Artifacts in Computer Graphics

Artifacts due to sampling - “Aliasing”

- Jaggies – sampling in space
- Moire – undersampling images
- Wagon wheel effect – sampling in time
- [Many more] ...

Behind the Aliasing Artifacts

- Signals are **changing too fast** (high frequency),
but **sampled too slowly**

Antialiasing Idea:
Blurring (Pre-Filtering) Before
Sampling


模糊 濾波

Rasterization: Point Sampling in Space



Note jaggies in rasterized triangle
where pixel values are **pure red or white**

Rasterization: Antialiased Sampling


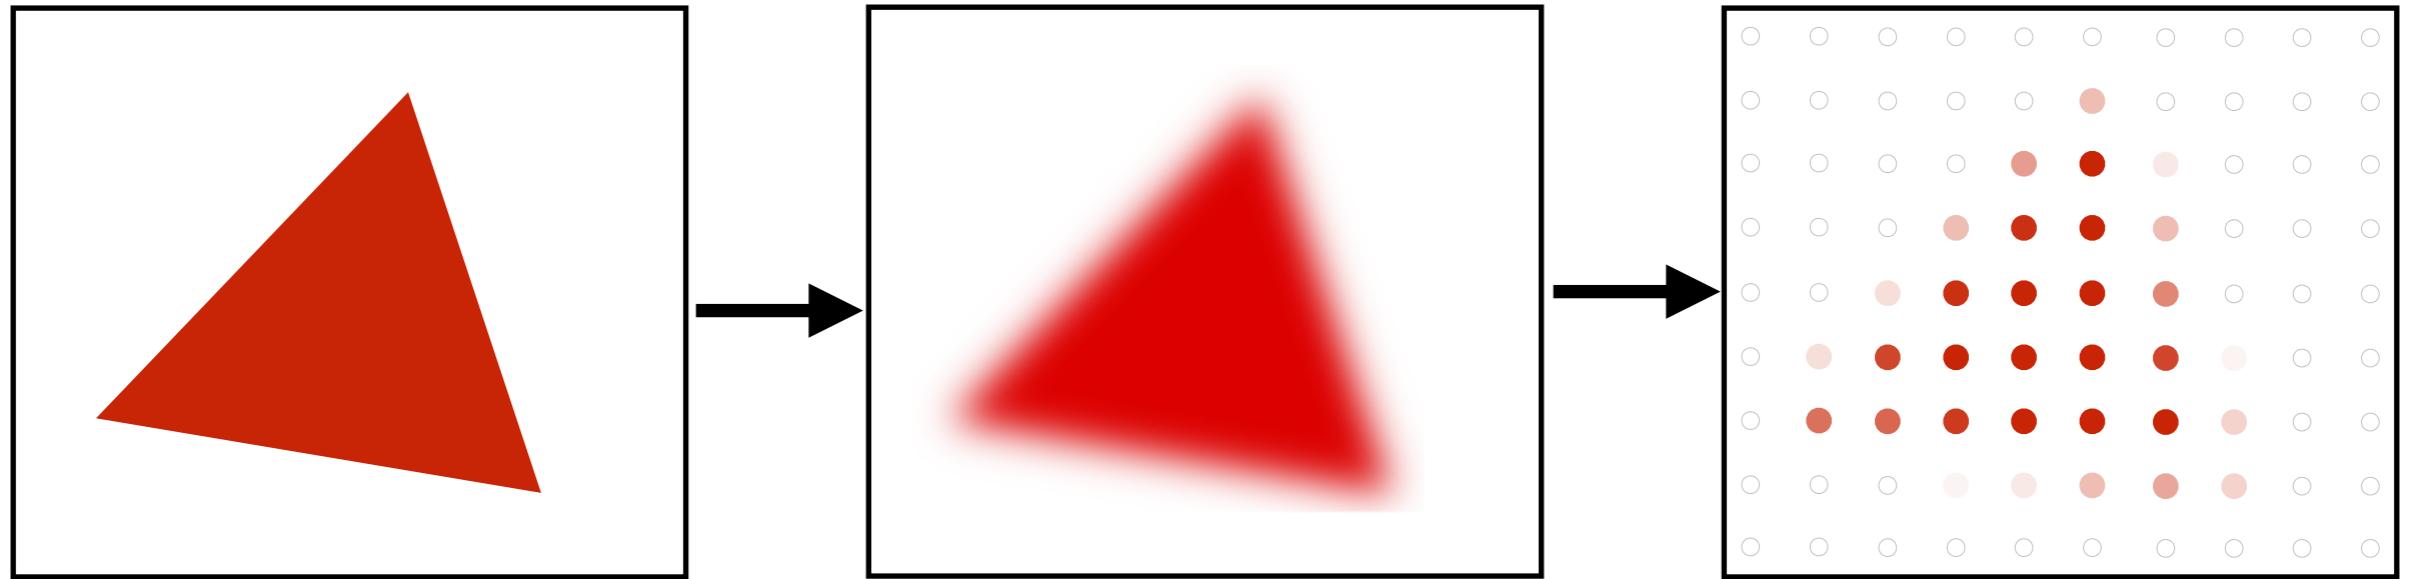


Pre-Filter
(remove frequencies above Nyquist) (?)



Sample

Note antialiased edges in rasterized triangle
where pixel values take intermediate values



Point Sampling

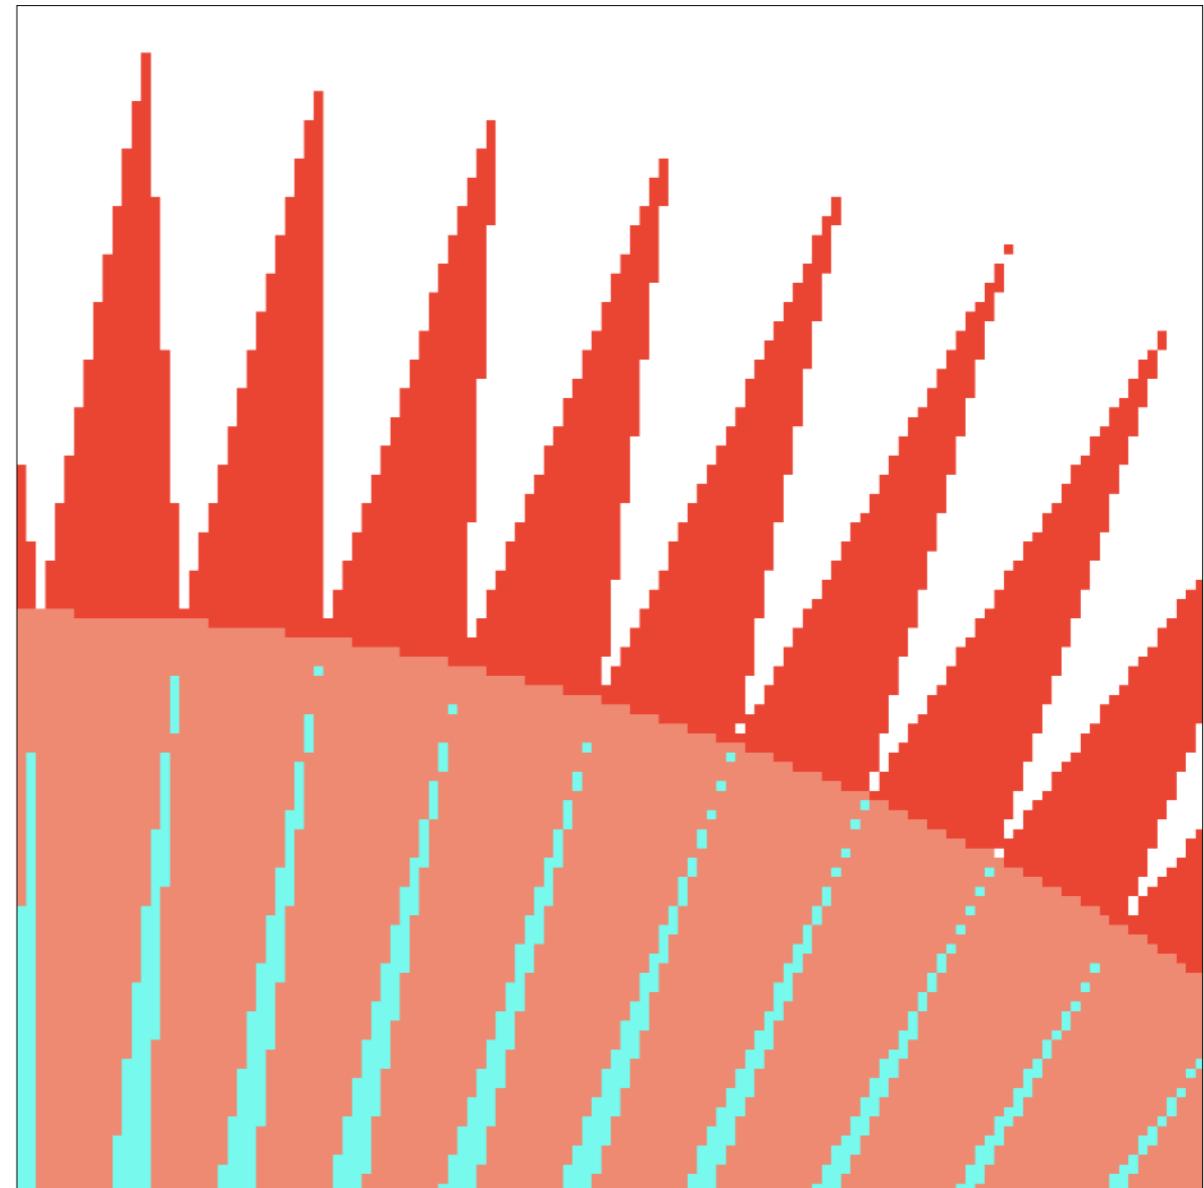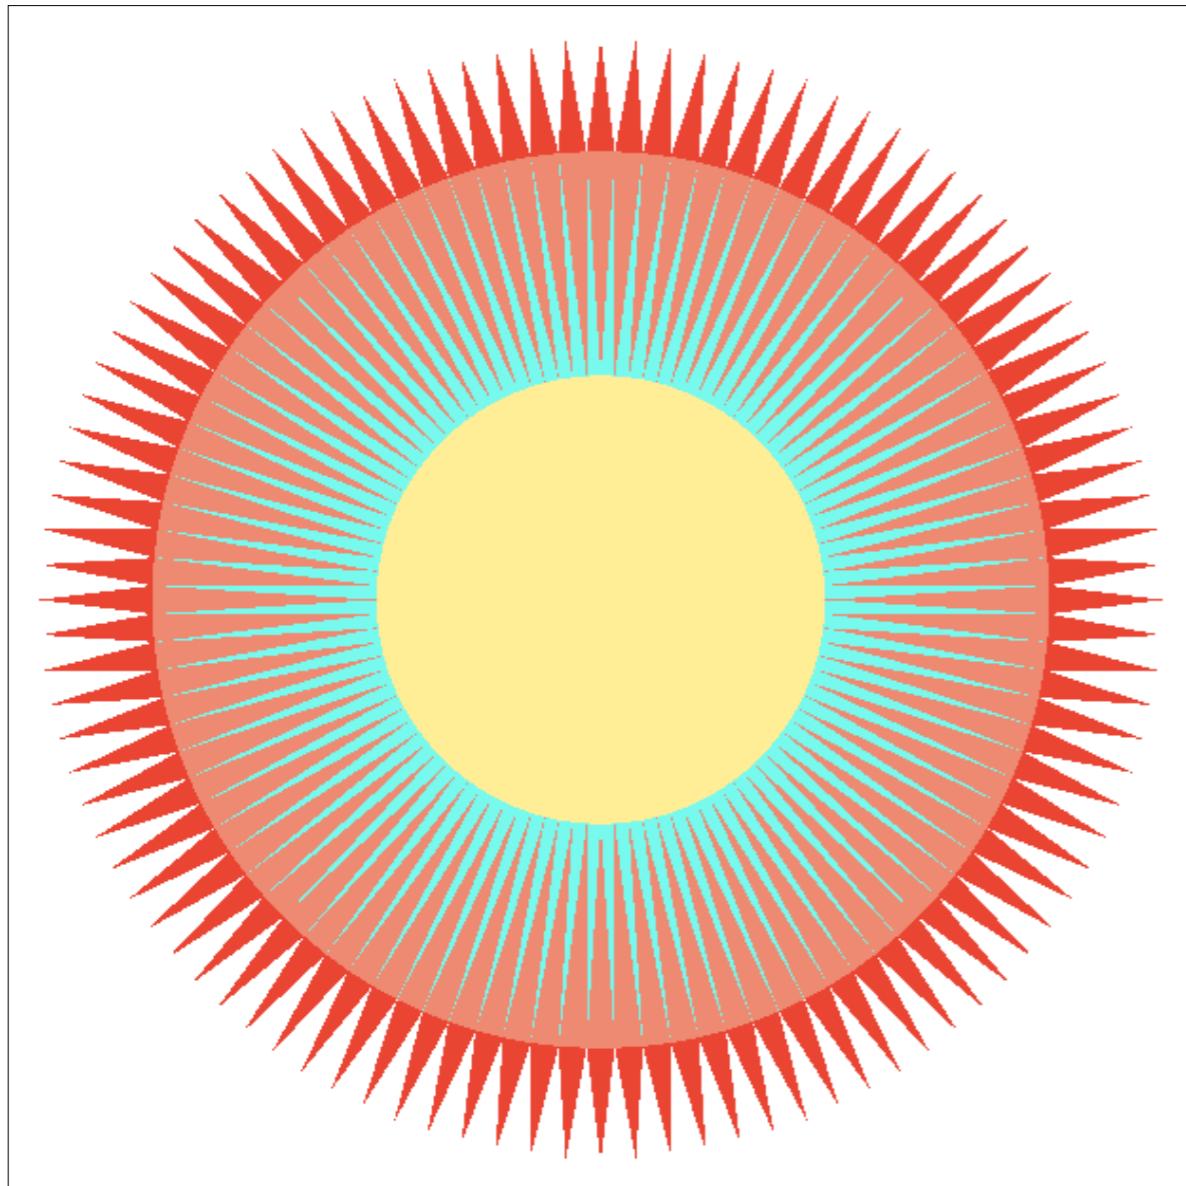


Antialiasing

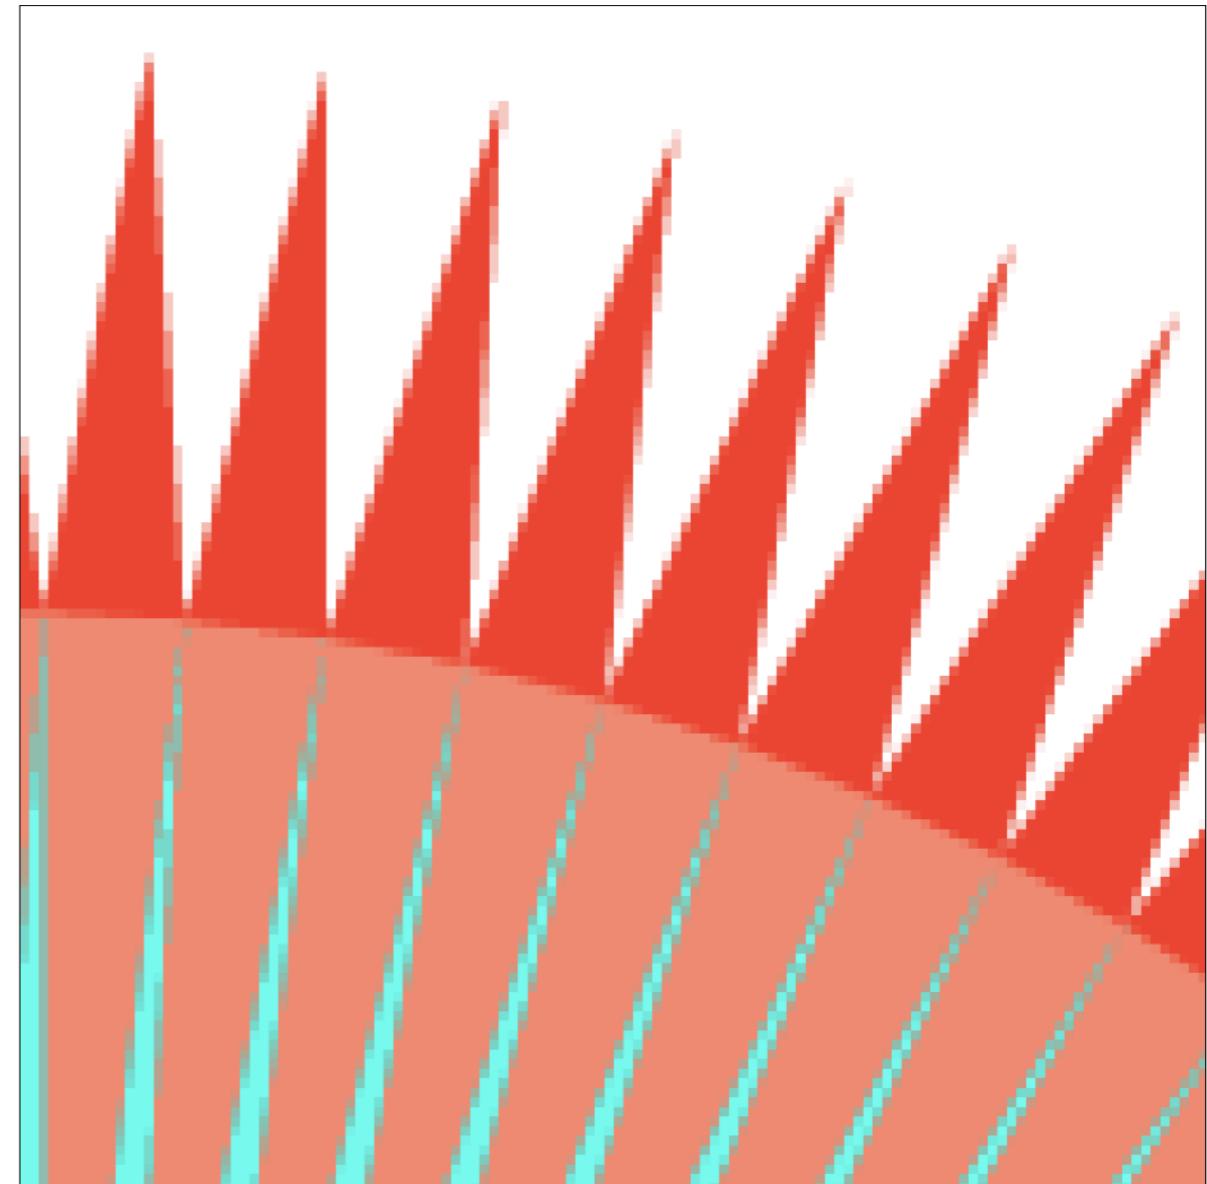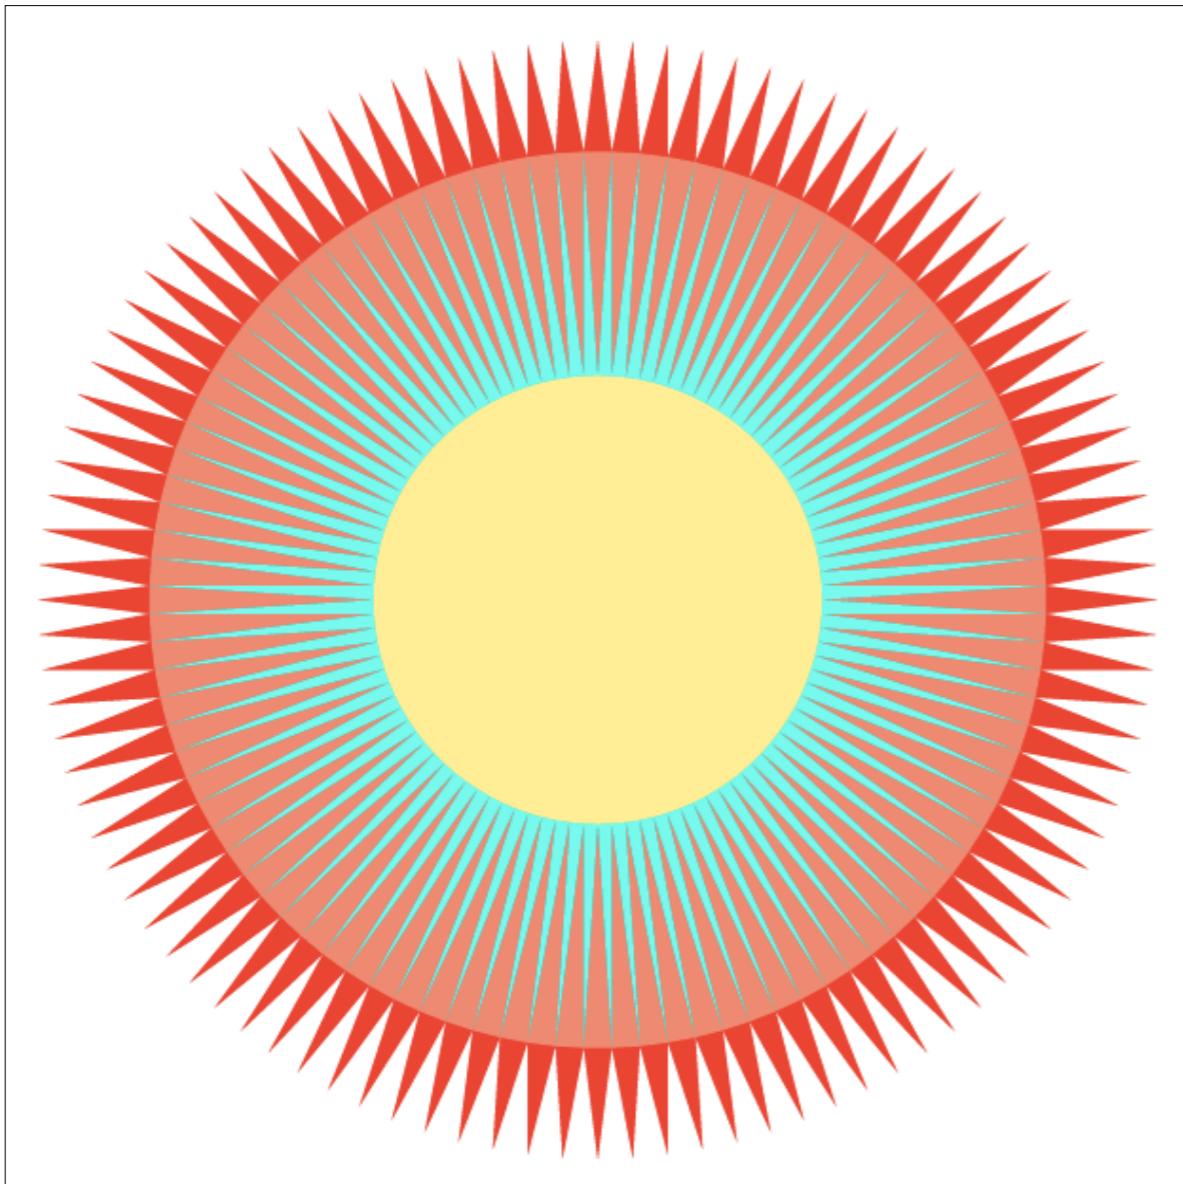


Point Sampling vs Antialiasing

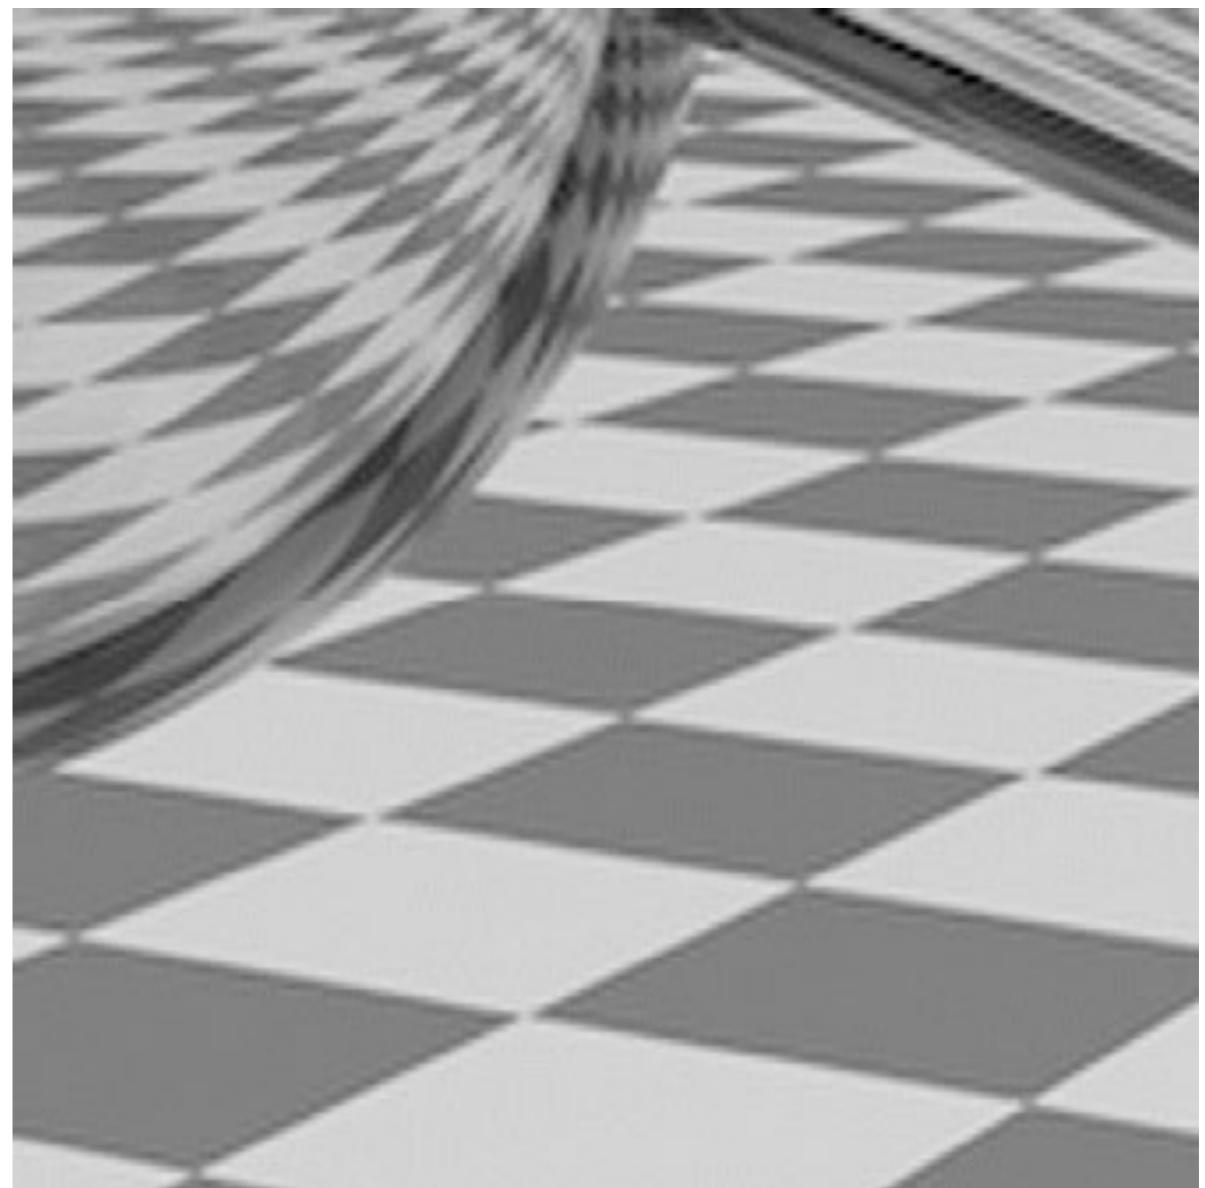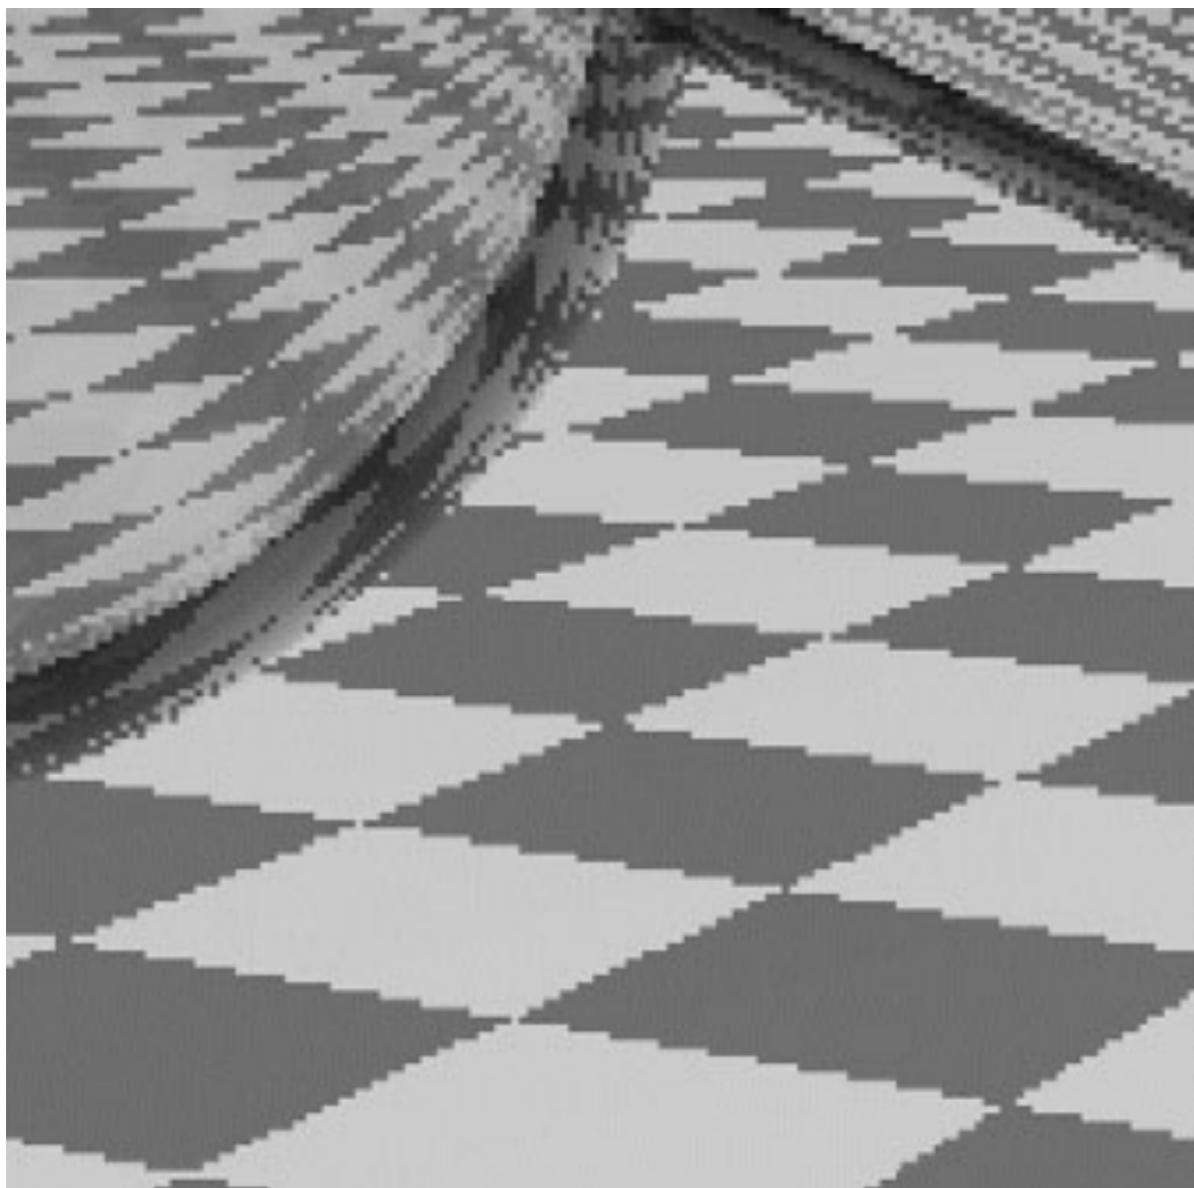

Antialiasing vs Blurred Aliasing

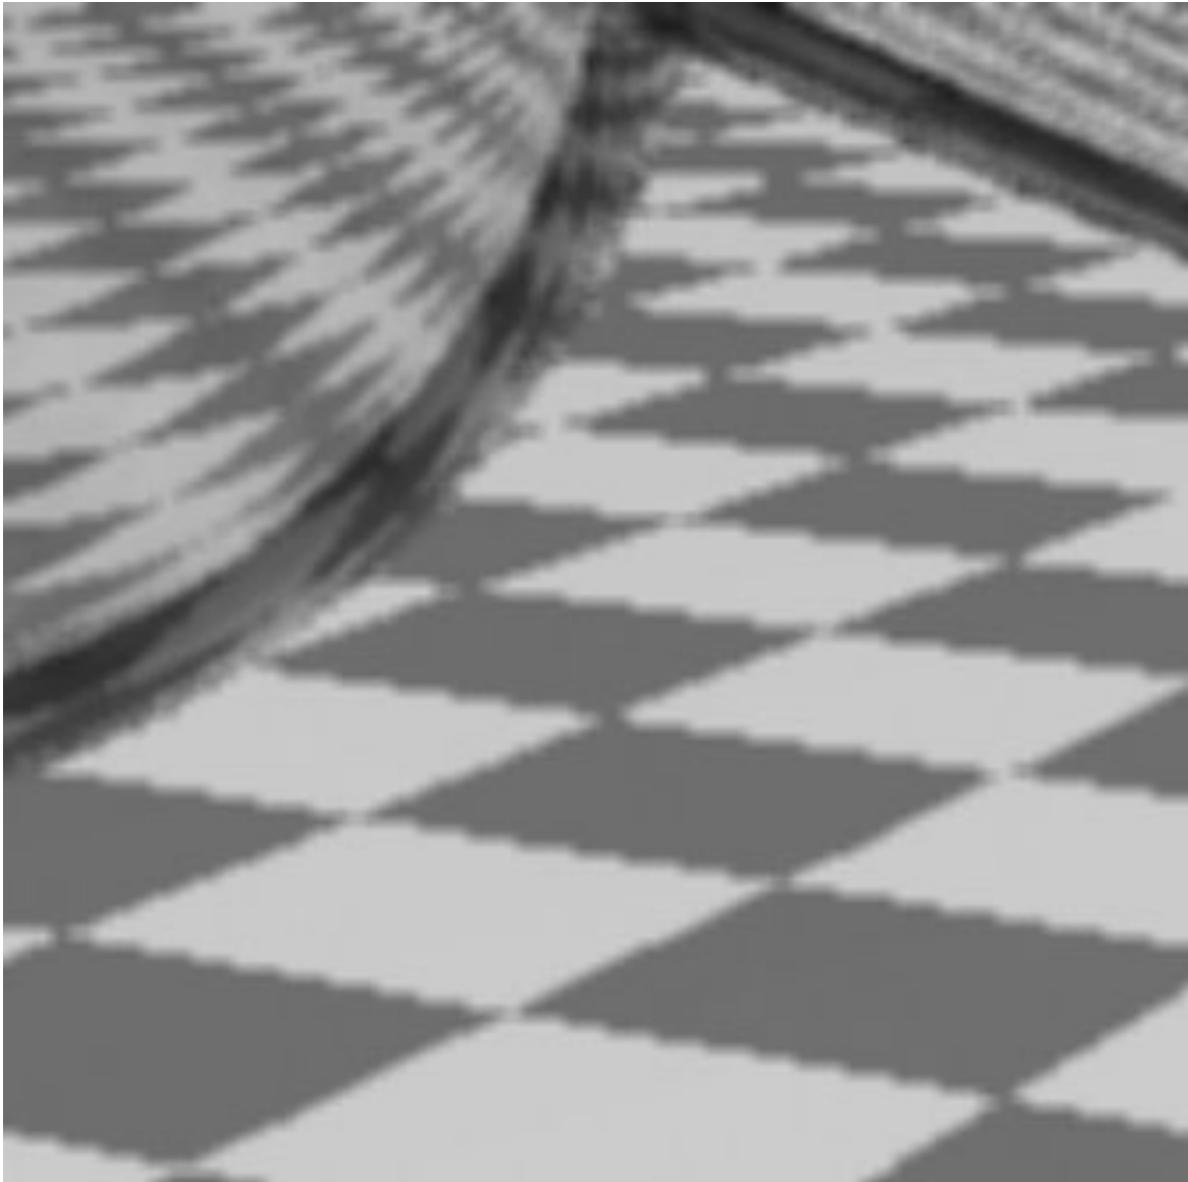

(Sample then filter, WRONG!)

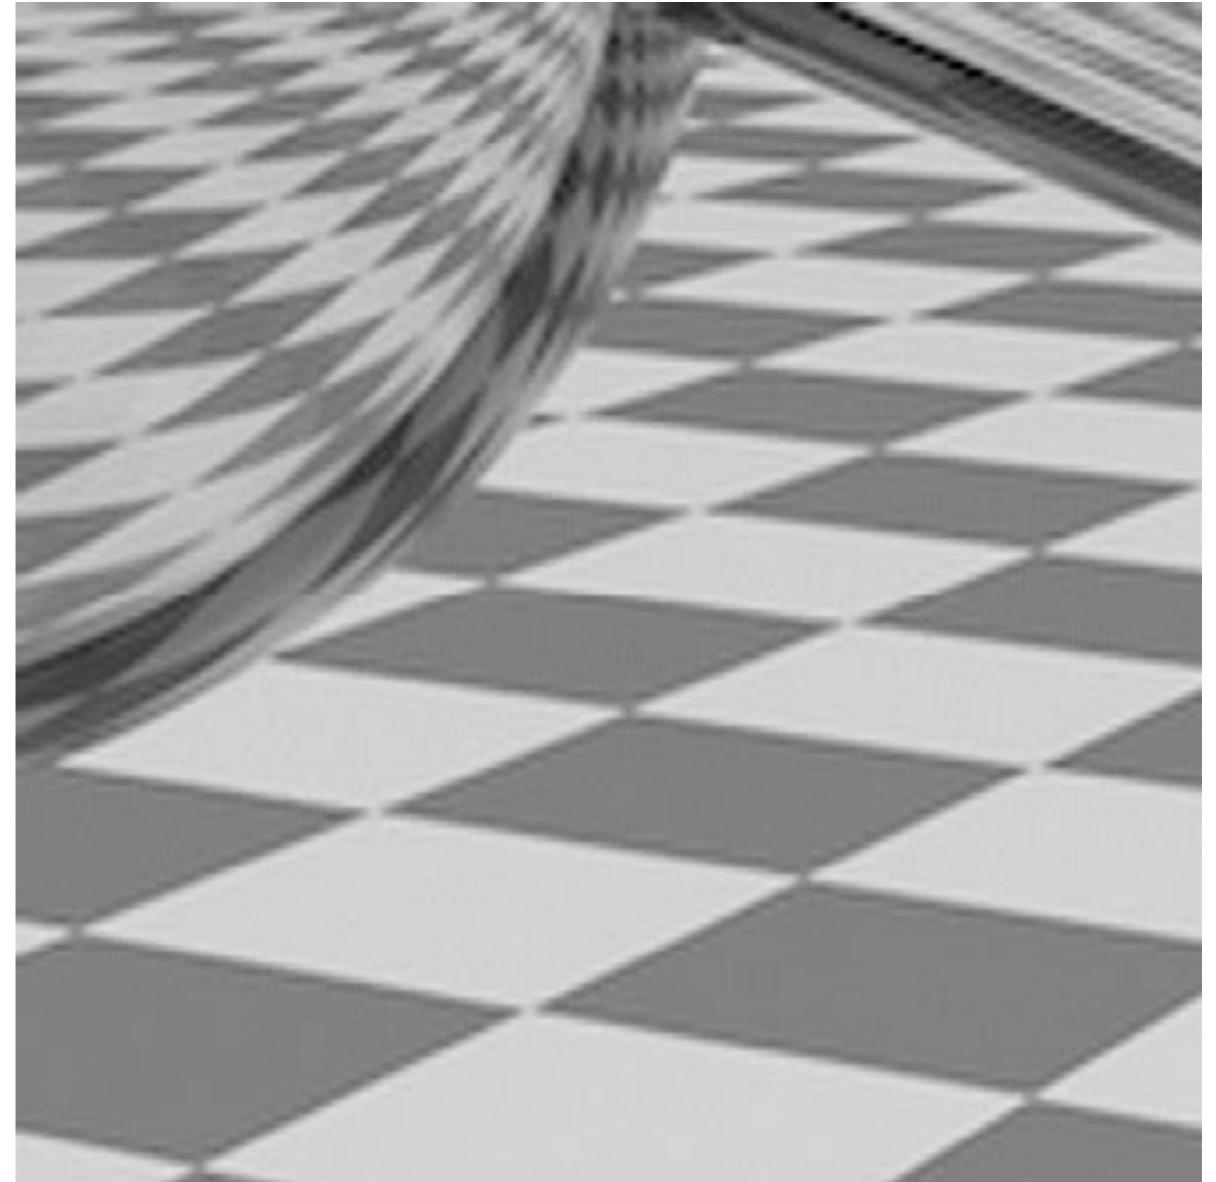

(Filter then sample)

But why?


1. Why undersampling introduces aliasing?
2. Why pre-filtering then sampling can do antialiasing?

Let's dig into fundamental reasons


And look at how to implement antialiased rasterization

Frequency Domain

Sines and Cosines

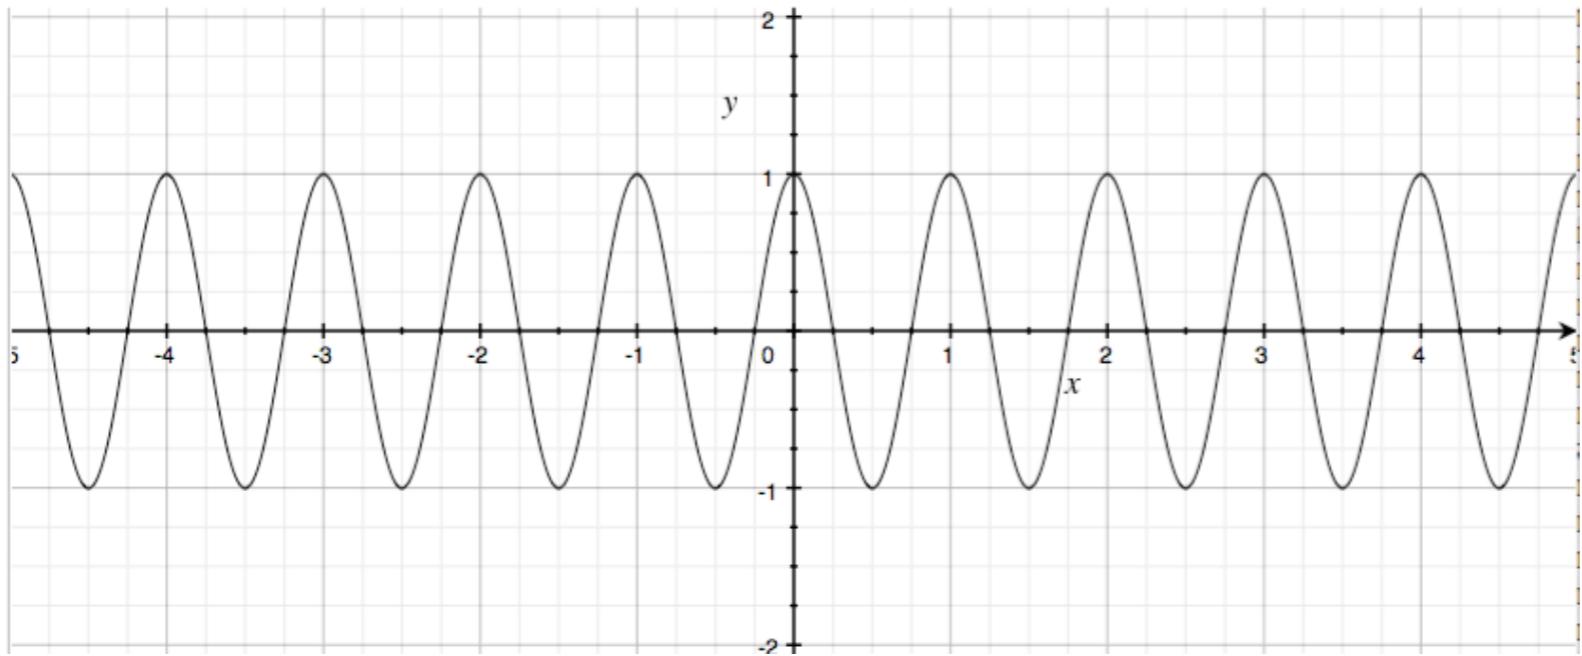


$$\cos 2\pi x$$

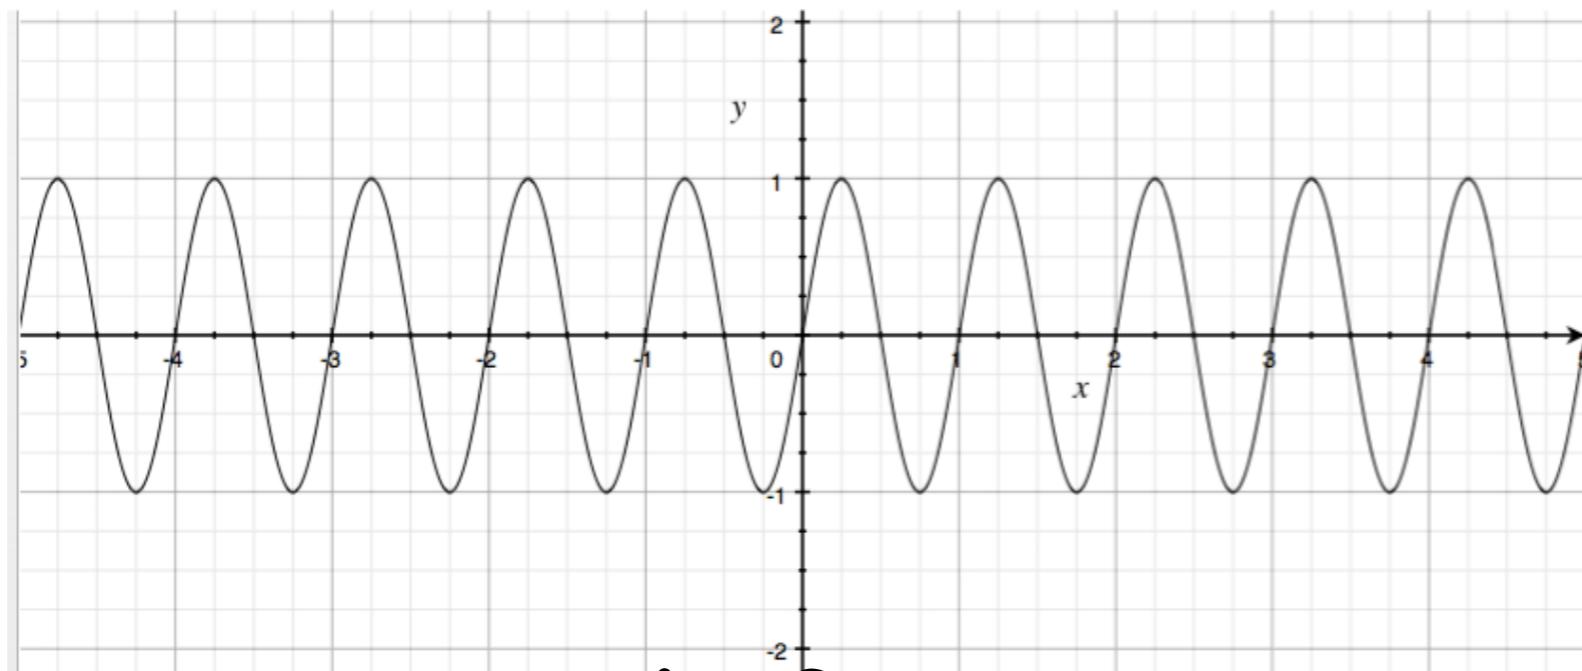

$$\sin 2\pi x$$


Frequencies $\cos 2\pi f x$

$$f = \frac{1}{T}$$

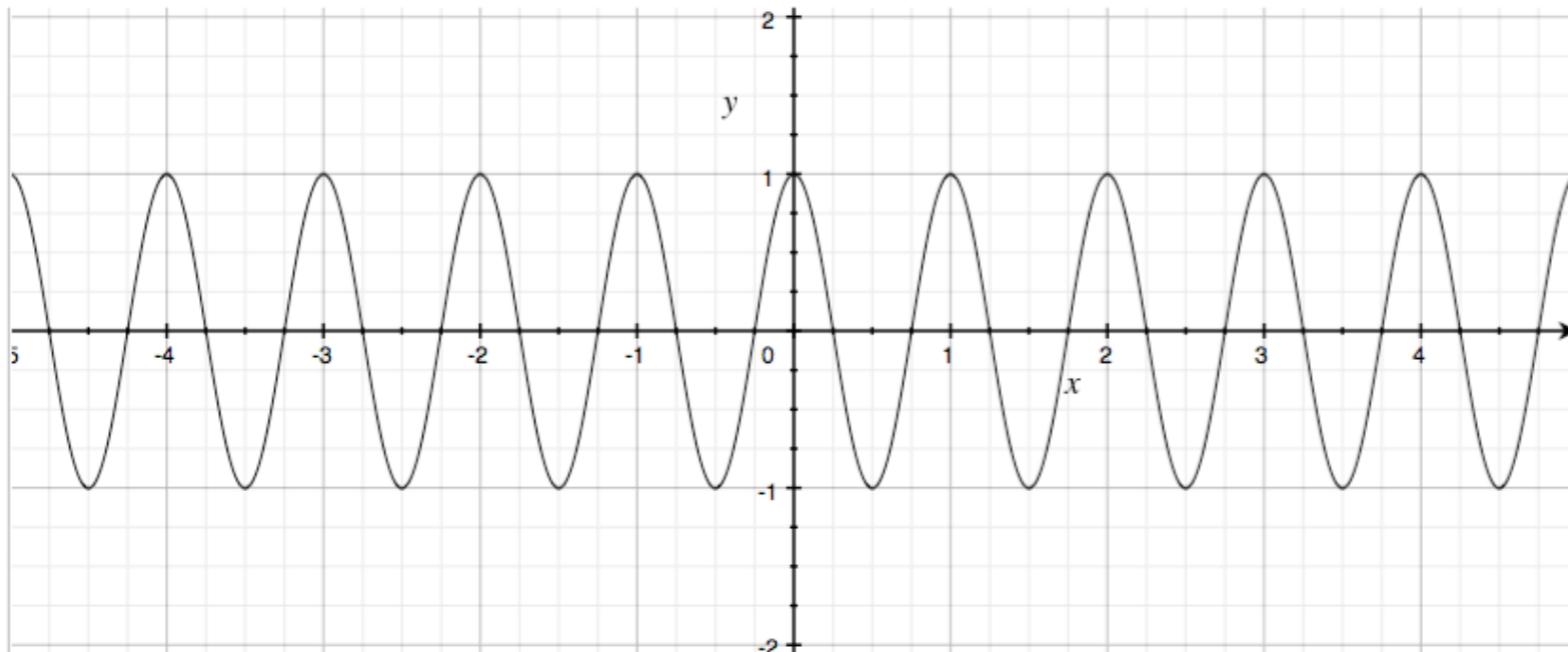

$\cos 2\pi x$

$$f = 1$$

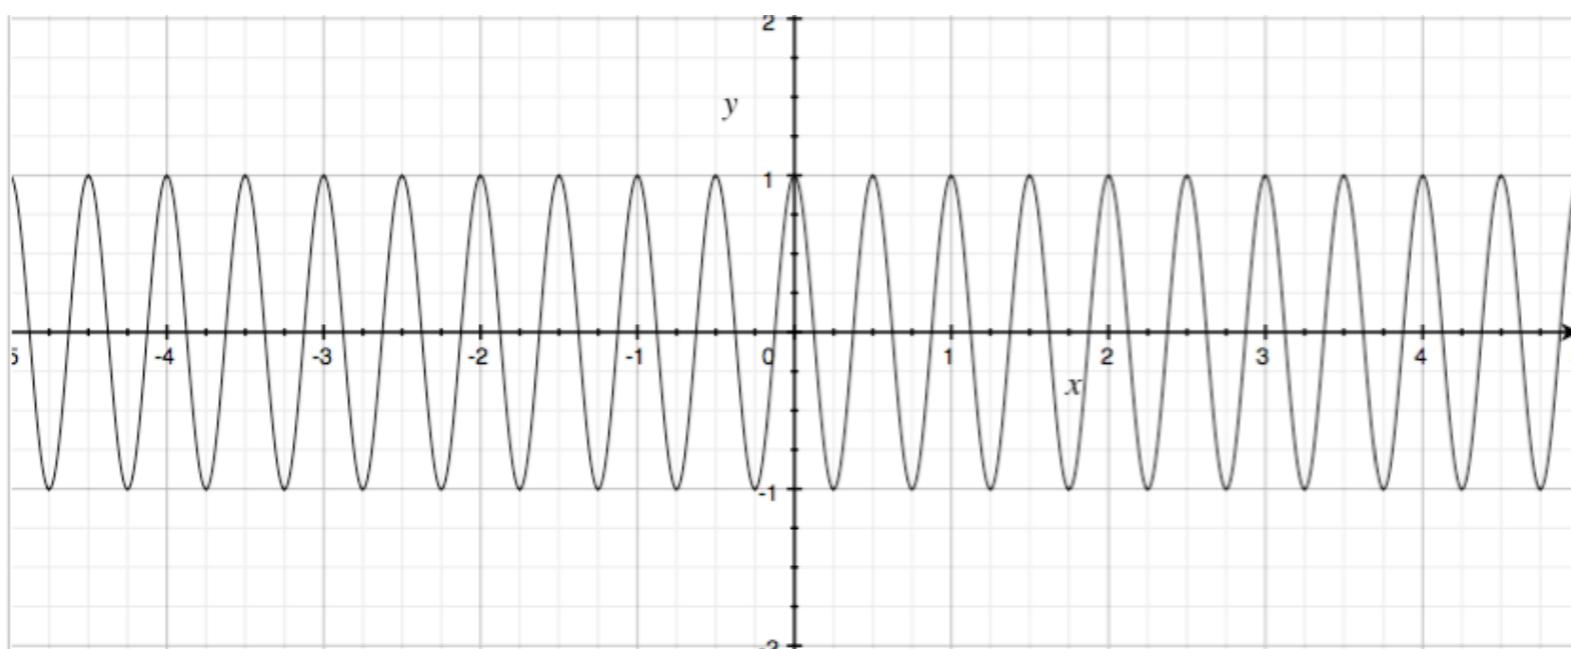

$\cos 4\pi x$


$$f = 2$$

Fourier Transform

Represent a function as a weighted sum of sines and cosines




Joseph Fourier 1768 - 1830

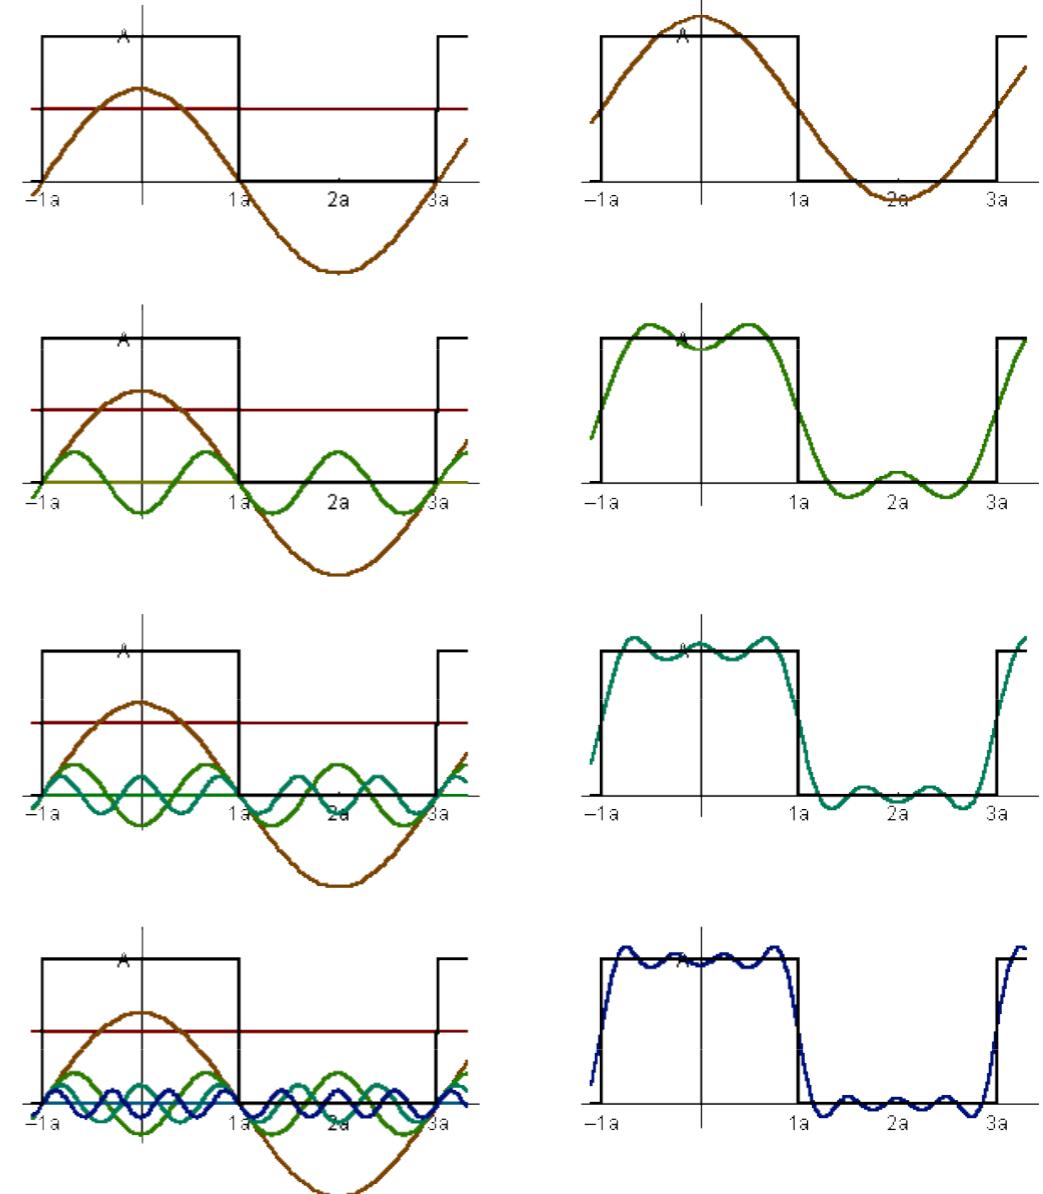

$$f(x) = \frac{A}{2} + \frac{2A \cos(t\omega)}{\pi} - \frac{2A \cos(3t\omega)}{3\pi} + \frac{2A \cos(5t\omega)}{5\pi} - \frac{2A \cos(7t\omega)}{7\pi} + \dots$$

Fourier Transform Decomposes A Signal Into Frequencies


$$f(x) \quad F(\omega) = \int_{-\infty}^{\infty} f(x) e^{-2\pi i \omega x} dx \quad F(\omega)$$

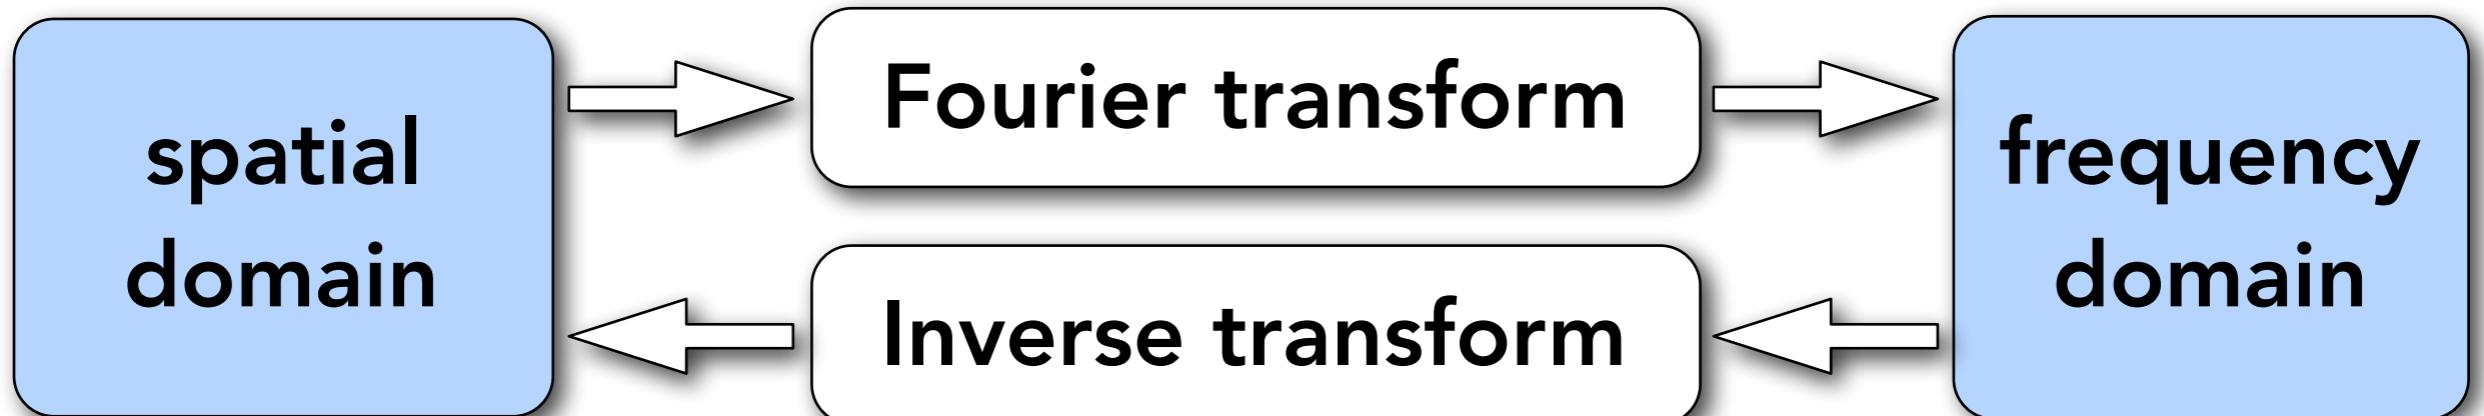


$$f(x) = \int_{-\infty}^{\infty} F(\omega) e^{2\pi i \omega x} d\omega$$

Recall $e^{ix} = \cos x + i \sin x$

Higher Frequencies Need Faster Sampling

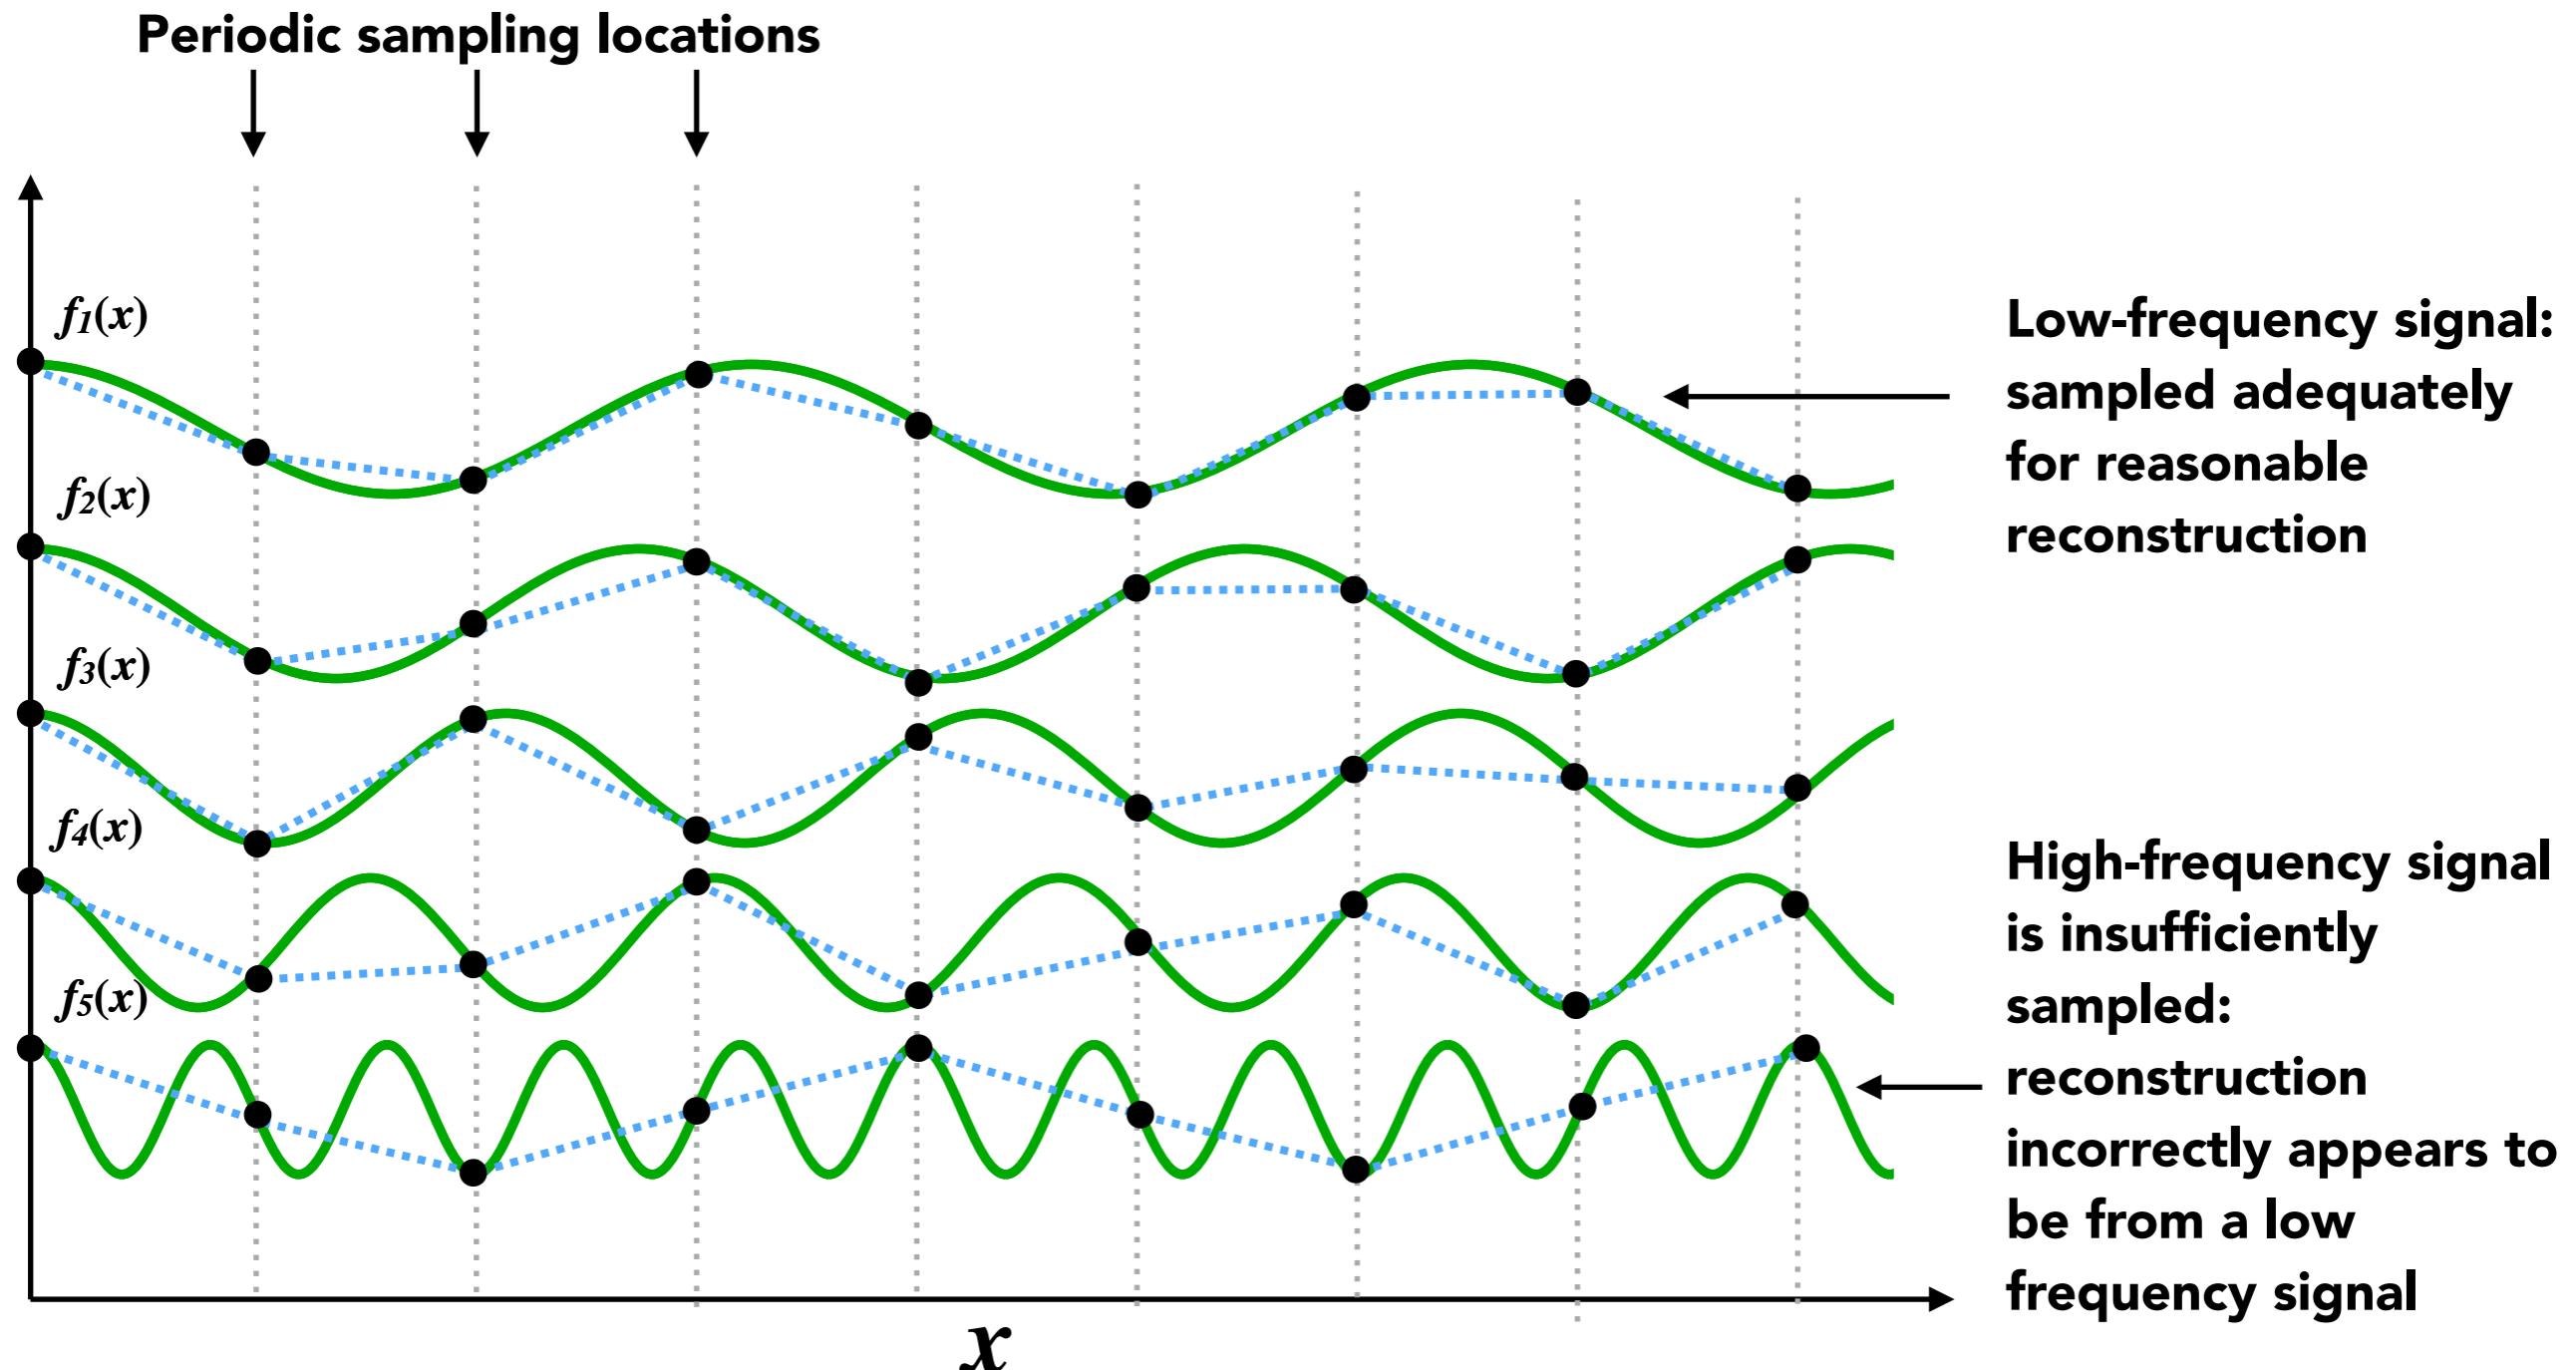

Undersampling Creates Frequency Aliases

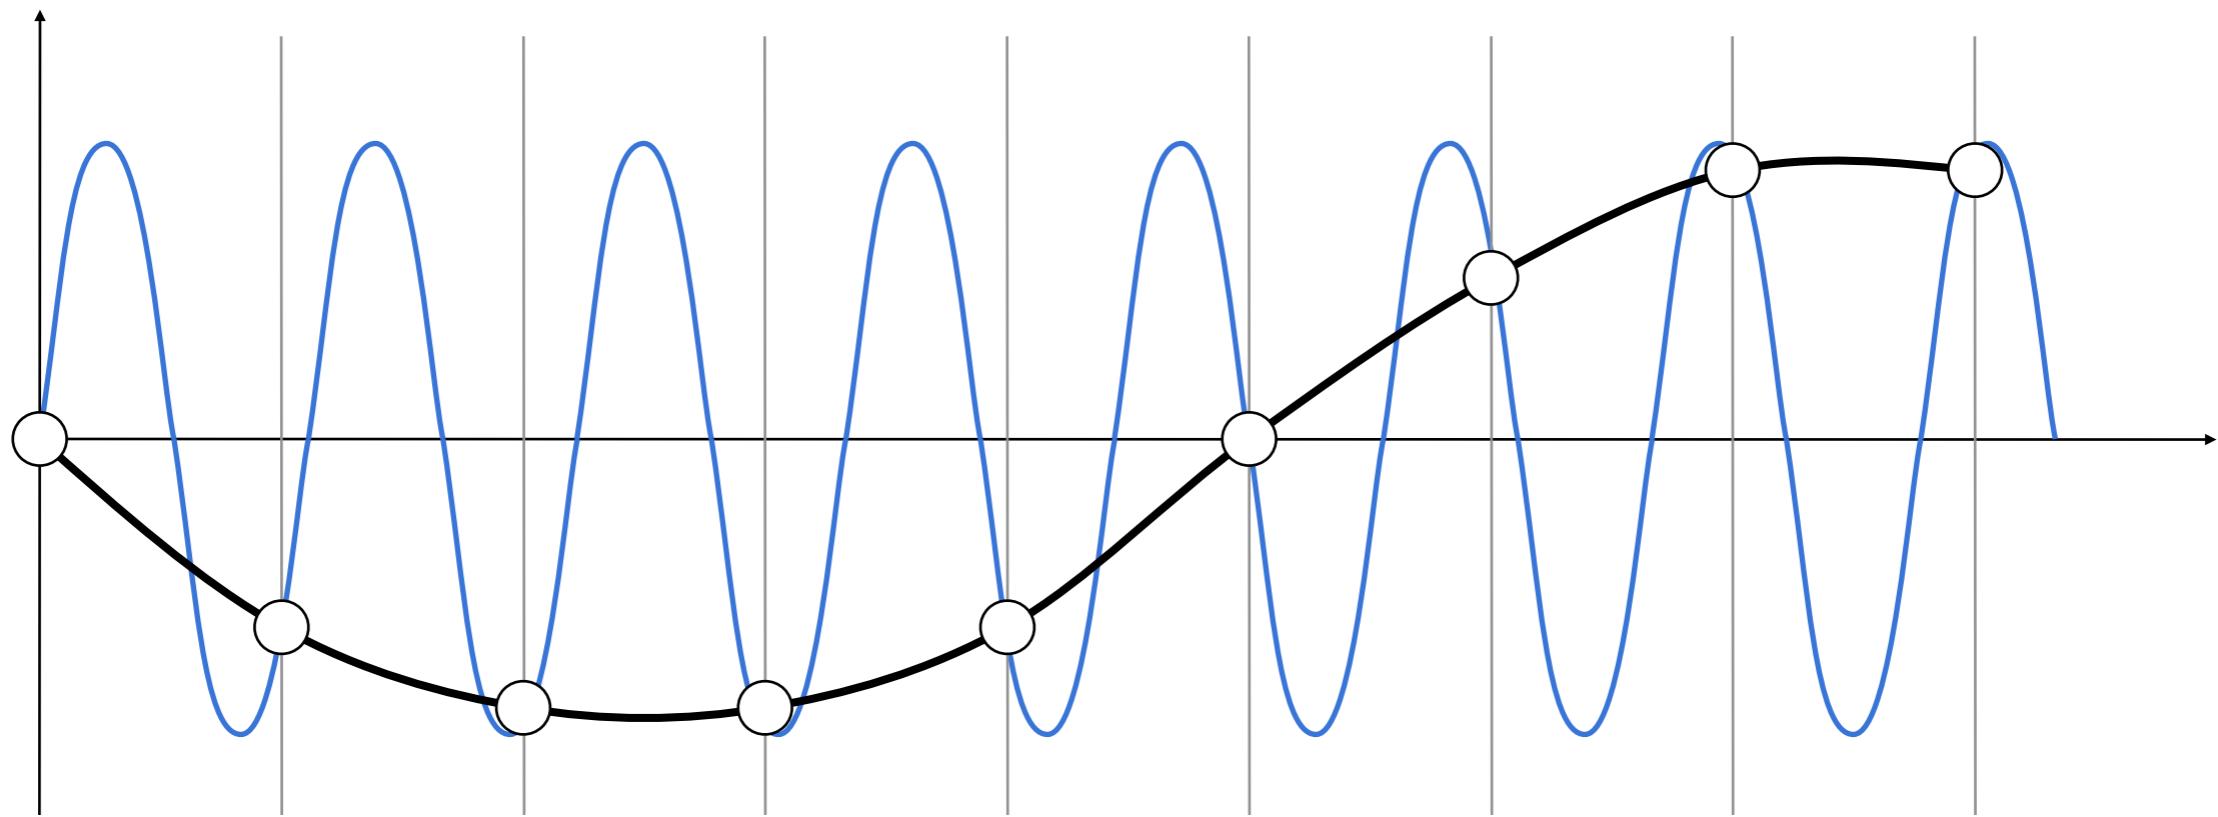


采样与频率：同一种采样在不同频率下的样本一样 ----- Alias

High-frequency signal is insufficiently sampled: samples erroneously appear to be from a low-frequency signal

Two frequencies that are indistinguishable at a given sampling rate are called “aliases”

Filtering = Getting rid of
certain frequency contents

Visualizing Image Frequency Content

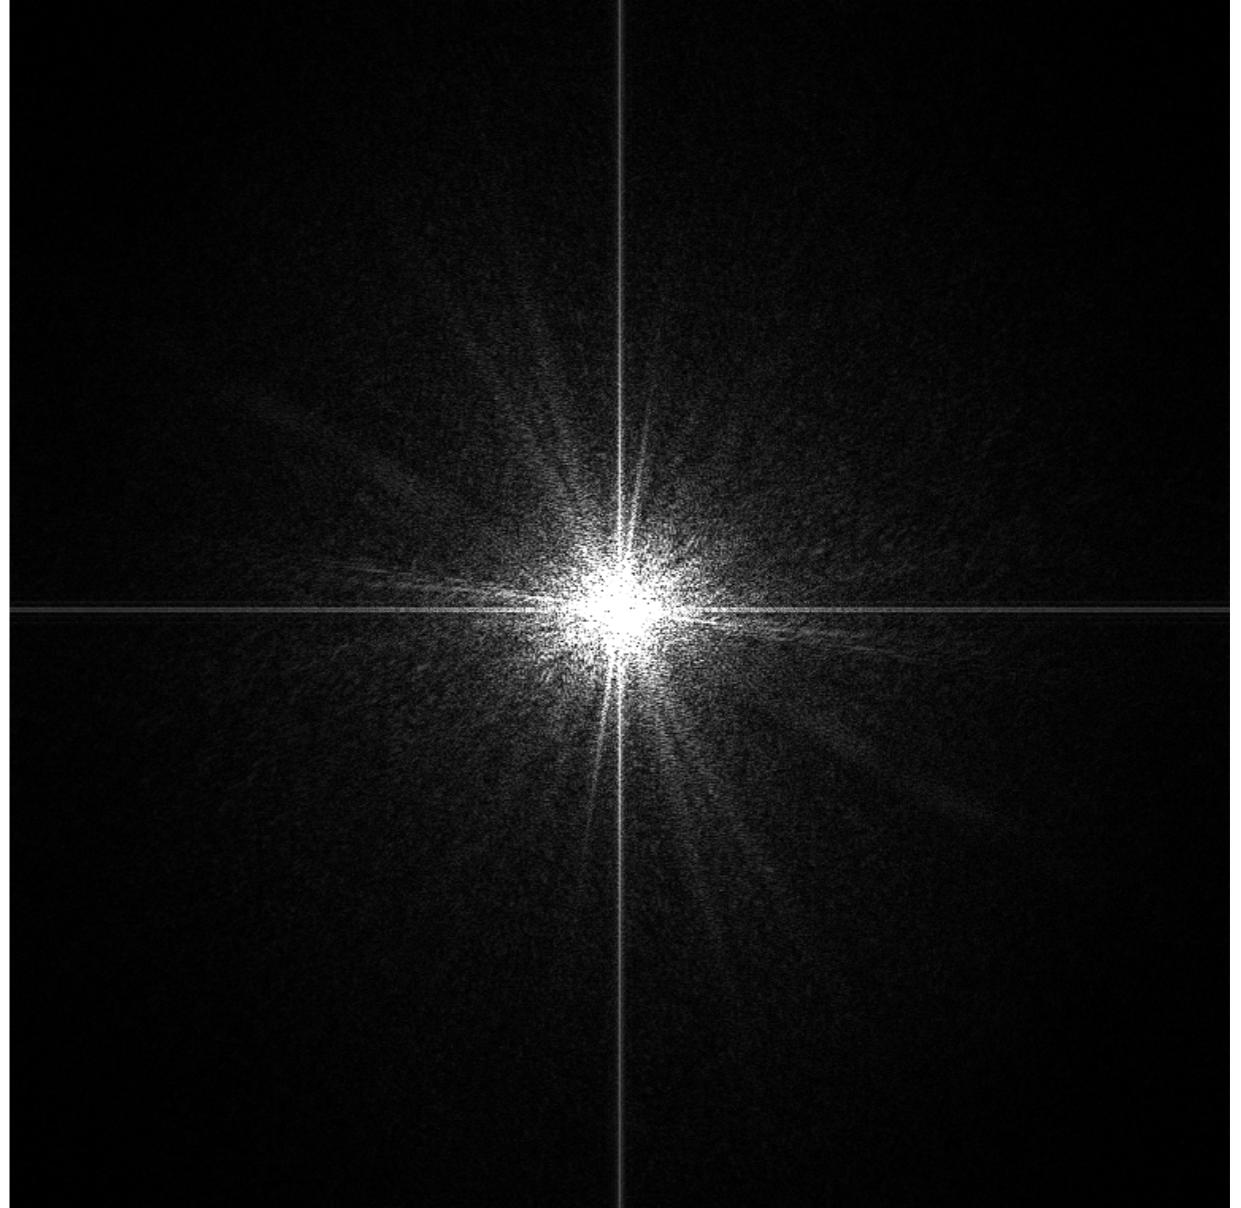


实域

傅里叶变换

频域

黑色是高频信息，白色是低频


Filter Out Low Frequencies Only (Edges)

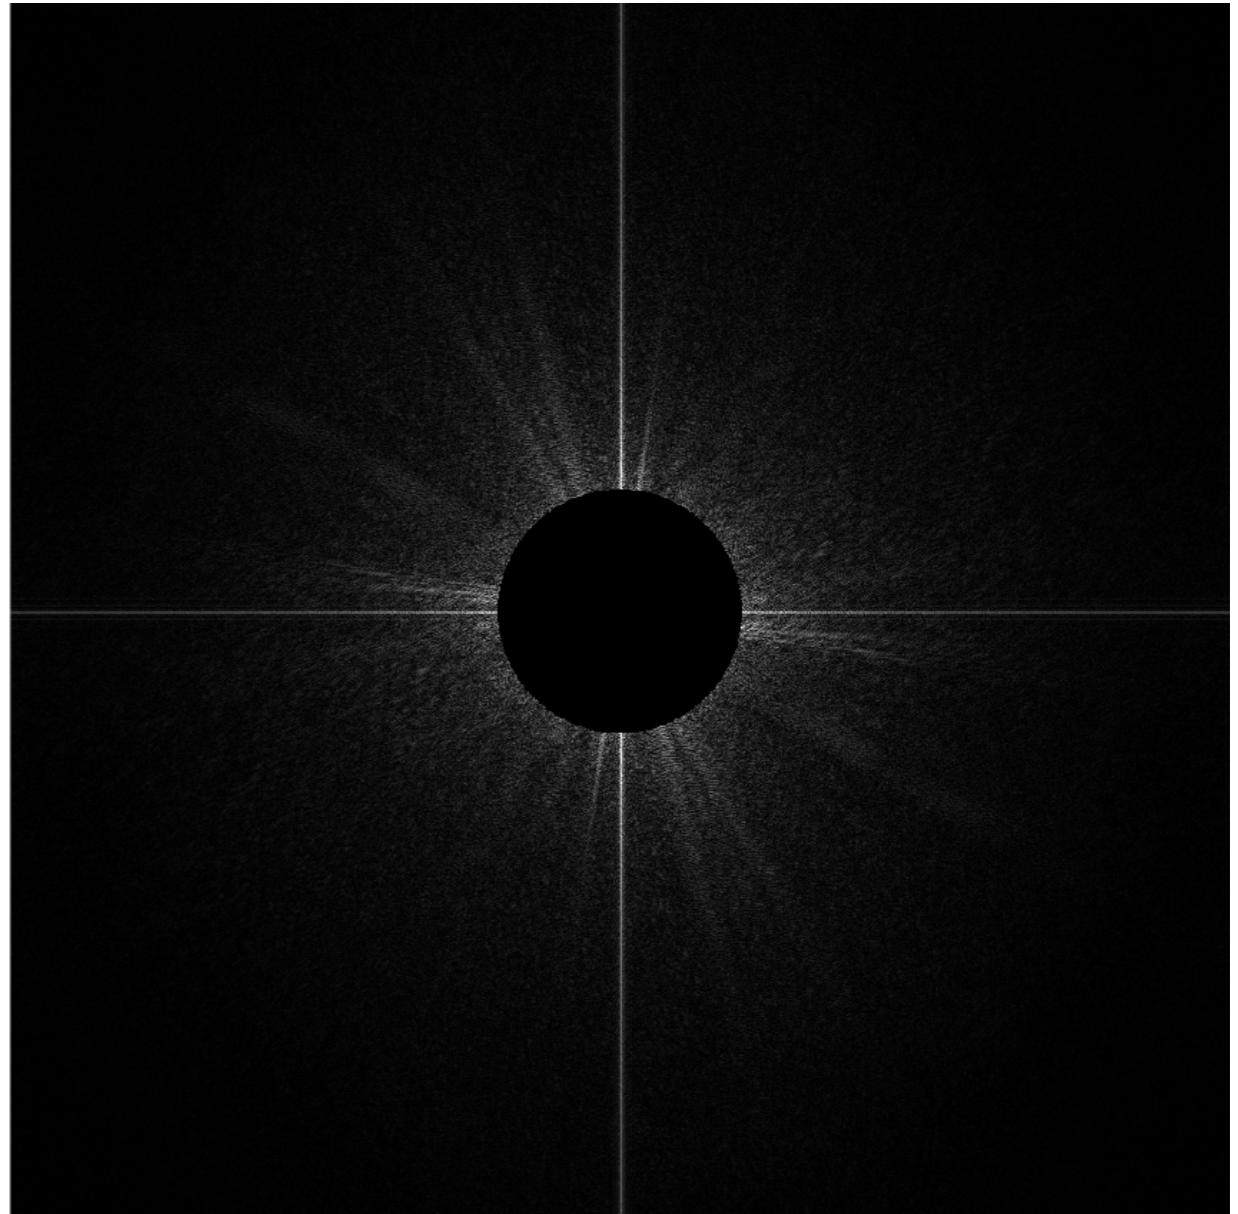

High-pass filter

高通滤波：剩下内容的边界


Filter Out High Frequencies (Blur)



Low-pass filter


低通濾波

Filter Out Low and High Frequencies



传统数字图像处理领域。最明显的特征对应最高频


Filter Out Low and High Frequencies

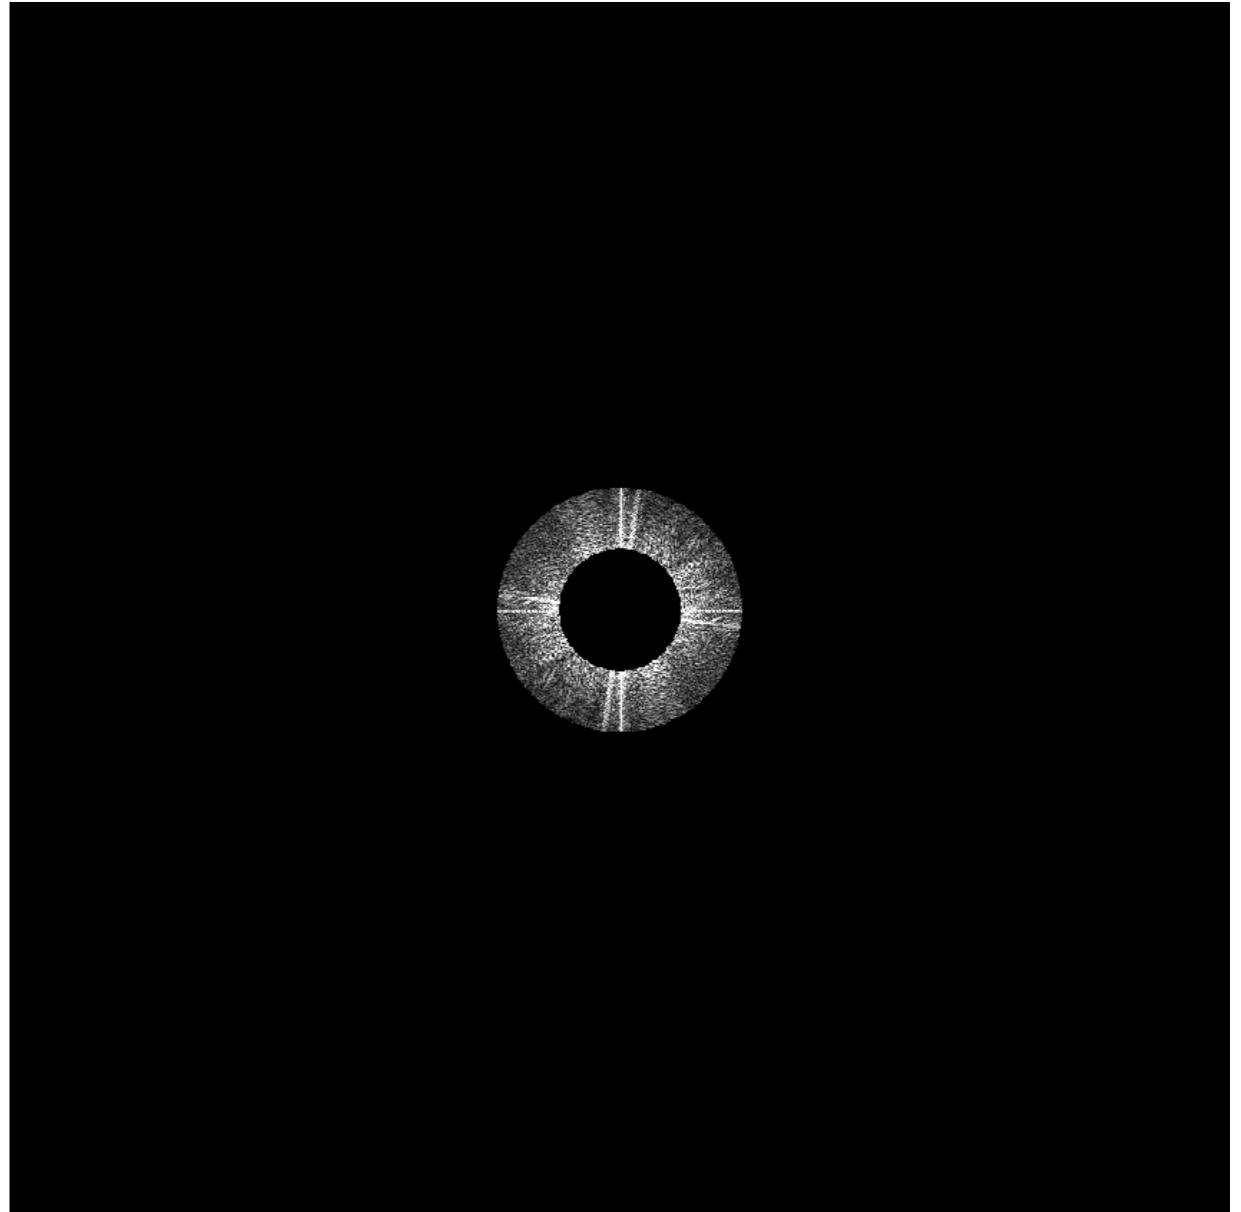

Filtering = Convolution
(= Averaging)


滤波=卷积=平均化

Convolution

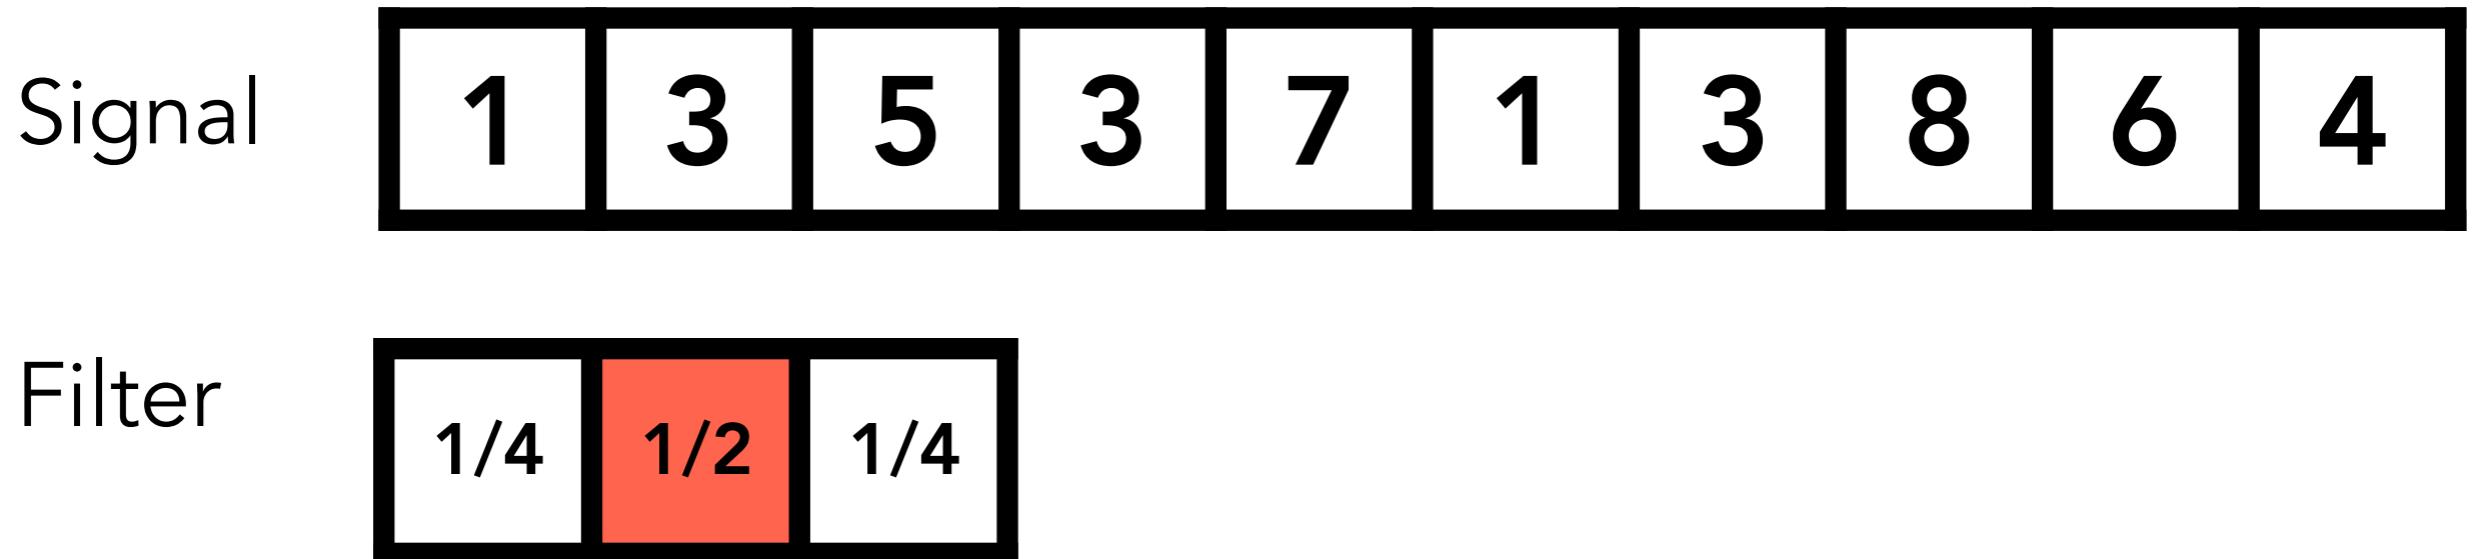


Point-wise local averaging in a “sliding window”

Convolution

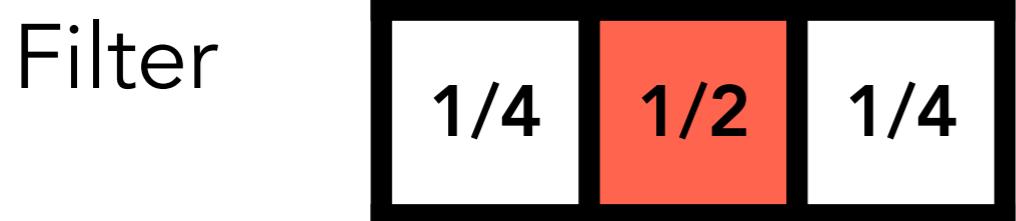


$$1 \times (1/4) + 3 \times (1/2) + 5 \times (1/4) = 3$$

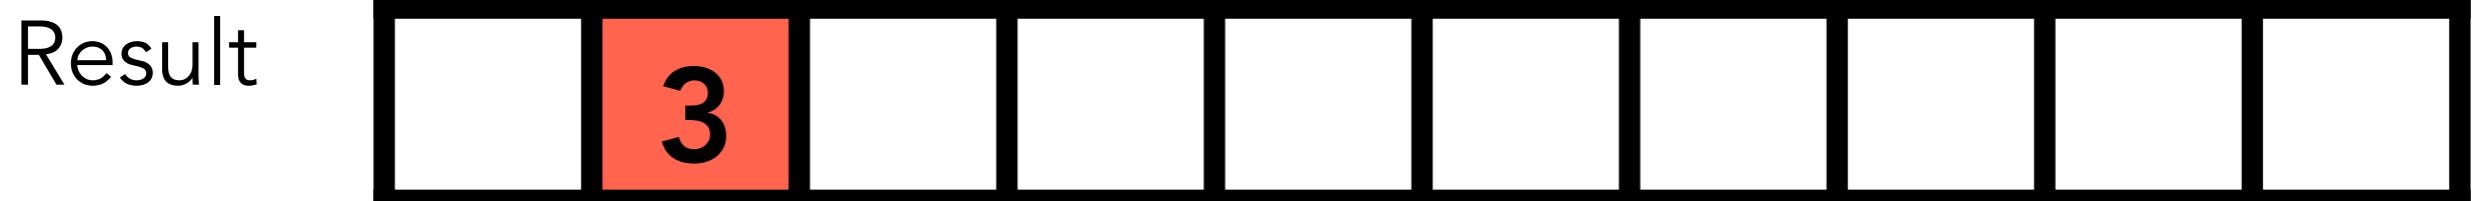

Convolution



$$3 \times (1/4) + 5 \times (1/2) + 3 \times (1/4) = 4$$

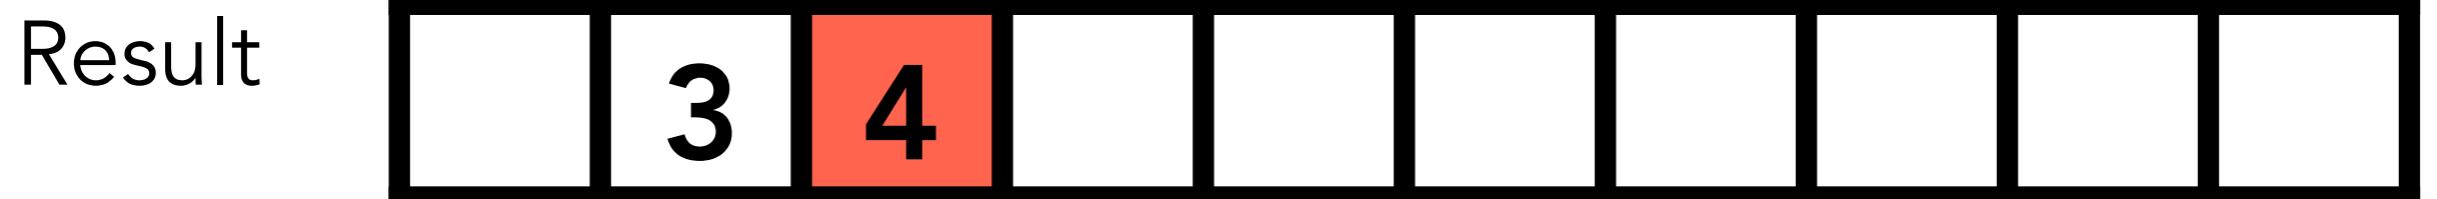

Convolution Theorem

Convolution in the spatial domain is **equal to multiplication in the frequency domain**, and vice versa

Option 1:


- Filter by convolution in the spatial domain

Option 2:

- Transform to frequency domain (Fourier transform)
- Multiply by Fourier transform of convolution kernel
- Transform back to spatial domain (inverse Fourier)

Convolution Theorem

Spatial
Domain

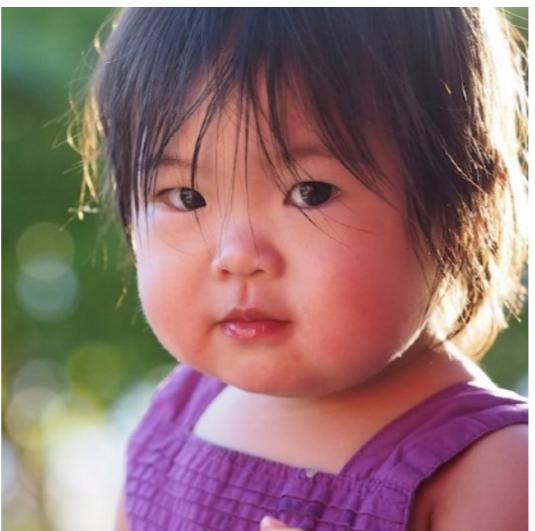

$$\ast \frac{1}{9} \begin{array}{|c|c|c|} \hline 1 & 1 & 1 \\ \hline 1 & 1 & 1 \\ \hline 1 & 1 & 1 \\ \hline \end{array} =$$




Fourier
Transform


Frequency
Domain




$$\times$$



Inv. Fourier
Transform


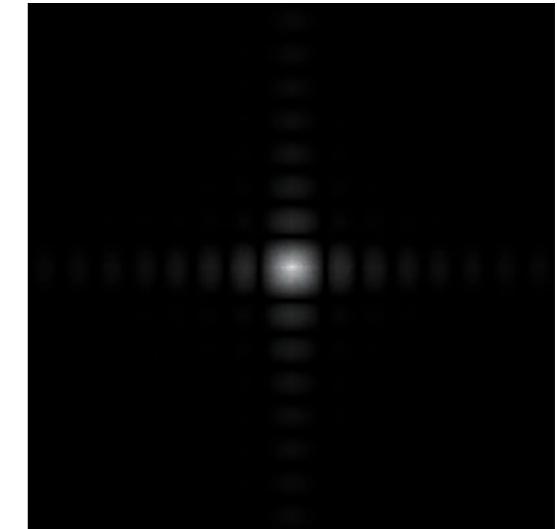


Box Filter


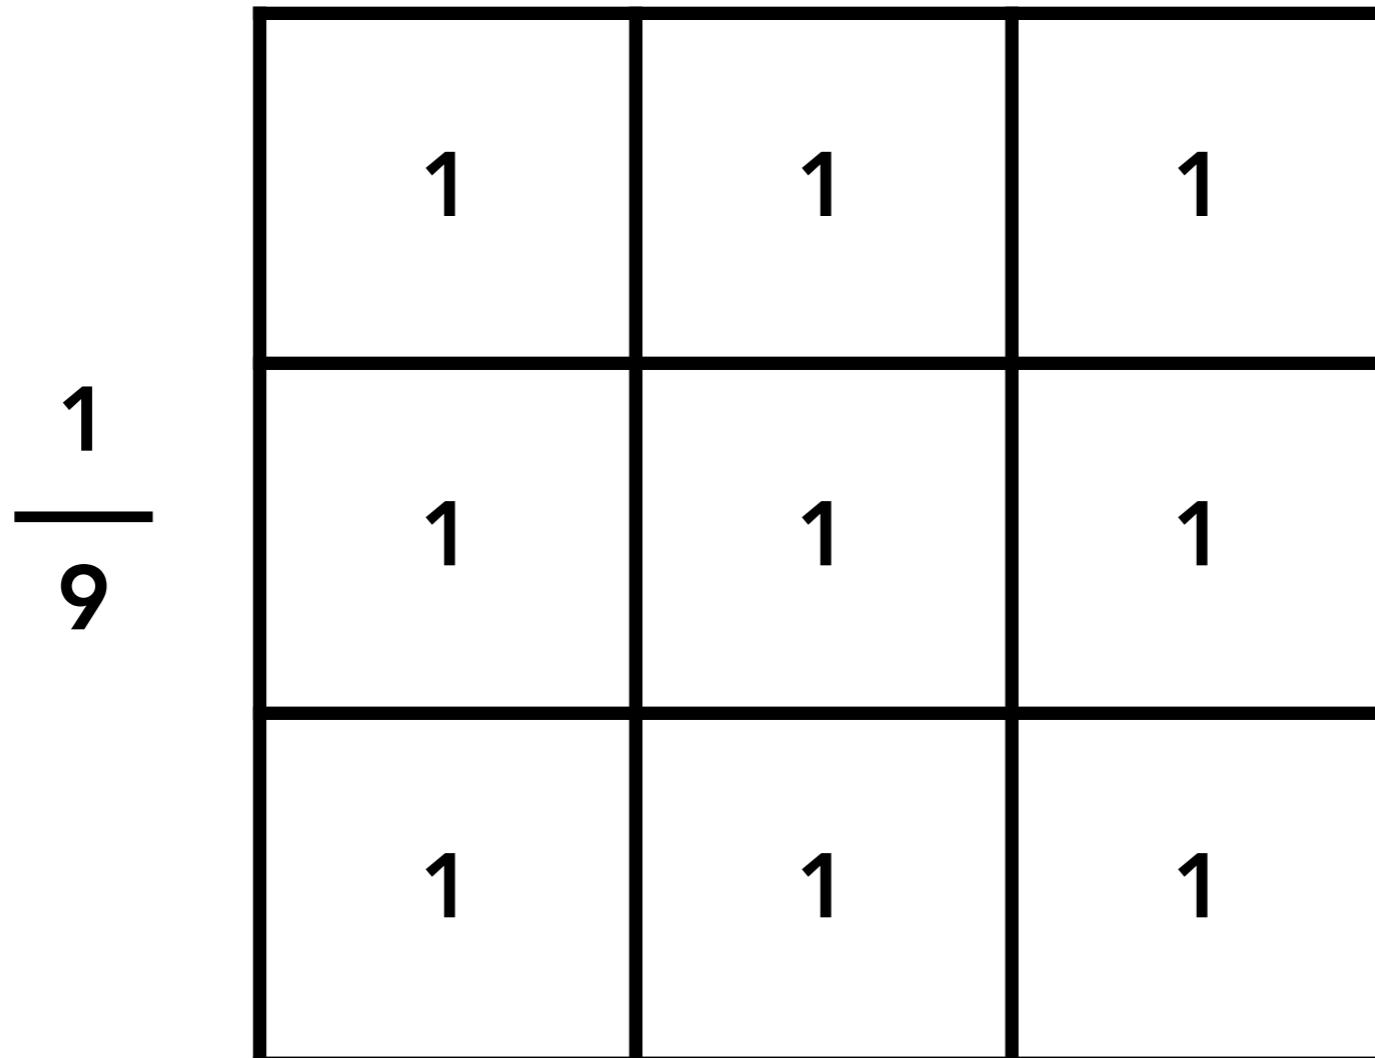


Example: 3x3 box filter

Box Function = “Low Pass” Filter

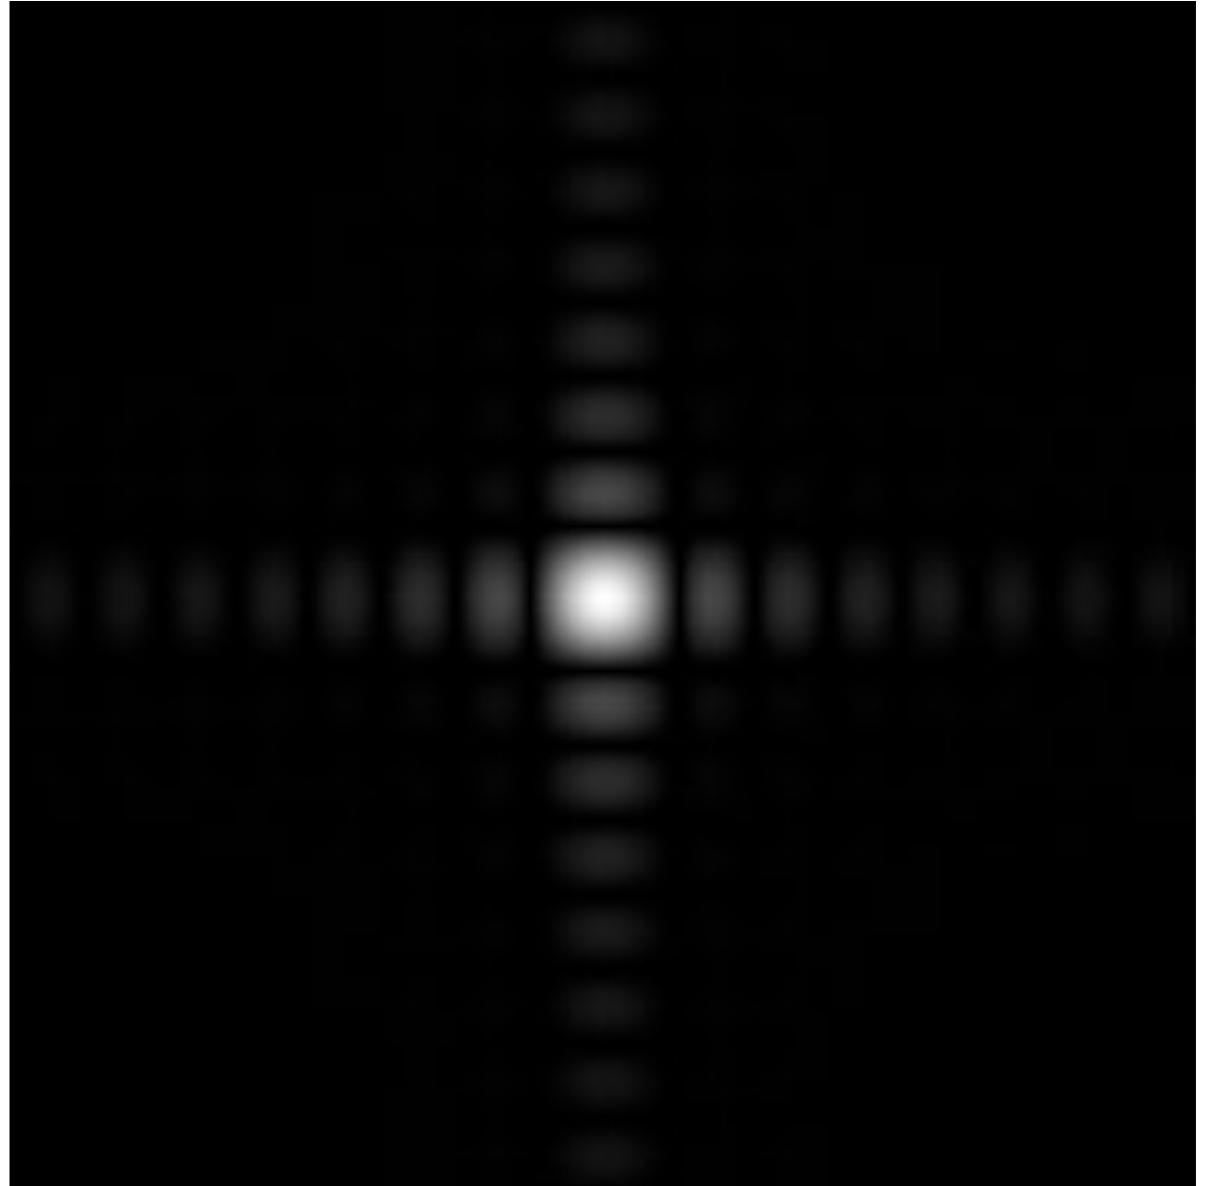


Wider Filter Kernel = Lower Frequencies




Sampling = Repeating
Frequency Contents


Sampling = Repeating Frequency Contents

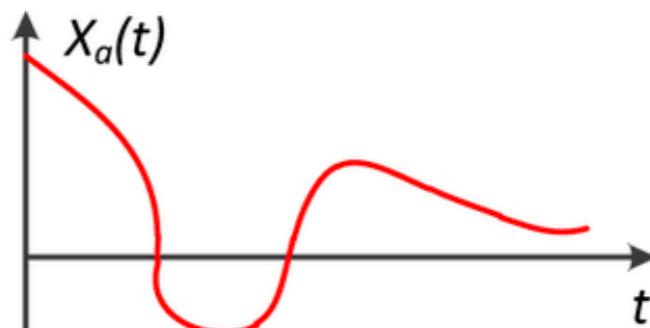


(a)

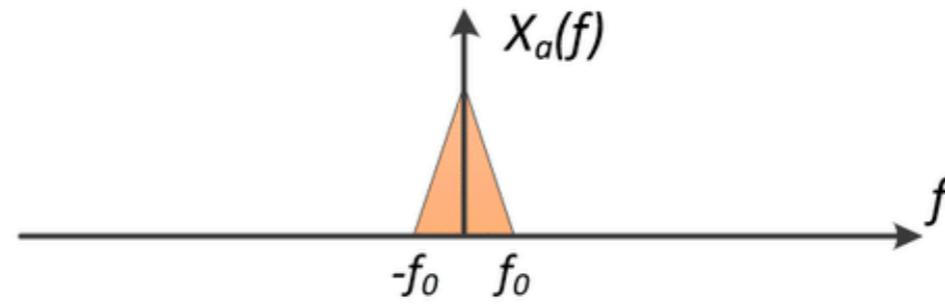


(b)

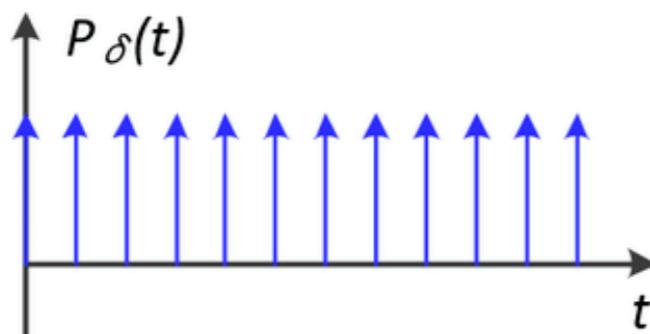


(c)

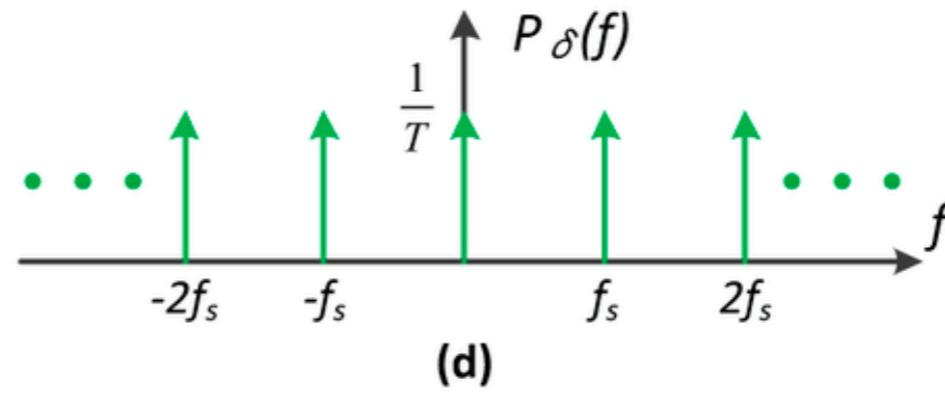

(d)

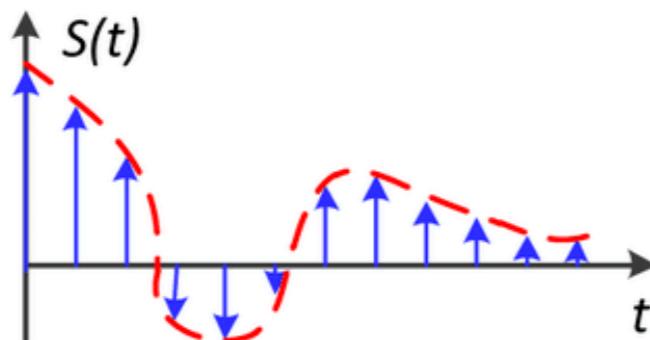

(e)

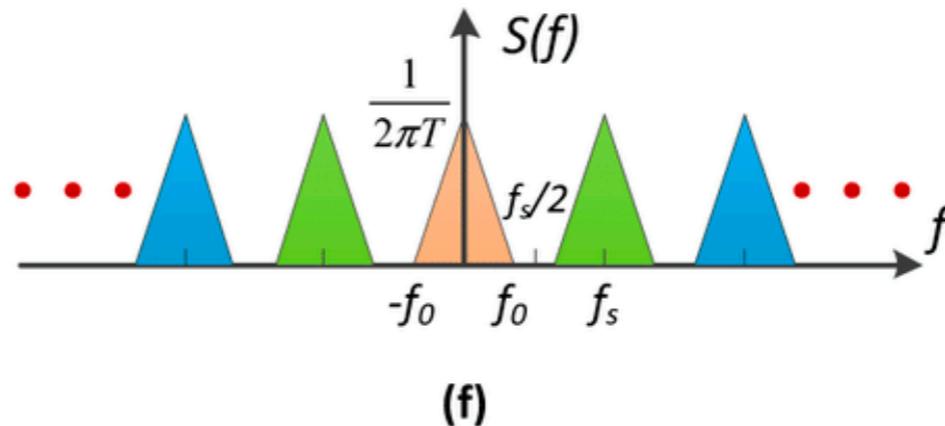


(f)


https://www.researchgate.net/figure/The-evolution-of-sampling-theorem-a-The-time-domain-of-the-band-limited-signal-and-b_fig5_301556095

Aliasing = Mixed Frequency Contents

Dense sampling:

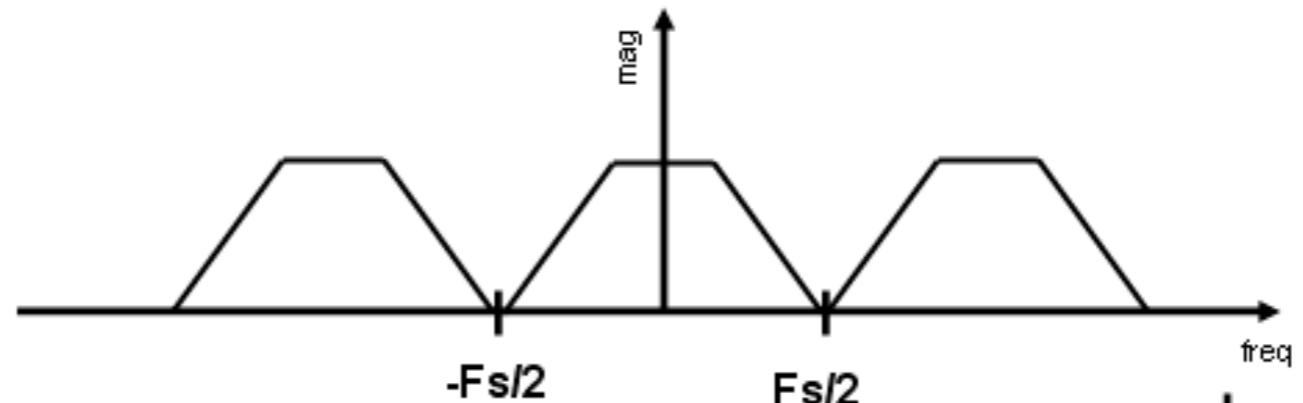

Sparse sampling:

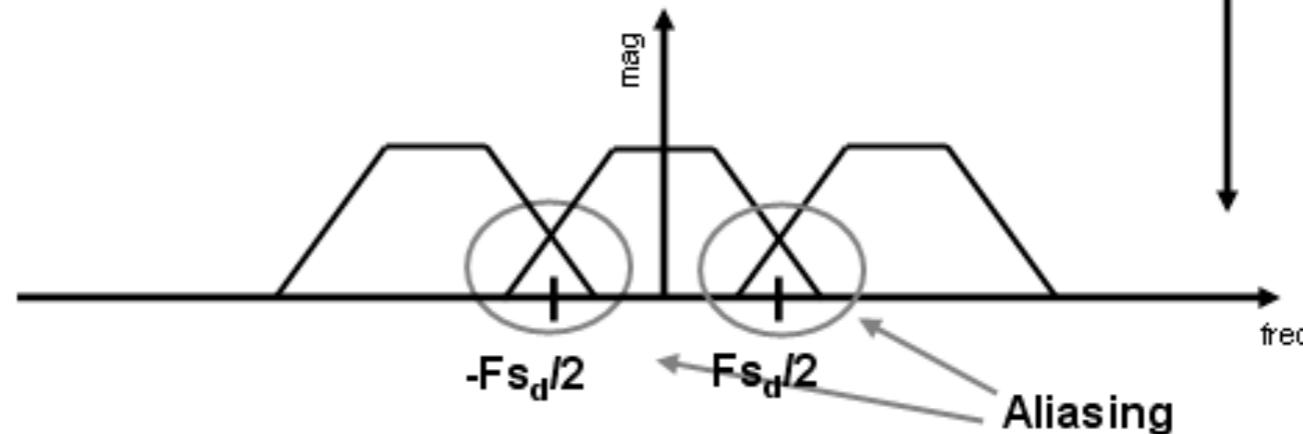

Antialiasing

How Can We Reduce Aliasing Error?

Option 1: Increase sampling rate


- Essentially increasing the distance between replicas in the Fourier domain
- Higher resolution displays, sensors, framebuffers...
- But: costly & may need very high resolution

Option 2: Antialiasing


- Making Fourier contents “narrower” before repeating
- i.e. **Filtering out high frequencies before sampling**

Antialiasing = Limiting, then repeating

Filtering

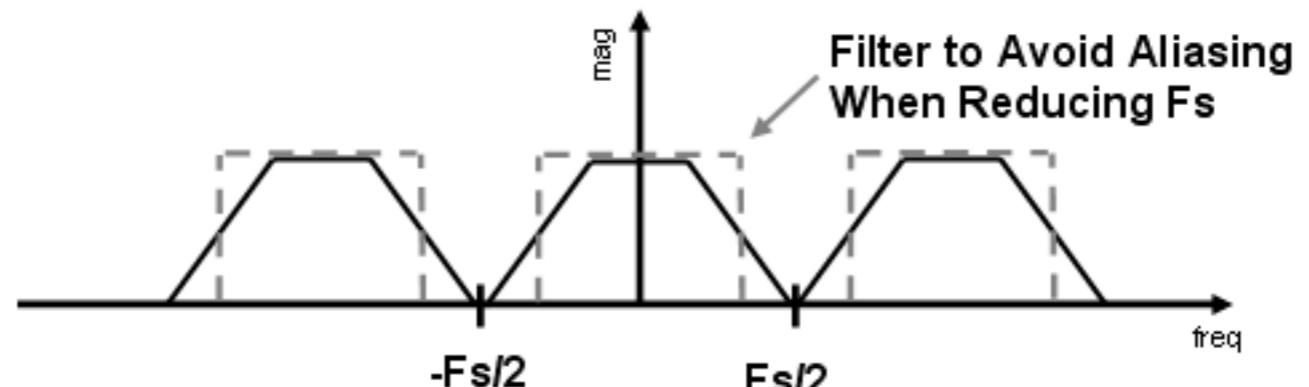

Then sparse sampling

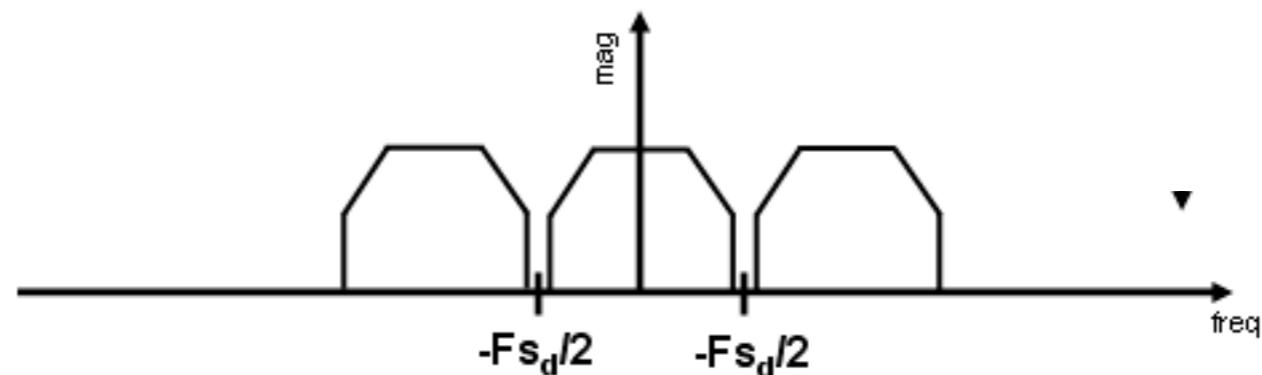


Regular Sampling



Note jaggies in rasterized triangle
where pixel values are pure red or white

Antialiased Sampling

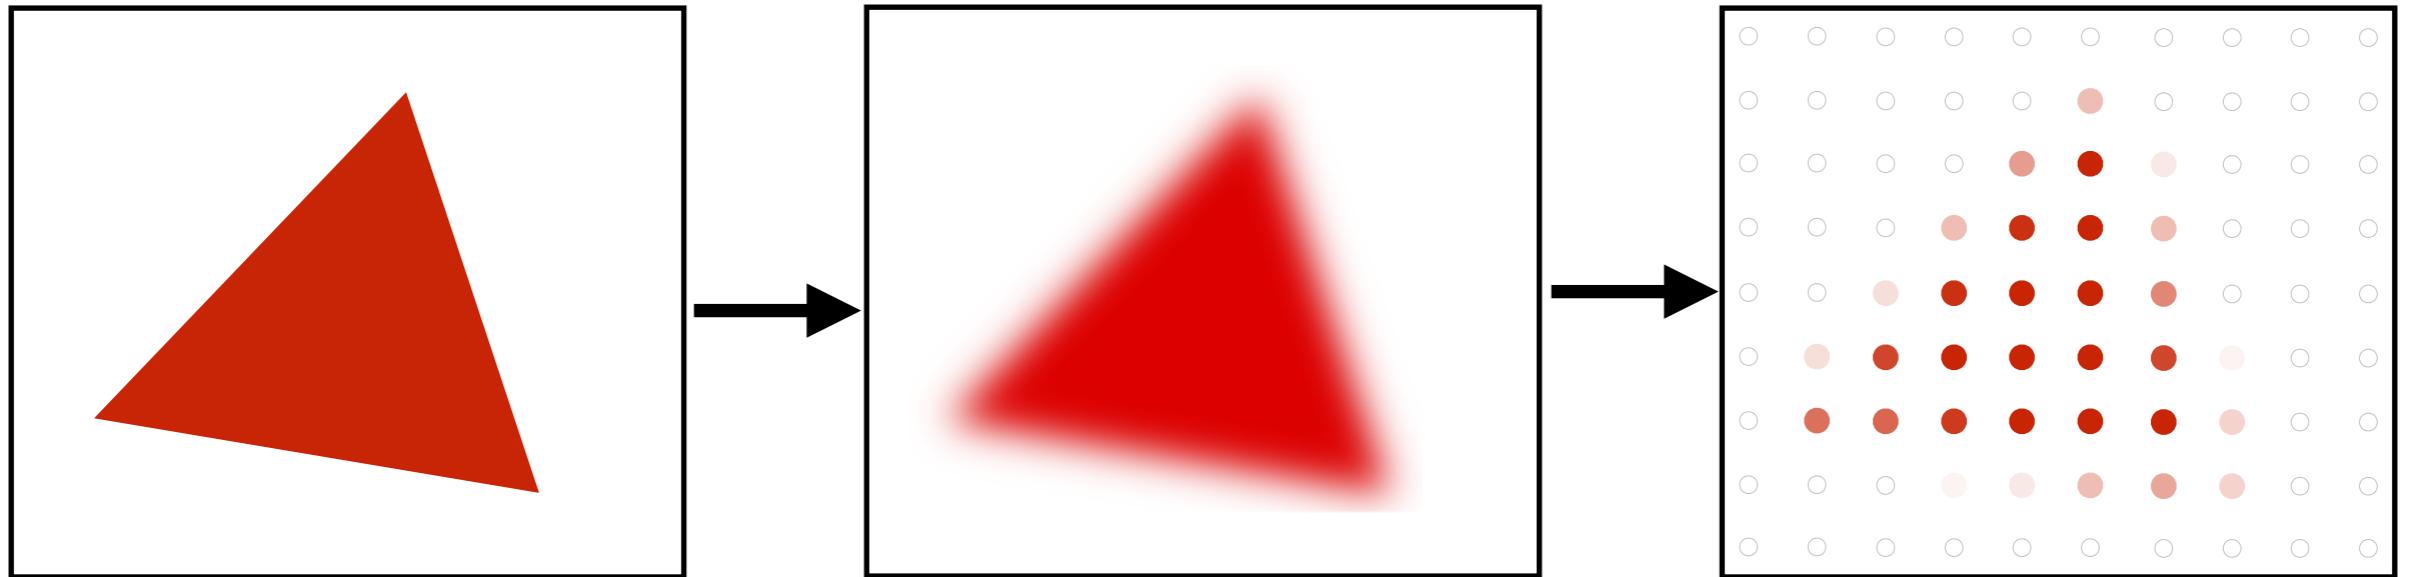


Pre-Filter
(remove frequencies above Nyquist)

Sample


Note antialiased edges in rasterized triangle
where pixel values take intermediate values

A Practical Pre-Filter

A 1 pixel-width box filter (low pass, blurring)



Spatial Domain

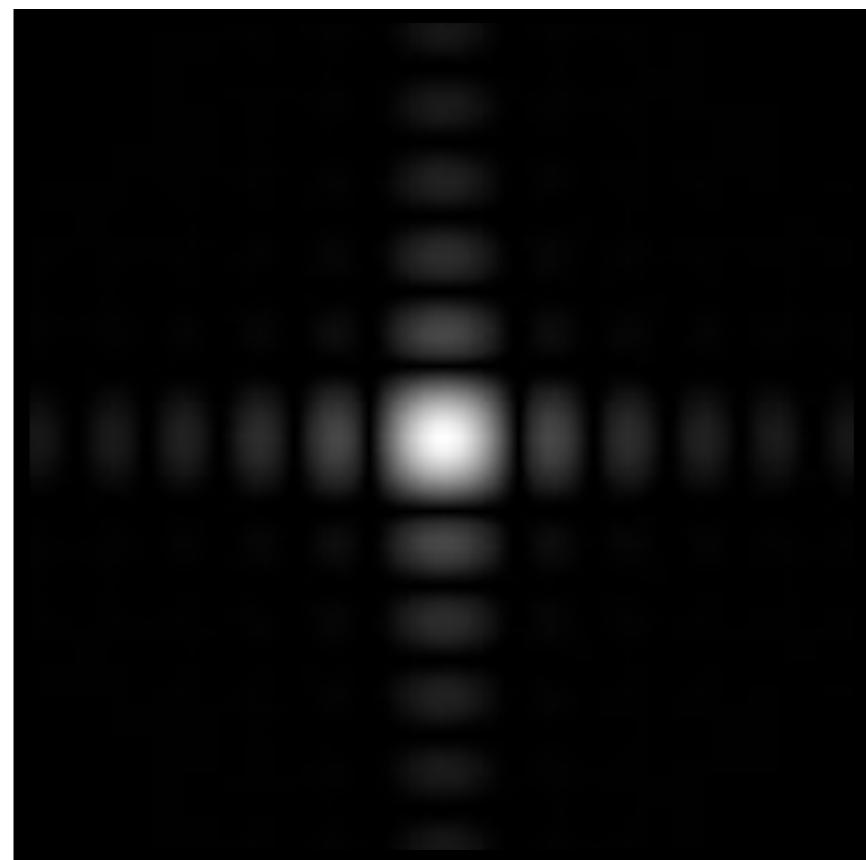

Frequency Domain

Antialiasing By Averaging Values in Pixel Area

Solution:

- **Convolve** $f(x,y)$ by a 1-pixel box-blur
 - Recall: convolving = filtering = averaging
- **Then sample** at every pixel's center


Antialiasing by Computing Average Pixel Value

In rasterizing one triangle, the average value inside a pixel area of $f(x,y) = \text{inside}(\text{triangle},x,y)$ is equal to the area of the pixel covered by the triangle.

Original




Filtered

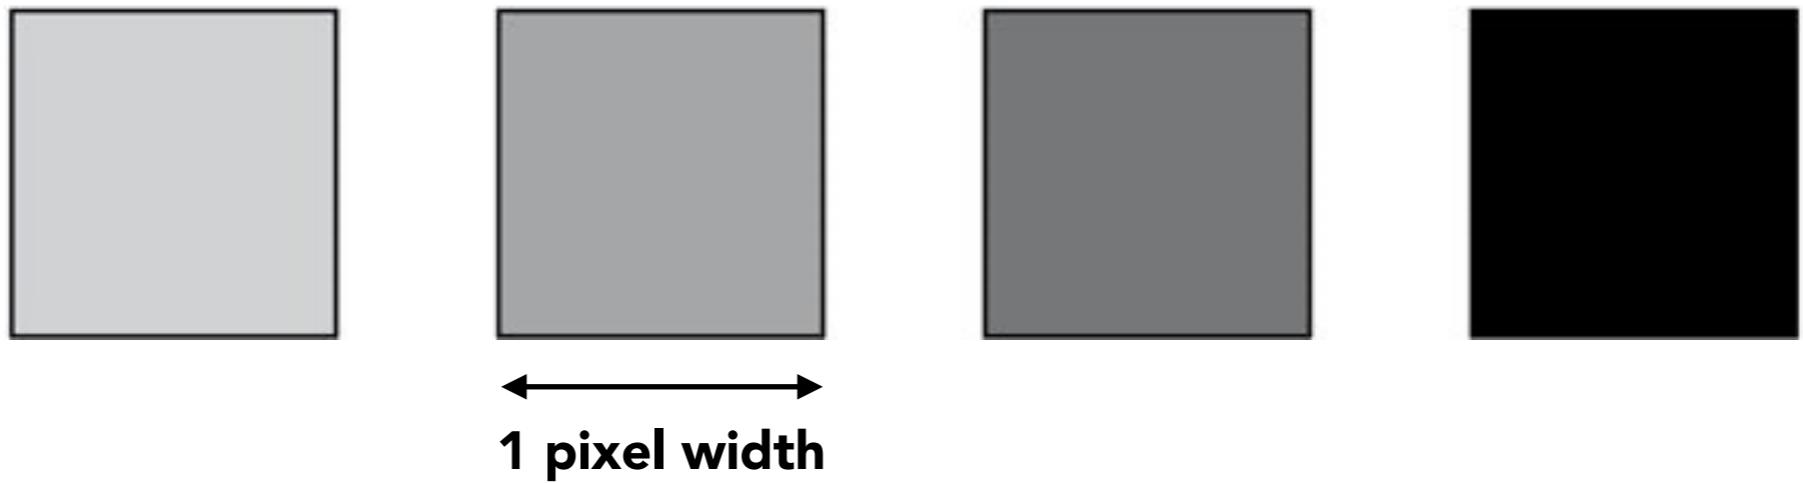

Antialiasing By Supersampling (MSAA)


Supersampling

Approximate the effect of the 1-pixel box filter by sampling multiple locations within a pixel and averaging their values:

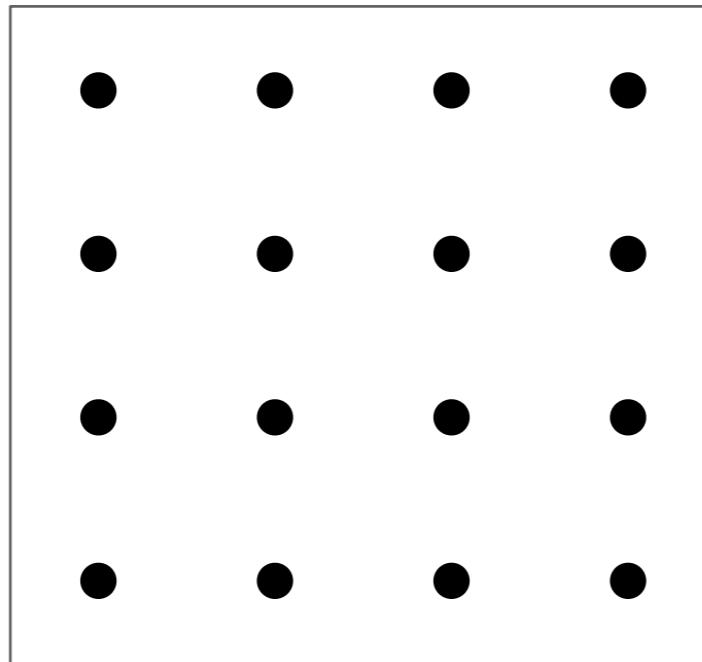


4x4 supersampling

Point Sampling: One Sample Per Pixel

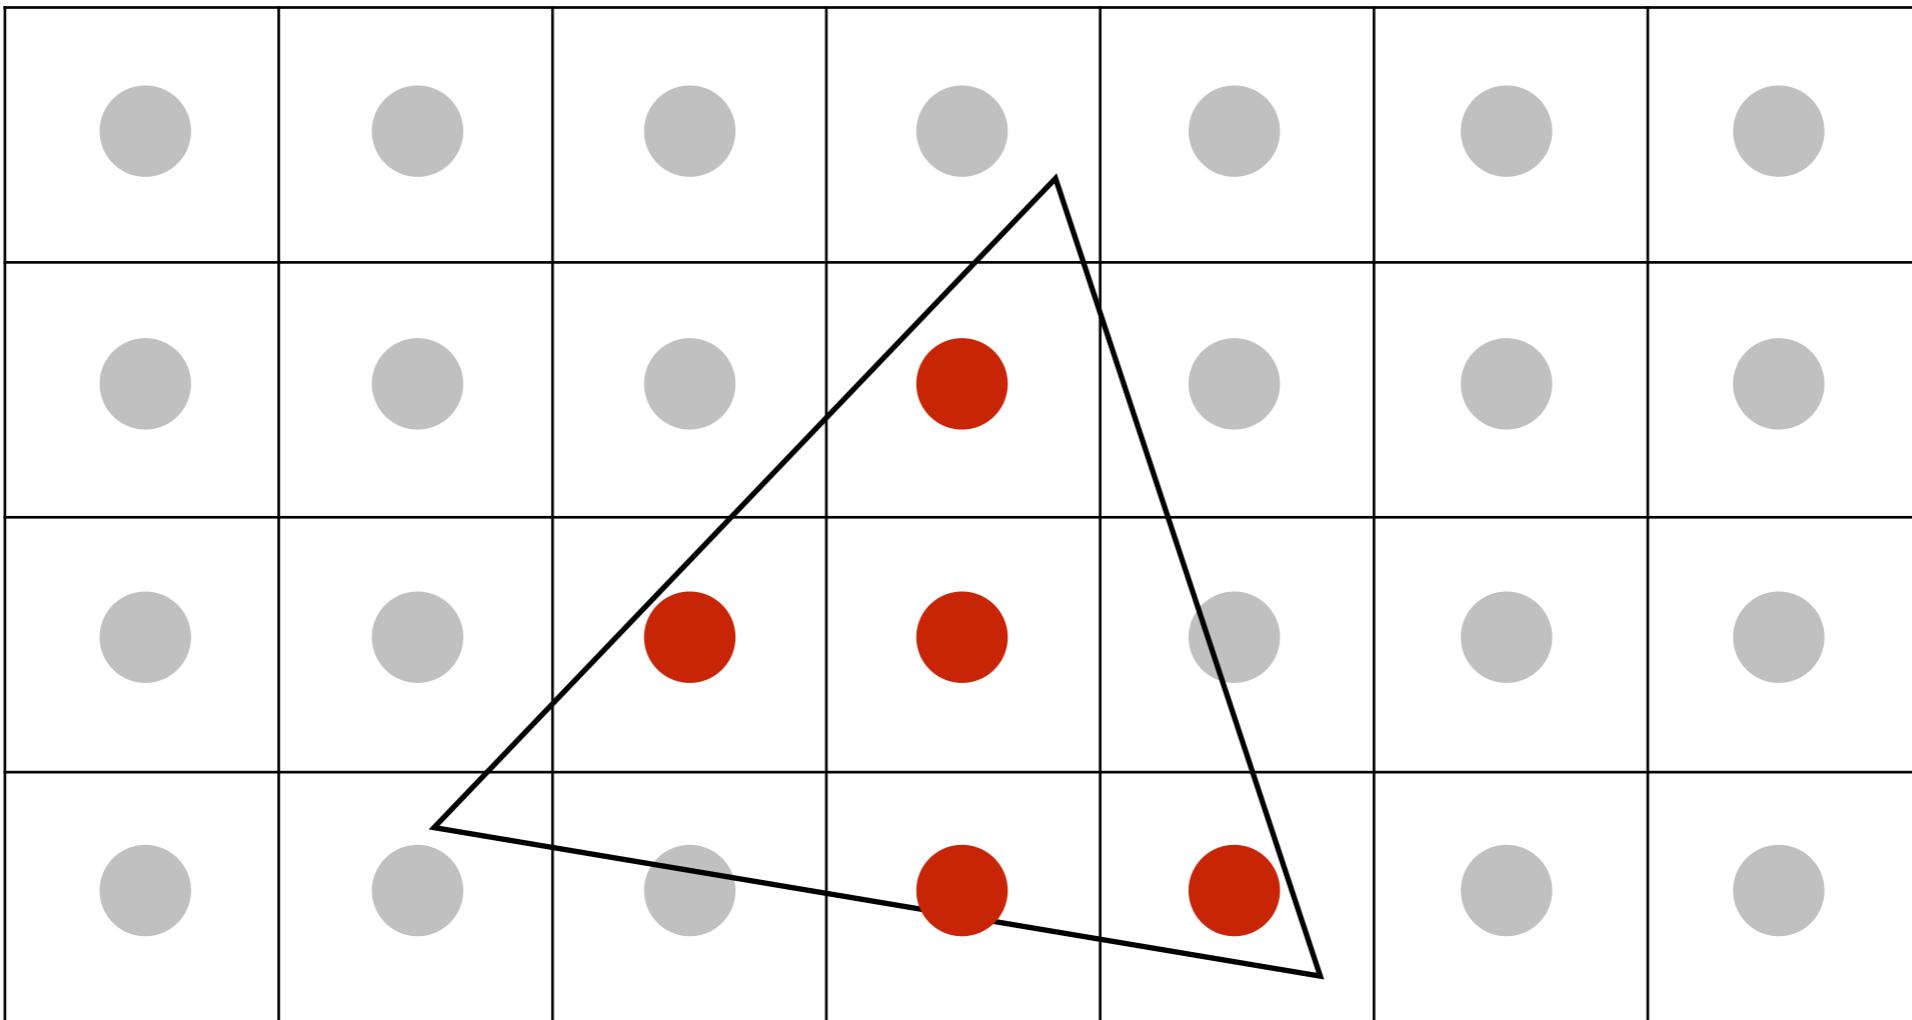

Supersampling: Step 1


Take NxN samples in each pixel.

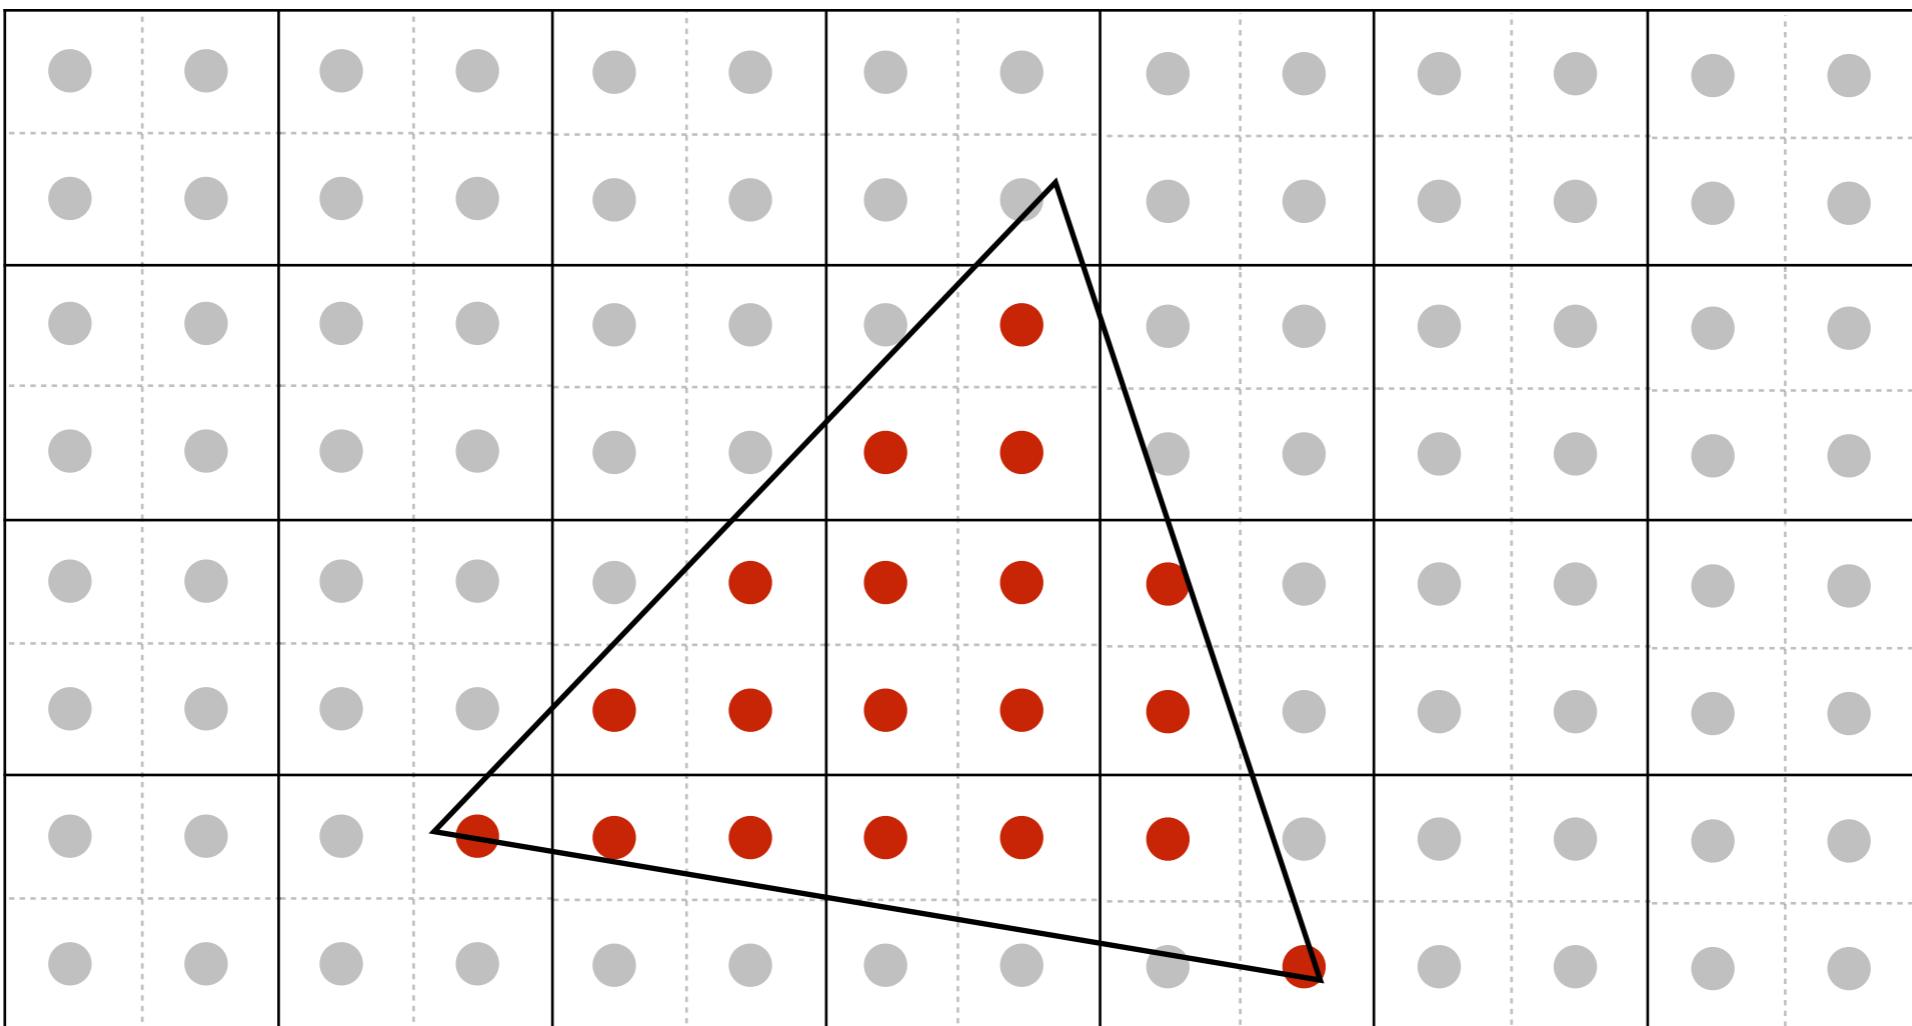

2x2 supersampling

Supersampling: Step 2


Average the NxN samples “inside” each pixel.

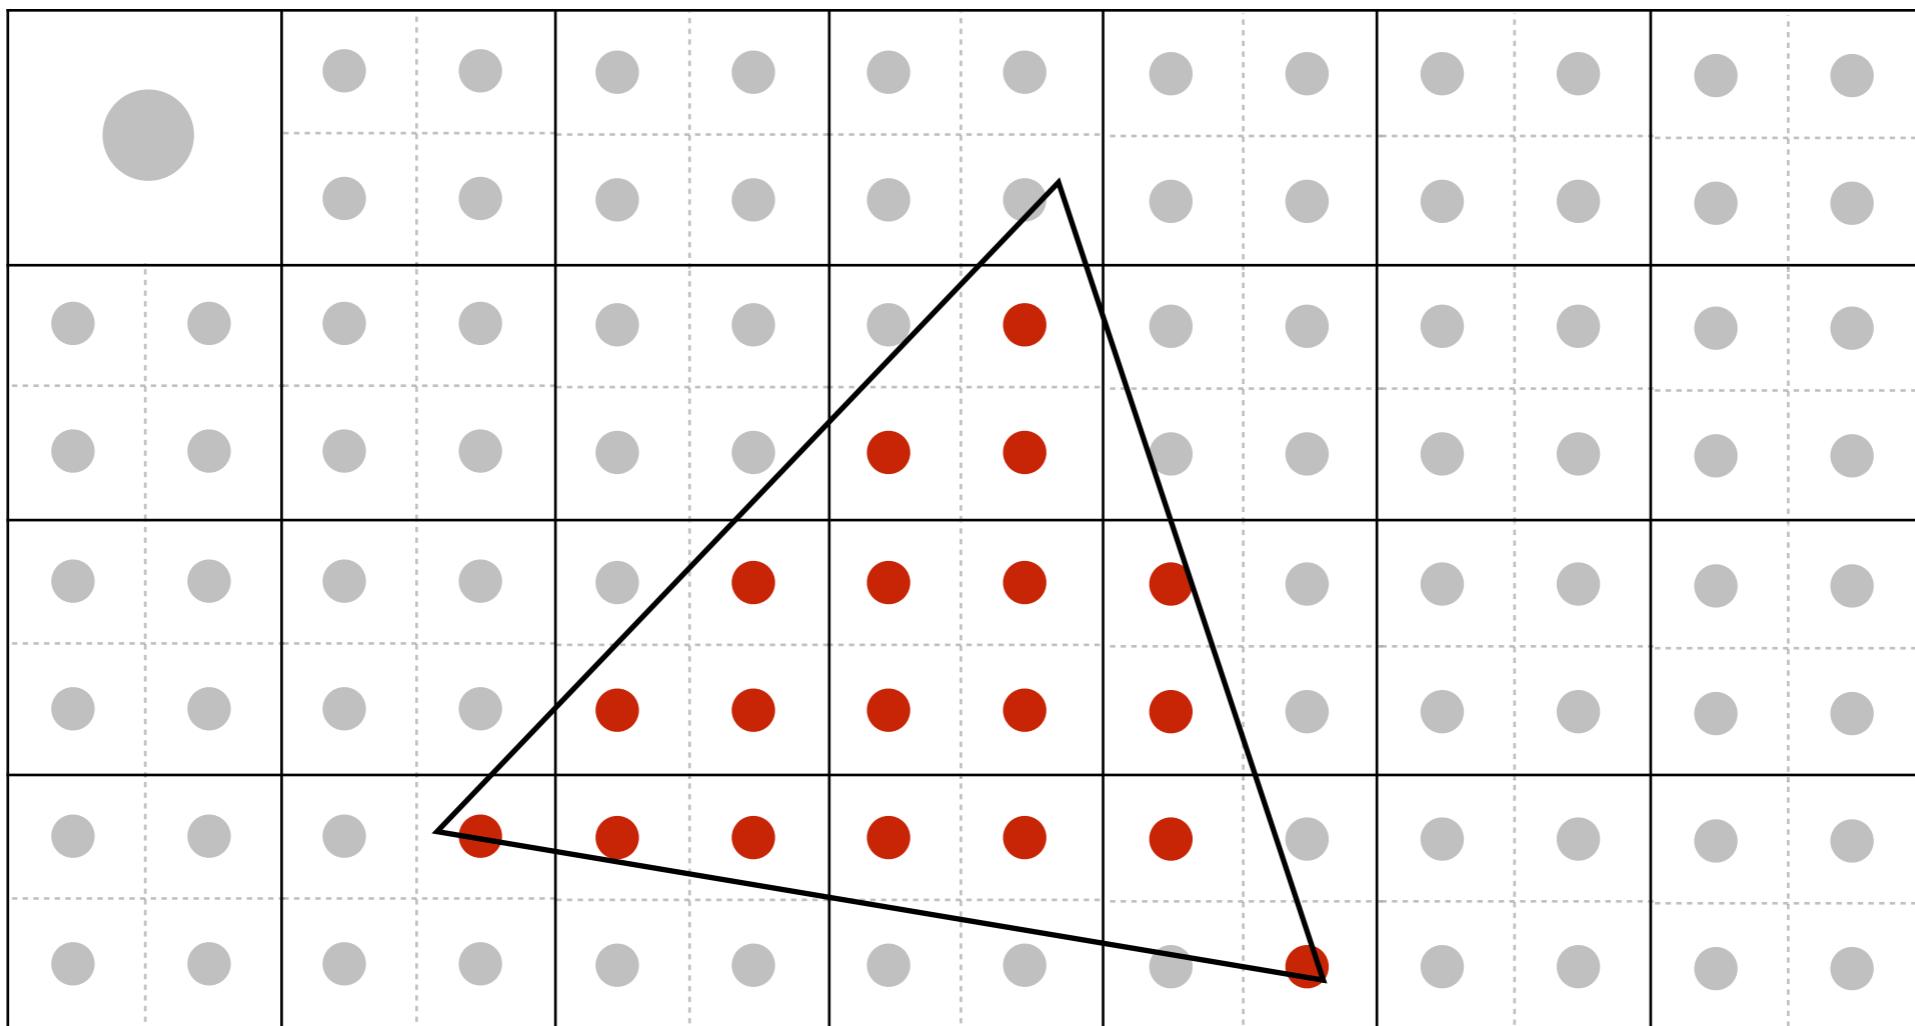

Averaging down

Supersampling: Step 2


Average the NxN samples “inside” each pixel.

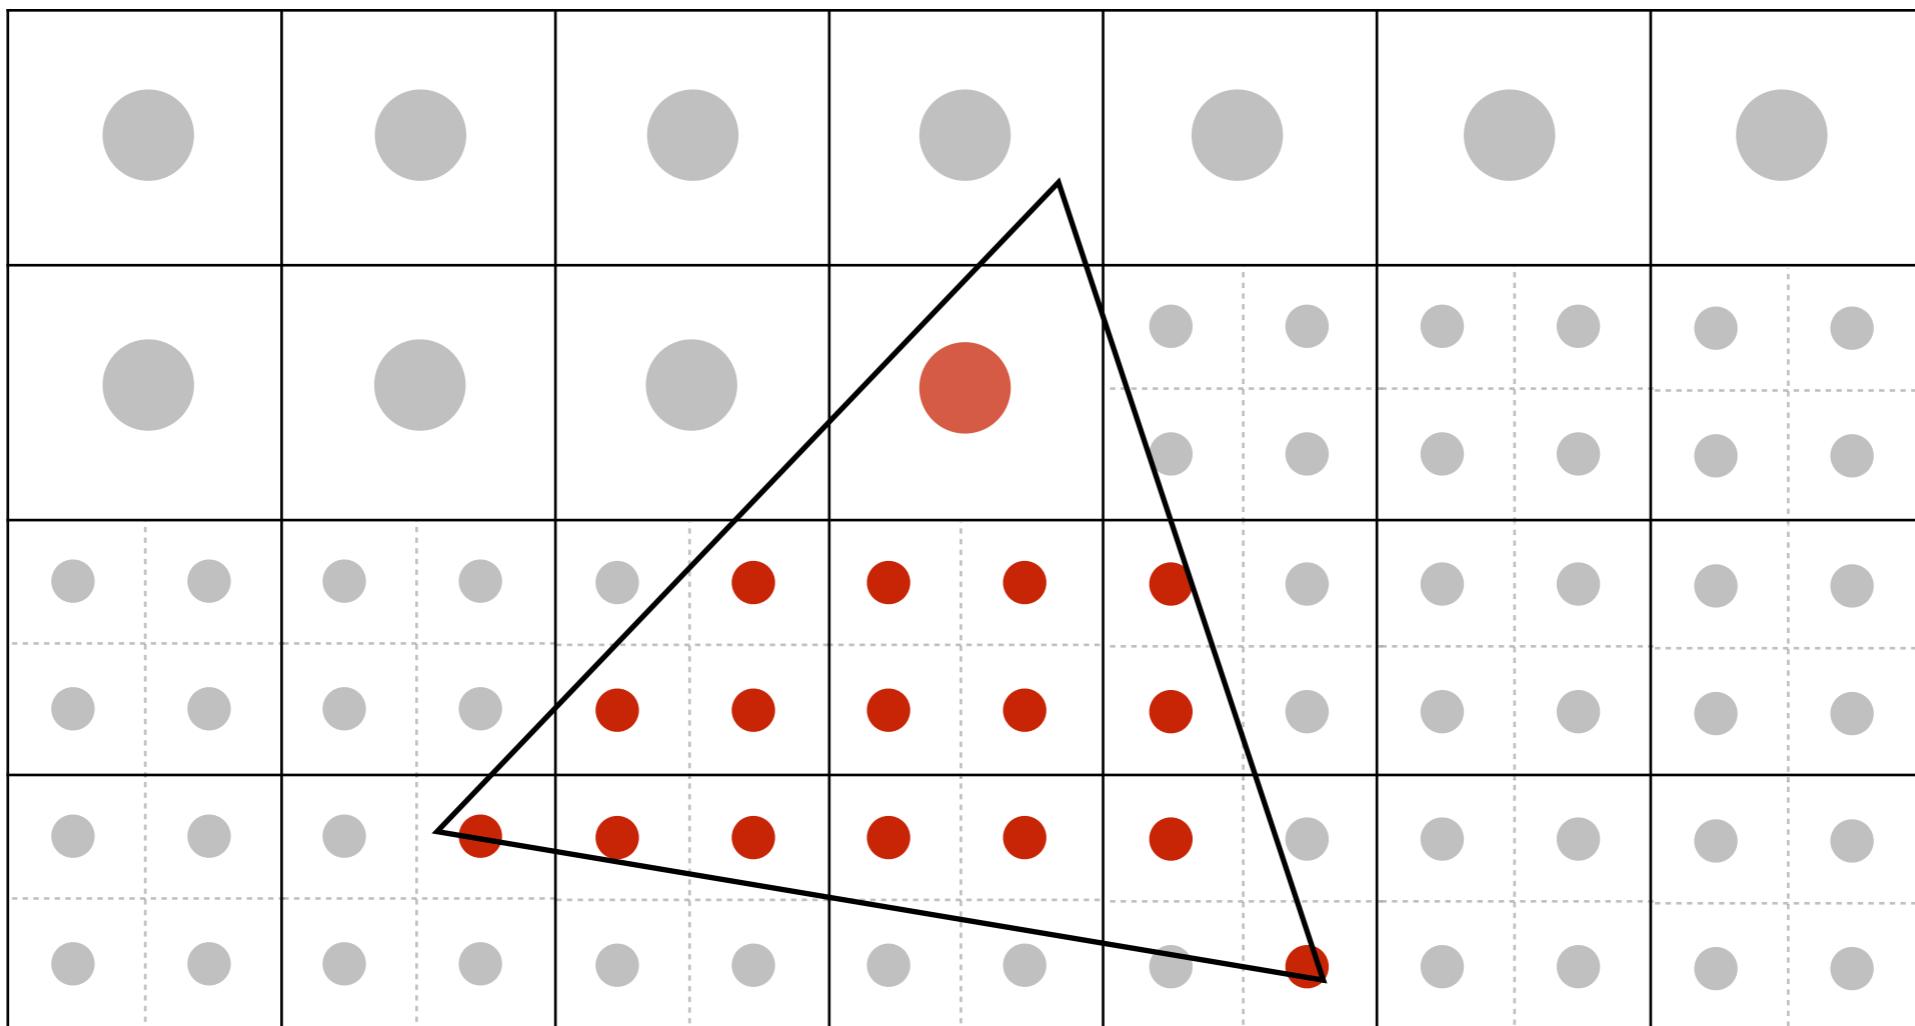

Averaging down


Supersampling: Step 2

Average the NxN samples “inside” each pixel.


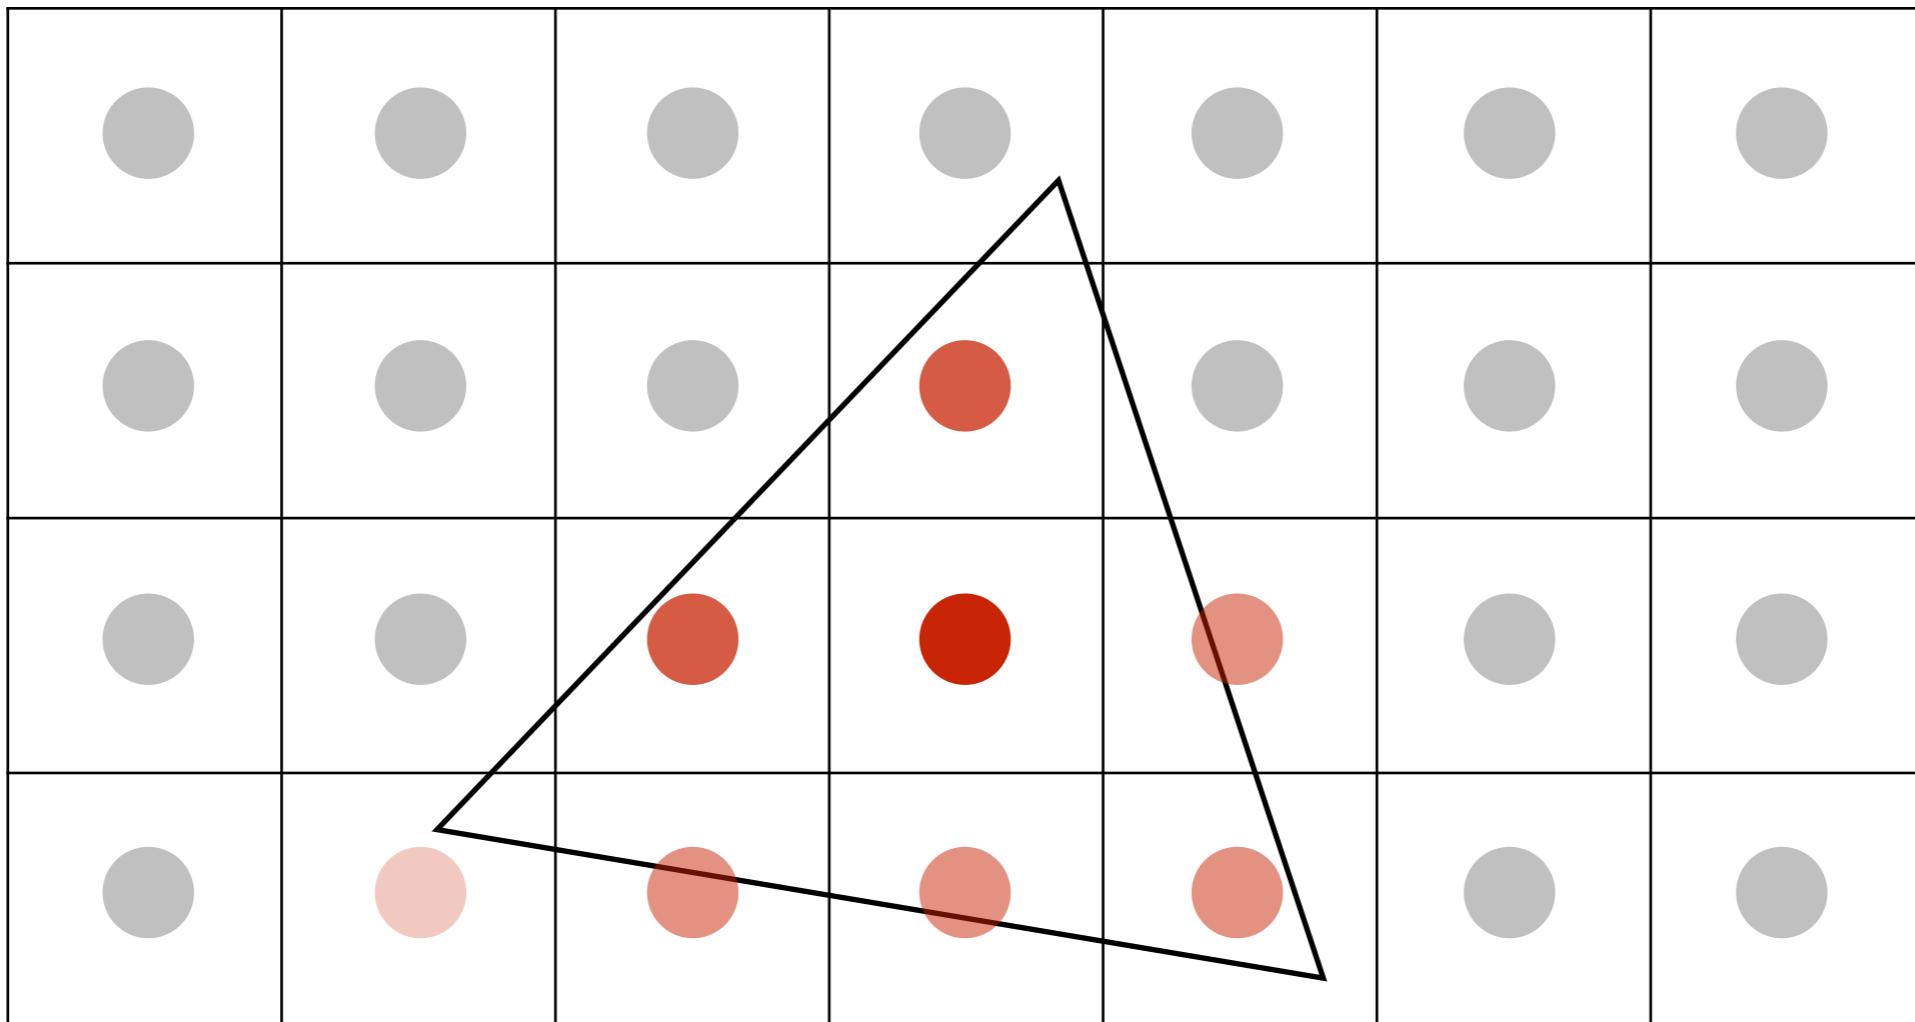


Supersampling: Result



This is the corresponding signal emitted by the display

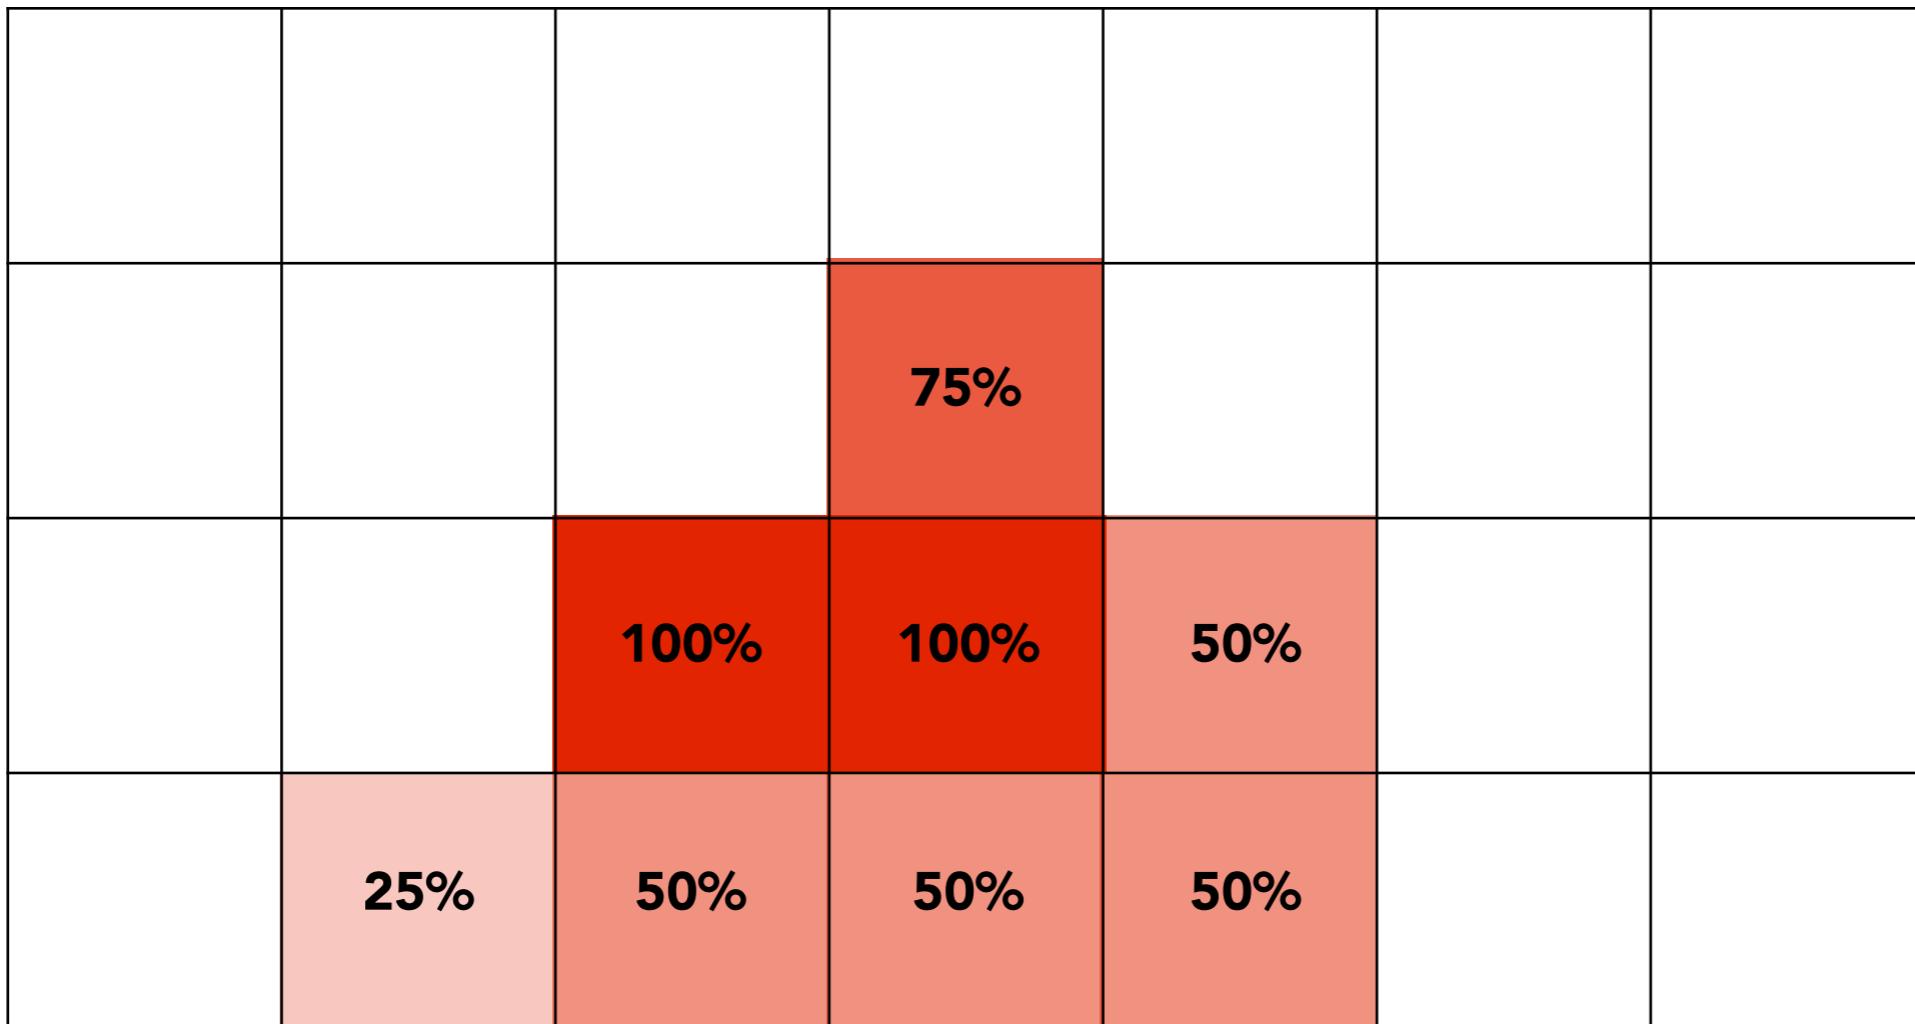

Point Sampling

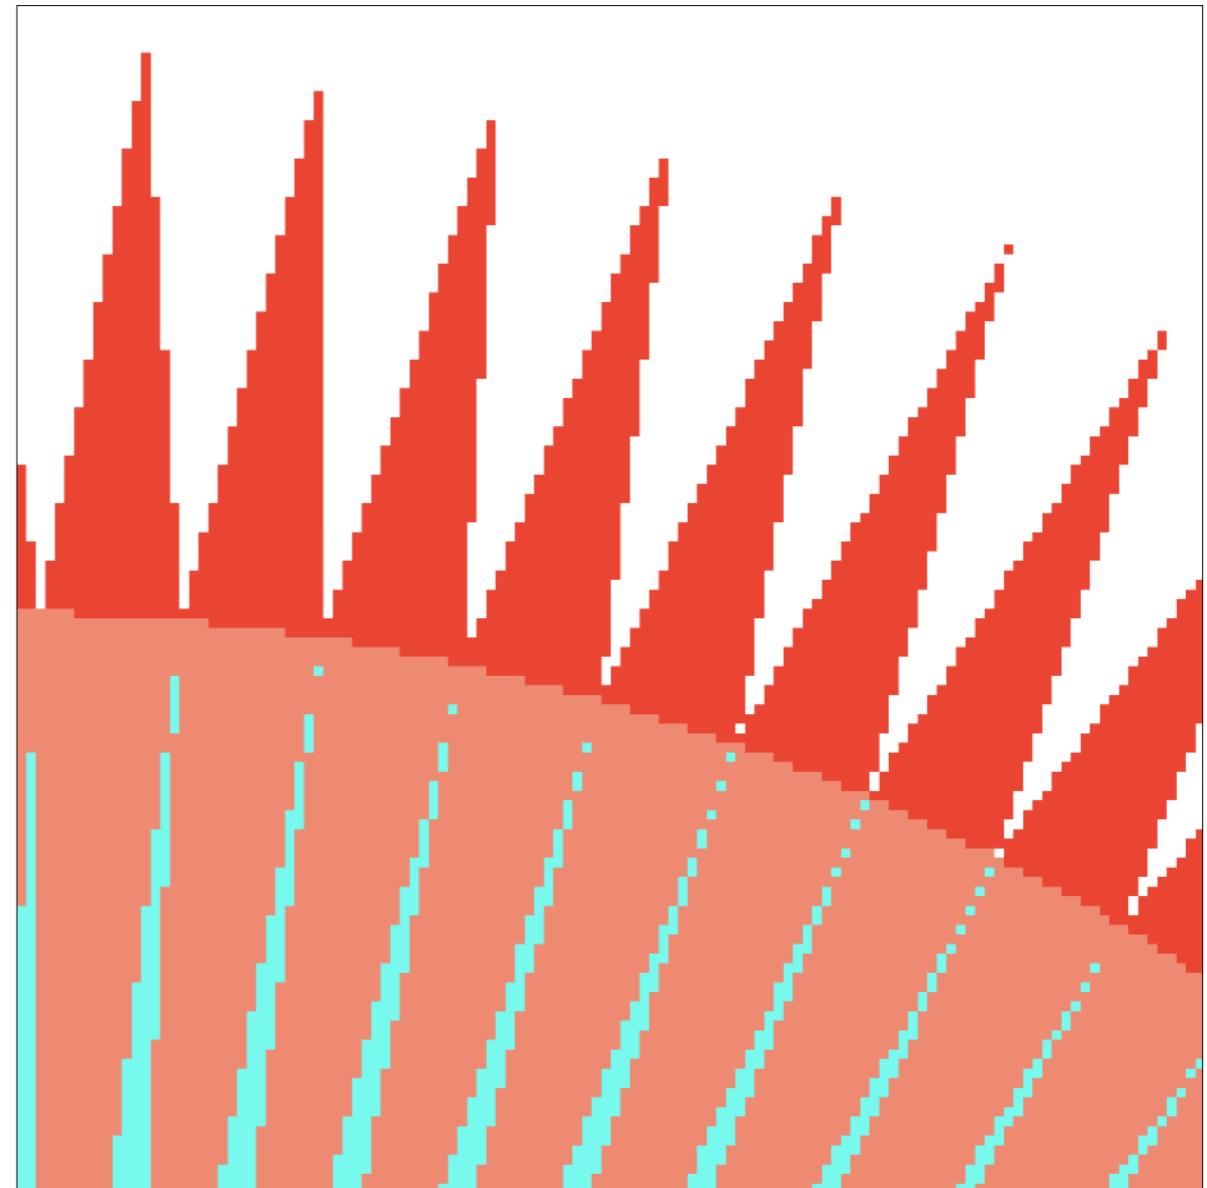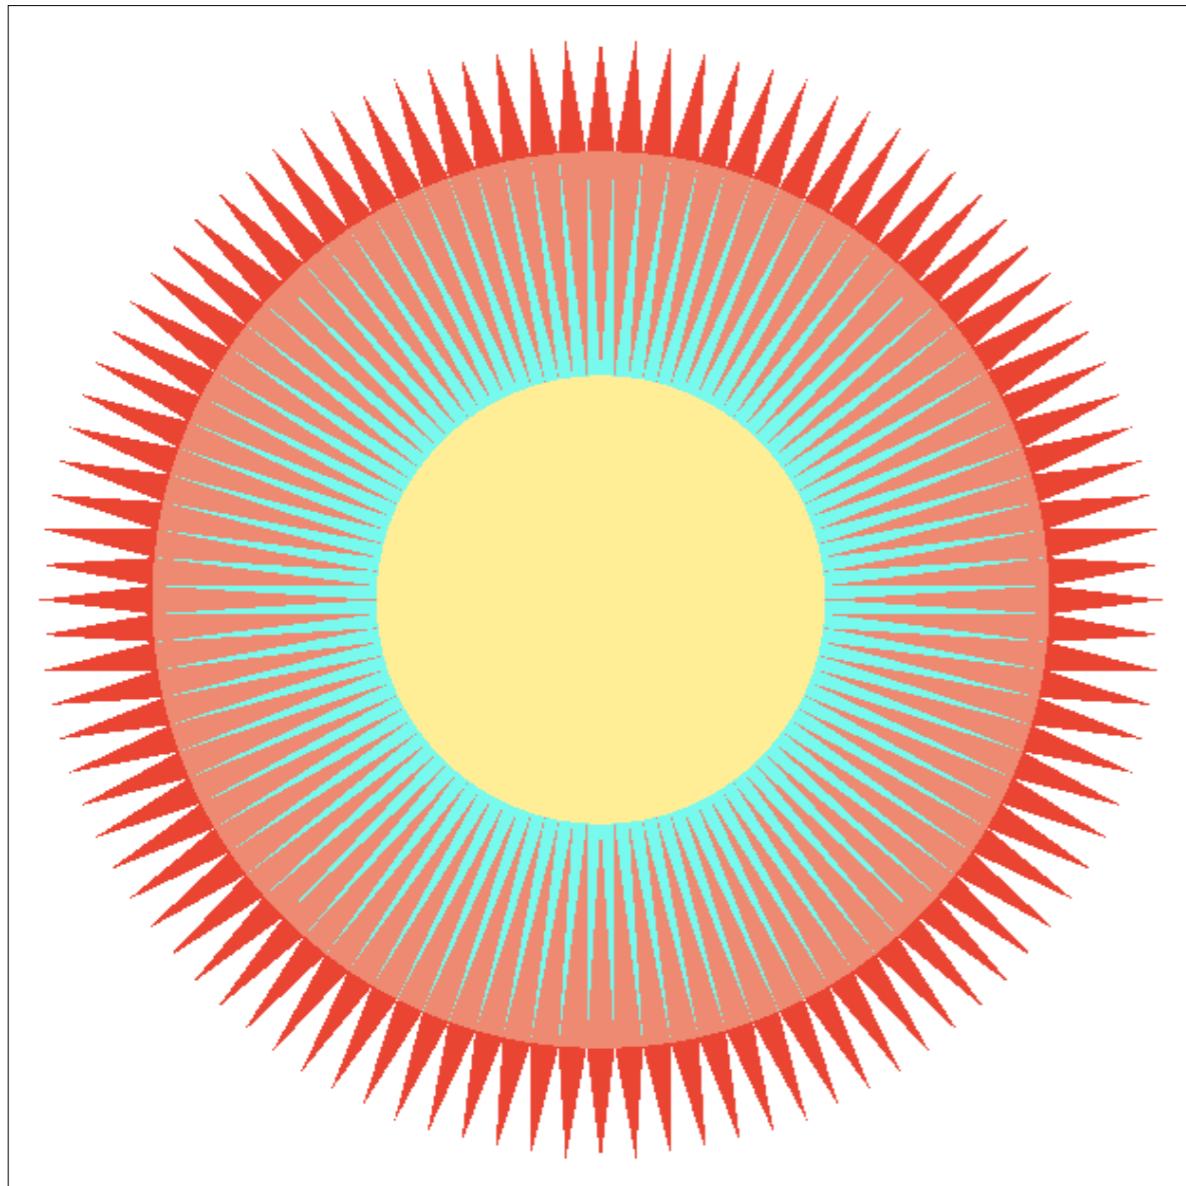

4x4 Supersampling

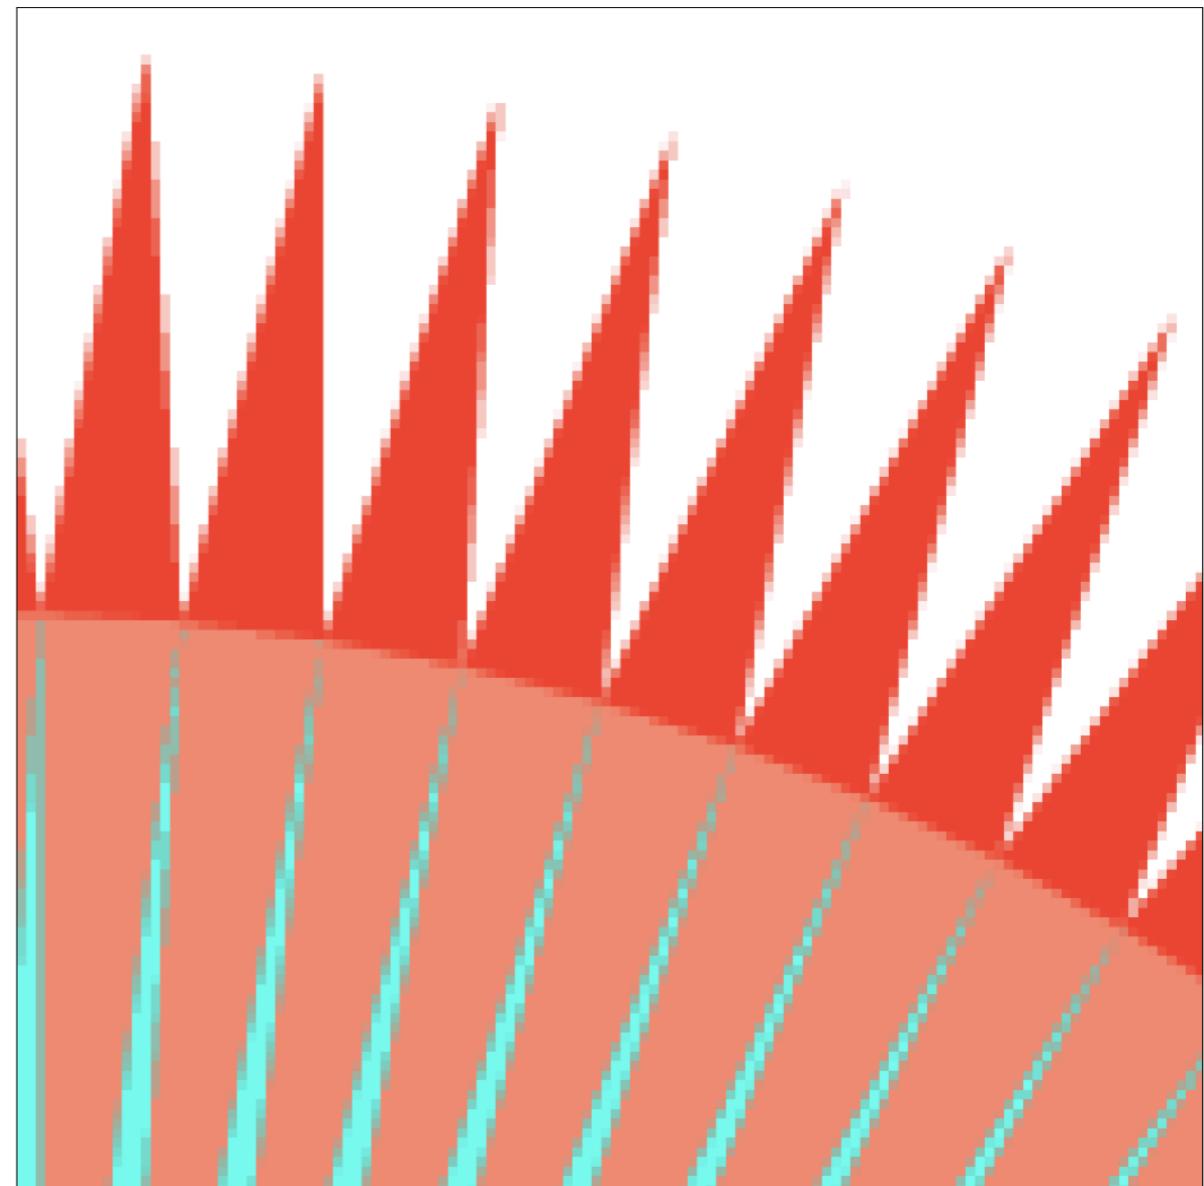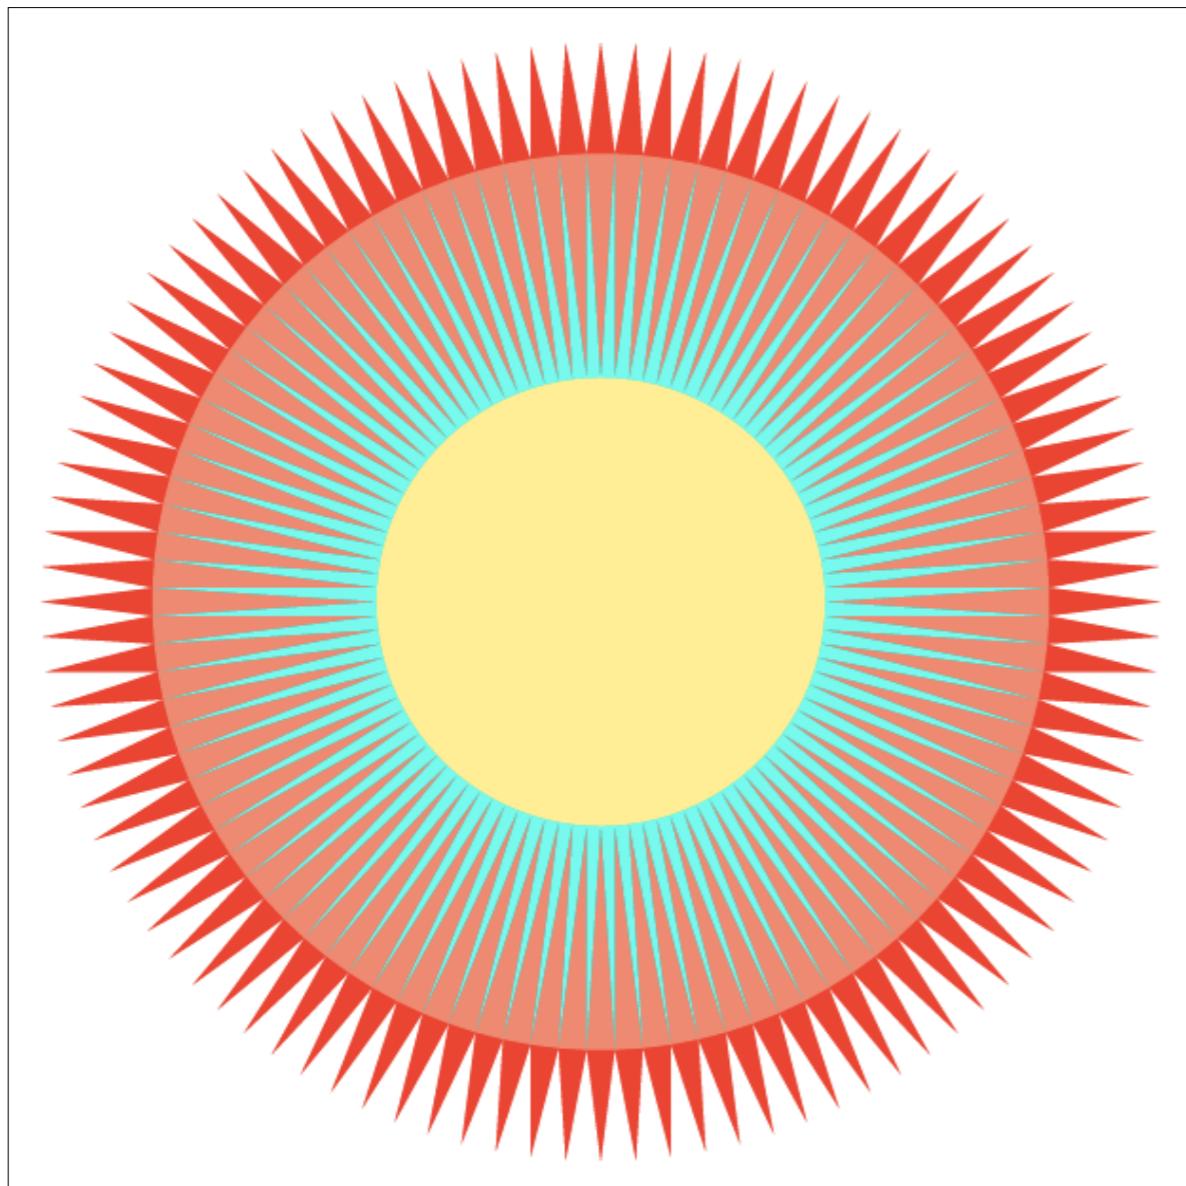

Antialiasing Today

No free lunch!

- What's the cost of MSAA?

Milestones (personal idea)

- FXAA (Fast Approximate AA)
- TAA (Temporal AA)

Super resolution / super sampling

- From low resolution to high resolution
- Essentially still “not enough samples” problem
- DLSS (Deep Learning Super Sampling)

Thank you!