

Arrangement for DroneGo

Hao Li, Peisen Wang, Benjia Liu

January 14, 2020

Abstract

After the worst hurricane to ever hit Puerto Rico, lots of people were injured. Highways were blocked and damaged by the flood. We establish a model to both meet the needs of medicine delivery and road reconnaissance with rotor wing drones. Our model takes into account the following factors : the number of cargo containers, the type and the number of drones, the number of medicines, the associated packing configuration of each cargo, the exact locations of cargo containers.

First, by thresholding the aerial image, morphological dilate and feature point recognition, the image is transformed into a Occupancy Grid Map with passable area (road) and obstacle area (non-road area) and extract the ROI (city) in the same time.

Second, we determined the geographic distribution of each container and the arrangement of drones based on the spatial distance between Puerto Rico's every hospital and the demand for medicines, which included the classification of two functions of drone , one is transportation Medicine drones, the other is the terrain survey drones: A single F drone that cannot survey the terrain but can carry more medicines is used to transport medicines to two hospitals that are closer to each other, which are located farther away. Of hospitals were selected to use 4 fast drones B to transport medicines. Then the remaining 45 B-type UAVs surveyed the surrounding terrain with each city as the base point, which not only ensured the drug demand of each hospital, but also greatly improved the effectiveness of the reconnaissance.

In the process of container loading, under the premise of using the **hybrid genetic simulated annealing** algorithm, medicines and drones are placed on the bottom of the container, and stability and safety can be guaranteed to the greatest extent when transporting. On the premise of ensuring a one-month drug demand for each hospital and a sufficient number of survey drones, the container volume utilization rate is optimized, and the space utilization rate of the three containers is 18.08 %, 20.56 %, 21.68 %.

Third, since there are not too many cargo esthest per shipment, the payload configuration of the drone is simply designed. For A Containers: Drone B mounts a MEDIC1. For B Containers: Drone F mounts three MEDIC1s, two MEDIC2s, two MEDIC3s. For C containers: Drone B is loaded with two MEDIC1s or one MEDIC3 or one MEDIC1 and one MEDIC3.

Fourth, because the Occupancy Grid Map has already contains the obstacle information, we determine to use **RRT-connect** instead of **A*** or **dijkstra** algorithm to plan the delivery path and roads between cities.

At last, the result we got is we can sustain a month of medicine supply, 100% road reconnaissance coverage within the flight radius and 100% road reconnaissance between cities.

Contents

1	Introduction	2
1.1	Background	2
1.2	Restatement	2
2	Assumptions and Justifications	2
3	Notations	3
4	Model Establishment	3
4.1	ROI Extract And Map Established	3
4.1.1	The ratio of the image between the real world	3
4.1.2	Threshold The Image	3
4.1.3	Dilated The Image	3
4.1.4	Detct And Extract The Cities Location	3
4.2	Related analysis of hospitals and drones	4
4.2.1	Analysis of hospital location and material needs	4
4.2.2	Comparison of drones	5
4.2.3	selection of drones	5
4.3	Container packing design	5
4.3.1	Problem Description	6
4.3.2	Model assumptions	6
4.3.3	Model building	6
4.3.4	Solving Algorithm	6

4.4	Drone flight path selection	9
4.4.1	Selection of container placement location	9
4.5	Path Planning And Trajectory Display	11
5	Drone Flight Plan	12
5.1	Time Schedule	12
6	Weakness	12

1 Introduction

1.1 Background

In 2017, the island's worst hurricane hit the territory of Puerto Rico in history, which killed more than 2,900 people ,causing severe damage to the island. The violent storm destroyed most of the island's cellular communications and power services systems. What's worse, flooding blocked and damaged many of the island's highways and roads, leaving the extent of damage to various parts of the island of Puerto Rico unclear.

As time goes by, the rescue and treatment of the people on the island is imminent! Due to the huge increase in the use of medical supplies and the urgent need for rescue organizations to understand the road conditions in various places,we need to design a portable disaster response system called "DroneGo" to assist rescue and assist HELP Inc. improve it response capabilities. We will make full use of the drones to transport the medical supplies needed, while providing high-resolution videos of the damaged and repairable transportation road network through the drones, which are able to prepare for the rescue and further reconstruction of the disaster area.

1.2 Restatement

Considering the requirements and conditions given in the background information and questions, we will complete the following questions:

(1) For the HELP Inc. DroneGo disaster response system, a drone fleet configuration system and a medical kit configuration system are recommended. These systems need to meet the requirements of the Puerto Rico Hurricane Program

(2) Design relevant packaging configurations for each of up to three ISO cargo containers to transport the system to Puerto Rico.

(3) Determine the optimal location for placing containers of the DroneGo disaster response system on Puerto Rico Island (the number of containers in each location is less than or equal to 3) in order to provide material preparation for medical supply and video surveillance of the road network.

(4) Provide payload packaging configurations (medical packaging in the drone's cargo bay), delivery routes and schedules for each drone included in the DroneGo fleet to meet the emergency medical care identified in the Puerto Rico Hurricane scenario Packaging requirements.

(5) Provide a drone flight plan that enables the DroneGo fleet to use car cameras to evaluate major highways and roads to support HelpInc's mission.

2 Assumptions and Justifications

We make some general assumptions to simplify our model. These assumptions and corresponding reasons are listed below:

(1) For simplicity, we made this assumption as follows. The weight of the cargo will not affect the maximum range of the drone used. That is to say, no matter whether there is cargo or not, the drone's maximum sailing distance is exactly the same. In fact, the weight of delivered drones is often greater than the weight of their cargo. It is reasonable to ignore the effect of cargo weight. This will greatly simplify our model.

(2) Helicopters can transport containers to any designated location we have established in the disaster area. In the affected areas, timely external assistance is urgently needed to restore order. Therefore, we consider air transport rather than sea transport. Although Puerto Rico is an island, air transport will bring adaptability to our model in other cases.

(3) We have a plan for transportation in most normal cases, so we can ignore the influence of factors such as harsh environment and extreme weather when the drones fly.

(4) The drones can be recycled, and it can be charged by returning to the starting place for the next use. Because drones are more than expensive and DroneGo is an NGO . As a result, we should focus on financial costs.

(5) When using containers to transport drones and medical packaging, the transportation time is long, the quantity of goods is large, and the weight is heavy. Therefore, we have added a buffer to the container, and we believe that medical packaging can only be placed in the container on the front side, not upright or inverted. Of course, medical packaging can be rotated horizontally to increase space utilization when placing containers. When transporting medical packaging by drones, the transportation time is shorter, the number of goods is smaller, and the weight is lighter, so we believe that medical packaging can be placed in the drone cargo compartment in various ways.

(6) Assume that drone communication and data transfer are always available. We can achieve telephone communication through radio communication or satellite communication. Drone communication does not rely on ground equipment.

3 Notations

4 Model Establishment

Before building the model, we first address the following issues. First of all, when designing the number of drones and medical kits, delivery routes and other tasks, the most basic goal must be to enable the drones to meet the daily needs of the hospital. What's more, while satisfying the needs, it should investigate the main traffic routes as much as possible, and obtain road video information in time to prepare for daily rescue. Last, considering the high cost of drones, we want to reduce the number of drones as much as possible so that ISO containers can have more space for more medical packages. In short, we will choose as few drones as possible to meet the most basic needs of each hospital, and use the selected drones to perform the maximum video surveillance in the affected area.

4.1 ROI Extract And Map Established

4.1.1 The ratio of the image between the real world

Through calculation we can get the ratio R of the physical distance corresponding to each pixel. This is of great significance for our future flight radius calculation and path planning. We extract two points $A(x_A, y_A)$ and $B(x_B, y_B)$ in the image, calculate euclidean distance between A and B (unit : *pixel*), measure their physical distance S_{real} using Google Map.

$$R = \frac{S_{real}}{\sqrt{(x_A - x_B)^2 + (y_A - y_B)^2}} = \frac{69.61km}{615.11pixels} = 113.1m/pixel$$

4.1.2 Threshold The Image

Load the original image and convert it into the threshold image so we can extract the road data from the original image. It makes us possible to reconnaissance along the road. The range is from (50, 50, 20) to (150, 90, 50)

```
cv::Scalar lower_range = { 50, 50, 20 };
cv::Scalar upper_range = { 150, 90, 50 };
cv::inRange(src, lower_range, upper_range, out);
```

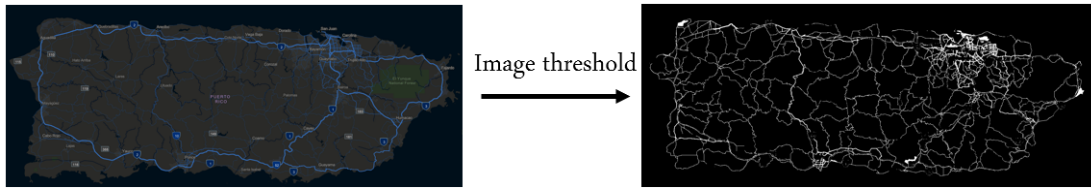


Figure 1: Shows the result after threshold.

4.1.3 Dilated The Image

We dilate the image (using $8 * 8$ Convolution kernel). On the one hand, the new white area represents the area that our drone can detect, on the other hand, this can be our better plan for the reconnaissance trajectory and delivery route of the medicine.

$$\text{Convolution Kernel} = \begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \end{bmatrix}$$

```
cv::Mat element = cv::getStructuringElement(cv::MORPH_RECT, cv::Size(8, 8));
cv::dilate(out, out_dilated, element);
```

4.1.4 Detect And Extract The Cities Location

By performing image feature detection and circle fitting, we can extract the locations of various cities for later road reconnaissance.

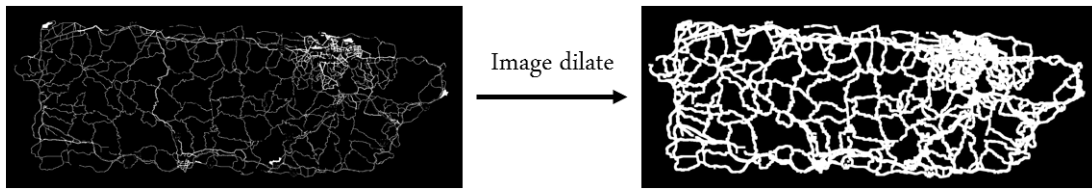


Figure 2: Shows the result after dilated.

```

medianBlur(src , cimg, 5);
GaussianBlur(cimg, cimg, Size(9, 9), 2, 2);
Canny(cimg, cimg, 10, 250, 5);
vector<vector<Point>>cnts;
findContours(cimg, cnts, RETR_EXTERNAL, CHAIN_APPROX_NONE);
for (int i = 0; i < cnts.size(); i++)
{
    vector<Point> cnts_single = cnts[i];
    if (cnts_single.size() > 0)
    {
        vector<Point> approx;
        string shape = detect(cnts_single, approx);
        Moments M = moments(cnts_single);
        int cX, cY;
        if (M.m10 != 0)
        {
            cX = int((M.m10 / M.m00));
            cY = int((M.m01 / M.m00));
        }
        putText(cimg, IntToStr(cX) + "_,_" + IntToStr(cY), Point(cX, cY),
            FONT_HERSHEY_SIMPLEX, 0.5, Scalar(255, 0, 255), 1);
    }
}

```



Figure 3: Shows the result after object detection.

4.2 Related analysis of hospitals and drones

4.2.1 Analysis of hospital location and material needs

To recommend drone fleets and medical kits to HELP, we should understand the basics of the Puerto Rican disaster firstly. The locations of the five hospitals given in the question are shown in Figure 1. We will analyze the demands of these hospitals and make drone selection based on the location of the hospitals.

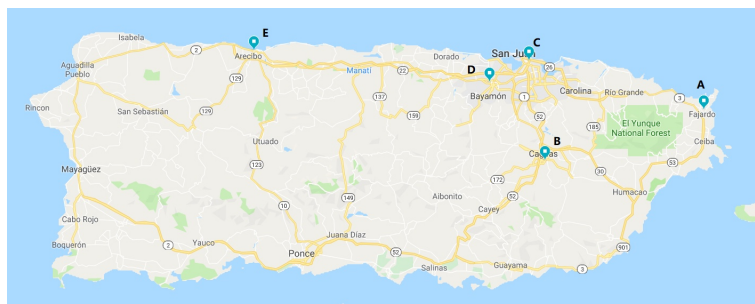


Figure 4: Map of Puerto Rico

Based on the idea of minimizing the number of drones. For two hospitals with distance $S(h_m, h_n)$, h_n and h_m . The weights of the medical packages they need are Mp_m and Mp_n . As long as any drones can be found, its maximum flight distance D_i and payload Z_i meet the requirements:

$$\begin{cases} S(h_m, h_n) \leq D_i \\ Mp_m \leq Z_i \\ Mp_n \leq Z_i \end{cases} \quad (1)$$

It is possible to use the same drone to distribute medicines to multiple hospitals. Next, we started to pay attention to the needs of the hospital every day. We integrated the medical packages required by each hospital every day, as shown in the following chart 2:

Demand for medical kits

HospitalName	MED1	MED2	MED3
Caribbean Medical Center Jajardo	1	0	1
Hospital HIMA San Pablo	2	0	1
Hospital Pavia Santurce San Juan	1	1	0
Puerto Rico Children's Hospital Bayamon	2	1	2
Hospital Pavia Arecibo Arecibo	1	0	0
SUM	7	2	4

4.2.2 Comparison of drones

We uphold the concept of economy and use as few drones as possible while satisfying the basic material delivery conditions. Therefore, we compared the load capacity, the volume and the running distance of the drone from the table, and selected two types of drones, B and F. We can conclude that although the drone B has a small payload, it has the longest flight distance and a small volume, so it is very suitable for the supply of medical supplies to Pavia Arecibo Hospital. For UAV F, it has the largest load capacity and a very long flight distance, which is very suitable for the medical supplies of the other four hospitals.

From the question we can know the basic information of the drones as follows:

Basic information about drones

Type of drone	Load capacity/lbs	Total flight distance/km	volume/cuft
A	3.5	23.33	50625
B	8	52.67	19800
C	14	37.33	90000
D	11	18	12500
E	15	15	13500
F	22	31.6	40000
G	20	17.07	17408

4.2.3 selection of drones

Based on the above analysis of the needs of the hospital, the analysis of the location of the hospital, and the analysis of the choice of drones, we choose: A type B drone transported medical supplies to Pavia Arecibo Hospital; An F-type drone supplies medical supplies to Hospital Pavia Santurce San Juan and Puerto Rico Children's Hospital Bayamon; A Type B drone carries medical supplies to the Caribbean Medical Center Jajardo; Two Type B drones transported medical supplies to Hospital HIMA San Pablo, one of which transported a medicine number three and the other transported two medicine number one. After solving the supply of medical supplies, we are now considering the issue of drone allocation for road reconnaissance. In this question, we selected drones by assigning criteria to large, medium and small cities near five hospitals. The distribution of cities near the five hospitals is shown below:

We chose the larger one as the main reconnaissance destination, as shown by the green dot in the figure above.

We will prepare 11 Type B drones near Pavia Arecibo Hospital, and select 14 Type B UAVs near the other four hospitals for road reconnaissance.

4.3 Container packing design

Since we have given the basic scheme of drone selection and the basic information of demand and supply of the five hospitals above, in this part, we will carry out the optimization of the container packing problem. These include a three-container joint design of drones and medical supplies.

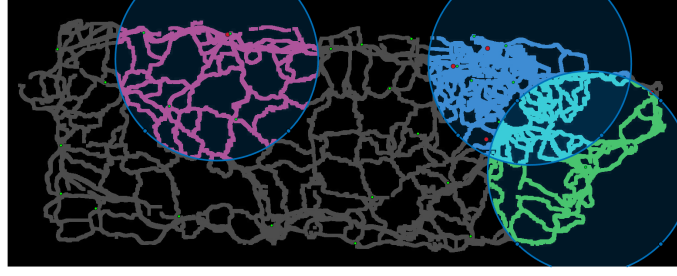


Figure 5: Map of main city

4.3.1 Problem Description

The container loading problem is defined as: Given i containers with length, width and height of L_i, W_i, H_i and j types of length, width and height of l_j, w_j, h_j , Goods with a weight of m_j . While considering certain constraints, and on the premise of meeting the supply of medicines, transport drones and medicine boxes as safely as possible.

Restrictions:

- (1) Volume constraints: During the loading of containers, space is continually shrinking, and container volume and cargo volume are the main criteria for loading feasibility.
- (2) Orientation constraint: When determining the loading order of goods, it is also necessary to consider the impact of loading in different directions on space utilization. Ensure that drugs and drones remain stable during transportation.
- (3) Loading order constraints: Different drones and medicines should be loaded according to different loading order priorities.

4.3.2 Model assumptions

The algorithm mainly studies the container loading layout. In order to improve the space utilization of the container, the maximum utilization of the container volume is used as the objective function. The following assumptions are made in the model:

- (1) There are no regional restrictions on the location inside the container
- (2) Good quality distribution
- (4) The goods can maintain their shape and size without being deformed by stacking.

4.3.3 Model building

Based on the above content analysis, the objective function and packing constraints of the current mathematical model are established as follows:

- (1) Objective function is optimal for container volume utilization

$$Z = \max \frac{\sum_{i=1}^n v_i}{V}$$

Among them, Z is the volume utilization rate of the container, i is the serial number of the cargo, $i = 1, 2, \dots, n$. v_i is the volume of the i -th cargo, and V is the volume of the container.

- (2) Cargo total volume constraint

$$\sum_{i=1}^n v_i \leq V$$

- (3) 3D dimensional constraints for cargo loading

$$\begin{cases} 0 \leq x_i + l_i \leq L \\ 0 \leq y_i + w_i \leq W \\ 0 \leq z_i + h_i \leq H \end{cases}$$

Among them, x_i, y_i, z_i are the reference coordinates of the goods placement position, l_i, w_i, h_i are the length, width, and height of the goods, L, W, H For the length, width, and height of the container.

4.3.4 Solving Algorithm

- (1) Three-space segmentation heuristic

The three-dimensional boxing problem itself has certain complexity, and an efficient loading scheme is generated by using a three-space segmentation heuristic algorithm. The heuristic algorithm can generate high-quality solutions in a short time, and also has the flexibility to adapt to different needs. Here are the rules of the heuristic algorithm.

- (A): Ordering rules

The order of cargo loading will affect the quality of the container space layout. In the process of designing the loading scheme, in order to determine the order in which the goods are placed in the container, sequencing rules are more commonly used.

This time is the commonly used rule of decreasing longest edge. First compare the longest side of the cargo, if the longest side is the same, compare the second longest side, and then load along the length of the container; If the longest side and the second longest side of the goods are the same, then consider the volume of the goods and fill them in descending order.

Therefore, during the packing process, the drone is first loaded, and then the medicine can be loaded.

(B): Positioning rules

In the process of packing the goods to be loaded one by one in a certain sequence, corresponding positioning rules are required to determine their placement. First place the cargo at one corner of the container, then load them along the sides one by one, and then fill the corners.

(C): Space segmentation rules

The remaining space of the container refers to the remaining space in the container that can be used after the cargo is loaded. In the subsequent process of continuously adding goods, the shape of the remaining space has become relatively complicated, and it is difficult to describe it overall. In order to make the cargo space to be expressed clear, the three-space division rule is used to divide the container space. When a container is loaded with a cargo, the space structure in the container changes at this time. Except for the volume occupied by the cargo, the remaining space is divided into the front, right, and upper parts. When the goods are continuously added, the above-mentioned subspaces are successively generated until the container is filled or there is no cargo to be held.

The following figure is the corresponding relationship between the container's three-space partition layout and the three-dimensional coordinate system: The specific encoding of the heuristic algorithm is as follows:

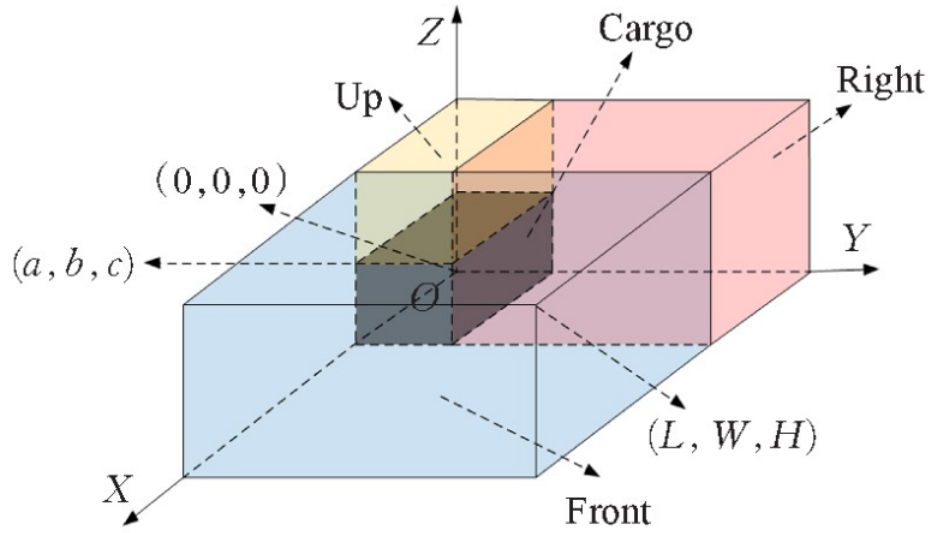


Figure 6: Division of remaining space

$$V = (i, x_a, y_a, z_a, x_b, y_b, z_b)$$

In the above coding sequence, i represents the serial number of the container, X_a , Y_a , and Z_a represent the three-dimensional coordinates of the reference point that can be placed in this space, that is, the coordinates of the lower left and lower vertices of the space. When the three-dimensional coordinates where the reference point can be placed are the origin, the length, width, and height of the space are X_b , Y_b , Z_b ; When the three-dimensional coordinates of the placeable reference point are not the origin, the length of the space is expressed as:

$$L = \max(x_b - x_a, y_b - y_a, z_b - z_a)$$

The width is expressed as:

$$W = \min(x_b - x_a, y_b - y_a, z_b - z_a)$$

The height is expressed as:

$$H = z_b - z_a$$

It can be known from the above coding rules that if the length of the container is L , the width is W , and the height is H , then the initial available space of the container is expressed as

$$V = (i, 0, 0, 0, L, W, H)$$

For example, after a piece of cargo with length a , width b , and height c is loaded into the container according to the method shown in Figure 1, the code and size of the newly generated three remaining spaces $V(m)$ are:

$$\begin{cases} V(m) = (i, a, 0, 0, L, W, H) \\ L_m = \max(L - a, W) \\ W_m = \min(L - a, W) \\ H_m = H \end{cases}$$

The encoding size of $V(m+1)$ is:

$$\begin{cases} V(m+1) = (i, 0, b, 0, a, W, H) \\ L_{m+1} = \max(a, W - b) \\ W_{m+1} = \min(a, W - b) \\ H_{m+1} = H \end{cases}$$

The encoding and size of $V(m+2)$ is

$$\begin{cases} V(m+2) = (i, 0, 0, c, a, b, H) \\ L_{m+2} = \max(a, b) \\ W_{m+2} = \min(a, b) \\ H_{m+2} = H - c \end{cases}$$

The division of the remaining space of the container is a prerequisite for the continued loading of the cargo. Before the container is fully loaded, the remaining space will be continuously generated, so the available remaining space must be searched out. In the process of searching for the remaining space, the height of the space is sorted in ascending order, and the priority of the space to be loaded is specified, thereby ensuring that the goods are loaded from bottom to top. **(2)Space merging rules** The space segmentation of the heuristic algorithm finds the available remaining space for the loading of the cargo. However, in the process of actually writing the algorithm, there will be some scattered space that cannot be used, so it must be integrated in a certain way. Space merger is to make full use of the scattered space to form a larger space to be installed. This will not only improve the space utilization of the container, but also improve the loading effect of the cargo. Define $K(l) = (X_i, Y_i, Z_i, X_j, Y_j, Z_j)$, l is the random space sequence number of the set $K(l)$, The length of the idle remaining space fragments is:

$$L_l = \max(x_j - x_i, y_j - y_i)$$

The width is expressed as:

$$W_l = \min(x_j - x_i, y_j - y_i)$$

The height is expressed as:

$$H_l = z_j - z_i$$

In the process of designing the algorithm, the container is placed in a three-dimensional coordinate system, so spatial merging includes merging in three directions.

(3)Three-space segmentation heuristic algorithm steps

According to the design concept of the three-space segmentation heuristic algorithm, combining the ordering rules, positioning rules, space segmentation rules, and space merger rules, the ordering and control of the cargo loading process is made.

Step 1: Import the basic data of the container, the drone, and the medicine, define the number of cargo types, the total number of cargoes, and the container serial number through function variables, and initialize the remaining space of the container according to the space coding rules.

Table 1. Standard ISO
Container Dimensions

	Exterior			Interior			Door opening	
	Length (in.)	Width (in.)	Height (in.)	Length (in.)	Width (in.)	Height (in.)	Width (in.)	Height (in.)
20' Standard Dry Container	240	96	102	231	92	94	2	89

	Shipping Container Dimension				Configuration Capabilities		
Drone	Length (in.)	Width (in.)	Height (in.)	Max Payload Capability (lbs.)	Video Capable	Medical package	Drone Cargo Bay Type*
B	30	30	22	8	Y	Y	1
F	40	40	25	N	Y	Y	2

Drone Cargo Bay Type	Length(in.)	Width(in.)	Height(in.)	
1	8	10	14	Top Loaded
2	24	20	20	Top Loaded

Step 2: Code the placement of the goods:

Emergency Medical Package Configuration		
Package ID	Weight (lbs.)	Package Dimension (L*W*H in.)
MED 1	2	14*7*5
MED 2	2	5*8*5
MED 3	3	12*7*4

$$C=(i,j,x,y,z,l,w,h)$$

Among them, i is the container number of the container, j is the type number of the cargo, x , y , and z are the starting coordinate points of the cargo, and l , w , and h are the length, width, and height of the cargo.

Step 3: Determine the size of the cargo to be placed in the container and the maximum volume of the container. The length, width, and height of the cargo are less than the length, width, and height of the remaining space in the container.

Step 4: When the cargo meets the above loading requirements, it will be loaded according to the above coding method. After loading, three subspaces are generated according to the space partitioning rules, namely the front space, the right space, and the upper space. Each time the remaining space set is generated, the space is merged according to the space merge rules.

Step 5: Sort the Z coordinates in the remaining space, and then determine the height of the space to ensure that the goods are loaded from bottom to top.

Step 6: Return to step 3, and load subsequent goods in turn until the goods sequence set is empty.

Step 7: When the remaining space of the container cannot satisfy the cargo loading, it is necessary to restart the packing.

Step 8: Finally, the data of loading result and remaining space are obtained. [1]

4.4 Drone flight path selection

After solving the problem of packing medical packages and drones, we began to plan the placement of containers and the drone flight routes. We found a road along the coastline in Puerto Rico's highway network, and we decided to choose three locations on the coast as containers for the containers.

4.4.1 Selection of container placement location

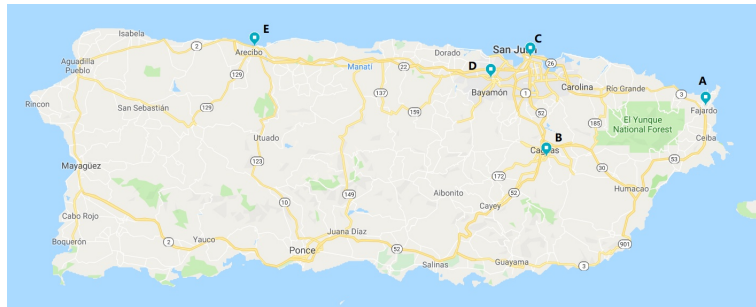


Figure 7: Location of the hospital

For the medical point above D B and C:

- (1) Use the RRT algorithm to obtain the path curve at the upper and lower ends of the right-hand ring road from [120, 711] to [151, 1200].
- (2) Extracting sample points on a path curve.

```
[151, 1200], # 道路面积为 : 13799
[129 , 945], # 道路面积为 : 11740
[124, 1064], # 道路面积为 : 13409
[111, 1144], # 道路面积为 : 13414
[130, 864 ], # out of distance
[124, 1064] # 道路面积为 : 13409
```

Figure 8: Location of the CITY

(3) Loop through all points and draw circles.

(4) Traverse the area of the road and select the point with the largest value. Use an unexpanded binary map .(you don't need to check whether the torus contains medical centers that should be included because it must be included)

(5) Get [130, 864], road area is: 103851 area is the largest.

For the medical point on the left E:

(1) Use the RRT algorithm to obtain the path curve from [86, 233] to [107, 545] on the right and left ends of the roundabout road

(2) Extract sample points on the path curve

```
[103, 331], # 道路面积为 : 25854
[67, 257], # out of distance
[125, 469], # 道路面积为 : 26017
[141, 481], # 道路面积为 : 26828
[125, 517], # 道路面积为 : 25202
[107, 545], # 道路面积为 : 23110
[267, 110], # out of distance
[341, 117], # out of distance
[428, 92 ], # out of distance
[451, 120] # out of distance
```

Figure 9: Location of the CITY

(3) Iterate through all points and draw circles

(4) (It is not necessary to check whether the medical center should be included in the torus, because it must be included.)

Traverse the road area and select the point with the largest value. Use an unexpanded binary map.

(5) Get point [141, 481], road area is: 54368 area is the largest

For the medical point on the right A:

(1) Use the RRT algorithm to obtain the path curve on the right and left ends of the roundabout road from [455, 1314] to [266, 1498].

(2) Extracting sample points on a path curve.

```
[266, 1498], [301, 1494], [325, 1462],
[334, 1444], [353, 1437], [356, 1417],
[375, 1410], [384, 1391], [382, 1391],
[394, 1375], [401, 1356], [401, 1336],
[423, 1339], [438, 1325]
```

Figure 10: Location of the CITY

(3) Loop through all points and draw circles.

(4) See if the circle contains medical centers that should be included, and if so, traverse the road area and select the point with the largest value.

Drawing with matlab

(1) Combine left, top, and right ROIs into img highlight in the form of imadd ().

(2) Add img highlight and img at a

3 : 7

ratio to get res img.

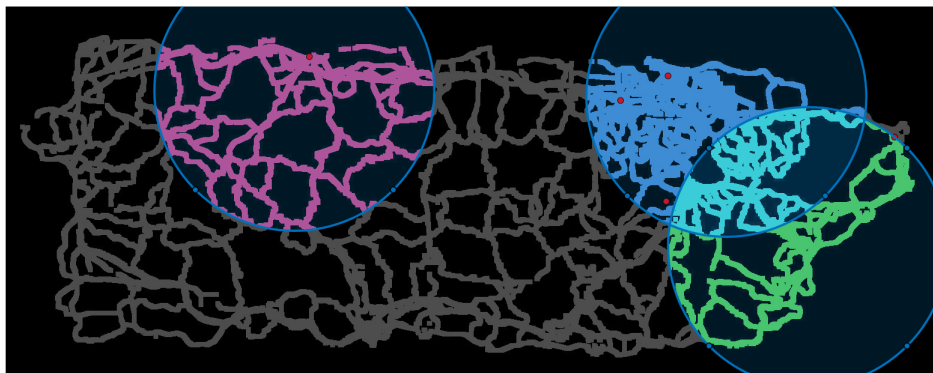


Figure 11: Location of the CIRCLE

OpenCV detection city

(1) Using OpenCV (C++) to detect urban features.

(2) Get the center pixel coordinates of a city.

```

cities = [
    799, 564; 1064, 548;
    607, 523; 394, 502;
    203, 484; 838, 458;
    123, 450; 1012, 425;
    1328, 389; 123, 339;
    943, 312; 1129, 285;
    525, 279; 372, 249;
    1483, 220; 878, 208;
    225, 194; 1162, 194;
    1066, 190; 1033, 157;
    115, 118; 743, 117;
    1145, 110; 814, 107;
    928, 94; 1072, 88;
    512, 82; 313, 80
];

```

Figure 12: the City coordinates

(3) List city coordinates as the main reconnaissance destination.

Find the Euclidean distance between each city and the landing point using MatLab
City points assigned to left. City points assigned to right. City points assigned to up.

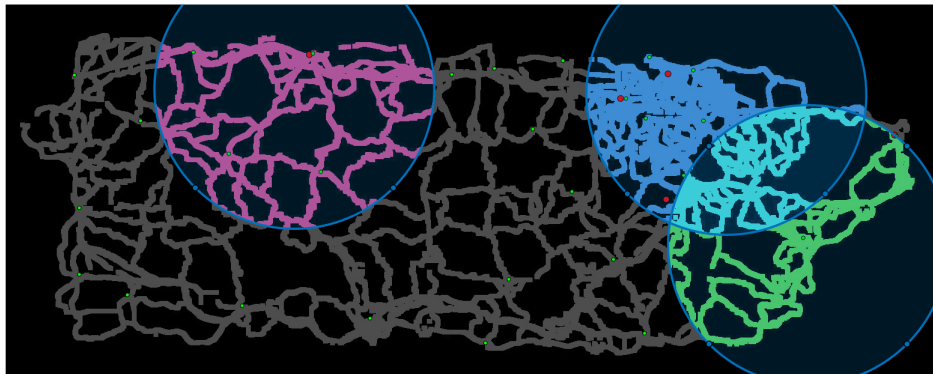


Figure 13: the City coordinates

4.5 Path Planning And Trajectory Display

The idea of RRT is to quickly expand a group of tree-like paths to explore (fill) most of the space and wait for opportunities to find feasible paths. The "tree" was chosen because it explores space.

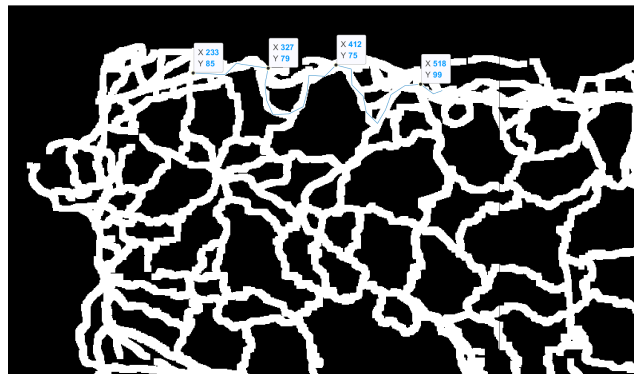


Figure 14: Sample points of the left side coastline obtained by RRT algorithm



Figure 15: The result of RRT-connect algorithm.

5 Drone Flight Plan

5.1 Time Schedule

6 Weakness

A weakness of RRT is that it is difficult to find a path in an environment with narrow passages. Because the narrow aisle area is small and the probability of being hit is low, the time required to find the path depends on luck.