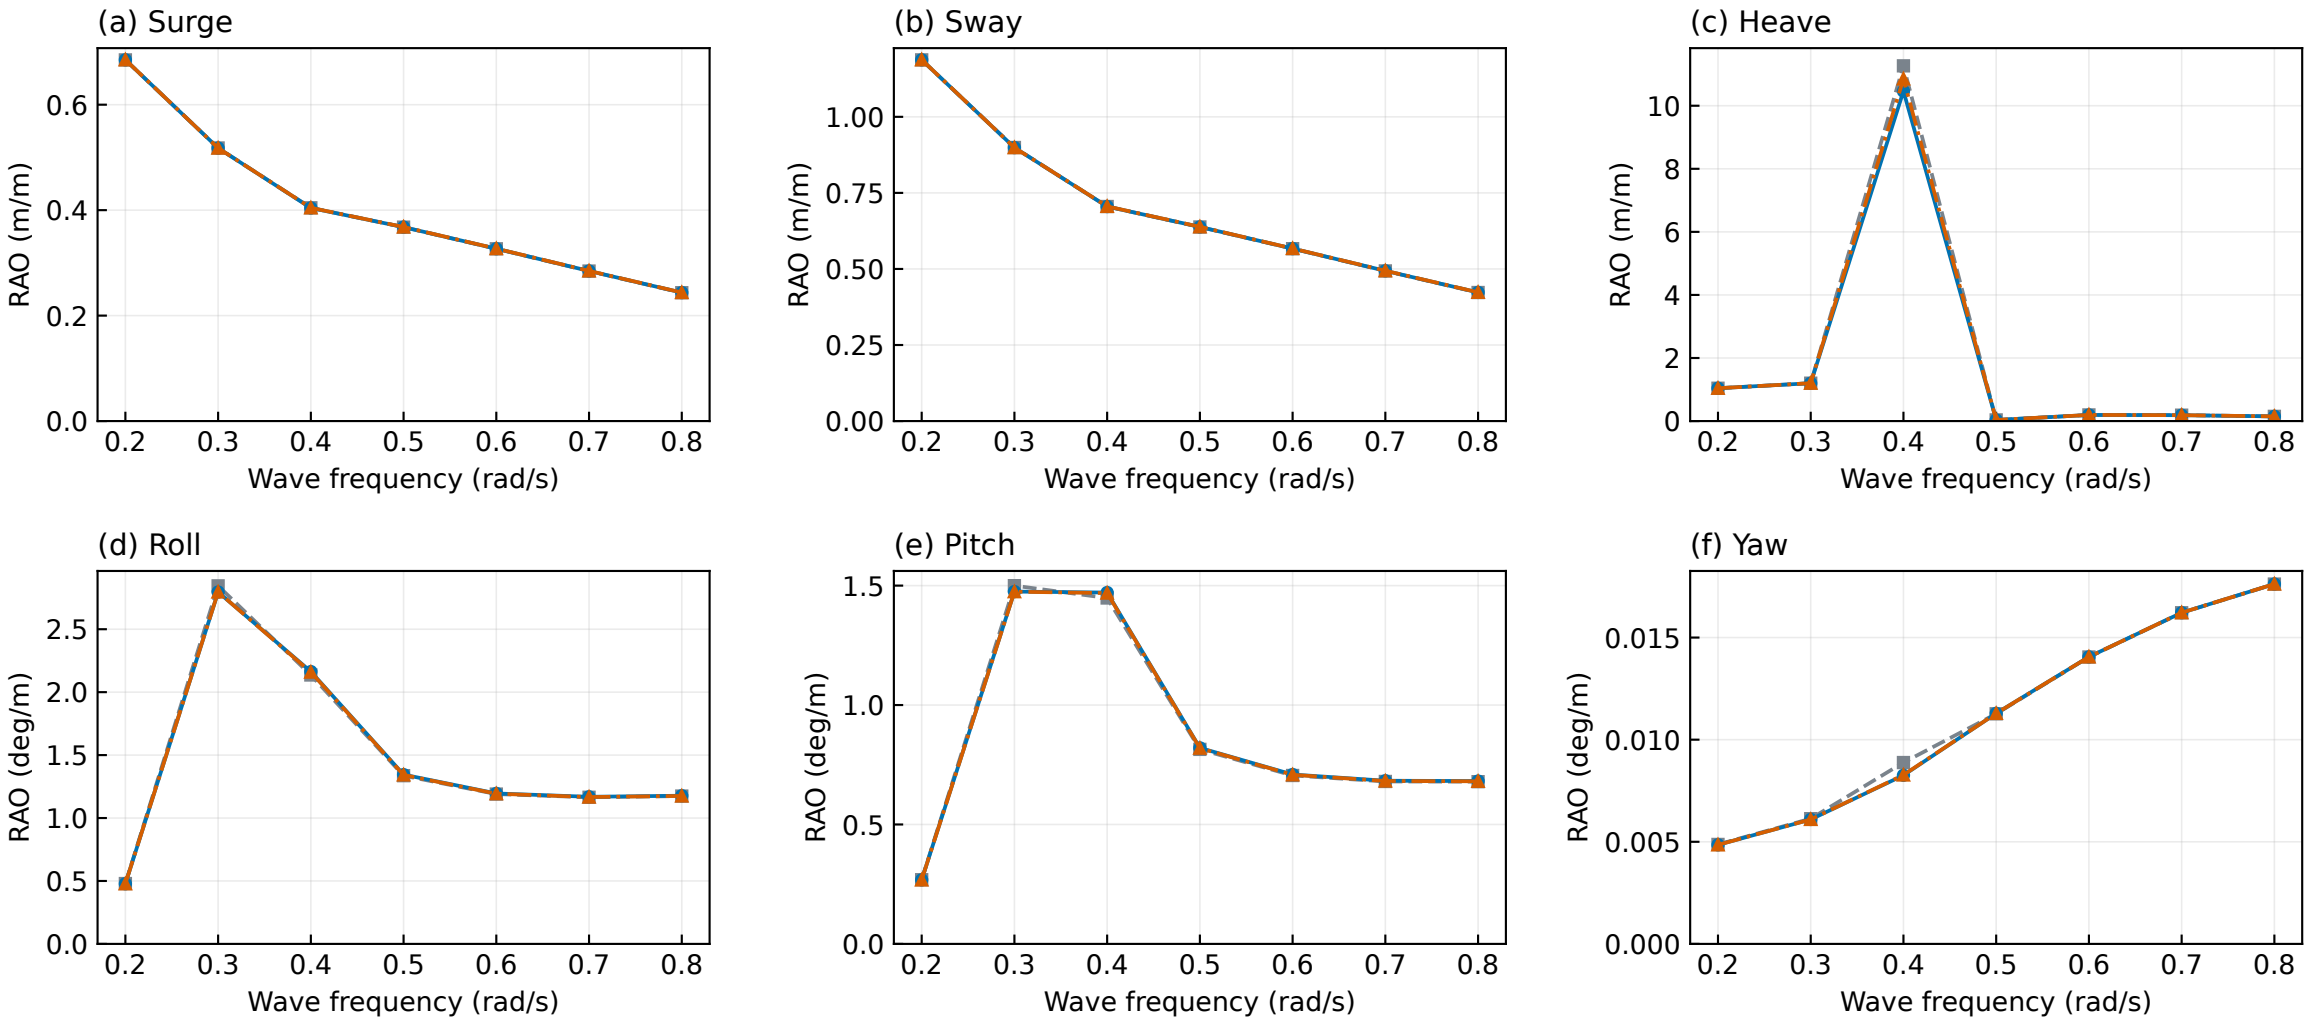
Spar: sampled sensitivity to native panel layout
(a) Surge
(b) Sway
(c) Heave
(d) Roll
(e) Pitch
(f) Yaw
RAO (m/m)
RAO (deg/m)
Wave frequency (rad/s)
v0.4 triangles (7,793)
Ring bands (6,800)
Ring bands (9,312)
Heading 60°. Native samples connected by lines. Mass, CG, inertia, damping and environment held fixed.