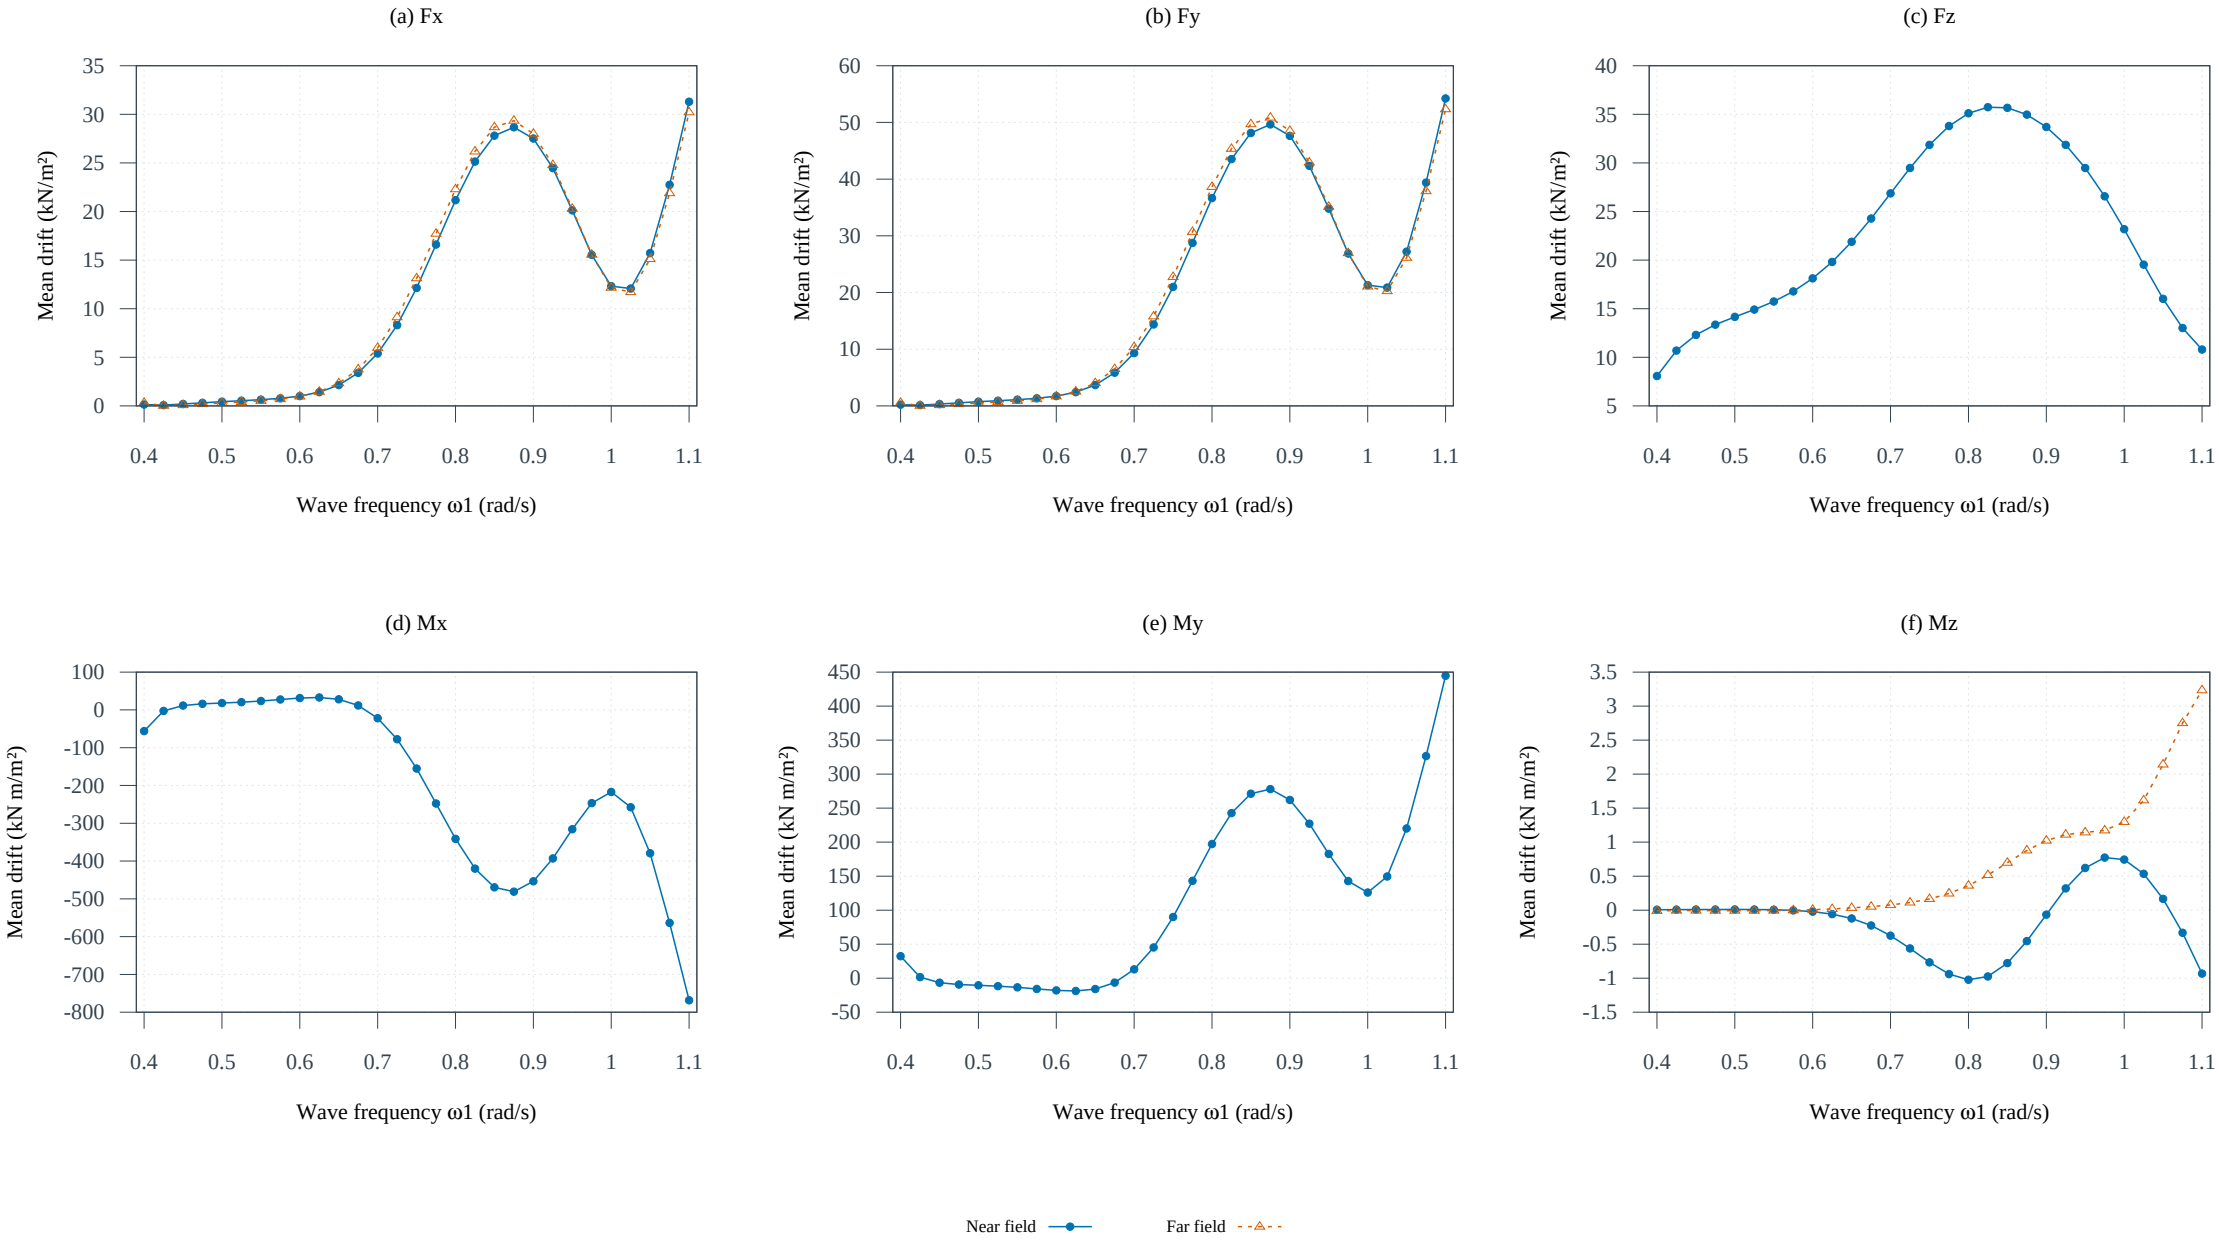Semisubmersible: Mean second-order drift loads (60 deg, 200 m depth)