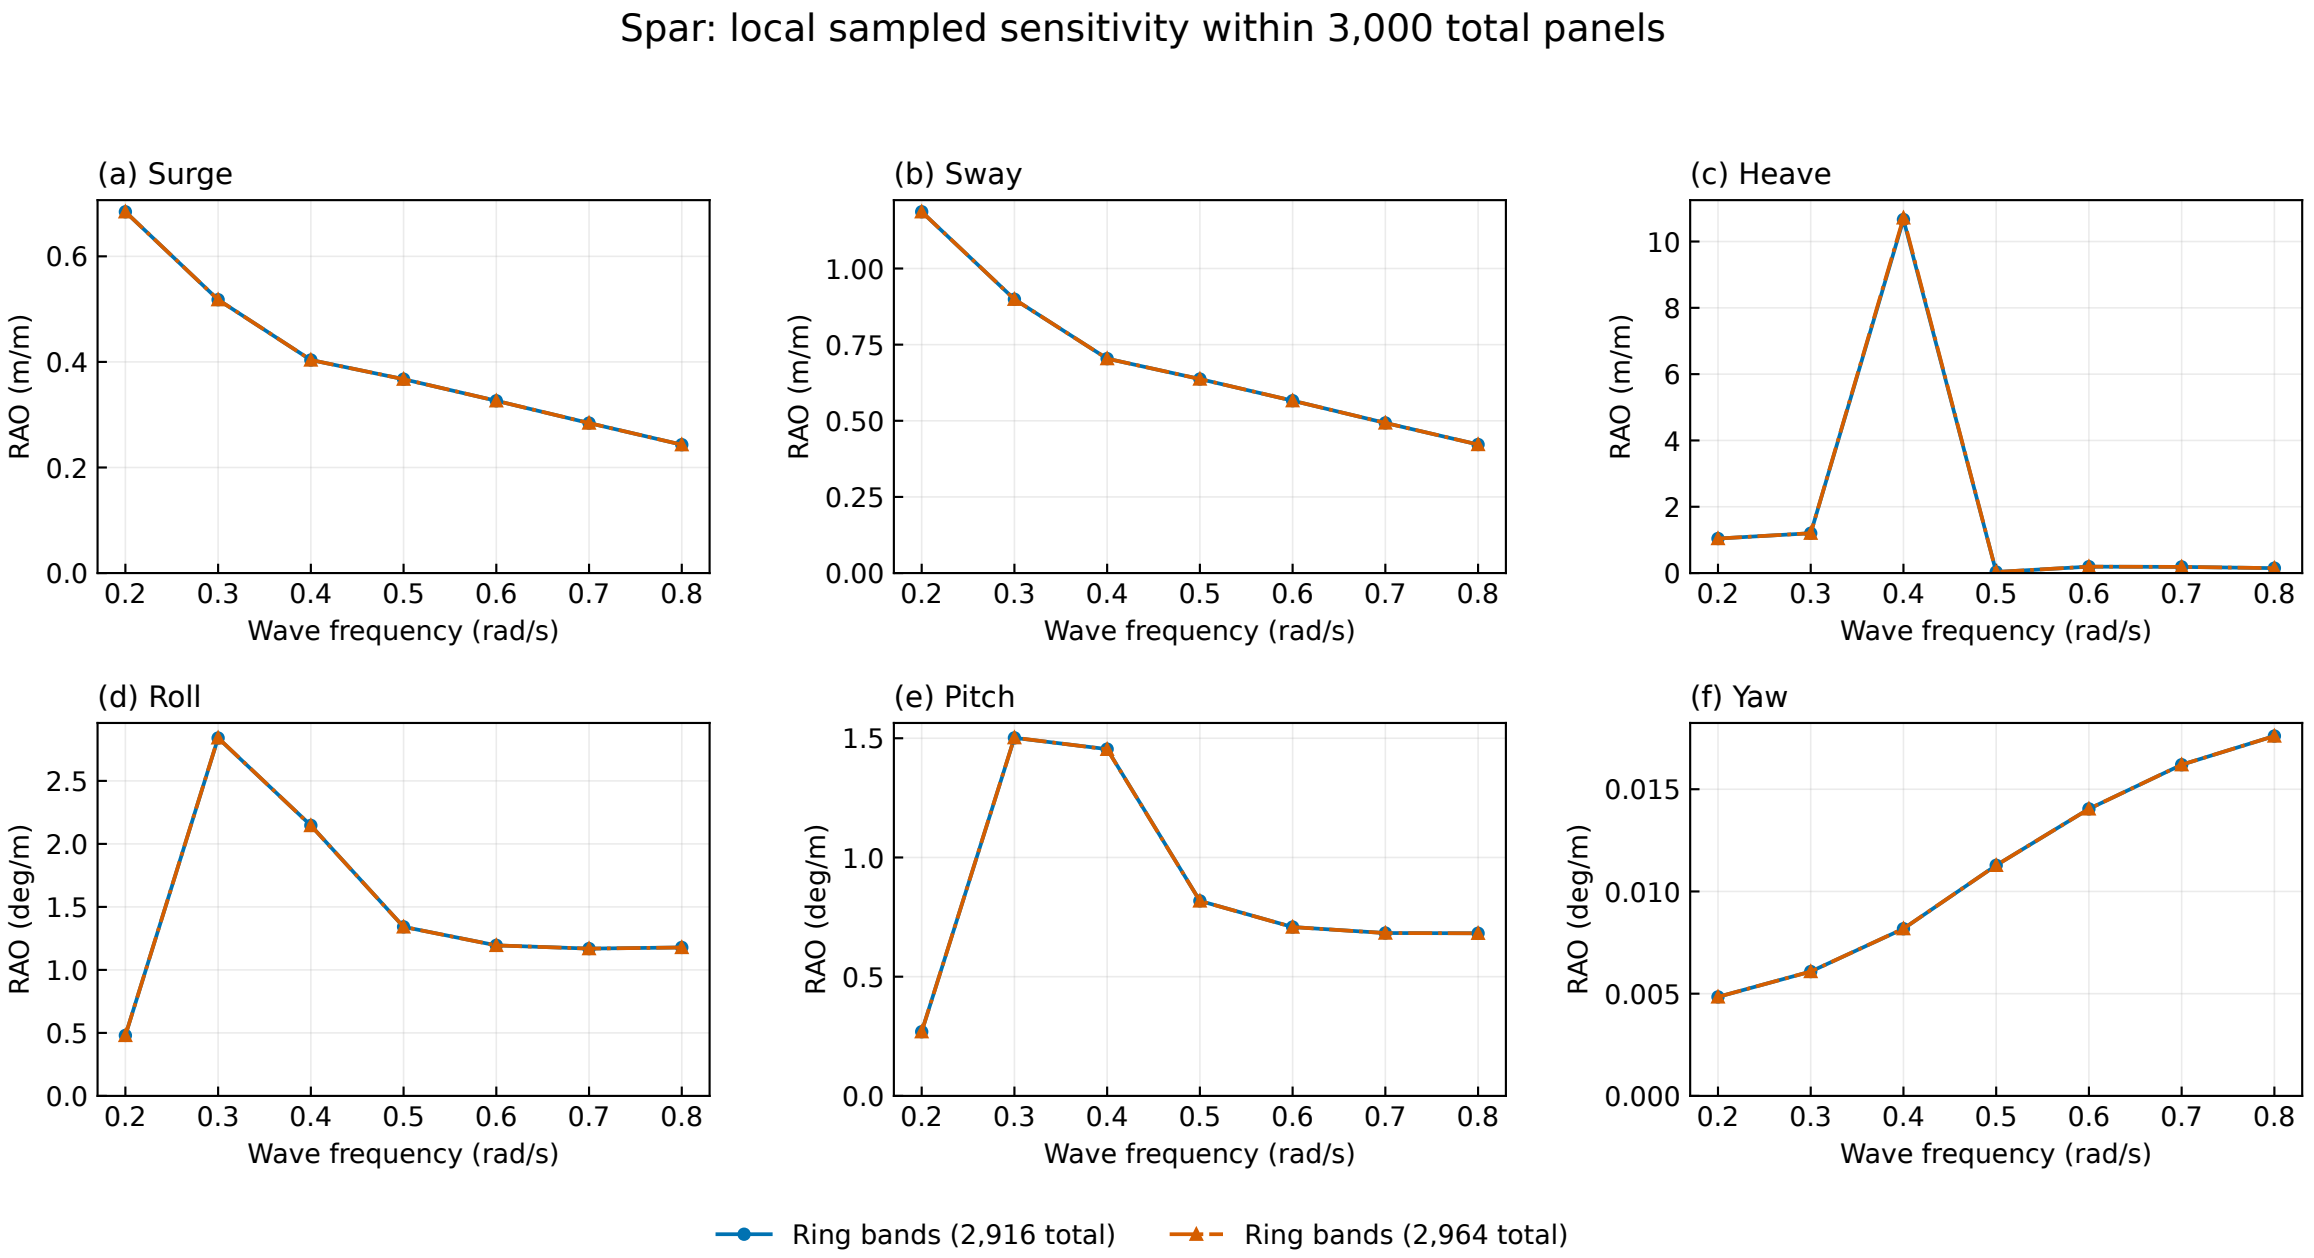
Spar: local sampled sensitivity within 3,000 total panels
(a) Surge
(b) Sway
(c) Heave
(d) Roll
(e) Pitch
(f) Yaw
RAO (m/m)
RAO (deg/m)
Wave frequency (rad/s)
Ring bands (2,916 total)
Ring bands (2,964 total)
Heading 60°. Native samples connected by lines. Mass, CG, inertia, damping and environment held fixed.