



**Consolidated**

**Pressure Relief Valves**



## 1900 Standard Series

Consolidated® Safety Relief Valve





# Table of Contents

---

Conversion Table . . . . .	1900.2
Features & Benefits . . . . .	1900.4
Scope of Design	
Overview . . . . .	1900.5
Pressure Relief Valve Operation . . . . .	1900.10
Product Features . . . . .	1900.12
Steam Trim (TD) Valves. . . . .	1900.14
Liquid Trim (LA) Valves . . . . .	1900.15
Restricted Lift Valves . . . . .	1900.16
Soft Seat Applications . . . . .	1900.17
Materials	
Conventional Design 1900 Series. . . . .	1900.20
Bellows Design 1900-30 Series . . . . .	1900.22
Balanced Bellows Design 1900-35. . . . .	1900.24
Soft Seat (DA) . . . . .	1900.26
Steam Trim (TD) . . . . .	1900.27
Liquid Trim (LA) . . . . .	1900.28
Special Material and Service Options . . . . .	1900.29
Sour Gas (SG) Trim . . . . .	1900.29
Hydrofluoric Acid (HA) Service . . . . .	1900.31
Corrosive Service	
Stainless Steel (S2, S3 and S4) . . . . .	1900.32
Alloy 20 (A1, A2, A3 and A4) . . . . .	1900.34
Monel (M1, M1½ (MB), M2, M3 and M4) . . . . .	1900.35
Hastelloy C (H1, H2, H3 and H4) . . . . .	1900.36
Duplex (D1, D2, D3 and D4) . . . . .	1900.37
Low Temperature - Process Fluid (L1, L2 and L3). . . . .	1900.39
Low Temperature - Ambient (C1 and C2) . . . . .	1900.40
High Temperature - (T1 and T2) . . . . .	1900.41
Lethal Service . . . . .	1900.42
O-Ring Selection (Durometer by valve type and set pressure). . . . .	1900.43
O-Ring Selection (Temperature limits) . . . . .	1900.44
Accessories	
1900 Caps, Levers, and Accessories . . . . .	1900.45
Cap and Lever Construction . . . . .	1900.49
Bolt-on Jackets . . . . .	1900.51
Dimension & Weights. . . . .	1900.52
Pressure / Temperature Tables. . . . .	1900.61
Capacity Tables . . . . .	1900.91
Valve Configuration Code . . . . .	1900.98
How to Order a 1900 Safety Relief Valve . . . . .	1900.101



## Conversion Table

All the USCS values are converted to  
Metric values using the following conversion factors:

USCS Unit	Conversion Factor	Metric Unit
in.	25.4	mm
lb.	0.4535924	kg
in <sup>2</sup>	6.4516	cm <sup>2</sup>
ft <sup>3</sup> /min	0.2831685	m <sup>3</sup> /min
gal/min	3.785412	L/min
lb/hr	0.4535924	kg/hr
psig	0.6894757	barg
ft lb	1.3558181	Nm
°F	5/9 (°F-32)	°C



The Consolidated type 1900 Safety Relief Valve is designed to be highly adaptable in order to meet numerous application requirements.

<b>INLET SIZES</b>	1" (25.4 mm) through 12" (304.8 mm)
<b>INLET RATINGS</b>	ANSI Class 150 through 2500
<b>OUTLET SIZES</b>	2" (50.8 mm) through 16" (406.4 mm)
<b>OUTLET RATINGS</b>	ANSI Class 150 and 300
<b>ORIFICE SIZES</b>	Seventeen sizes: D through W
<b>TEMPERATURE RANGE</b>	-450°F (-267.8°C) to 1500°F (815.6°C)
<b>MATERIALS</b>	Cast carbon steel body with stainless steel trim is standard.
<b>CERTIFICATION</b>	<p>ASME B &amp; PVC, Section II - Material (Applicable as required by ASME B &amp; PVC, Section III or VIII)</p> <p>ASME B &amp; PVC, Section III, class 2 and 3 (Gas, Vapor, and Liquid Service)</p> <p>ASME B &amp; PVC, Section VIII (Gas, Vapor, and Liquid Service)</p> <p>ASME B16.34 and ASME B16.5</p> <p>API 520, 526 and 527</p> <p>ISO 4126</p> <p>NACE MR0103-2003 Standard Material Requirements</p>



# Features & Benefits

- Heavy duty construction provides low cost of ownership by providing longer valve service life, lower maintenance costs and easy valve conversions.
- Design flexibility and parts interchangeability accommodates process changes through easy conversion to a variety of designs.
- An optional bellows design is a cost effective solution which compensates for the effects of variable back pressure.
- A soft seat design allows the valve to remain leak free at 95% of set pressure over 100 psig (6.89 barg) with a backup metal seat for additional safety.

## API Standard 526-2002

Pressure Relief Valves specified within this catalog comply with API Standard 526 Fifth edition, 2002.

When required for replacement, Consolidated 1900 valves are also available with connections and dimensions in accordance with supplanted API Standard Third edition 1984 and prior editions.


Product variations covered in subsequent pages are noted below:

Product Variation	Description
1900	Conventional
1900-30	Bellows Construction
1900-35	Balanced Bellows with Auxiliary Balancing Piston
1900HA	Special Materials for Hydrofluoric Acid Service
1900SG	Sour Gas Trim
1900DA	Soft Seat
1900LA	Liquid Trim with Metallic Seats
1900DA - LA	Liquid Trim with Soft Seats
1900TD	Special Trim for Steam & Organic Heat Transfer Media

# Scope of Design

## 1900 Series Overview

Type 1900 Series  
Conventional

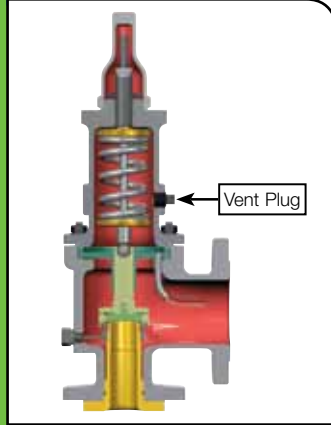

### 1900 Series Conventional Safety Relief Valves

#### Steel, Flat Seat, Top Guided, High Capacity, Stainless Steel Trim


This standard rugged configuration is equipped with corrosion resistant trim and a carbon steel body, bonnet and cap. The components are top guided, providing for free and repeatable action.

The flat disc seat provides for easy maintenance and remachining.

The exclusive "Eductor Tube" minimizes bonnet cavity pressure so that product performance is predictable.

The nozzle is bottom inserted and rigidly held in position, providing a corrosion resistant path of flow to the valve and corrosion resistant seating surfaces.

Type 1900-30 Series  
Bellows

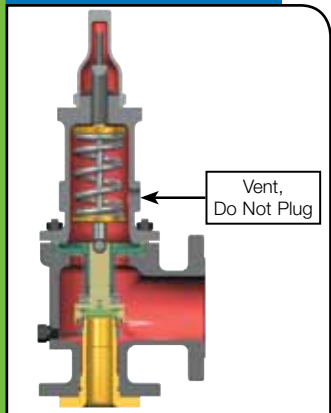

### 1900-30 Series Bellows Construction

This valve is the same as the conventional design except that a bellows has been added. When the bellows is installed, the eductor tube is removed.

#### Caution: It is important that the bonnet be vented to the atmosphere.

A bellows is added to the conventional valve to deal with any of several situations:

- (1) Back pressure entering the valve through the valve outlet is excessive or variable. If back pressure fluctuates with  $\pm 10\%$  of a nominal value, a bellows is required.

If a built up back pressure exceeds 10% of the set pressure or cold differential set pressure, a bellows must be used.


- (2) If the entering fluid is a slurry, highly viscous, or of a nature that it can enter the critical clearances between the guides/disc holder, protect that area with a bellows.

- (3) If the fluid being handled is corrosive to the upper works of the valve, isolate the bonnet chamber through use of a bellows.

Conventional valves can be easily converted to a bellows design or vice versa through the use of retrofit kits.

All Consolidated 1900-30 Series valves are balanced bellows designs, meaning that they fully compensate for the effects of back pressure.

Type 1900-35 Series  
Balanced Bellows with Auxiliary  
Balancing Piston

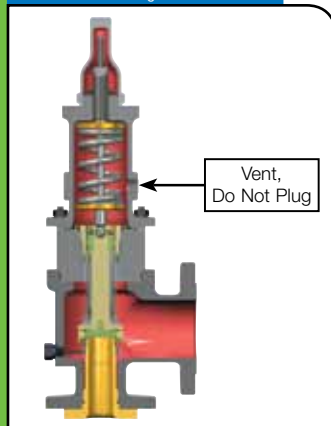

### 1900-35 Series Balanced Bellows (with Auxiliary Balancing Piston)

The Balanced Bellows seals the body and fluid stream from the bonnet and working parts. Auxiliary balancing piston assures proper valve performance by compensating for back pressure in case of bellows failure.

The use of an auxiliary balanced piston is indicated when:

- (1) Back pressure (either constant or variable) exists and;
- (2) Excessive pressure may build in the bonnet as a result of pressure build-up in the bonnet vent piping and;
- (3) Resultant build-up of pressure in the bonnet would cause a dangerous condition.

#### Caution: It is important that the bonnet be vented to the atmosphere.

**NOTE:** Unless otherwise stated the valve is always supplied with a screwed cap. The exception to this would be where ASME B & PVC, Section VIII requires levers for steam, air, and hot water service over 140°F (60°C).

Refer to Accessories for available types of caps, levers, and accessories.

# Scope of Design (Contd.)

## 1900 Series Overview (Contd.)

Standard Valve Connection - D Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	0.110		in <sup>2</sup>	0.128	
	cm <sup>2</sup>	0.710		cm <sup>2</sup>	0.825	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	1.00	25.4	150	2.00	50.8	150
1906	1.00	25.4	300	2.00	50.8	150
1910	1.00	25.4	300	2.00	50.8	150
1912	1.00	25.4	600	2.00	50.8	150
1914	1.50	38.1	900	2.00	50.8	300
1916	1.50	38.1	1500	2.00	50.8	300
1918	1.50	38.1	2500	3.00	76.2	300
1920	1.00	25.4	300	2.00	50.8	150
1922	1.00	25.4	600	2.00	50.8	150
1924	1.50	38.1	900	2.00	50.8	300
1926	1.50	38.1	1500	2.00	50.8	300
1928	1.50	38.1	2500	3.00	76.2	300

Standard Valve Connection - E Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	0.196		in <sup>2</sup>	0.228	
	cm <sup>2</sup>	1.265		cm <sup>2</sup>	1.470	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	1.00	25.4	150	2.00	50.8	150
1906	1.00	25.4	300	2.00	50.8	150
1910	1.00	25.4	300	2.00	50.8	150
1912	1.00	25.4	600	2.00	50.8	150
1914	1.50	38.1	900	2.00	50.8	300
1916	1.50	38.1	1500	2.00	50.8	300
1918	1.50	38.1	2500	3.00	76.2	300
1920	1.00	25.4	300	2.00	50.8	150
1922	1.00	25.4	600	2.00	50.8	150
1924	1.50	38.1	900	2.00	50.8	300
1926	1.50	38.1	1500	2.00	50.8	300
1928	1.50	38.1	2500	3.00	76.2	300

Standard Valve Connection - F Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	0.307		in <sup>2</sup>	0.357	
	cm <sup>2</sup>	1.981			2.302	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	1.50	38.1	150	2.00	50.8	150
1906	1.50	38.1	300	2.00	50.8	150
1910	1.50	38.1	300	2.00	50.8	150
1912	1.50	38.1	600	2.00	50.8	150
1914	1.50	38.1	900	3.00	76.2	300
1916	1.50	38.1	1500	3.00	76.2	300
1918	1.50	38.1	2500	3.00	76.2	300
1920	1.50	38.1	300	2.00	50.8	150
1922	1.50	38.1	600	2.00	50.8	150
1924	1.50	38.1	900	3.00	76.2	300
1926	1.50	38.1	1500	3.00	76.2	300
1928	1.50	38.1	2500	3.00	76.2	300

Standard Valve Connection - G Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	0.503		in <sup>2</sup>	0.585	
	cm <sup>2</sup>	3.245			3.774	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	1.50	38.1	150	3.00	76.2	150
1906	1.50	38.1	300	3.00	76.2	150
1910	1.50	38.1	300	3.00	76.2	150
1912	1.50	38.1	600	3.00	76.2	150
1914	1.50	38.1	900	3.00	76.2	300
1916	2.00	50.8	1500	3.00	76.2	300
1918	2.00	50.8	2500	3.00	76.2	300
1920	1.50	38.1	300	3.00	76.2	150
1922	1.50	38.1	600	3.00	76.2	150
1924	1.50	38.1	900	3.00	76.2	300
1926	2.00	50.8	1500	3.00	76.2	300
1928	2.00	50.8	2500	3.00	76.2	300



# Scope of Design (Contd.)

## 1900 Series Overview (Contd.)

Standard Valve Connection - H Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	0.785		in <sup>2</sup>	0.913	
	cm <sup>2</sup>	5.065		cm <sup>2</sup>	5.888	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	1.50	38.1	150	3.00	76.2	150
1906	1.50	38.1	300	3.00	76.2	150
1910	2.00	50.8	300	3.00	76.2	150
1912	2.00	50.8	600	3.00	76.2	150
1914	2.00	50.8	900	3.00	76.2	150
1916	2.00	50.8	1500	3.00	76.2	300
1920	2.00	50.8	300	3.00	76.2	150
1922	2.00	50.8	600	3.00	76.2	150
1924	2.00	50.8	900	3.00	76.2	150
1926	2.00	50.8	1500	3.00	76.2	300

Standard Valve Connection - J Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	1.287		in <sup>2</sup>	1.496	
	cm <sup>2</sup>	8.303		cm <sup>2</sup>	9.652	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	2.00	50.8	150	3.00	76.2	150
1906	2.00	50.8	300	3.00	76.2	150
1910	3.00	76.2	300	4.00	101.6	150
1912	3.00	76.2	600	4.00	101.6	150
1914	3.00	76.2	900	4.00	101.6	150
1916	3.00	76.2	1500	4.00	101.6	300
1920	3.00	76.2	300	4.00	101.6	150
1922	3.00	76.2	600	4.00	101.6	150
1924	3.00	76.2	900	4.00	101.6	150
1926	3.00	76.2	1500	4.00	101.6	300

Standard Valve Connection - K Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	1.838		in <sup>2</sup>	2.138	
	cm <sup>2</sup>	11.858		cm <sup>2</sup>	13.794	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	3.00	76.2	150	4.00	101.6	150
1906	3.00	76.2	300	4.00	101.6	150
1910	3.00	76.2	300	4.00	101.6	150
1912	3.00	76.2	600	4.00	101.6	150
1914	3.00	76.2	900	6.00	152.4	150
1916	3.00	76.2	1500	6.00	152.4	300
1920	3.00	76.2	300	4.00	101.6	150
1922	3.00	76.2	600	4.00	101.6	150
1924	3.00	76.2	900	6.00	152.4	150
1926	3.00	76.2	1500	6.00	152.4	300

Standard Valve Connection - L Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	2.853		in <sup>2</sup>	3.317	
	cm <sup>2</sup>	18.406		cm <sup>2</sup>	21.400	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	3.00	76.2	150	4.00	101.6	150
1906	3.00	76.2	300	4.00	101.6	150
1910	4.00	101.6	300	6.00	152.4	150
1912	4.00	101.6	600	6.00	152.4	150
1914	4.00	101.6	900	6.00	152.4	150
1916	4.00	101.6	1500	6.00	152.4	150
1920	4.00	101.6	300	6.00	152.4	150
1922	4.00	101.6	600	6.00	152.4	150
1924	4.00	101.6	900	6.00	152.4	150
1926	4.00	101.6	1500	6.00	152.4	150

# Scope of Design (Contd.)

## 1900 Series Overview (Contd.)

Standard Valve Connection - M Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	3.600		in <sup>2</sup>	4.186	
	cm <sup>2</sup>	23.226		cm <sup>2</sup>	27.006	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	4.00	101.6	150	6.00	152.4	150
1906	4.00	101.6	300	6.00	152.4	150
1910	4.00	101.6	300	6.00	152.4	150
1912	4.00	101.6	600	6.00	152.4	150
1914	4.00	101.6	900	6.00	152.4	150
1920	4.00	101.6	300	6.00	152.4	150
1922	4.00	101.6	600	6.00	152.4	150
1924	4.00	101.6	900	6.00	152.4	150

Standard Valve Connection - N Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	4.340		in <sup>2</sup>	5.047	
	cm <sup>2</sup>	28.000		cm <sup>2</sup>	32.561	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	4.00	101.6	150	6.00	152.4	150
1906	4.00	101.6	300	6.00	152.4	150
1910	4.00	101.6	300	6.00	152.4	150
1912	4.00	101.6	600	6.00	152.4	150
1914	4.00	101.6	900	6.00	152.4	150
1920	4.00	101.6	300	6.00	152.4	150
1922	4.00	101.6	600	6.00	152.4	150
1924	4.00	101.6	900	6.00	152.4	150

Standard Valve Connection - P Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	6.380		in <sup>2</sup>	7.417	
	cm <sup>2</sup>	41.161		cm <sup>2</sup>	47.852	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	4.00	101.6	150	6.00	152.4	150
1906	4.00	101.6	300	6.00	152.4	150
1910	4.00	101.6	300	6.00	152.4	150
1912	4.00	101.6	600	6.00	152.4	150
1914	4.00	101.6	900	6.00	152.4	150
1920	4.00	101.6	300	6.00	152.4	150
1923	4.00	101.6	600	6.00	152.4	150
1924	4.00	101.6	900	6.00	152.4	150

Standard Valve Connection - Q Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	11.050		in <sup>2</sup>	12.850	
	cm <sup>2</sup>	71.290		cm <sup>2</sup>	82.903	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	6.00	152.4	150	8.00	203.2	150
1906	6.00	152.4	300	8.00	203.2	150
1910	6.00	152.4	300	8.00	203.2	150
1912	6.00	152.4	600	8.00	203.2	150
1920	6.00	152.4	300	8.00	203.2	150
1922	6.00	152.4	600	8.00	203.2	150

Standard Valve Connection - R Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	16.000		in <sup>2</sup>	18.600	
	cm <sup>2</sup>	103.226		cm <sup>2</sup>	120.000	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	6.00	152.4	150	8.00	203.2	150
1906	6.00	152.4	300	8.00	203.2	150
1910	6.00	152.4	300	10.00	254.0	150
1912	6.00	152.4	600	10.00	254.0	150
1920	6.00	152.4	300	8.00	203.2	150
1922	6.00	152.4	600	10.00	254.0	150

Standard Valve Connection - T Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	26.000		in <sup>2</sup>	30.210	
	cm <sup>2</sup>	167.742		cm <sup>2</sup>	194.903	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	8.00	203.2	150	10.00	254.0	150
1906	8.00	203.2	300	10.00	254.0	150
1910	8.00	203.2	300	10.00	254.0	150
1912	8.00	203.2	600	10.00	254.0	150
1920	8.00	203.2	300	10.00	254.0	150
1922	8.00	203.2	600	10.00	254.0	150

# Scope of Design (Contd.)

## 1900 Series Overview (Contd.)

Standard Valve Connection - U Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	N/A		in <sup>2</sup>	35.099	
	cm <sup>2</sup>	N/A		cm <sup>2</sup>	226.445	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	8.00	203.2	150	10.00	254.0	150
1906	8.00	203.2	300	10.00	254.0	150
1910	8.00	203.2	300	10.00	254.0	150
1912	8.00	203.2	600	10.00	254.0	150
1920	8.00	203.2	300	10.00	254.0	150
1922	8.00	203.2	600	10.00	254.0	150

Standard Valve Connection - V Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	N/A		in <sup>2</sup>	50.260	
	cm <sup>2</sup>	N/A		cm <sup>2</sup>	324.257	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	10.00	254.0	150	14.00	355.6	150
1906	10.00	254.0	300	14.00	355.6	150
1910	10.00	254.0	300	14.00	355.6	150
1920	10.00	254.0	300	14.00	355.6	150


Standard Valve Connection - W Orifice

	API			ASME		
Orifice Area	in <sup>2</sup>	N/A		in <sup>2</sup>	78.996	
	cm <sup>2</sup>	N/A		cm <sup>2</sup>	509.651	
Valve Type	Inlet			Outlet		
	Size		ANSI Std. Class	Size		ANSI Std. Class
	in.	mm		in.	mm	
1905	12.00	304.8	150	16.00	406.4	150
1906	12.00	304.8	300	16.00	406.4	150
1910	12.00	304.8	300	16.00	406.4	150
1920	12.00	304.8	300	16.00	406.4	150


# Scope of Design (Contd.)

## How Pressure Relief Valves Operate

All pressure relief valves operate on the principle of inlet system pressure overcoming a spring load, allowing the valve to relieve a defined capacity.

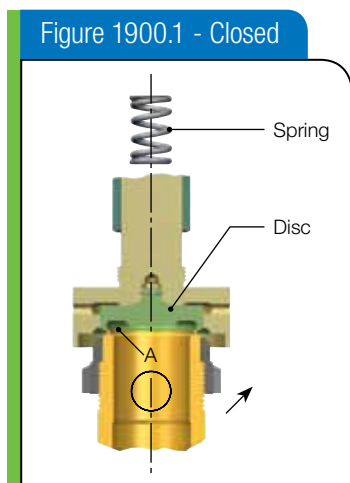


When the valve is closed during normal operation (See Figure 1900.1), the vessel pressure acting against the seating surfaces (area A) is resisted by the spring force. As vessel pressure increases, the pressure at (A) tends to equalize the spring force and the pressure holding the seats together approaches zero.

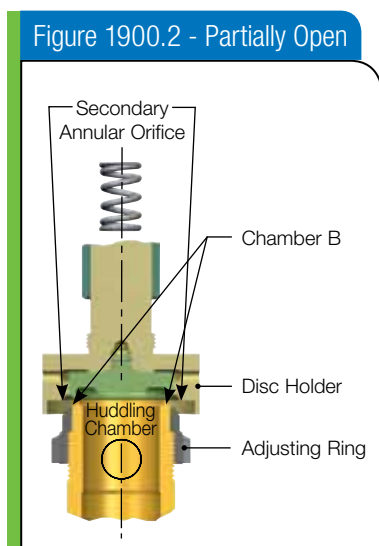

In vapor or gas service the valve may “simmer” before it will “pop”. When the vessel pressure increases to within one to two percent of the set pressure, media will audibly move past the seating surfaces into Chamber (B). As a result of restriction of flow in the secondary annular orifice, pressure builds up in Chamber (B) (See Figure 1900.2). Since

pressure can now act over a larger area, an additional force is available to overcome the spring force. By adjusting the “adjusting ring” the opening in the secondary annular orifice can be altered, thus controlling pressure build-up in chamber (B). This controlled pressure build-up in chamber (B) will overcome the spring force causing the disc to move away from the nozzle seat and the valve to “pop” open.

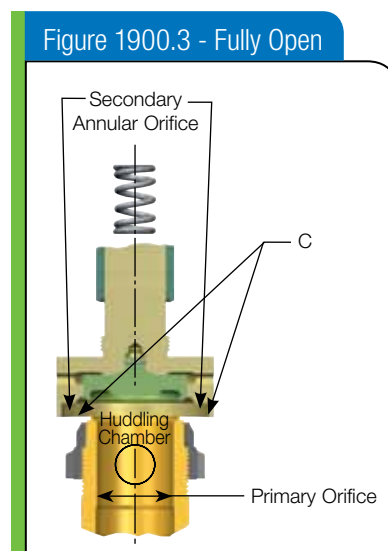

Once the valve has opened an additional pressure build-up at (C) occurs. (See Figure 1900.3.) This is due to the sudden flow increase and the restriction to flow through another annular orifice formed between the inner edge of the disc holder and the outside diameter of the adjusting ring. These additional forces at (C) cause the disc to lift substantially at “pop”.


Flow is restricted by the opening between the nozzle seat and disc seat until the disc seat has been lifted from the nozzle seat approximately one-quarter of the nozzle throat diameter. After the disc has attained this degree of lift, flow is then restricted by the primary orifice rather than by the area between the seating surfaces.

Blowdown (the difference between opening and closing pressure) can be controlled within limits by positioning the single adjusting ring. Blowdown is caused by the result of the spring force not being able to overcome the summation of the forces at (A), (B), and (C) until the pressure at (A) drops below the set pressure.

# Scope of Design (Contd.)

## How Pressure Relief Valves Operate

Figure 1900.4

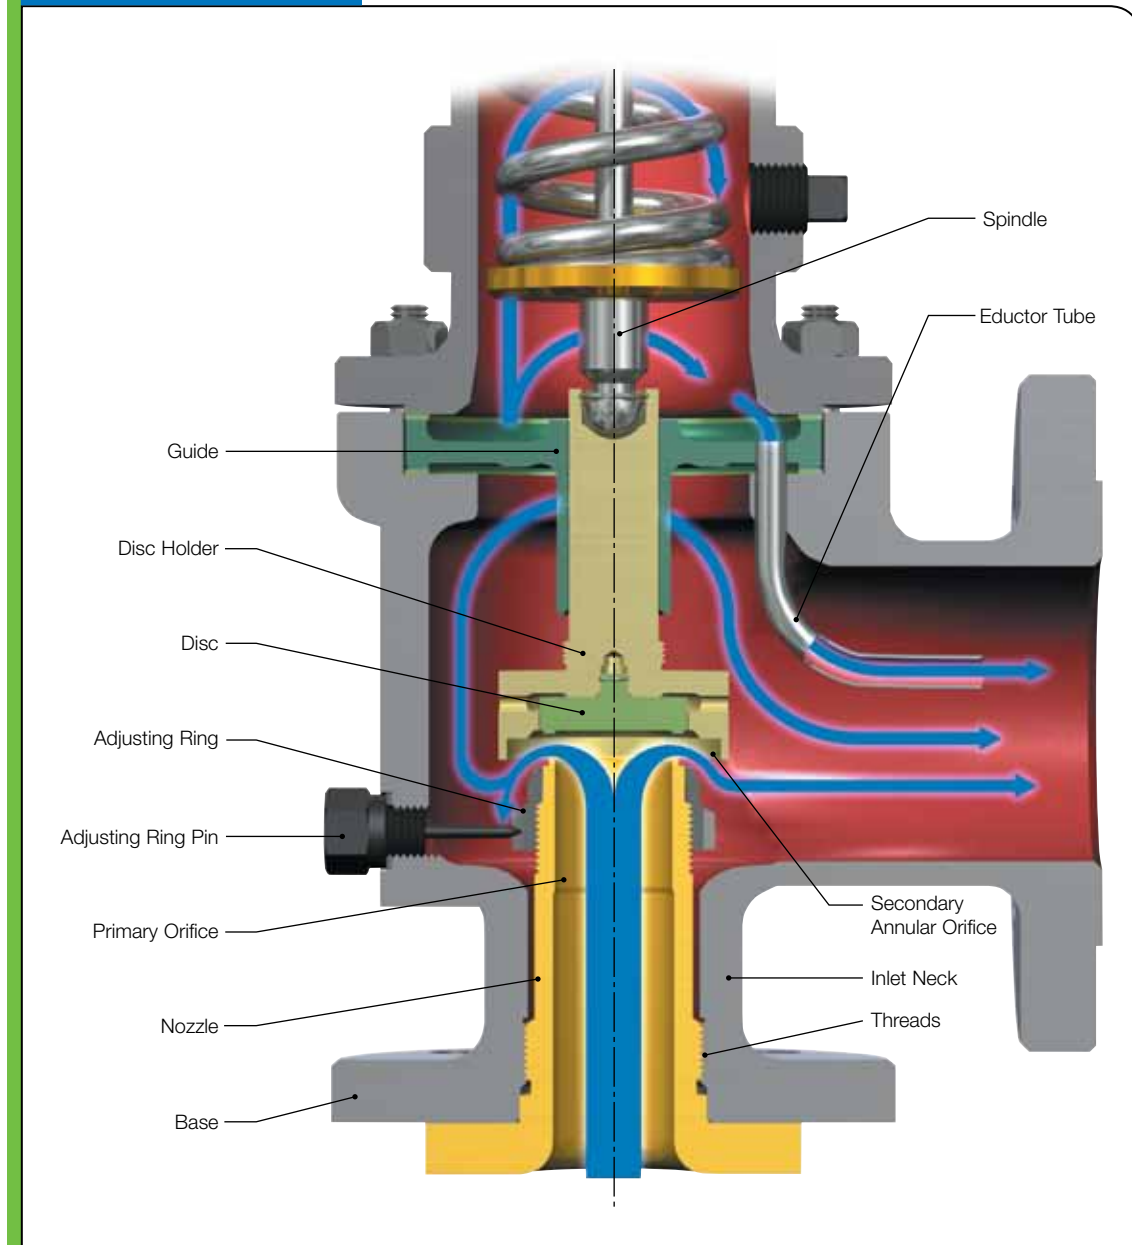

**Note:** Figure 1900.4 reflects the flow path of fluid through the valve. It is significant to recognize that the system pressure enters through the nozzle and remains at a high pressure until it expands through the secondary annular orifice. Pressure downstream of the secondary annular orifice is much lower than the system pressure. The upper portion of the valve base plus the outlet flange are of a lower pressure rating than the inlet side of the valve.

**Blowdown Settings** - Production testing required by Manufacturers of safety relief valves is governed by ASME Section VIII, UG-136 (d), which does not require the setting of blowdown during production test. Adjusting rings on the 1900 flanged safety relief valve series are factory adjusted to predetermined ring settings. This will provide a consistent opening and closing pressure on the safety relief valve.

# Scope of Design (Contd.)

## Product Features - 1900 Flanged Series

---

### Adjusting Ring

The adjusting ring in the Consolidated safety relief valve is preset to predetermined positions prior to putting the valve in service. Presetting reduces the necessity of popping the valve in service to ascertain that the ring has been set properly for attaining the necessary lift and relieving capacity.

### Simple Blowdown Adjustment

Adjustment of Consolidated safety relief valve blowdown, or reseating pressure, is by means of a single adjusting ring. When moved upward, blowdown is increased (lowering the reseating pressure), or when moved downward, the blowdown is decreased (raising the reseating pressure). The simplicity and advantages of this adjustment are obvious when comparing valves having two or more adjusting rings each of which affect valve action as well as blowdown.

### Minimum Guiding Area

Guiding areas greater than those required to align the seating surfaces are undesirable in a safety relief valve, especially those used in the process industries. The smaller the guiding area of the valve (when corrosion or contamination from the flowing medium build up in the valve guiding surfaces) the less tendency the guiding area will have to stick and hinder valve operation.

### Nozzle

The nozzle is a pressure containing component in constant contact with the process media in both the open and closed valve positions. To ensure maximum reliability and safety, CONSOLIDATED flanged SRV nozzles are made from forgings, investment castings, or centrifugal castings.

### Spindle Pocket Connection

The connection between the spindle and disc holder in a Consolidated safety relief valve is a positive method of attachment. The Inconel snap ring and groove design make it virtually impossible to remove the spindle from the disc holder, unless the ring is compressed intentionally. This design requires a minimum amount of effort to disassemble during maintenance.

### Design Simplicity

Consolidated safety relief valves embody a minimum number of component parts which results in a savings by minimizing spare parts inventory and simplifying valve maintenance.

### Maximum Seat Tightness

Seat finish in a safety relief valve is of the utmost importance; otherwise, valve leakage will occur.

Consolidated safety relief valve seats are precision machined and lapped. This ensures positive seating and prevents loss of contained media.

The Thermodisc™ design provides a tighter closure and compensates for temperature variations around the periphery of the nozzle. Thermal distortion, which produces seat leakage, is minimized in steam service.

### Cap and Lever Interchangeability

Many times it is necessary to change the type of cap or lever in the field after a valve has been installed. All Consolidated safety relief valves are supplied so they can be converted to any type of lever or cap desired. It is not necessary to remove the valve from the installation, nor will the set pressure be affected when making such a change.

### Valve Interchangeability

A Consolidated safety relief valve may be converted from the standard, conventional type valve to the bellows type, or to the O-Ring seat seal type, Thermodisc™ seat Liquid Trim, or vice versa, requiring a minimum number of new parts. This results in lower costs.

### Quality Material

All Consolidated safety relief valve castings and forgings are made to ASTM/ASME specifications and are subject to many rigid inspections, ensuring the highest degree of quality.

Coupled with the highest quality workmanship, this ensures continuous protection and long, trouble-free valve life.



# Scope of Design (Contd.)

## Product Features - 1900 Flanged Series

### Reduction of Valve Bonnet Pressure

Closed bonnet valves are subject to variable pressure past the guiding surfaces when the valve is open, which adds a variable force to that of the spring, affecting valve performance. To eliminate excess bonnet pressure and ensure good valve opening and closing action, an Eductor Tube is provided.


The Eductor Tube reduces bonnet pressure by pulling discharging fluids out of the bonnet faster than it is possible for the discharging fluids to enter past the guiding surfaces, acting as a siphon due to the drawing effect of the flow through the outlet side of the valve.

### Eductor Tube Reduces Bonnet Pressure

An exclusive with Consolidated valves! During valve discharge, media flows through the clearance between the disc holder and guide, building up bonnet pressure. This adds a variable force to the spring force, which inhibits valve lift. Bonnet pressure is reduced by the eductor effect of the medium flowing at high velocity at the valve outlet.

The greater lifting force (resulting from a reduction in bonnet pressure) introduces important advantages:

- (1) Response to blowdown control adjustment is uniform
- (2) Positive, full-rated capacity at low overpressures is assured
- (3) Better operation at higher back pressures with Eductor Tube.
- (4) Complete stability (of valve lift and capacity) is assured during operation.
- (5) Increases the lifting force when the valve opens and tends to break slight corrosive deposits or surface film which accumulate on the guiding surfaces and retard valve action. (For severe corrosion applications, a bellows valve is recommended.)

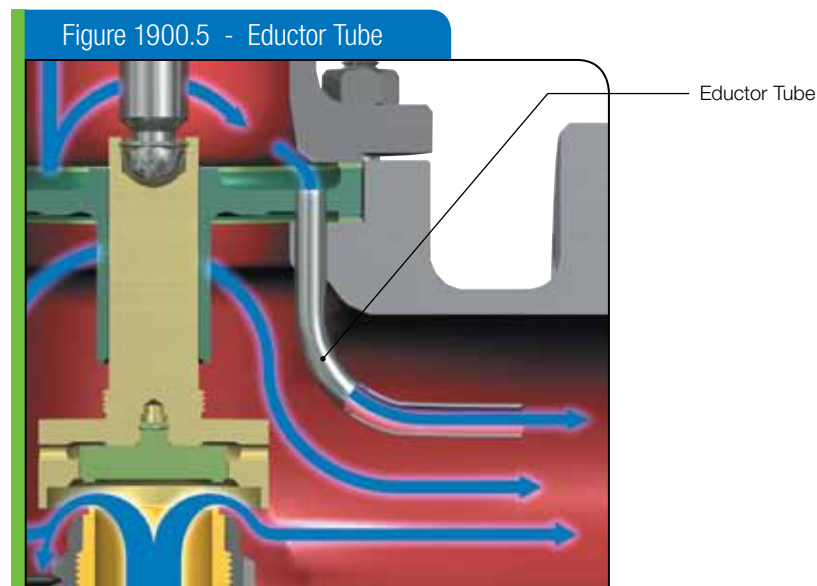

# Scope of Design (Contd.)


## 1900 Steam Trim (TD) Valves

The 1900 TD is specifically designed for steam service and organic heat transfer media and is certified to ASME Code Section VIII.

Thermodisc™ – this is a specifically designed disc for use on high temperature fluids. This concept has more than 40 years of field proven performance that ensures the tightest valves in the world.

A Thermodisc™ is required for steam service.

The Martensitic stainless steel disc construction allows for high strength and toughness. As the set point of the valve is approached, the pressure sealing effect of the Thermodisc™ assists in the tightness of the seat as does the rapid thermal equalization that occurs due to the thin sealing section.

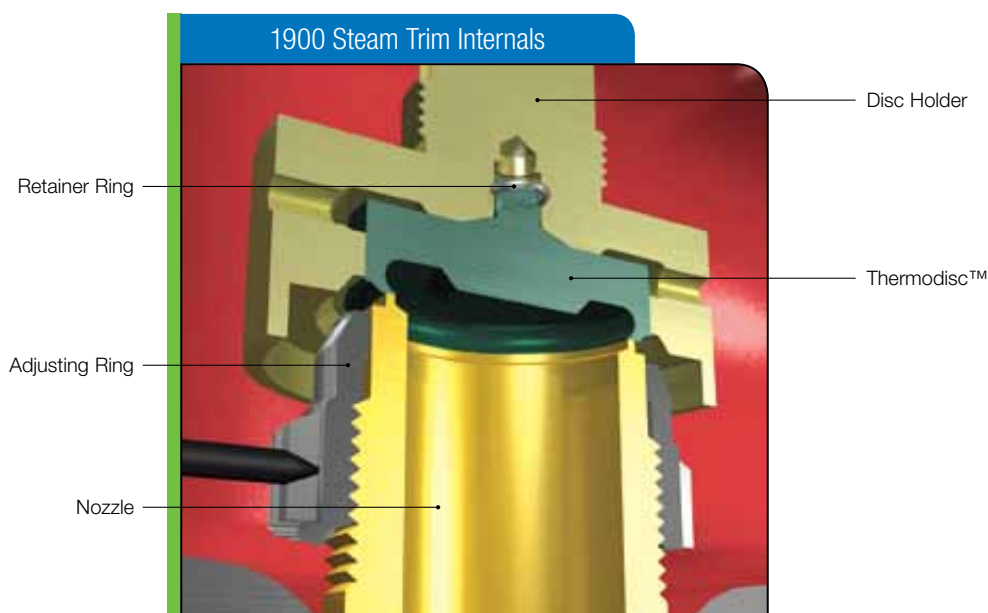

1900 Disc Design Availability

Valve Type	Disc Design										ASME Code Section
	Standard Solid Disc					Thermodisc <sup>1</sup>					
	Steam	Liquid	Liquid Organic Heat Transfer Media	Vapor Organic Heat Transfer Media	Vapor	Steam	Liquid	Liquid Organic Heat Transfer Media	Vapor Organic Heat Transfer Media	Vapor	
1900	-	X	X	X	X	X	-	-	X	-	VIII
1900-30	-	X	X	X	X	X	-	-	X	-	VIII
1900-35	-	X	X	X	X	X	-	-	X	-	VIII
1900/P1 <sup>2</sup>	-	-	-	-	-	X <sup>3</sup>	X <sup>4</sup>	-	X	-	I or VIII
1900/P3 <sup>2</sup>	-	-	-	-	-	X <sup>3</sup>	-	-	X	-	I or VIII

- NOTES: 1 Thermodisc™ is provided in one material only, a specially heat treated martensitic stainless steel.  
 2 Refer to the 1900/P Series section for product information.  
 3 1900/P Series are not intended for overpressure protection of power boiler drum, superheater or reheater equipment.  
 4 Consult the factory for special conditions that require the use of an ASME Code Section I pressure relief valve.  
 Except for liquid thermal relief applications, the "P" Series are not intended for liquid service.

# Scope of Design (Contd.)


## 1900 Liquid Trim (LA) Valves

The Liquid Trim LA (liquid application) represents the second generation of ASME B & PVC, Section VIII certified liquid trim valves and must be used for all liquid applications for both ASME B & PVC, Section VIII certified and non-certified valves. Liquid applications have been defined as follows:

- (1) if the fluid remains liquid while flowing through the valve
- (2) if flowing fluid flashes going through the valve
- (3) for ASME B & PVC, Section VIII certified and non-certified thermal relief applications. (Thermal Relief is to prevent excessive pressure caused by thermal expansion of trapped

liquids). The LA trim provides blowdown performance with ranges from 7% to 12% below the set pressure. This valuable feature provides conservation of media, a positive lift and a smooth chatter-free operation. Because of the short blowdown performance of this design, it is critical that the inlet connection always provide for a pressure drop of 3% or less from the vessel to the valve as recommended by API 520.

Conversion of existing 1900 Series valves to liquid trim is available through the factory or your local Green Tag Center.

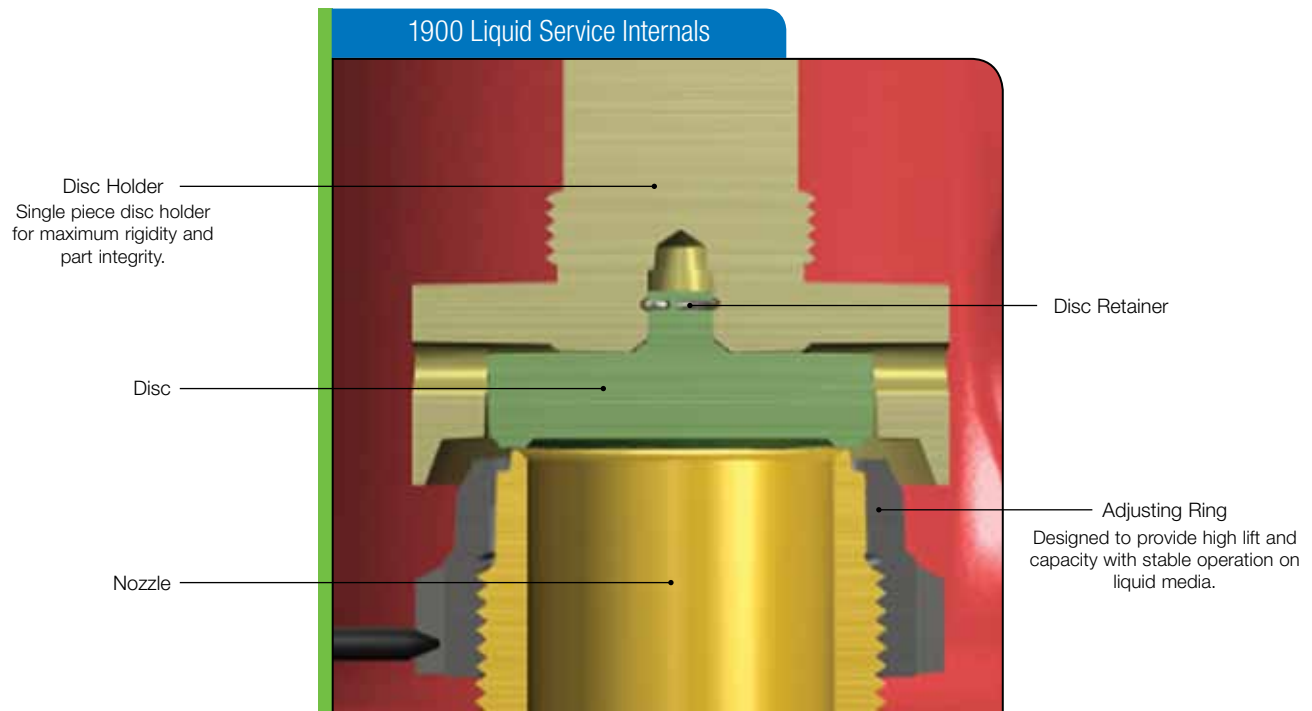


# Scope of Design (Contd.)

## 1900 Restricted Lift Valves

The 1900 series is offered in orifice sizes ranging from the smallest “D” size to the largest “W” size. In order to accomplish certain valve functions some special considerations have to be made. Such a case is the D and E orifice designs noted below.

The D and E valves are restricted lift versions of the “F” orifice valve. The lift is restricted by a limit washer to provide the equivalent effective orifice area for a “D” or “E” orifice. This design is available with a balanced bellows configuration and is designed for back pressure applications.

The standard 1900 Series are available with restricted lifts in orifices ranging from “F” to “W” for compressible media only.

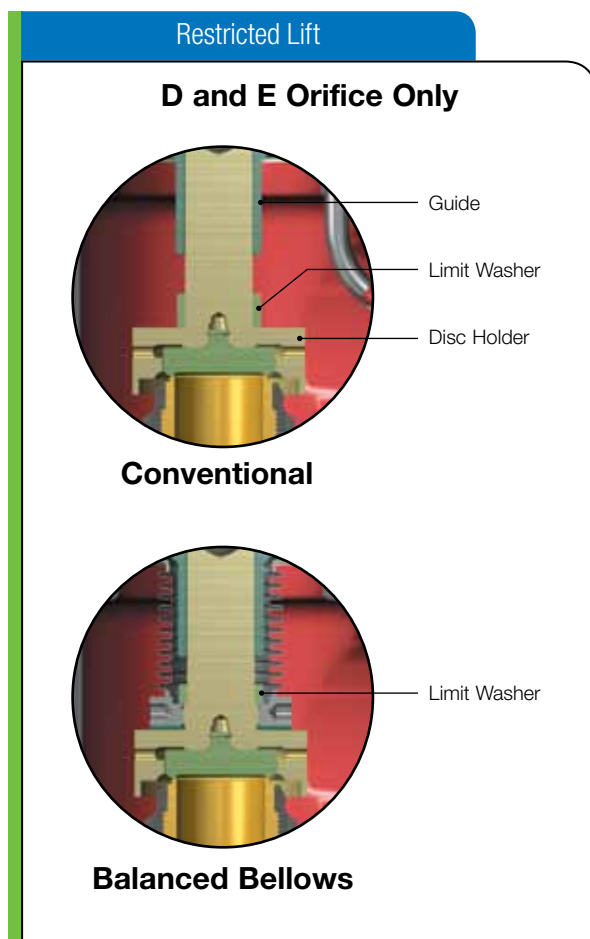

# Scope of Design (Contd.)

## Soft Seat Applications

### Closeness of Operating Pressure to Set Pressure

Where the operating pressure is close to the set pressure, seat tightness can be maintained at relatively higher operating pressures.

### Compressor Discharge and Positive Displacement Pump Service

Mechanical vibration and pressure waves could lift the valve disc with each stroke and may cause flat metal-to-metal seats to rub together and become damaged.

The 45° metal-to-metal load bearing seats in the Consolidated O-Ring seat seal assure true alignment, aided by full system pressure behind the O-Ring, which effectively seals against leakage.

### Corrosive Services

In some services, corrosion of the seating surfaces is the cause of valve leakage. In this type of service, the Consolidated O-Ring seat seal will protect the metal seat on the nozzle against contact of the corrosive fluid thereby maintaining greater tightness.

### Foreign Matter and Slurry Service

Many times foreign material such as pipe scale, welding beads, sand dust particles, etc. may damage the metal-to-metal seating surfaces in a valve of this type when it is open and flowing.

The Consolidated O-Ring seat seal is designed to absorb the impact of most foreign particles without damage.

### Hot Water Boiler Service

When a safety relief valve opens hot water flashes into steam at the seating surfaces and solid particles which float to the water surface are driven against the seating surfaces at steam velocities. Consolidated O-Ring seat seal valves can withstand this type of service and remain tight to a greater degree than metal-to-metal seat valves.

Consolidated uses proven quality Teflon® O-Ring seats for this service. In some pressure/temperature applications, Teflon® is not resilient, and leakage may occur.


### Benefits

Safety Relief Valve leakage which is aggravated by any cause is usually costly. In many cases, expensive product is lost and maintenance costs increased. Consolidated O-Ring seat seal valves are designed to eliminate leakage in troublesome applications and reduce overall costs. Should leakage occur, it is much simpler and less expensive to replace the O-Ring than to maintain metal-to-metal seats.

### O-Ring Conversion

1900 Series Consolidated metal seated valves can be converted to O-Ring seat seals by installing a few basic parts provided in a conversion kit.

1900-DA soft seats without bellows

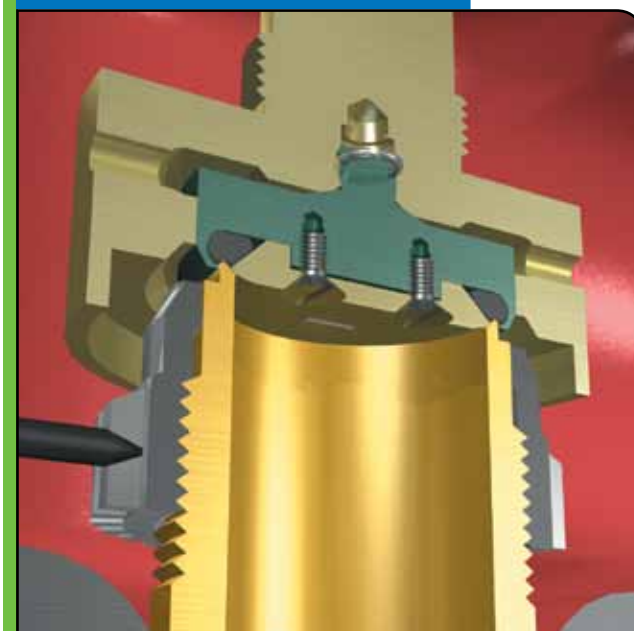

# Scope of Design (Contd.)

## 1900 Soft Seat (DA) Option

### The Double Seal Soft Seat

The double seal design incorporates the merits of both a soft seat and a metal seat design valve. The 45° metal seat provides the load bearing surface to transmit spring force, the slotted O-Ring retainer allows the O-Ring to be pressurized and accomplish the primary sealing function. This O-Ring seal design can be used throughout the full pressure range of the valve. For pressure/temperature ratings of the seal, refer to O-Ring Selection Table in this section (pages 1900.41 and 1900.42).


Tightness: Consolidated O-Ring seat seal valves are bubble tight at 95% of set pressures over 100 psig (6.89 barg).

The following table reflects the percent of set pressure (popping pressure) at which the valve will be bubble tight on air.

Bubble Tight Pressures				
Set Pressure				Percent of Set Pressure
psig		barg		
min.	max.	min.	max.	
5	30	0.34	2.07	90%
31	50	2.14	3.45	92%
51	100	3.52	6.89	94%
101 to max. rating of valve		6.96 to max. rating of valve		95%

Consolidated O-Ring seat seals provide positive closure at service pressures closer to the set pressure than is possible with metal-to-metal seats assuring continuous, trouble-free service, and complete valve tightness after numerous “pops”

**Note:** The Consolidated 1900 O-Ring design features a secondary metal-to-metal seat which becomes effective if O-Ring integrity is lost due to external fire or other causes. The retainer is lapped to the nozzle at assembly assuring seat tightness.

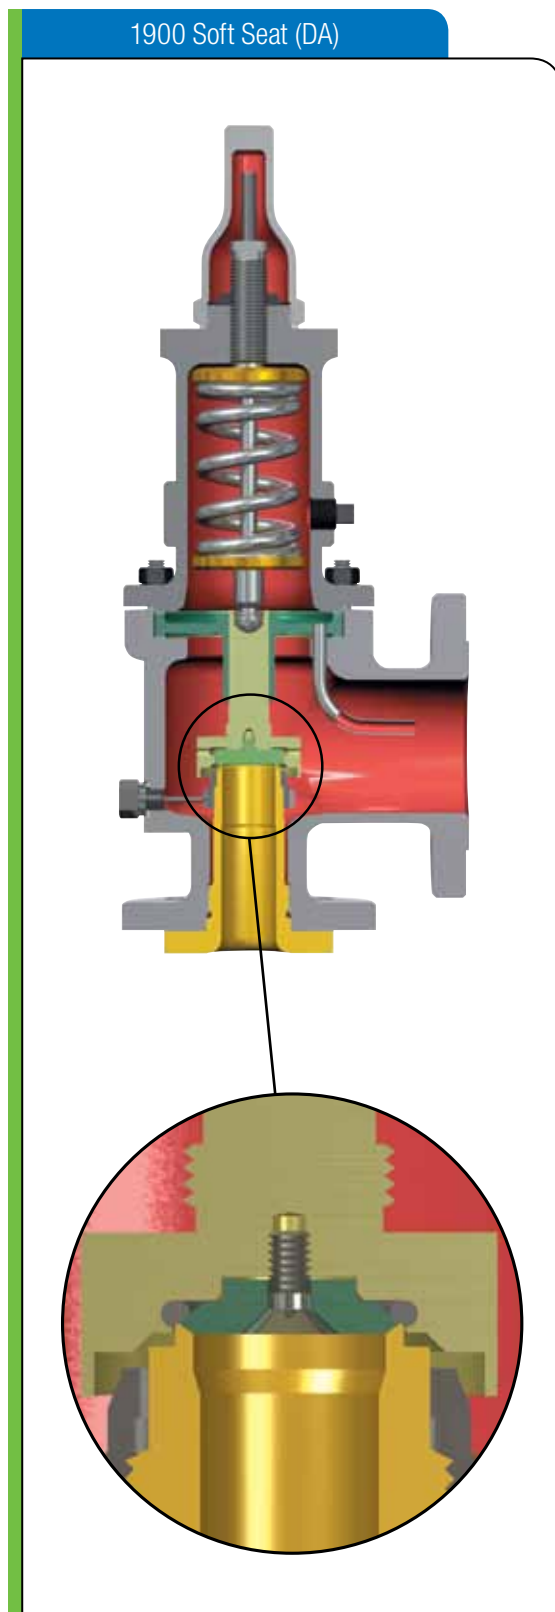





# Scope of Design (Contd.)


## 1900 Soft Seat (DA) Option - How the Double Seal Works

Two unique features distinguish the Consolidated O-Ring seat safety valve from other designs. These are the 45° metal-to-metal load bearing seats and the slotted O-Ring retainer.

### Three Essentials to a Tighter and More Secure Seal:

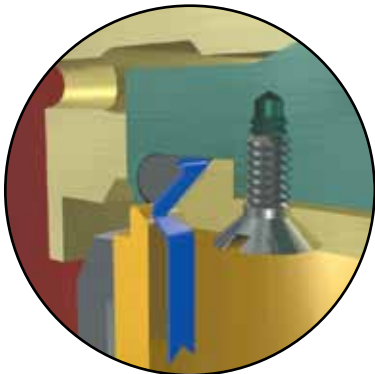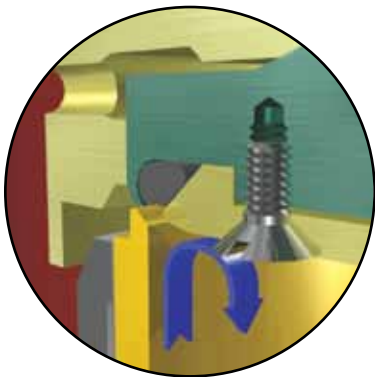

### Double Seal

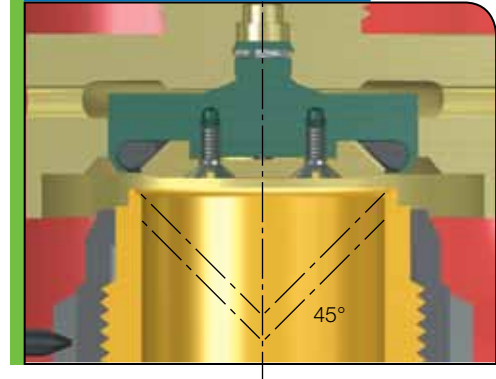

### 1) Concentric Alignment

The nozzle bore and O-Ring retainer are both machined to an angle of 45°. This ensures that as the valve disc opens and closes, the O-Ring is aligned concentrically against the lip of the nozzle. Close tolerance between the nozzle and the body, or the body and the disc guide and disc holder, also help to ensure a tight seal when the valve is closed. Accurate alignment coupled with the load bearing function of the O-Ring retainer virtually eliminates O-Ring abrasion from valve action.

### 2) Maximum Sealing Force

On the back side of the O-Ring retainer there are two small slots. When the valve is closed, process media enters between the machined seat of the nozzle and the O-Ring retainer and proceeds up the slots behind the O-Ring. This pressure forces the O-Ring against the lip of the nozzle and the curved recess of the disc holder. As the pressure within the valve rises to set point, the O-Ring is pressed tightly against the nozzle to maintain maximum sealing force until break-away pressure is reached.


### 3) O-Ring Retention

When the valve opens, the pressure behind the O-Ring escapes from the same two slots on the O-Ring retainer. This prevents the O-Ring from being ejected. Additionally, the O-Ring encapsulating retainer prevents the O-Ring from being pulled from its setting by the high velocity, low pressure discharge inside the upper valve body.

# Materials

## Conventional SRV 1900 Series

1900 Series Safety Relief Valve (Conventional Type)

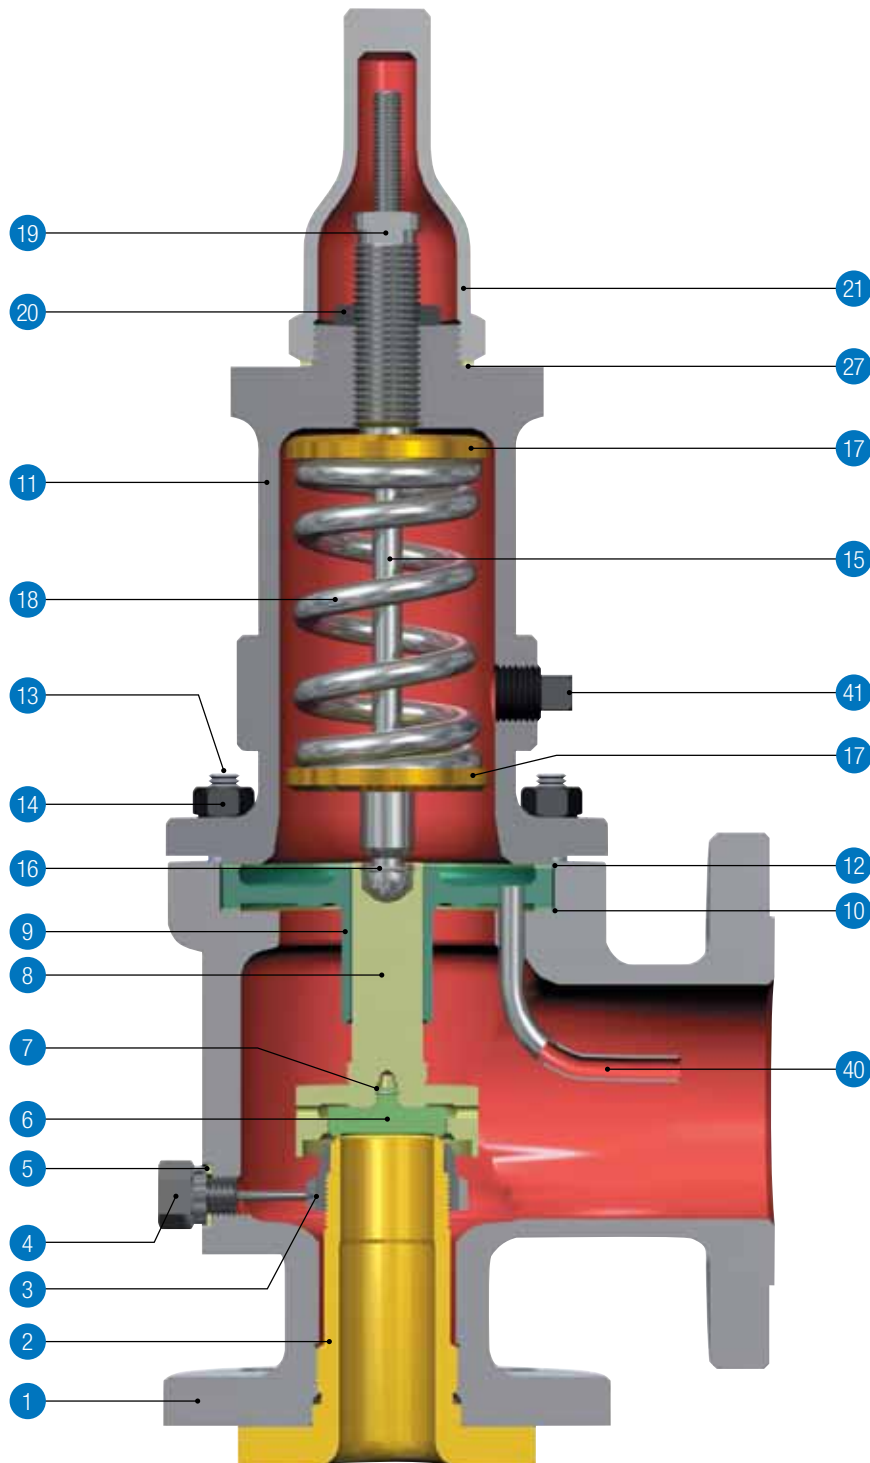

# Materials (Contd.)

## For Gas, Vapor and Liquid Service 1900 Series (Conventional)

SRV 1900 (Conventional) (D-U Orifices)		
Part No.	Nomenclature	Conventional (Standard) Valve Material (-00)
1	Base	
	(1905-1918)	ASME SA216 WCC Carbon Steel
	(1920-1928)	ASME SA217 WC6 Alloy Steel
1A	Base Plug	
	(1905-1918)	Carbon Steel
	(1920-1928)	316 Stainless Steel
2	Nozzle	316 Stainless Steel
3	Adjusting Ring	316 Stainless Steel
4	Adjusting Ring Pin	316 Stainless Steel
5	Adjusting Ring Pin Gasket	Soft Iron
6	Disc	
	Solid Metal Flat Seat	316 Stainless Steel
	Thermodisc	616 Stainless Steel
7	Disc Retainer	Inconel X-750
8	Disc Holder	316 Stainless Steel
9	Guide	316 Stainless Steel
10	Guide Gasket	Soft Iron
11	Bonnet	ASME SA216 WCC Carbon Steel
12	Bonnet Gasket	Soft Iron
13	Base Stud	ASME SA193 B7 Alloy Steel
14	Stud Nut	ASME SA194 2H Carbon Steel
15	Spindle	410 Stainless Steel
16	Spindle Retainer	Inconel X-750
17	Spring Washer	Carbon Steel
18	Spring	
	(-450° to -76°F)	316 Stainless Steel
	(-75° to 800°F)	Alloy Steel
	(801° to 1000°F)	Tungsten Steel or Inconel X-750
19	Adjusting Screw	416 Stainless Steel
20	Adjusting Screw Nut	416 Stainless Steel
21	Screwed Cap	Carbon Steel
22	Bolted Cap	Carbon Steel
23	Packed Cap	Carbon Steel
24	Plain Cap	Malleable Iron
25	Cap Bolt	Carbon Steel
26	Cap Set Screw	Carbon Steel
27	Cap Gasket	Soft Iron
28	Release Nut	Carbon Steel
29	Release Locknut	Carbon Steel
30	Lever (Packed & Plain)	Malleable Iron
31	Lifting Fork	Malleable Iron
32	Lever Shaft	410/416 Stainless Steel
33	Packing	316 Stainless Steel <sup>1</sup>
34	Packing Nut	410/416 Stainless Steel
35	Top Lever	Malleable Iron
36	Drop Lever	Malleable Iron
37	Gag	Carbon Steel
38	Sealing Plug	Carbon Steel
39	Sealing Plug Gasket	Soft Iron
40	Eductor Tube	316 Stainless Steel
41	Bonnet Plug	Carbon Steel
42	Limit Washer (D-2 & E-2)	316 Stainless Steel


SRV 1900 (Conventional) (V & W Orifices)		
Part No.	Nomenclature	Conventional (Standard) Valve Material (-00)
3	Adjusting Ring	410 Stainless Steel
8	Disc Holder	
	(1905-1910)	316 Stainless Steel
	(1920)	316 Stainless Steel (Boronized)
9	Guide	
	(1905-1910)	410 Stainless Steel
	(1920)	316 Stainless Steel (Boronized)
36	Drop Lever	Carbon Steel
48	Guide Rings (Not Shown)	Teflon
49	Disc Retainer Screw (Not Shown)	316 Stainless Steel
50	Retainer Screw Locknut (Not Shown)	316 Stainless Steel
51	Compression Screw (Not Shown)	616 Stainless Steel
52	Compression Screw Locknut Gasket (Not Shown)	Soft Iron
53	Spring Plunger (Not Shown)	616 Stainless Steel
	Plunger Rings (Not Shown)	Teflon

### Notes:

<sup>1</sup> with Flexible Graphite Fillers (Spiral Wound).

# Materials (Contd.)

## Conventional SRV 1900-30 Series (Bellows)

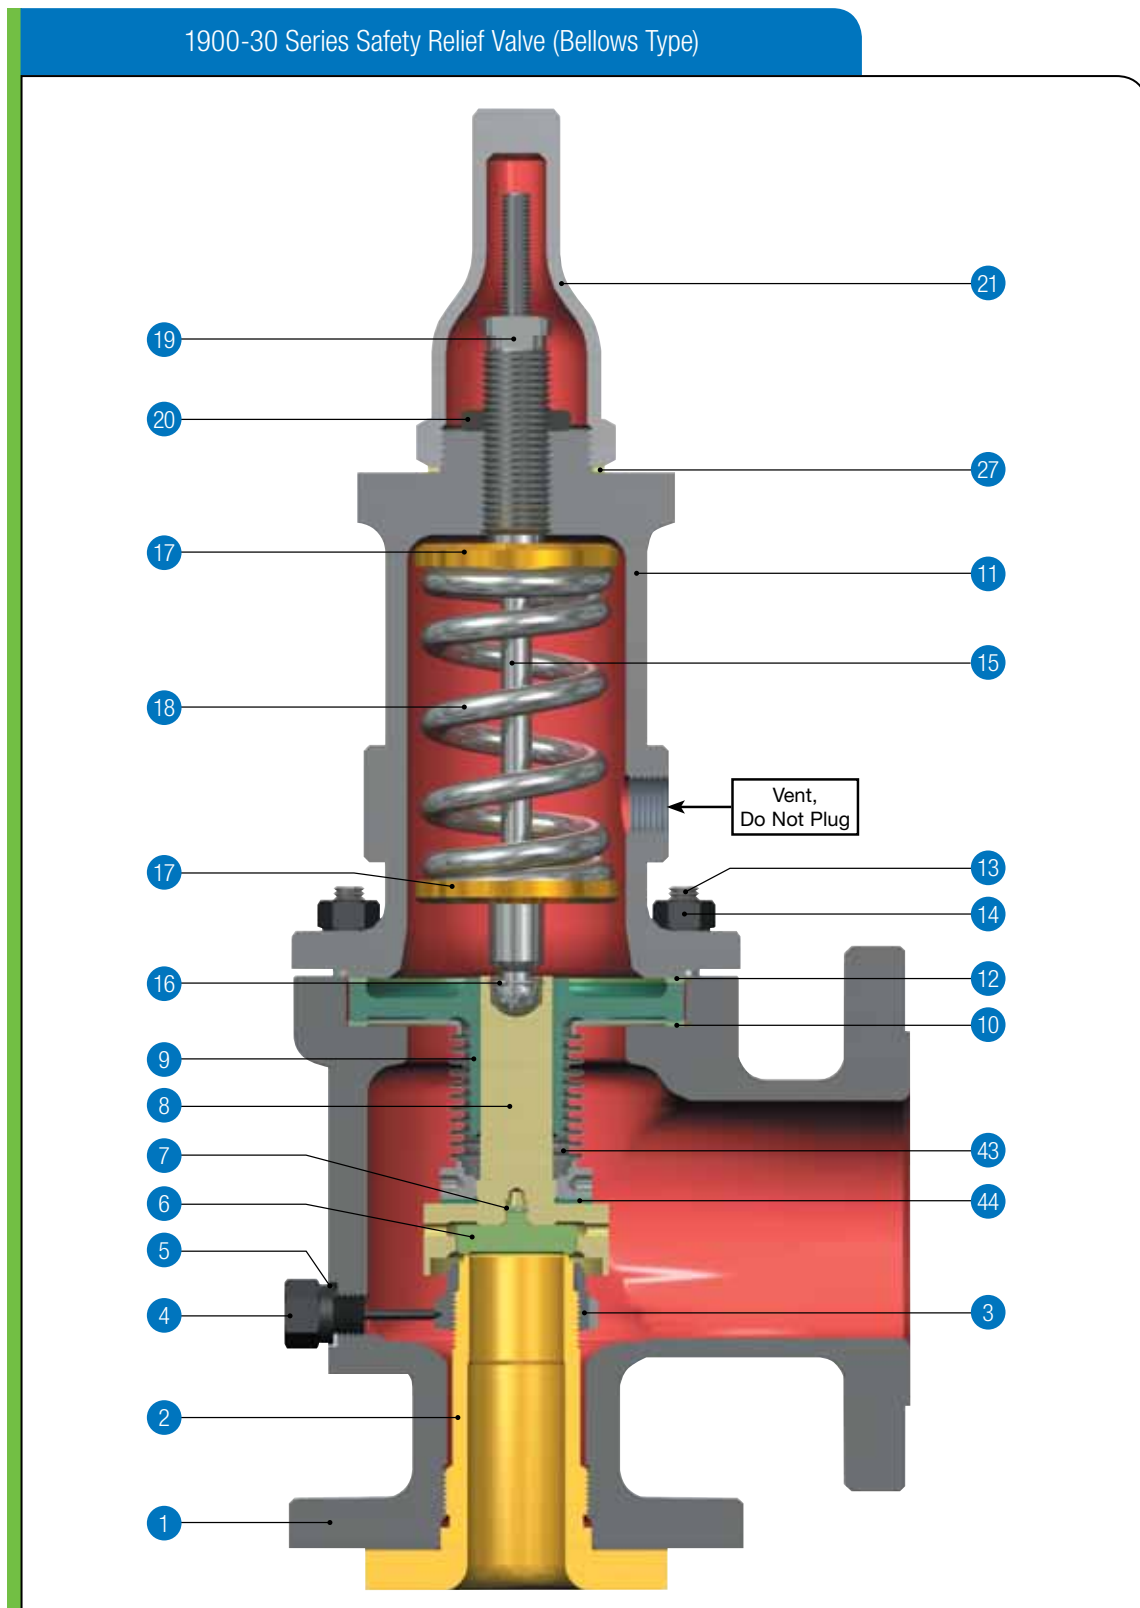

# Materials (Contd.)

## For Gas, Vapor, and Liquid Service 1900-30 Series

### SRV 1900 Bellows (D - U Orifices)

Part No.	Nomenclature	Bellows Valve Material (-30)
1	Base	
	(1905-1918)	ASME SA216 WCC Carbon Steel
	(1920-1928)	ASME SA217 WC6 Alloy Steel
1A	Base Plug	
	(1905-1918)	Carbon Steel
	(1920-1928)	316 Stainless Steel
2	Nozzle	316 Stainless Steel
3	Adjusting Ring	316 Stainless Steel
4	Adjusting Ring Pin	316 Stainless Steel
5	Adjusting Ring Pin Gasket	Soft Iron
6	Disc	
	Solid Metal Flat Seat	316 Stainless Steel
	Thermodisc	616 Stainless Steel
7	Disc Retainer	Inconel X-750
8	Disc Holder	316 Stainless Steel
9	Guide	316 Stainless Steel
10	Guide Gasket	Soft Iron
11	Bonnet	ASME SA216 WCC Carbon Steel
12	Bonnet Gasket	Soft Iron
13	Base Stud	ASME SA193 B7 Alloy Steel
14	Stud Nut	ASME SA194 2H Carbon Steel
15	Spindle	410 Stainless Steel
16	Spindle Retainer	Inconel X-750
17	Spring Washer	Carbon Steel
18	Spring	
	(-450° to -76°F)	316 Stainless Steel
	(-75° to 800°F)	Alloy Steel
	(801° to 1000°F)	Tungsten Steel or Inconel X-750
19	Adjusting Screw	416 Stainless Steel
20	Adjusting Screw Nut	416 Stainless Steel
21	Screwed Cap	Carbon Steel
22	Bolted Cap	Carbon Steel
23	Packed Cap	Carbon Steel
24	Plain Cap	Malleable Iron
25	Cap Bolt	Carbon Steel
26	Cap Set Screw	Carbon Steel
27	Cap Gasket	Soft Iron
28	Release Nut	Carbon Steel
29	Release Locknut	Carbon Steel
30	Lever (Packed & Plain)	Malleable Iron
31	Lifting Fork	Malleable Iron
32	Lever Shaft	410/416 Stainless Steel
33	Packing	316 Stainless Steel <sup>1</sup>
34	Packing Nut	410/416 Stainless Steel
35	Top Lever	Malleable Iron
36	Drop Lever	Malleable Iron
37	Gag	Carbon Steel
38	Sealing Plug	Carbon Steel
39	Sealing Plug Gasket	Soft Iron
42	Limit Washer (D-2 & E-2)	316 Stainless Steel
43	Bellows	Inconel 625 LCF
43	Bellows Nut	316L Stainless Steel
43	Bellows Flange	316L Stainless Steel
44	Bellows Gasket	Soft Iron

### SRV 1900 Bellows (V & W Orifices)


Part No.	Nomenclature	Bellows Valve Material (-30)
3	Adjusting Ring	410 Stainless Steel
8	Disc Holder	
	(1905-1910)	316 Stainless Steel
	(1920)	316 Stainless Steel (Boronized)
9	Guide	
	(1905-1910)	410 Stainless Steel
	(1920)	316 Stainless Steel (Boronized)
20	Compression Screw Nut	416 Stainless Steel
36	Drop Lever	Carbon Steel
45	Bellows Bolts (Not Shown)	ASME SA193 B7 Alloy Steel
46	Bellows Bolts Lock Washers (Not Shown)	316 Stainless Steel
47	Overlift Restrictor (Not Shown)	410 Stainless Steel
48	Guide Rings (Not Shown)	Teflon
49	Disc Retainer Screw (Not Shown)	316 Stainless Steel
50	Retainer Screw Locknut (Not Shown)	316 Stainless Steel
51	Compression Screw (Not Shown)	616 Stainless Steel
52	Compression Screw Locknut Gasket (Not Shown)	Soft Iron
53	Spring Plunger (Not Shown)	616 Stainless Steel
	Plunger Rings (Not Shown)	Teflon

#### Notes:

<sup>1</sup> with Flexible Graphite Fillers (Spiral Wound).

# Materials (Contd.)

## Conventional SRV 1900-35 Series (Balanced Bellows)

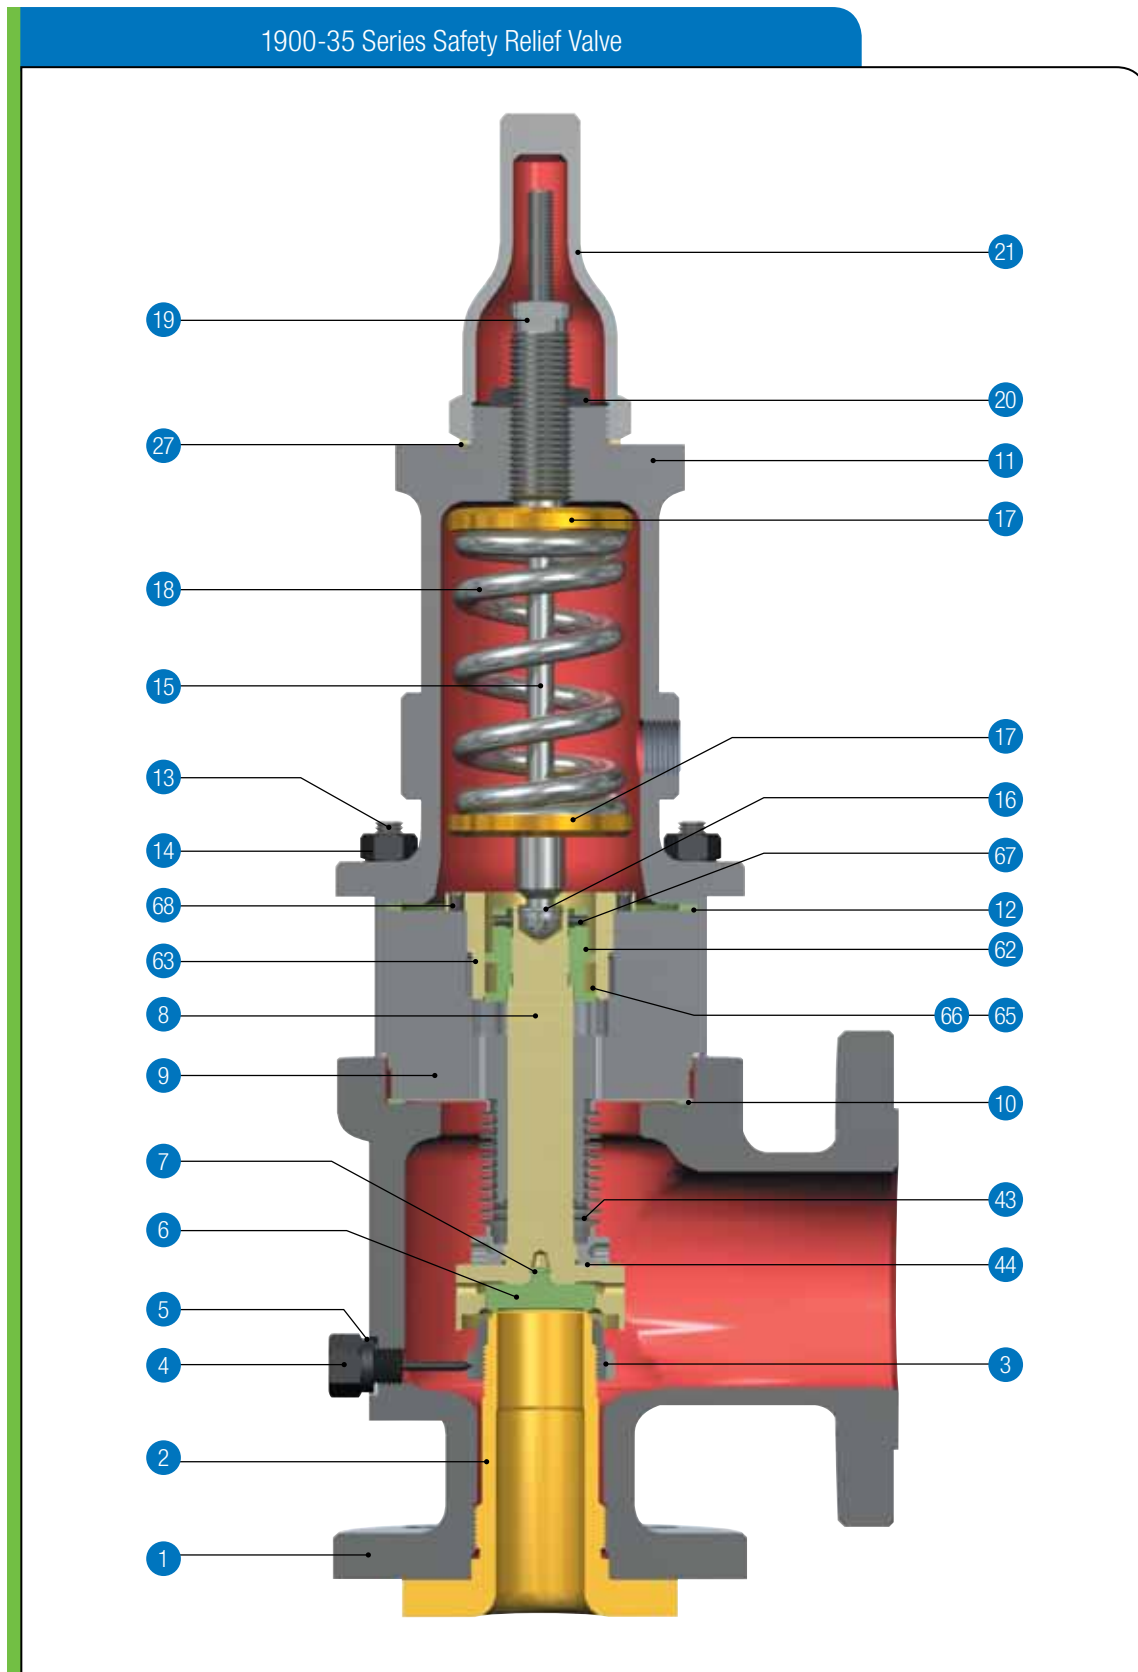



# Materials (Contd.)

## For Gas, Vapor, and Liquid Service 1900-35 Series

SRV 1900 Balanced Bellows		
Part No.	Nomenclature	Balanced Bellows Valve Material (-35) <sup>1</sup>
1	Base	
	(1905-1918)	ASME SA216 WCC Carbon Steel
	(1920-1928)	ASME SA217 WC6 Alloy Steel
1A	Base Plug	
	(1905-1918)	Carbon Steel
	(1920-1928)	316 Stainless Steel
2	Nozzle	316 Stainless Steel
3	Adjusting Ring	316 Stainless Steel
4	Adjusting Ring Pin	316 Stainless Steel
5	Adjusting Ring Pin Gasket	Soft Iron
6	Disc	
	Solid Metal Flat Seat	316 Stainless Steel
	Thermodisc	616 Stainless Steel
7	Disc Retainer	Inconel X-750
8	Disc Holder	316 Stainless Steel
9	Guide	316 Stainless Steel
10	Guide Gasket	Soft Iron
11	Bonnet	ASME SA216 WCC Carbon Steel
12	Bonnet Gasket	Soft Iron
13	Base Stud	ASME SA193 B7 Alloy Steel
14	Stud Nut	ASME SA194 2H Carbon Steel
15	Spindle	410 Stainless Steel
16	Spindle Retainer	Inconel X-750
17	Spring Washer	Carbon Steel
18	Spring	
	(-450° to -76°F)	316 Stainless Steel
	(-75° to 800°F)	Alloy Steel
	(801° to 1000°F)	Tungsten Steel or Inconel X-750
19	Adjusting Screw	416 Stainless Steel
20	Adjusting Screw Nut	416 Stainless Steel
21	Screwed Cap	Carbon Steel
22	Bolted Cap	Carbon Steel
23	Packed Cap	Carbon Steel
24	Plain Cap	Malleable Iron
25	Cap Bolt	Carbon Steel

SRV 1900 Balanced Bellows (Contd.)		
Part No.	Nomenclature	Balanced Bellows Valve Material (-35) <sup>1</sup>
26	Cap Set Screw	Carbon Steel
27	Cap Gasket	Soft Iron
28	Release Nut	Carbon Steel
29	Release Locknut	Carbon Steel
30	Lever	Malleable Iron
31	Lifting Fork	Malleable Iron
32	Lever Shaft	410/416 Stainless Steel
33	Packing	316 Stainless Steel <sup>2</sup>
34	Packing Nut	410/416 Stainless Steel
35	Top Lever	Malleable Iron
36	Drop Lever	Malleable Iron
37	Gag	Carbon Steel
38	Sealing Plug	Carbon Steel
39	Sealing Plug Gasket	Soft Iron
42	Limit Washer (D-2 & E-2)	316 Stainless Steel
43	Bellows	Inconel 625 LCF
43	Bellows Nut	316L Stainless Steel
43	Bellows Flange	316L Stainless Steel
44	Bellows Gasket	Soft Iron
62	Piston	304 Stainless Steel
63	Piston Guide	316 Stainless Steel
64	Piston Retainer Ring (D-F only) (Not Shown)	Inconel X-750
65	Seal Ring	Graphitar Grade 67
66	Seal Ring Expander	410 Stainless Steel
67	Piston Lock Screw	18-8 Stainless Steel
68	Piston Guide lock Screw	18-8 Stainless Steel
69	Piston Plate (D-F only) (Not Shown)	316 Stainless Steel


### Notes:

- Other material variations are available. Balanced piston components will be per the bellows "-30" type, except in "X3" and "X4" variations. (S3, S4, etc.). In these cases, the materials for the piston, lock screws, seal ring expander, and piston guide may be changed. The Seal Ring will remain as Graphitar Grade 67.
- with Flexible Graphite Fillers (Spiral Wound).

# Materials (Contd.)

## 1900 Soft Seat (DA) Option

1900 Soft Seat (DA) Safety relief Valve

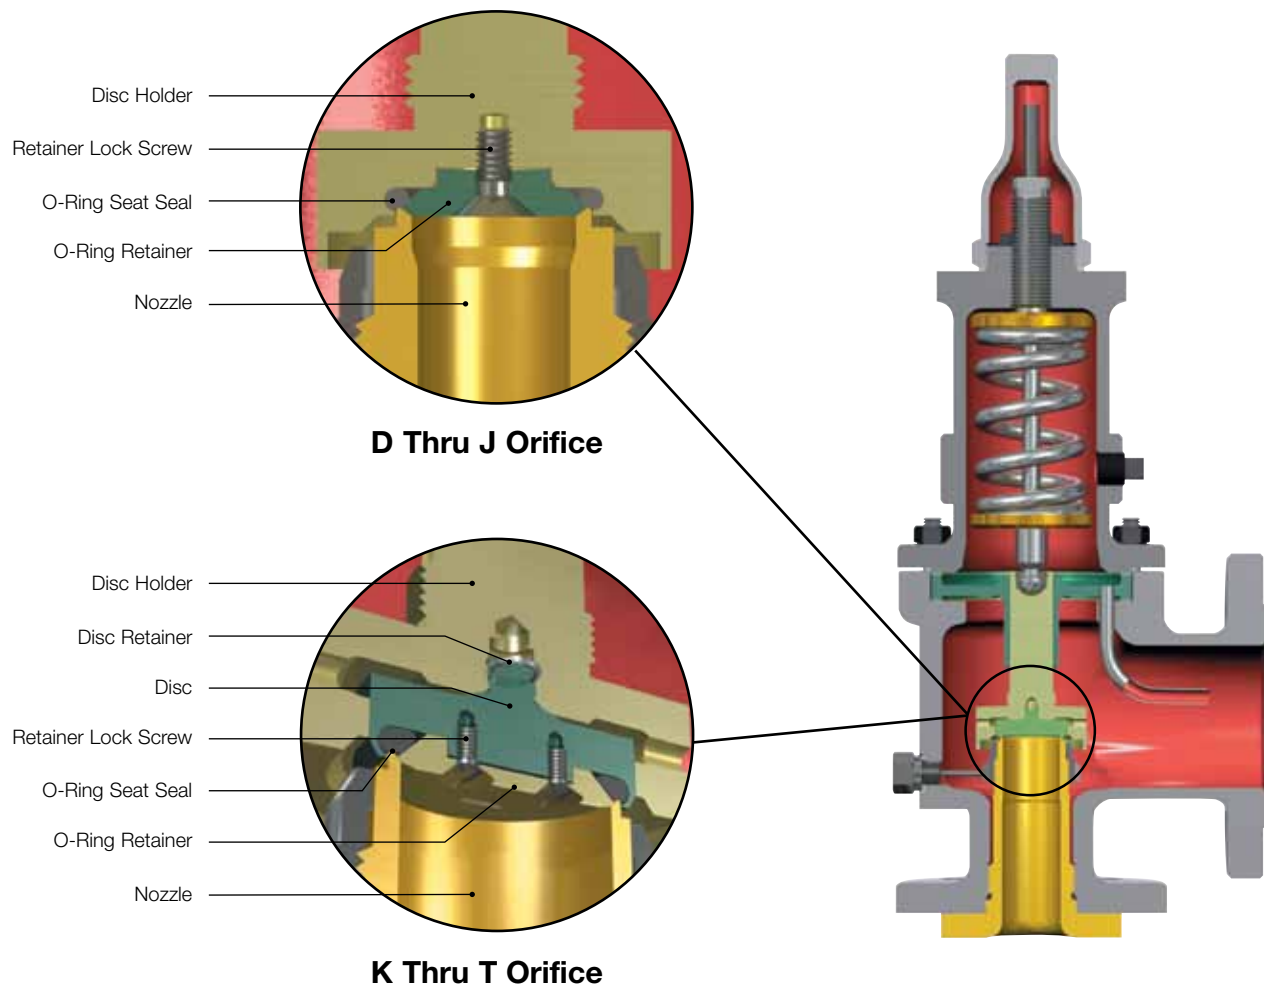

Standard Material for 1900 Soft Seat (DA) Safety Relief Valves

Part Name	Materials <sup>1</sup>
Disc (K-T Orifice)	316 Stainless Steel
Disc Holder <sup>2</sup>	316 Stainless Steel
Bonnet	ASME SA352 LCC CS
Disc Retainer	Inconel X750
O-Ring Retainer <sup>3</sup>	316 Stainless Steel
Retainer Lock Screw (Not Shown) <sup>3</sup>	316 Stainless Steel
O-Ring Seat Seal	Select <sup>4</sup>

Note 1 Balance of Materials same as 1900 standard construction


Note 2 Disc Holder material for D-J orifice, will be Monel for "M" variations and Hastelloy C for "H" variations.

Note 3 O-Ring Retainer material will be Monel for "M" variations and Hastelloy C for "H" variations. The retainer lock screw will be Monel with Nylon locking feature in the "M" variations and Hastelloy C with Nylon locking feature in the "H" variations.

Note 4 Refer to pages 1900.41 & 1900.42 for O-Ring Selection (Durometer and Temperature Limits). See Technical Information Section for application.

# Materials (Contd.)

## 1900 Steam Trim (TD) Option

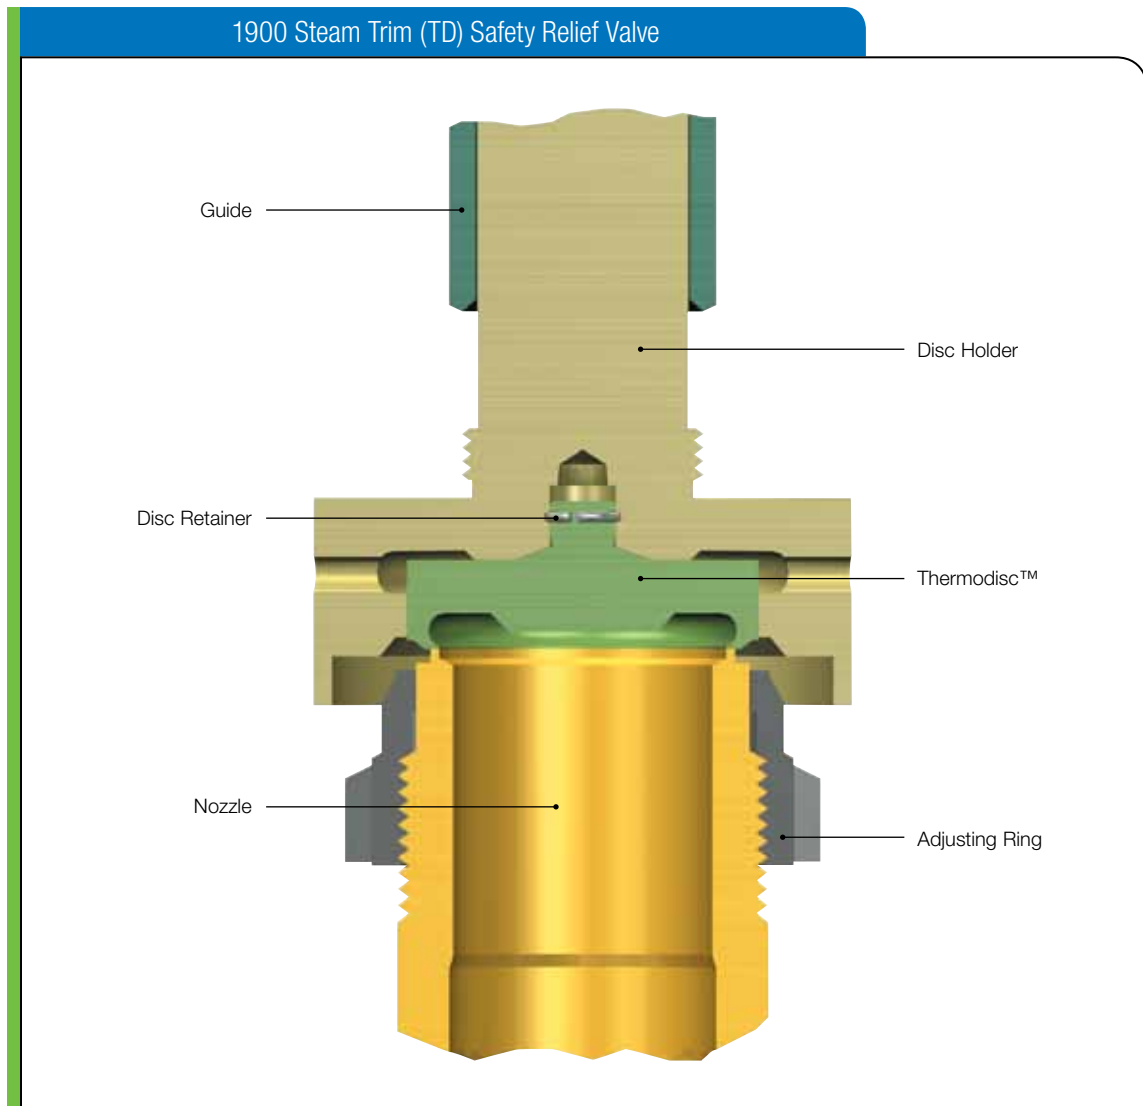

### Standard Material for 1900 Steam Trim (TD) Safety Relief Valves


Part Name	Materials <sup>1</sup>
Nozzle	316 Stainless Steel
Thermodisc™	616 Stainless Steel
Disc Retainer	Inconel X750
Disc Holder	316 Stainless Steel
Guide	316 Stainless Steel
Adjusting Ring	316 Stainless Steel

#### Notes:

- 1 Balance of materials same as 1900 standard construction.

# Materials (Contd.)

## 1900 Liquid Trim (LA) Option

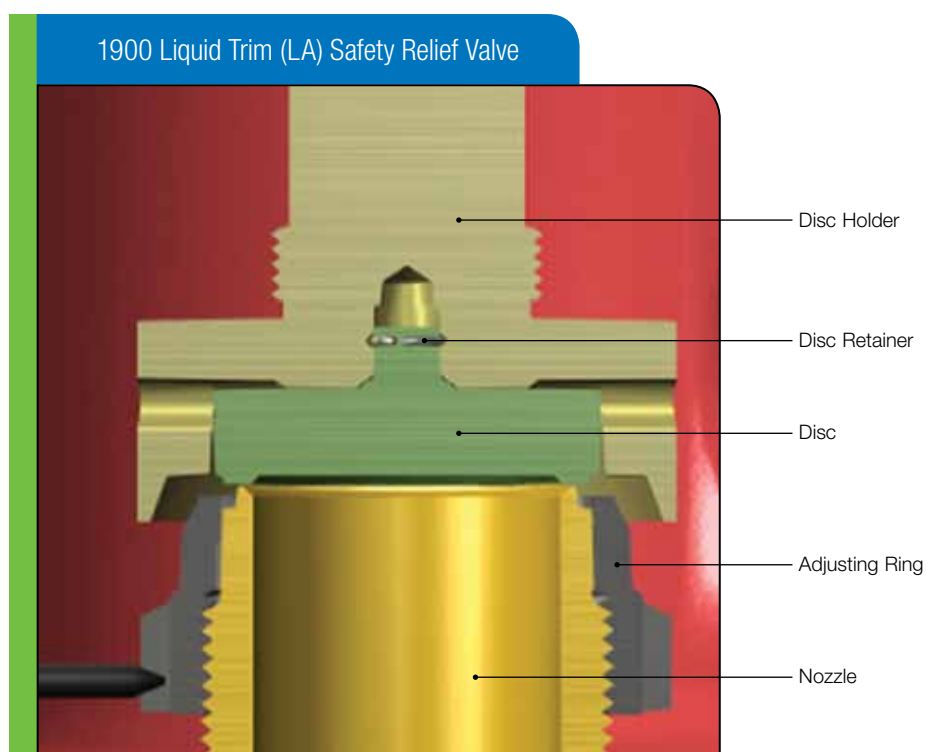

Standard Material for 1900 Liquid Trim (LA) Safety Relief Valves

Part Name	Materials <sup>1</sup>
Nozzle	316 Stainless Steel
Disc	316 Stainless Steel
Disc Retainer	Inconel X750
Disc Holder	316 Stainless Steel
Guide	316 Stainless Steel
Adjusting Ring	316 Stainless Steel

### Notes:

- <sup>1</sup> Balance of materials same as 1900 standard construction.

# Materials (Contd.)

## 1900 Special Material & Service Options

The 1900 Flanged Series offers various material options to satisfy customer needs and API standards. The most common options are listed in this section.

These material options are not the only available options however. Inquire of Dresser Measurement for options not listed here. Specify the material construction classification using the construction variations such as: S2, H4, etc.

Options included are:	Page Number
• Sour Gas Service (SG1, SG10, SG5 and SG15)	1900.29
• Hydrofluoric Acid Service (HA)	1900.31
• Stainless Steel (S2, S3 and S4)	1900.32
• Alloy 20 (A1, A2, A3 and A4)	1900.34
• Monel (M1, M1½(MB), M2, M3 and M4)	1900.35
• Hastelloy C (H1, H2, H3 and H4)	1900.36
• Duplex (D1, D2, D3 and D4)	1900.37
• Low Temperature - Process Fluid (L1, L2, and L3) (For media temperatures to -450°F or -268°C)	1900.39
• Low Temperature - Ambient (C1 and C2) (For ambient temperatures to -50°F or -45.6°C)	1900.40
• High Temperature (T1 & T2) (For media temperatures to 1500°F or 816°C)	1900.41
• Lethal Service	1900.42
• O-Ring Selection	1900.43

Many other special options are available not necessarily of a material nature. These include, but are not limited to, special facings on connections or special connections. Contact the factory for any special requirements you may have.

## 1900 Sour Gas (SG) Trims

Material requirements of NACE Standard MR0103-2003 are applicable to systems handling sour gas if the total operating pressure of the system is 65 psia or greater and if the partial pressure of H<sub>2</sub>S in the gas is 0.05 psia or greater.

The SG10 (non-bellows) and SG15 (bellows) material selections are satisfactory for applications in which the valve secondary pressure (outlet side) does not exceed 65 psia (50 psig (3.45 barg)). Under valve relieving conditions, 50 psig

(3.45 barg) secondary pressure would not normally be exceeded until the valve set pressure exceeds 450 psig (31.03 barg).

The SG1 (non-bellows) and SG5 (bellows) material selections comply with NACE standard MR0103-2003.

Specific applications may be referred to the factory for recommendations.

# Materials (Contd.)

## 1900 Sour Gas (SG) Trims (Contd.)

### Special Materials, Sour Gas Service<sup>1 & 2</sup>

Component	Construction Variation			
	Conventional Valves		Bellows Valves	
	SG1 <sup>3</sup>	SG10 <sup>4</sup>	SG5 <sup>3</sup>	SG15 <sup>4</sup>
Base (1905-1918), Bonnet	ASME SA216 WCC CS	ASME SA216 WCC CS	ASME SA216 WCC CS	ASME SA216 WCC CS
Base (1920-1928)	ASME SA217 WC6 AS	ASME SA217 WC6 AS	ASME SA217 WC6 AS	ASME SA217 WC6 AS
Base Plug (1905-1918)	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
Base Plug (1920-1928), Nozzle	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Ring, Adjusting Ring Pin	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Ring Pin Gasket	Soft Iron	Soft Iron	Soft Iron	Soft Iron
Disc - Solid Metal Flat Seat, Disc Holder	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Disc - Thermodisc, Disc Retainer	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Guide, Limit Washer (D-2 & E-2)	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Guide Gasket, Bonnet Gasket	Soft Iron	Soft Iron	Soft Iron	Soft Iron
Base Stud	ASME SA193 B7 AS	ASME SA193 B7 AS	ASME SA193 B7 AS	ASME SA193 B7 AS
Stud Nut	ASME SA194 2H CS	ASME SA194 2H CS	ASME SA194 2H CS	ASME SA194 2H CS
Spindle	316 Stainless Steel	410 Stainless Steel	410 Stainless Steel	410 Stainless Steel
Spindle Retainer	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Spring Washer	316 Stainless Steel	Carbon Steel	Carbon Steel	Carbon Steel
Spring	Inconel X-750	Alloy Steel <sup>5</sup>	Alloy Steel <sup>5</sup>	Alloy Steel <sup>5</sup>
Adjusting Screw, Adjusting Screw Nut	316 Stainless Steel	416 Stainless Steel	416 Stainless Steel	416 Stainless Steel
Screwed Cap, Bolted Cap, Gag	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
Packed Cap, Cap Bolt	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
Plain Cap, Lever, Lifting Fork	Malleable Iron	Malleable Iron	Malleable Iron	Malleable Iron
Cap Set Screw, Sealing Plug	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
Cap Gasket, Sealing Plug Gasket	Soft Iron	Soft Iron	Soft Iron	Soft Iron
Release Nut, Release Locknut	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
Lever Shaft, Packing Nut	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel
Packing	316 Stainless Steel <sup>7</sup>	316 Stainless Steel <sup>7</sup>	316 Stainless Steel <sup>7</sup>	316 Stainless Steel <sup>7</sup>
Top Lever, Drop Lever	Malleable Iron	Malleable Iron	Malleable Iron	Malleable Iron
Eductor Tube	316 Stainless Steel	316 Stainless Steel	Not Applicable	Not Applicable
Bonnet Plug	Carbon Steel	Carbon Steel	Not Applicable	Not Applicable
Bellows	Not Applicable	Not Applicable	Inconel 625 LCF <sup>6</sup>	Inconel 625 LCF
Bellows Nut, Bellows Flange	Not Applicable	Not Applicable	316L Stainless Steel	316L Stainless Steel
Bellows Gasket	Not Applicable	Not Applicable	Soft Iron	Soft Iron

#### Notes:

- 1 The materials in red denote variation from standard material construction.
- 2 Compliance to NACE MR0175 requires media and materials evaluation. Please contact factory sales.
- 3 (SG1) and (SG5) valves are for installations for compliance to NACE MR0103-2003 and prior editions.
- 4 (SG10) and (SG15) valves are for installations where the outlet of the valve is not in a Sour Gas environment per NACE MR-01-75 (Pressures on the outlet side does not exceed 65 psia under relieving conditions).
- 5 Spring is Aluminum Metallized.
- 6 Heat treated.
- 7 with Flexible Graphite Fillers (Spiral Wound).



# Materials (Contd.)

## 1900 Hydrofluoric Acid (HA) Service

To meet the demanding requirements of the extremely corrosive HF Alky service, Dresser Measurement has, in conjunction with major designers and users in this industry, developed the 1900 HA variation. Extensive use of Monel Alloy 400, in the stress relieved condition for critical components, has been utilized for this option.

NACE document 5A171 states, "In practice, occurrence of stress corrosion cracking may either be avoided by complete exclusion of oxygen or may be minimized by stress relieving

welded or cold formed parts." The HA materials should not be confused with the M1 through the M4 materials used for other corrosive applications.

In addition to the special stress relieved conditioned Monel 400 materials, a bellows seal and litharged cured soft seat has been incorporated into this option. Long term applications have provided excellent results in the most severe, moist, aerated, HF Alky service.

### Special Materials, Hydrofluoric Acid Service (HA)<sup>1 & 2</sup>

Component	Bellows Valve Material (-30)	Component	Bellows Valve Material (-30)
Base (1905-1918)	ASME SA216 WCC CS <sup>3</sup>	Plain Cap	Malleable Iron
Base Plug (1905-1918)	Carbon Steel	Cap Bolt	Carbon Steel
Nozzle	Monel 400 <sup>3</sup>	Cap Set Screw	Carbon Steel
Adjusting Ring	Monel 400	Cap Gasket	Monel 400
Adjusting Ring Pin	Monel 400	Release Nut	Carbon Steel
Adjusting Ring Pin Gasket	Monel 400	Release Locknut	Carbon Steel
Disc - Solid Metal Flat Seat	Monel 400 <sup>3</sup>	Lever	Malleable Iron
Disc Retainer	Inconel X-750	Lifting Fork	Malleable Iron
Disc Holder	Monel 400 <sup>4</sup>	Lever Shaft	410 Stainless Steel
Guide	Monel 400	Packing	316 Stainless Steel <sup>5</sup>
Guide Gasket	Monel 400	Packing Nut	410 Stainless Steel
Bonnet	ASME SA216 WCC CS	Top Lever	Malleable Iron
Bonnet Gasket	Monel 400	Drop Lever	Malleable Iron
Base Stud	ASTM F468 Nickel Alloy 500	Gag	Carbon Steel
Stud Nut	ASTM F467 Nickel Alloy 500	Sealing Plug	Carbon Steel
Spindle	Monel 400	Sealing Plug Gasket	Monel 400
Spindle Retainer	Inconel X-750	Limit Washer (D-2 & E-2)	Monel 400
Spring Washer	Carbon Steel	Bellows	Monel 400 <sup>4</sup>
Spring	Carbon Steel (Nickel Plated)	Bellows Nut	Monel 400 <sup>4</sup>
Adjusting Screw	Monel 400	Bellows Flange	Monel 400 <sup>4</sup>
Adjusting Screw Nut	Monel 400	Bellows Gasket	Garlock Gylon 35101
Screwed Cap	Carbon Steel	O-ring Retainer	Monel 400 <sup>4</sup>
Bolted Cap	Carbon Steel	Retainer Lock Screw	Monel 400 with Nylon Lock Feature
Packed Cap	Carbon Steel	O-Ring	Kalrez Spectrum 6375

### Notes:

- The materials in red denote variation from standard material construction.
- To specify valves, add material designation to the valve type, 1910L/HA or 1910-30L/HA.
- (Including Supplement S5)  
PWHT is required for weld repairs per ASTM A216 paragraph 10, or if C.E. is above 0.40. Carbon equivalent shall be determined per ASTM A216, S11.2. Weld PQR shall include hardness test of PWHT area. Test piece to confirm that weld and weld heat-affected-zone hardnesses are 200 brinell maximum.
- Stress relieved.
- with Flexible Graphite Fillers (Spiral Wound).

# Materials (Contd.)

## Corrosive Service

### Corrosive Service, Stainless Steel Material (D-U Orifice)<sup>1&2</sup>

Component	Construction Variation		
	S2	S3	S4
Common Components (-00 & -30)			
Base (1905-1918), Bonnet	ASME SA216 WCC CS	ASME SA351 CF8M SS	ASME SA351 CF8M SS
Base (1920-1928)	ASME SA217 WC6 AS	ASME SA351 CF8M SS	ASME SA351 CF8M SS
Base Plug (1905-1918), Release Nut, Sealing Plug	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Base Plug (1920-1928), Nozzle	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Ring, Adjusting Ring Pin	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Ring Pin Gasket, Guide Gasket	Monel	Monel	Monel
Disc - Solid Metal Flat Seat, Disc Holder	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Disc - Thermodisc	616 Stainless Steel	616 Stainless Steel	616 Stainless Steel
Disc Retainer, Spindle Retainer	Inconel X-750	Inconel X-750	Inconel X-750
Guide, Limit Washer (D-2 & E-2)	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Base Stud	ASME SA193 B7 AS	ASME SA193 B8M SS	ASME SA193 B8M SS
Stud Nut	ASME SA194 2H CS	ASME SA194 8M SS	ASME SA194 8M SS
Spring Washer, Release Locknut	Carbon Steel	Carbon Steel	316 Stainless Steel
Spring (-20° to 800°F)	Alloy Steel	Alloy Steel	316 Stainless Steel
Spring (801° to 1000°F)	Tungsten Steel <sup>3</sup>	Tungsten Steel <sup>3</sup>	316 Stainless Steel
Screwed Cap, Bolted Cap, Packed Cap	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Plain Cap, Lifting Fork	Malleable Iron	316 Stainless Steel	316 Stainless Steel
Cap Bolt	Carbon Steel	ASME SA193 B8M SS	ASME SA193 B8M SS
Cap Set Screw	Carbon Steel	B8M Stainless Steel	B8M Stainless Steel
Cap Gasket, Sealing Plug Gasket	Monel	Monel	Monel
Lever, Top Lever, Drop Lever	Malleable Iron	Malleable Iron	Malleable Iron
Lever Shaft, Packing Nut	410/416 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Packing	316 Stainless Steel <sup>4</sup>	316 Stainless Steel <sup>4</sup>	316 Stainless Steel <sup>4</sup>
Gag	Carbon Steel	Carbon Steel	Carbon Steel
Conventional (Standard) Valve Components (-00)			
Bonnet Gasket	Monel	Monel	Monel
Spindle, Adjusting Screw	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Screw Nut, Eductor Tube	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Bonnet Plug	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Bellows Valve Components (-30)			
Bonnet Gasket	Soft Iron	Monel	Monel
Spindle, Adjusting Screw	410 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Screw Nut	416 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Bellows	Inconel 625 LCF	Inconel 625 LCF	Inconel 625 LCF
Bellows Nut, Bellows Flange	316L Stainless Steel	316L Stainless Steel	316L Stainless Steel
Bellows Gasket	Monel	Monel	Monel

#### Notes:

- 1 The materials in red denote variation from standard material construction.
- 2 To specify valves, add material designation to the valve type, 1910L/S3 or 1910-30L/S3.
- 3 or Inconel X-750
- 4 with Flexible Graphite Fillers (Spiral Wound).

# Materials (Contd.)

## Corrosive Service (Contd.)

### Corrosive Service, Stainless Steel Material (V & W Orifice)<sup>1&2</sup>

Component	Construction Variation		
	S2	S3	S4
Common Components (-00 & -30)			
Base(1905-1910)	ASME SA216 WCC CS	ASME SA351 CF8M SS	ASME SA351 CF8M SS
Base(1920-1928)	ASME SA217 WC6 AS	ASME SA351 CF8M SS	ASME SA351 CF8M SS
Base Plug (1905-1910), Screwed Cap, Bolted Cap	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Packed Cap, Cap Set Screw, Release Nut	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Release Locknut, Sealing Plug	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Base Plug (1920-1928), Nozzle, Adjusting Ring	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Ring Pin, Disc - Solid Metal Flat Seat	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Disc Retainer Screw, Retainer Screw Locknut	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Disc Holder - (1905-1910), Spindle	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Compression Screw Nut, Guide (1905-1910)	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Ring Pin Gasket, Guide Gasket, Cap Gasket	Monel	Monel	Monel
Compression Screw Locknut Gasket, Sealing Plug Gasket	Monel	Monel	Monel
Disc - Thermodisc, Spring Plunger, Compression Screw	616 Stainless Steel	616 Stainless Steel	616 Stainless Steel
Disc Holder (1920-1928), Guide (1920-1928)	316 Stainless Steel (Boronized)	316 Stainless Steel (Boronized)	316 Stainless Steel (Boronized)
Bonnet	ASME SA216 WCC CS	ASME SA351 CF8M SS	ASME SA351 CF8M SS
Base Stud	ASME SA193 B7 Alloy Steel	ASME SA193 B8M Alloy Steel	ASME SA193 B8M Alloy Steel
Stud Nut	ASME SA194 2H Carbon Steel	ASME SA194 8M Carbon Steel	ASME SA194 8M Carbon Steel
Spring Washer, Drop Lever, Gag	Carbon Steel	Carbon Steel	Carbon Steel
Spring (-20° to 800°F)	Alloy Steel	Alloy Steel	316 Stainless Steel
Spring (801° to 1000°F)	Tungsten Steel or Inconel X-750	Tungsten Steel or Inconel X-750	316 Stainless Steel
Plain Cap	Malleable Iron	316 Stainless Steel	316 Stainless Steel
Cap Bolt	Carbon Steel	ASME SA193 B8M Alloy Steel	ASME SA193 B8M Alloy Steel
Lever, Top Lever	Malleable Iron	Malleable Iron	Malleable Iron
Lifting Fork	Malleable Iron	316 Stainless Steel	316 Stainless Steel
Lever Shaft	410/416 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Packing	316 Stainless Steel <sup>3</sup>	316 Stainless Steel <sup>3</sup>	316 Stainless Steel <sup>3</sup>
Packing Nut	410/416 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Guide Rings (1905-1910), Plunger Rings (Not Shown)	Teflon	Teflon	Teflon
Conventional (Standard) Valve Components (-00)			
Bonnet Gasket	Monel	Monel	Monel
Eductor Tube	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Bonnet Plug	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Bellows Valve Components (-30)			
Bonnet Gasket	Soft Iron	Monel	Monel
Limit Washer	410 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Bellows	Inconel 625 LCF	Inconel 625 LCF	Inconel 625 LCF
Bellows Nut , Bellows Flange	316L Stainless Steel	316L Stainless Steel	316L Stainless Steel
Bellows Gasket	Monel	Monel	Monel
Bellows Bolts	ASME SA193 B7 Alloy Steel	ASME SA193 B8M Alloy Steel	ASME SA193 B8M Alloy Steel
Bellows Bolts Lock Washers	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Overlift Restrictor	410 Stainless Steel	410 Stainless Steel	410 Stainless Steel

#### Notes:

- 1 The materials in red denote variation from standard material construction.
- 2 To specify valves, add material designation to the valve type, 1910L/S3 or 1910-30L/S3.
- 3 with Flexible Graphite Fillers (Spiral Wound).

# Materials (Contd.)

## Corrosive Service (Contd.)

### Corrosive Service, Alloy 20 Material<sup>1 & 2</sup>

Component	Construction Variation			
	A1	A2	A3	A4
Common Components (-00 & -30)				
Base (1905-1918)	ASME SA216 WCC CS	ASME SA216 WCC CS	ASME SA351 CN7M AS	ASME SA351 CN7M AS
Base (1920-1928)	ASME SA217 WC6 AS	ASME SA217 WC6 AS	ASME SA351 CN7M AS	ASME SA351 CN7M AS
Base Plug (1905-1918)	Carbon Steel	Carbon Steel	Alloy 20 <sup>3</sup>	Alloy 20
Base Plug (1920-1928)	316 Stainless Steel	316 Stainless Steel	Alloy 20	Alloy 20
Nozzle, Disc - Solid Metal Flat Seat	Alloy 20	Alloy 20	Alloy 20	Alloy 20
Adjusting Ring, Adjusting Ring Pin	316 Stainless Steel	Alloy 20	Alloy 20	Alloy 20
Adjusting Ring Pin Gasket	Soft Iron	Monel	Monel	Monel
Disc - Thermodisc, Disc Retainer	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Disc Holder	316 Stainless Steel	Alloy 20	Alloy 20	Alloy 20
Guide Gasket	Soft Iron	Monel	Monel	Monel
Bonnet	ASME SA216 WCC CS	ASME SA216 WCC CS	ASME SA351 CN7M AS	ASME SA351 CN7M AS
Base Stud	ASME SA193 B7 AS	ASME SA193 B7 AS	Alloy 20	Alloy 20
Stud Nut	ASME SA194 2H CS	ASME SA194 2H CS	Alloy 20	Alloy 20
Spindle Retainer	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Spring Washer	Carbon Steel	Carbon Steel	Carbon Steel	Alloy 20
Spring (-20° to 800°F)	Alloy Steel	Alloy Steel	Alloy Steel	Alloy 20
Spring (801° to 1000°F)	Tungsten Steel <sup>4</sup>	Tungsten Steel <sup>4</sup>	Tungsten Steel <sup>4</sup>	Alloy 20
Packed Cap	Carbon Steel	Carbon Steel	Alloy 20	Alloy 20
Plain Cap	Malleable Iron	Malleable Iron	Not Applicable	Not Applicable
Cap Bolt, Sealing Plug	Carbon Steel	Carbon Steel	Alloy 20	Alloy 20
Cap Set Screw	Carbon Steel	Carbon Steel	Not Applicable	Not Applicable
Cap Gasket	Soft Iron	Monel	Monel	Monel
Release Nut, Release Locknut	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
Lever, Lifting Fork	Malleable Iron	Malleable Iron	Malleable Iron	Malleable Iron
Lever Shaft	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel
Packing	316 Stainless Steel <sup>5</sup>	316 Stainless Steel <sup>5</sup>	316 Stainless Steel <sup>5</sup>	316 Stainless Steel <sup>5</sup>
Packing Nut	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel
Top Lever, Drop Lever	Malleable Iron	Malleable Iron	Not Applicable	Not Applicable
Gag	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
Sealing Plug Gasket	Soft Iron	Monel	Monel	Monel
Conventional (Standard) Valve Components (-00)				
Guide	316 Stainless Steel	Alloy 20	Alloy 20	Alloy 20
Bonnet Gasket	Soft Iron	Monel	Monel	Monel
Spindle	410 Stainless Steel	Alloy 20	Alloy 20	Alloy 20
Adjusting Screw, Adjusting Screw Nut	416 Stainless Steel	Alloy 20	Alloy 20	Alloy 20
Screwed Cap, Bolted Cap, Bonnet Plug	Carbon Steel	Carbon Steel	Alloy 20	Alloy 20
Eductor Tube	316 Stainless Steel	316 Stainless Steel	Alloy 20	Alloy 20
Limit Washer (D-2 & E-2)	316 Stainless Steel	Alloy 20	Alloy 20	Alloy 20
Bellows Valve Components (-30)				
Guide	316 Stainless Steel	316 Stainless Steel	Alloy 20	Alloy 20
Bonnet Gasket	Soft Iron	Soft Iron	Monel	Monel
Spindle	410 Stainless Steel	410 Stainless Steel	Alloy 20	Alloy 20
Adjusting Screw, Adjusting Screw Nut	416 Stainless Steel	416 Stainless Steel	Alloy 20	Alloy 20
Screwed Cap, Bolted Cap	Carbon Steel	Carbon Steel	Carbon Steel	Alloy 20
Limit Washer (D-2 & E-2)	316 Stainless Steel	Alloy 20	Alloy 20	Alloy 20
Bellows	Inconel 625 LCF	Alloy 20	Alloy 20	Alloy 20
Bellows Nut, Bellows Flange	316L Stainless Steel	Alloy 20	Alloy 20	Alloy 20
Bellows Gasket	Soft Iron	Monel	Monel	Monel

#### Notes:

- 1 The materials in red denote variation from standard material construction.
- 2 To specify valves, add material designation to the valve type, 1910L/A3 or 1910-30L/A3.
- 3 Alloy 20 - ASTM B473 UNS N08020.
- 4 or Inconel X-750.
- 5 with Flexible Graphite Fillers (Spiral Wound).

# Materials (Contd.)

## Corrosive Service (Contd.)

### Corrosive Service, Monel Material<sup>1&2</sup>

Component	Construction Variation				
	M1	MB (M 1½ )	M2	M3	M4
Common Components (-00 & -30)					
Base (1905-1918)	ASME SA216 WCC CS	ASME SA216 WCC CS	ASME SA216 WCC CS	ASME SA494 M35-1 NCA <sup>3</sup>	ASME SA494 M35-1 NCA <sup>3</sup>
Base (1920-1928)	ASME SA217 WC6 AS	ASME SA217 WC6 AS	ASME SA217 WC6 AS	ASME SA494 M35-1 NCA <sup>3</sup>	ASME SA494 M35-1 NCA <sup>3</sup>
Base Plug (1905-1918)	Carbon Steel	Carbon Steel	Carbon Steel	Monel	Monel
Base Plug (1920-1928)	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	Monel	Monel
Nozzle	Monel	Monel	Monel	Monel	Monel
Adjusting Ring, Adjusting Ring Pin	316 Stainless Steel	Monel	Monel	Monel	Monel
Adjusting Ring Pin Gasket	Soft Iron	Monel	Monel	Monel	Monel
Disc - Solid Metal Flat Seat	Monel	Monel	Monel	Monel	Monel
Disc - Thermodisc, Disc Retainer	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Disc Holder	316 Stainless Steel	Monel	Monel	Monel	Monel
Guide	316 Stainless Steel	316 Stainless Steel	Monel	Monel	Monel
Guide Gasket	Soft Iron	Monel	Monel	Monel	Monel
Bonnet	ASME SA216 WCC CS	ASME SA216 WCC CS	ASME SA216 WCC CS	ASME SA494 M35-1 NCA <sup>3</sup>	ASME SA494 M35-1 NCA <sup>3</sup>
Base Stud	ASME SA193 B7 AS	ASME SA193 B7 AS	ASME SA193 B7 AS	Monel K500	Monel K500
Stud Nut	ASME SA194 2H CS	ASME SA194 2H CS	ASME SA194 2H CS	Monel K500	Monel K500
Spindle Retainer	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Spring Washer	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel	Monel
Spring (-450° to -21°F)	Not Applicable	Not Applicable	Not Applicable	316 Stainless Steel	Inconel X-750
Spring (-20° to 800°F)	Alloy Steel	Alloy Steel	Alloy Steel	Alloy Steel	Not Applicable
Spring (801° to 1000°F)	Tungsten Steel <sup>4</sup>	Tungsten Steel <sup>4</sup>	Tungsten Steel <sup>4</sup>	Not Applicable	Not Applicable
Adjusting Screw, Adjusting Screw Nut	416 Stainless Steel	416 Stainless Steel	Monel	Monel	Monel
Screwed Cap, Bolted Cap	Carbon Steel	Carbon Steel	Carbon Steel	Monel	Monel
Packed Cap, Sealing Plug	Carbon Steel	Carbon Steel	Carbon Steel	Monel	Monel
Plain Cap	Malleable Iron	Malleable Iron	Malleable Iron	Not Applicable	Not Applicable
Cap Bolt	Carbon Steel	Carbon Steel	Carbon Steel	Monel K500	Monel K500
Cap Set Screw	Carbon Steel	Carbon Steel	Carbon Steel	Not Applicable	Not Applicable
Cap Gasket	Soft Iron	Monel	Monel	Monel	Monel
Release Nut, Release Locknut	Carbon Steel	Carbon Steel	Carbon Steel	Monel	Monel
Lever, Lifting Fork	Malleable Iron	Malleable Iron	Malleable Iron	Malleable Iron <sup>5</sup>	Malleable Iron <sup>5</sup>
Lever Shaft, Packing Nut	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel
Packing	316 Stainless Steel <sup>6</sup>	316 Stainless Steel <sup>6</sup>	316 Stainless Steel <sup>6</sup>	316 Stainless Steel <sup>6</sup>	316 Stainless Steel <sup>6</sup>
Top Lever, Drop Lever	Malleable Iron	Malleable Iron	Malleable Iron	Not Applicable	Not Applicable
Gag	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
Sealing Plug Gasket	Soft Iron	Monel	Monel	Monel	Monel
Limit Washer (D-2 & E-2)	316 Stainless Steel	Monel	Monel	Monel	Monel
Conventional (Standard) Valve Components (-00)					
Bonnet Gasket	Soft Iron	Monel	Monel	Monel	Monel
Spindle	410 Stainless Steel	410 Stainless Steel	Monel	Monel	Monel
Eductor Tube	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel	Monel	Monel
Bonnet Plug	Carbon Steel	Carbon Steel	Carbon Steel	Monel	Monel
Bellows Valve Components (-30)					
Bonnet Gasket	Soft Iron	Soft Iron	Soft Iron	Monel	Monel
Spindle	410 Stainless Steel	410 Stainless Steel	410 Stainless Steel	Monel	Monel
Bellows	Inconel 625 LCF	Inconel 625 LCF	Monel	Monel	Monel
Bellows Nut, Bellows Flange	316L Stainless Steel	316L Stainless Steel	Monel	Monel	Monel
Bellows Gasket	Soft Iron	Monel	Monel	Monel	Monel

#### Notes:

- 1 The materials in **red** denote variation from standard material construction.
- 2 To specify valves, add material designation to the valve type, 1910L/M3 or 1910-30L/M3.
- 3 Nickel Copper Alloy (Per ASME Code Case 1750-22).
- 4 or Inconel X-750.
- 5 else Customer Specified.
- 6 with Flexible Graphite Filler (Spiral Wound).

# Materials (Contd.)

## Corrosive Service (Contd.)

### Corrosive Service, Hastelloy Material<sup>1&2</sup>

Component	Construction Variation			
	H1	H2	H3	H4
Common Components (-00 & -30)				
Base (1905-1918)	ASME SA216 WCC CS	ASME SA216 WCC CS	Nickel Alloy <sup>3</sup>	Nickel Alloy <sup>3</sup>
Base (1920-1928)	ASME SA217 WC6 AS	ASME SA217 WC6 AS	Nickel Alloy <sup>3</sup>	Nickel Alloy <sup>3</sup>
Base Plug (1905-1918), Cap Bolt	Carbon Steel	Carbon Steel	Hastelloy C	Hastelloy C
Base Plug (1920-1928)	316 Stainless Steel	316 Stainless Steel	Hastelloy C	Hastelloy C
Nozzle, Disc - Solid Metal Flat Seat	Hastelloy C	Hastelloy C	Hastelloy C	Hastelloy C
Adjusting Ring, Adjusting Ring Pin	316 Stainless Steel	Hastelloy C	Hastelloy C	Hastelloy C
Adjusting Ring Pin Gasket	Soft Iron	Monel	Monel	Monel
Disc - Thermodisc, Disc Retainer	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Disc Holder	316 Stainless Steel	Hastelloy C	Hastelloy C	Hastelloy C
Guide Gasket	Soft Iron	Monel	Monel	Monel
Bonnet	ASME SA216 WCC CS	ASME SA216 WCC CS	Nickel Alloy <sup>2</sup>	Nickel Alloy <sup>2</sup>
Bonnet Gasket	Soft Iron	Monel	Monel	Monel
Base Stud	ASME SA193 B7 AS	ASME SA193 B7 AS	Hastelloy C	Hastelloy C
Stud Nut	ASME SA194 2H CS	ASME SA194 2H CS	Hastelloy C	Hastelloy C
Spindle Retainer	Inconel X-750	Inconel X-750	Inconel X-750	Inconel X-750
Spring Washer	Carbon Steel	Carbon Steel	Carbon Steel	Hastelloy C
Spring (-450° to -76°F)	316 Stainless Steel	Not Applicable	Not Applicable	Not Applicable
Spring (-75° to 800°F)	Alloy Steel	Alloy Steel	Alloy Steel	Hastelloy C
Spring (801° to 1000°F)	Tungsten Steel <sup>4</sup>	Tungsten Steel <sup>4</sup>	Tungsten Steel <sup>4</sup>	Hastelloy C
Screwed Cap, Bolted Cap,	Carbon Steel	Carbon Steel	Hastelloy C	Hastelloy C
Packed Cap, Sealing Plug	Carbon Steel	Carbon Steel	Hastelloy C	Hastelloy C
Plain Cap	Malleable Iron	Malleable Iron	Not Applicable	Not Applicable
Cap Set Screw	Carbon Steel	Carbon Steel	Not Applicable	Not Applicable
Cap Gasket	Soft Iron	Monel	Monel	Monel
Release Nut, Release Locknut, Gag	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
Lever	Malleable Iron	Malleable Iron	Malleable Iron <sup>5</sup>	Malleable Iron <sup>5</sup>
Lifting Fork, Top Lever, Drop Lever	Malleable Iron	Malleable Iron	Malleable Iron	Malleable Iron
Lever Shaft, Packing Nut	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel
Packing	316 Stainless Steel <sup>6</sup>	316 Stainless Steel <sup>6</sup>	316 Stainless Steel <sup>6</sup>	316 Stainless Steel <sup>6</sup>
Sealing Plug Gasket	Soft Iron	Monel	Monel	Monel
Limit Washer (D-2 & E-2)	316 Stainless Steel	Hastelloy C	Hastelloy C	Hastelloy C
Standard Components (-00)				
Guide	316 Stainless Steel	Hastelloy C	Hastelloy C	Hastelloy C
Spindle	410 Stainless Steel	Hastelloy C	Hastelloy C	Hastelloy C
Adjusting Screw, Adjusting Screw Nut	416 Stainless Steel	Hastelloy C	Hastelloy C	Hastelloy C
Eductor Tube	316 Stainless Steel	316 Stainless Steel	Hastelloy C	Hastelloy C
Bonnet Plug	Carbon Steel	Carbon Steel	Hastelloy C	Hastelloy C
Bellows Components (-30)				
Guide	316 Stainless Steel	316 Stainless Steel	Hastelloy C	Hastelloy C
Spindle	410 Stainless Steel	410 Stainless Steel	Hastelloy C	Hastelloy C
Adjusting Screw, Adjusting Screw Nut	416 Stainless Steel	416 Stainless Steel	Hastelloy C	Hastelloy C
Bellows	Inconel 625 LCF	Hastelloy C	Hastelloy C	Hastelloy C
Bellows Nut, Bellows Flange	316L Stainless Steel	Hastelloy C	Hastelloy C	Hastelloy C
Bellows Gasket	Soft Iron	Monel	Monel	Monel

#### Notes:

- 1 The materials in red denote variation from standard material construction.
- 2 To specify valves, add material designation to the valve type, 1910L/H3 or 1910-30L/H3.
- 3 ASME SA494 CW12MW Nickel Alloy.
- 4 or Inconel X-750.
- 5 else Customer Specified.
- 6 with Flexible Graphite Filler (Spiral Wound).

# Materials (Contd.)

## Corrosive Service (Contd.)

Duplex Material <sup>1 &amp; 2</sup>		
Component	Construction Variation	
	D1	D2
Common Components (-00 & -30)		
Base (1905-1918)	ASME SA216 WCC Carbon Steel	ASME SA216 WCC Carbon Steel
Base (1920-1928)	ASME SA217 WC6 Alloy Steel	ASME SA217 WC6 Alloy Steel
Base Plug (1905-1918)	Carbon Steel	Carbon Steel
Base Plug (1920-1928)	316 Stainless Steel	316 Stainless Steel
Nozzle	Duplex ASME SA479 UNS 31803 <sup>3</sup>	Duplex ASME SA479 UNS 31803 <sup>3</sup>
Adjusting Ring	316 Stainless Steel	Duplex ASME SA479 UNS 31803 <sup>3</sup>
Adjusting Ring Pin	316 Stainless Steel	Duplex AS479 UNS S31803
Adjusting Ring Pin Gasket	Soft Iron	Monel
Disc - Solid Metal Flat Seat	Duplex ASME SA479 UNS 31803 <sup>3</sup>	Duplex ASME SA479 UNS 31803 <sup>3</sup>
Disc - Thermosdisc	Inconel X-750	Inconel X-750
Disc Retainer, Spindle Retainer	Inconel X-750	Inconel X-750
Disc Holder	316 Stainless Steel	Duplex ASME SA479 UNS 31803 <sup>3</sup>
Guide Gasket, Cap Gasket	Soft Iron	Monel
Bonnet	ASME SA216 WCC Carbon Steel	ASME SA216 WCC Carbon Steel
Base Stud	ASME SA193 B7 Alloy Steel	ASME SA193 B7 Alloy Steel
Stud Nut	ASME SA194 2H Carbon Steel	ASME SA194 2H Carbon Steel
Spring Washer	Carbon Steel	Carbon Steel
Spring (-20° to 800°F)	Alloy Steel	Alloy Steel
Spring (801° to 1000°F)	Tungsten Steel or Inconel X-750	Tungsten Steel or Inconel X-750
Screwed Cap, Bolted Cap, Packed Cap	Carbon Steel	Carbon Steel
Plain Cap	Malleable Iron	Malleable Iron
Cap Bolt	Carbon Steel	Carbon Steel
Cap Set Screw	Carbon Steel	Carbon Steel
Release Nut, Release Locknut, Gag	Carbon Steel	Carbon Steel
Lever	Malleable Iron	Malleable Iron
Lifting Fork	Malleable Iron	Malleable Iron
Lever Shaft, Packing Nut	410/416 Stainless Steel	410/416 Stainless Steel
Packing	316 Stainless Steel <sup>4</sup>	316 Stainless Steel <sup>4</sup>
Top Lever, Drop Lever	Malleable Iron	Malleable Iron
Sealing Plug	Carbon Steel	Carbon Steel
Sealing Plug Gasket	Soft Iron	Monel
Limit Washer (D-2 & E-2)	316 Stainless Steel	316 Stainless Steel
Conventional (Standard) Valve Material (-00)		
Guide	316 Stainless Steel	Duplex ASME SA479 UNS 31803 <sup>3</sup>
Bonnet Gasket	Soft Iron	Monel
Spindle	410 Stainless Steel	Duplex SA479 UNS S31803
Adjusting Screw, Adjusting Screw Nut	416 Stainless Steel	Duplex SA479 UNS S31803
Eductor Tube	316 Stainless Steel	316 Stainless Steel
Bonnet Plug	Carbon Steel	Carbon Steel
Bellows Valve Material (-30)		
Guide	316 Stainless Steel	316 Stainless Steel
Bonnet Gasket	Soft Iron	Soft Iron
Spindle	410 Stainless Steel	410 Stainless Steel
Adjusting Screw, Adjusting Screw Nut	416 Stainless Steel	416 Stainless Steel
Bellows	Inconel 625 LCF	Inconel 625 LCF
Bellows Nut, Bellows Flange	316L Stainless Steel	316L Stainless Steel
Bellows Gasket	Soft Iron	Monel

### Notes:

- 1 The materials in red denote variation from standard material construction.
- 2 To specify valves, add material designation to the valve type, 1910L/D2 or 1910-30L/D2.
- 3 or SA995 UNS J93345.
- 4 with Flexible Graphite Filler (Spiral Wound).



# Materials (Contd.)

## Corrosive Service (Contd.)

Duplex Material <sup>1 &amp; 2</sup>		
Component	Construction Variation	
	D3	D4
Common Components (-00 & -30)		
Base (1905-1918)	ASME SA995 CE8MN UNS J93345 Duplex SS	ASME SA995 CE8MN UNS J93345 Duplex SS
Base Plug (1905-1918)	Duplex ASME SA479 UNS 31803	Duplex ASME SA479 UNS 31803
Nozzle	Duplex ASME SA479 UNS 31803 <sup>3</sup>	Duplex ASME SA479 UNS 31803 <sup>3</sup>
Adjusting Ring	Duplex ASME SA479 UNS 31803 <sup>3</sup>	Duplex ASME SA479 UNS 31803 <sup>3</sup>
Adjusting Ring Pin	Duplex SA479 UNS S31803	Duplex SA479 UNS S31803
Adjusting Ring Pin Gasket	Monel	Monel
Disc - Solid Metal Flat Seat	Duplex ASME SA479 UNS 31803 <sup>3</sup>	Duplex ASME SA479 UNS 31803 <sup>3</sup>
Disc - Thermodisc	Inconel X-750	Inconel X-750
Disc Retainer, Spindle Retainer	Inconel X-750	Inconel X-750
Disc Holder	Duplex ASME SA479 UNS 31803 <sup>3</sup>	Duplex ASME SA479 UNS 31803 <sup>3</sup>
Guide Gasket, Cap Gasket	Monel	Monel
Bonnet	ASME SA995 CE8MN UNS J93345 Duplex	ASME SA995 CE8MN UNS J93345 Duplex
Base Stud	ASME SA193 B8M Alloy Steel	ASME SA193 B8M Alloy Steel
Stud Nut	ASME SA194 8M Carbon Steel	ASME SA194 8M Carbon Steel
Spring Washer	Carbon Steel	Duplex ASME SA479 UNS S31803
Spring (-20° to 800°F)	Alloy Steel	Inconel X-750
Spring (801° to 1000°F)	Tungsten Steel or Inconel X-750	Inconel X-750
Screwed Cap, Bolted Cap, Packed Cap	Duplex ASME SA479 UNS 31803 <sup>3</sup>	Duplex ASME SA479 UNS 31803 <sup>3</sup>
Plain Cap	Not Applicable	Not Applicable
Cap Bolt	ASTM A193 B8M Stainless Steel	ASTM A193 B8M Stainless Steel
Release Nut, Release Locknut, Gag	Carbon Steel	Carbon Steel
Lever	Malleable Iron else Customer Specified	Malleable Iron else Customer Specified
Lifting Fork	Malleable Iron	Malleable Iron
Lever Shaft, Packing Nut	410/416 Stainless Steel	410/416 Stainless Steel
Packing	316 Stainless Steel <sup>4</sup>	316 Stainless Steel <sup>4</sup>
Sealing Plug	Duplex ASME SA479 UNS S31803	Duplex ASME SA479 UNS S31803
Sealing Plug Gasket	Monel	Monel
Limit Washer (D-2 & E-2)	Duplex UNS S31803	Duplex UNS S31803
Conventional (Standard) Valve Material (-00)		
Guide	Duplex ASME SA479 UNS 31803 <sup>3</sup>	Duplex ASME SA479 UNS 31803 <sup>3</sup>
Bonnet Gasket	Monel	Monel
Spindle	Duplex SA479 UNS S31803	Duplex SA479 UNS S31803
Adjusting Screw, Adjusting Screw Nut	Duplex SA479 UNS S31803	Duplex SA479 UNS S31803
Eductor Tube	ASTM A789 <sup>5</sup>	ASTM A789 <sup>5</sup>
Bonnet Plug	Duplex ASME SA479 UNS S31803	Duplex ASME SA479 UNS S31803
Bellows Valve Material (-30)		
Guide	316 Stainless Steel	316 Stainless Steel
Bonnet Gasket	Monel	Monel
Spindle	410 Stainless Steel	410 Stainless Steel
Adjusting Screw, Adjusting Screw Nut	416 Stainless Steel	416 Stainless Steel
Bellows	Inconel 625	Inconel 625
Bellows Nut, Bellows Flange	Inconel 625	Inconel 625
Bellows Gasket	Monel	Monel

### Notes:

- 1 The materials in red denote variation from standard material construction.
- 2 To specify valves, add material designation to the valve type, 1910L/D2 or 1910-30L/D2.
- 3 or SA995 UNS J93345
- 4 with Flexible Graphite Filler (Spiral Wound)
- 5 or ASME SA789 SAF 2507 Super Duplex UNS S32750

# Materials (Contd.)

## Low Temperature

### Special Materials for Low Process Fluid Temperature<sup>1&2</sup>

Nomenclature	Construction Variation		
	L1 <sup>3</sup>	L2	L3
	-21 to -75°F (-29 to -59°C)	-76 to -150°F (-60 to -101°C)	-151 to -450°F (-102 to -268°C)
Common Components (-00 & -30)			
Base (1905-1918)	ASME SA351 CF8M <sup>4</sup>	ASME SA351 CF8M <sup>4</sup>	ASME SA351 CF8M <sup>4</sup>
Base Plug (1905-1918), Nozzle	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Ring, Adjusting Ring Pin, Guide	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Ring Pin Gasket, Sealing Plug Gasket	Monel	Monel	Monel
Guide Gasket, Bonnet Gasket, Cap Gasket	Monel	Monel	Monel
Disc - Solid Metal Flat Seat, Disc Holder	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel <sup>6</sup>
Disc - Thermodisc, Disc Retainer	Inconel X-750	Inconel X-750	Inconel X-750
Bonnet	ASME SA216 WCC CS	ASME SA351 CF8M	ASME SA351 CF8M
Base Stud	ASME SA193 B8M St.St.	ASME SA193 B8M St.St.	ASME SA193 B8M St.St.
Stud Nut	ASME SA194 8M St.St.	ASME SA194 8M St.St.	ASME SA194 8M St.St.
Spindle	410 Stainless Steel	316 Stainless Steel	316 Stainless Steel <sup>6</sup>
Spindle Retainer	Inconel X-750	Inconel X-750	Inconel X-750
Spring Washer	Carbon Steel	316 Stainless Steel	316 Stainless Steel <sup>6</sup>
Sealing Plug	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Spring (-450° to -76°F)	Not Applicable	316 Stainless Steel	316 Stainless Steel
Spring (-75° to 800°F)	Alloy Steel	Not Applicable	Not Applicable
Adjusting Screw	416 Stainless Steel	316 Stainless Steel	316 Stainless Steel <sup>6</sup>
Adjusting Screw Nut	416 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Screwed Cap, Bolted Cap, Packed Cap	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Plain Cap, Lifting Fork	Malleable Iron	316 Stainless Steel	316 Stainless Steel
Cap Bolt	Carbon Steel	316 Stainless Steel	ASME SA193 B8M St.St.
Cap Set Screw, Release Nut, Release Locknut	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Lever, Top Lever, Drop Lever	Malleable Iron	Malleable Iron	Malleable Iron
Lever Shaft, Packing Nut	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel
Packing	316 Stainless Steel <sup>5</sup>	316 Stainless Steel <sup>5</sup>	316 Stainless Steel <sup>5</sup>
Gag	Carbon Steel	Carbon Steel	Carbon Steel
Limit Washer (D-2 & E-2)	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Conventional (Standard) Components (-00)			
Eductor Tube	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Bonnet Plug	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Bellows Components (-30)			
Bellows	Inconel 625 LCF	Inconel 625 LCF	316L Stainless Steel
Bellows Nut, Bellows Flange	316L Stainless Steel	316L Stainless Steel	316L Stainless Steel
Bellows Gasket	Monel	Monel	Monel

#### Notes:

- 1 The materials in red denote variation from standard material construction.
- 2 To specify valves, add material designation to the valve type, 1910L/L2 or 1910-30L/L2.
- 3 Media temperature may impact valve temperature. Contact factory for assistance.
- 4 ASME SA352 LCC can be substituted for bases down to -50°F (-45.6°C) when requested.
- 5 with Flexible Graphite Filler (Spiral Wound).
- 6 With Titanium Nitride Coating.

# Materials (Contd.)

## Low Temperature (Contd.)

Special Materials for Low Ambient Temperatures <sup>1, 2 &amp; 3</sup> (to -50°F or -45°C)		
Component	Construction Variation	
	C1	C2 <sup>4</sup>
Common Components (-00 & -30)		
Base (1905-1918)	ASME SA352 LCC Carbon Steel	ASME SA351 CF8M Stainless Steel
Base Plug (1905-1918), Nozzle	316 Stainless Steel	316 Stainless Steel
Adjusting Ring, Adjusting Ring Pin	316 Stainless Steel	316 Stainless Steel
Adjusting Ring Pin Gasket, Guide Gasket	Soft Iron	Soft Iron
Disc - Solid Metal Flat Seat	316 Stainless Steel	316 Stainless Steel
Disc - Thermodisc	616 Stainless Steel	616 Stainless Steel
Disc Retainer, Spindle Retainer	Inconel X-750	Inconel X-750
Disc Holder, Guide, Spring Washer	316 Stainless Steel	316 Stainless Steel
Bonnet Gasket, Cap Gasket, Sealing Plug Gasket	Soft Iron	Soft Iron
Bonnet	ASME SA352 LCC Carbon Steel	ASME SA351 CF8M Stainless Steel
Base Stud	ASME SA193 B8M Stainless Steel	ASME SA193 B8M Stainless Steel
Stud Nut	ASME SA194 8M Stainless Steel	ASME SA194 8M Stainless Steel
Spindle	410 Stainless Steel	410 Stainless Steel
Spring (-50° to 800°F)	Alloy Steel	Alloy Steel
Adjusting Screw, Adjusting Screw Nut	416 Stainless Steel	416 Stainless Steel
Screwed Cap, Bolted Cap, Packed Cap	LCC Carbon Steel	LCC Carbon Steel
Plain Cap, Lever, Lifting Fork, Top Lever, Drop Lever	Malleable Iron	Malleable Iron
Cap Bolt, Gag, Sealing Plug	Carbon Steel	Carbon Steel
Cap Set Screw, Limit Washer (D-2 & E-2)	316 Stainless Steel	316 Stainless Steel
Release Nut, Release Locknut	Carbon Steel	Carbon Steel
Lever Shaft, Packing Nut	410/416 Stainless Steel	410/416 Stainless Steel
Packing	316 Stainless Steel <sup>5</sup>	316 Stainless Steel <sup>5</sup>
Conventional (Standard) Valve Components (-00)		
Eductor Tube	316 Stainless Steel	316 Stainless Steel
Bonnet Plug	316 Stainless Steel	316 Stainless Steel
Bellows Valve Components (-30)		
Bellows	Inconel 625 LCF	Inconel 625 LCF
Bellows Nut, Bellows Flange	316L Stainless Steel	316L Stainless Steel
Bellows Gasket	Soft Iron	Soft Iron

### Notes:

- 1 The materials in red denote variation from standard material construction.
- 2 Media temperature may impact valve temperature. Contact factory for assistance.
- 3 To specify valves, add material designation to the valve type, 1910L/C1 or 1910-30L/C1.
- 4 If impact testing is required, use the "C1" material variation.
- 5 with Flexible Graphite Filler (Spiral Wound).

# Materials (Contd.)

## High Temperature

### Special Materials for Low Process Fluid Temperature<sup>1 & 2</sup>

Component	T1		T2 <sup>3</sup> and 4
	1001 to 1200°F (538°C to 649°C)		1201 to 1500°F (649 to 815°C)
	Standard Valve Material (-00)	Bellows Valve Material (-30)	Standard Valve Material (-00)
Base(1920-1928)	ASME SA351 CF8M St.St.	ASME SA351 CF8M St.St.	ASME SA351 CF8M St.St. <sup>5</sup>
Base Plug(1920-1928), Nozzle	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Ring, Adjusting Ring Pin	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Adjusting Ring Pin Gasket, Guide Gasket	Monel	Monel	Monel
Disc - Solid Metal Flat Seat	316 Stainless Steel	316 Stainless Steel	Inconel X-750
Disc - Thermodisc, Disc Retainer	Inconel X-750	Inconel X-750	Inconel X-750
Disc Holder	316 Stainless Steel <sup>6</sup>	316 Stainless Steel <sup>6</sup>	316 Stainless Steel <sup>6</sup>
Guide	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel <sup>6</sup>
Bonnet <sup>7</sup>	ASME SA351 CF8M St.St.	ASME SA351 CF8M St.St.	ASME SA351 CF8M St.St.
Bonnet Gasket, Sealing Plug Gasket	Monel	Monel	Not Applicable
Base Stud	ASME SA193 B8M Alloy Steel	ASME SA193 B8M Alloy Steel	ASME SA193 B8M Alloy Steel
Stud Nut	ASME SA194 8M Carbon Steel	ASME SA194 8M Carbon Steel	ASME SA194 8M Carbon Steel
Spindle	410 Stainless Steel	410 Stainless Steel	316 Stainless Steel (Stellited)
Spindle Retainer	Inconel X-750	Inconel X-750	Inconel X-750
Spring Washer	Carbon Steel	Carbon Steel	410 Stainless Steel
Spring	Tungsten Steel or Inconel X-750	Tungsten Steel or Inconel X-750	Tungsten Steel or Inconel X-750
Adjusting Screw	416 Stainless Steel	416 Stainless Steel	416 Stainless Steel
Adjusting Screw Nut	416 Stainless Steel	416 Stainless Steel	416 Stainless Steel
Screwed Cap, Bolted Cap, Packed Cap	Carbon Steel	Carbon Steel	Carbon Steel
Plain Cap, Cap Bolt, Gag, Sealing Plug	Carbon Steel	Carbon Steel	Carbon Steel
Cap Set Screw	Carbon Steel	Carbon Steel	Malleable Iron
Cap Gasket	Monel	Monel	Not Applicable
Release Nut, Release Locknut	Carbon Steel	Carbon Steel	Carbon Steel
Lever, Lifting Fork, Top Lever, Drop Lever	Malleable Iron	Malleable Iron	Malleable Iron
Lever Shaft, Packing Nut	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel
Packing	316 Stainless Steel <sup>8</sup>	316 Stainless Steel <sup>8</sup>	316 Stainless Steel <sup>8</sup>
Eductor Tube, Bonnet Plug	316 Stainless Steel	Not Applicable	Not Applicable
Limit Washer (D-2 & E-2)	316 Stainless Steel	316 Stainless Steel	316 Stainless Steel
Bellows	Not Applicable	Inconel 625 LCF	Inconel 625 LCF
Bellows Nut, Bellows Flange	Not Applicable	Inconel 625	Inconel 625
Bellows Gasket	Not Applicable	Monel	Monel
Deflector Plate (Not Shown)	Not Applicable	Not Applicable	316 Stainless Steel

#### Notes:

- 1 The materials in red denote variation from standard material construction.
- 2 To specify valves, add material designation to the valve type, 1920L/T2 or 1920-30L/T2.
- 3 All T2 valves have ANSI Class 300 outlet flanges.
- 4 Consult factory for temperatures above 1500°F (815°C).
- 5 Carbon content must be 0.04% or higher.
- 6 Glide-Aloy Coated.
- 7 Slotted Yoke Bonnet for T2. Slotted Bonnet not available for liquid service.
- 8 with Flexible Graphite Filler (Spiral Wound).

# Materials (Contd.)

## 1900 Valves for Lethal Service

In some industries served by Consolidated, there are lethal service applications. These applications require special consideration as detailed below. Should you feel that your application may be for lethal service, please review this information. “Lethal Service” should be prominently indicated in your discussions, inquiries, or purchase orders.

### I. Definition

ASME B & PVC, Section VIII (Division 1) states that it is the responsibility of the user to state that the valve will be in lethal service.

#### IMPORTANT:

Consolidated does not determine if a fluid is lethal. The customer must specify the fluid is lethal and his paperwork should be clearly stamped, identifying the application as a lethal fluid.

#### The ASME Code definition is as follows:

Lethal Substance - Poisonous gases or liquids of such a nature that a very small amount of the gas or the vapor of the liquid, mixed or unmixed with air, is dangerous to life when inhaled.

ASME B31.3, a chemical plant and petroleum refining piping standard, supplies a similar definition, which they call a “Category M Fluid Service”.

### II. Valve Requirements for Lethal Service Application

- A. Only closed bonnet valves with a screwed or bolted cap or packed lever can be used for lethal service.
- B. Valve model numbers that are acceptable for lethal service after modification are 1905/1910 conventional and bellows flanged valves.
- C. It is recommended that a soft seat design be used for improved tightness.
- D. When service temperature exceeds 450°F (232°C), bolting material review is required by Dresser Measurement Engineering.
- E. Use non-sparking material for flammable media. Examples are Bronze, 316 Stainless Steel, and Monel.

### III. Base, Bonnet, and Cap Casting Requirements

- A. Each casting requires 100% visual inspection
- B. Each casting requires complete surface examination either by magnetic particle for steel castings or liquid penetrant for stainless castings.
- C. Each casting shall have radiographic examination.
- D. All repairs to base, bonnet, and cap castings must be documented.
- E. All threads must be inspected for continuity of threads
- F. Hydrotest hold time for ten (10) minutes.
- G. The base drain plug is to be sealed by seal welding a plug of the same material as the base.
- H. The bonnet vent is to be sealed in accordance with paragraph G for conventional valves (non-bellows). Bellows valves are to have the vent connection vented to a safe location.

### IV. Additional Requirements

- A. Each bellows requires a mass spectrometer leak test to  $1 \times 10^{-7}$  cc/sec to be imposed.
- B. It is necessary to seal the nozzle-base joint. The customer must state their preference between a seal weld or O-Ring joint, depending on conformance of their maintenance practice.
- C. The nozzle and disc require hydrotesting with a hold time for a minimum of ten (10) minutes.
- D. Cleaning procedures and lubricants used shall be acceptable for lethal service.
- E. Back pressure testing is required. Documentation of test is required.

# Materials (Contd.)

## O-Ring Selection

O-Ring Selection Table - Durometer

Valve Type	Set Pressure Range																			
	50 <sup>1</sup>				70 - 75 <sup>1</sup>				90 <sup>2</sup>				Teflon <sup>3</sup> (-300°F to 200°F) (-184.4 to 93.3°C)				Teflon <sup>3</sup> (201°F to 500°F) (93.9 to 260°C)			
	psig		barg		psig		barg		psig		barg		psig		barg		psig		barg	
	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.
1900D & E	5	75	0.34	5.17	76	800	5.24	55.16	801	2000	55.23	137.90	2000	6000	137.90	413.69	285	6000	19.65	413.69
1900F	5	75	0.34	5.17	76	800	5.24	55.16	801	2000	55.23	137.90	2000	6000	137.90	413.69	285	6000	19.65	413.69
1900G	5	75	0.34	5.17	76	780	5.24	53.78	781	1900	53.85	131.00	1900	3705	131.00	255.45	285	3705	19.65	255.45
1900H	5	75	0.34	5.17	76	780	5.24	53.78	781	1900	53.85	131.00	1900	2750	131.00	189.61	285	2750	19.65	189.61
1900J	5	75	0.34	5.17	76	780	5.24	53.78	781	1900	53.85	131.00	1900	2700	131.00	186.16	285	2700	19.65	186.16
1900K	5	75	0.34	5.17	76	580	5.24	39.99	581	1400	40.06	96.53	1400	2220	96.53	153.06	250	2220	17.24	153.06
1900L	5	75	0.34	5.17	76	580	5.24	39.99	581	1400	40.06	96.53	1400	1500	96.53	103.42	155	1500	10.69	103.42
1900M	5	75	0.34	5.17	76	580	5.24	39.99	581	1100	40.06	75.84	–	–	–	–	140	1100	9.65	75.84
1900N	5	75	0.34	5.17	76	580	5.24	39.99	581	1000	40.06	68.95	–	–	–	–	90	1000	6.21	68.95
1900P	5	70	0.34	4.83	71	500	4.90	34.47	501	1000	34.54	68.95	–	–	–	–	75	1000	5.17	68.95
1900Q	5	70	0.34	4.83	71	420	4.90	28.96	421	600	29.03	41.37	–	–	–	–	80	600	5.52	41.37
1900R	5	50	0.34	3.45	51	420	3.52	28.96	421	600	29.03	41.37	–	–	–	–	60	300	4.14	20.68
1900T	5	50	0.34	3.45	51	200	3.52	13.79	201	300	13.86	20.68	–	–	–	–	30	300	2.07	20.68
1900U	5	50	0.34	3.45	51	200	3.52	13.79	201	300	13.86	20.68	–	–	–	–	30	300	2.07	20.68
1900V	–	–	–	–	15	150	1.03	10.34	151	300	10.41	20.68	–	–	–	–	15	300	1.03	20.68
1900W	–	–	–	–	7	150	0.48	10.34	151	300	10.41	20.68	–	–	–	–	15	300	1.03	20.68

### Notes:

- 1 Maximum set pressure for silicone compounds is half of the maximum value.
- 2 The E962-90D O-Ring can be used in steam service in applications down to 15 psig (1.03 barg).
- 3 Teflon will not be supplied for conditions that deviate from these ranges.

# Materials (Contd.)

## O-Ring Selection (Contd.)

O-Ring Temperature Limits				
Materials	Durometer	Description <sup>1</sup>	Temp. Limits (°F)	Temp. Limits (°C)
Nitrile	50	N299-50 or N1009-50	-45 to +225	-43 to +107
	70	N674-70	-40 to +250	-40 to +121
	90	N552-90	-40 to +250	-40 to +121
	70 <sup>2</sup>	N1173-70	-25 to +300	-31 to +149
Ethylene/Propylene	50	E1100-50 or E981-50	-65 to +212	-53 to +100
	70	E603-70	-65 to +212	-53 to +100
	75 & 80 <sup>3</sup>	E740-75 & E515-80	-70 to +250	-57 to +121
	90	E962-90 <sup>4</sup>	-70 to +500	-57 to +260
	75 <sup>5</sup>	E962-75	-60 to +250/400	-51 to +121/204
Fluorocarbon	50	V986-50	-15 to +400	-26 to +204
	75	V747-75 or V884-75	-15 to +400	-26 to +204
	90	V894-90 or V709-90	-15 to +400	-26 to +204
Neoprene	50	C267-50	-45 to +300	-43 to +149
	70	C944-70 or C873-70	-45 to +300	-43 to +149
Silicone	50	S595-50	-65 to +437	-53 to +225
	70	S604-70	-65 to +437	-53 to +225
Teflon	N/A	Teflon	-300 to +505	-184 to +263
Kalrez <sup>6</sup>	82	1050LF	-42 to +550	-41 to +288
	75	4079	-58 to +601	-50 to +316
	91	3018	-35 to +601	-37 to +316
	65	1058	-40 to +500	-40 to +260

### Notes:

- 1 Contact factory for O-Ring selection for various fluids.
- 2 Consult factory before using. For use with freon 134A/ester oil service.
- 3 Set pressure ranges from durometer table for 70-75 Durometer shall apply to these compounds (for nuclear service, radiation environment).
- 4 EPR962-90D can be used on steam service to lower pressure limit of 15 psig (1.03 barg).
- 5 Can be used upto 400°F (204°C) for Steam Applications.
- 6 Consult factory before selecting.



# Accessories

## 1900 Caps, Levers, and Accessories

### Lifting Mechanisms

The purpose of the lifting mechanism is to open the valve when the pressure under the valve disc is lower than the set pressure. These mechanisms are made in three basic types: plain lever, packed lever, and air-operated lifting device. The lifting lever may be used as follows:

- (1) to lift the disc from the valve seat periodically during the operation of equipment to be sure that the disc holder is not frozen in the guide as a result of corrosion, coking, sulphur deposits, etc. This will ensure protection of the unit at all times. Operating pressure under the disc should be approximately 75% of the set pressure when lifting in accordance with the ASME Code; otherwise the lever assembly could be damaged.
- (2) to remove foreign particles which are sometimes trapped under the seat as the valve closes. Immediate cleaning of the valve seat with the pressure of the media, by use of the lifting lever, will correct an otherwise leaking valve, save maintenance costs at a later date and in some cases will avoid a shutdown of the equipment.
- (3) to vent equipment to the atmosphere or discharge piping.

### Plain Lever

This lever assembly is not pressure-tight and should not be used where back pressure is present or where the escape of vapor discharging from an open valve is undesirable around the lever assembly.

### Packed Lever

As indicated by the name, this lifting lever assembly is packed around the lever shaft, so that leakage will not occur around the upper part of the valve when the valve is open or when back pressure is present. The packed lifting lever should be used when positive protection against leakage is required.

### Bolted Cap

CONSOLIDATED Standard Safety Relief Valves are supplied with screwed caps but bolted caps are available.

### Gag

The purpose of the gag is to hold the safety relief valve closed while equipment is being subjected to an operational hydrostatic test. This is the only purpose for which the gag is intended, and it can be accomplished by pulling the gag hand-tight. Force should never be used. The gag should never be left in the valve during the operation of the equipment. It should be removed each time after using and hung in a safe, convenient location and the sealing plug reinstated and properly torqued.

#### ASME B & PVC, Section VIII, Lever

ASME Codes require that a lifting lever must be supplied with the valve for steam, air, and hot water service over 140°F (60°C) applications. However, it need not be a sealed lifting mechanism. The ASME Codes do recommend that sealed lifting mechanisms be used; however, they are not mandatory. The lifting lever may be omitted under Code Case 2203. However, Dresser requires that all orders for pressure relief valves without levers or blowdown valves for steam, air, and water over 140°F (60°C) state specifically that the valves are being purchased per Code Case 2203. The purchaser is responsible for obtaining jurisdictional authorization for use of Code Case 2203.

Thermal Relief Valves: When ASME Code stamped valves are used for thermal relief applications, the ASME Code guidelines shall be followed in regard to lifting levers.

# Accessories (Contd.)

## 1900 Caps, Levers, and Accessories (Contd.)


### Air-Operated Lifting Device

The Air Operated Lifting Device uses an air cylinder to obtain lifting power to open the valve from a remote control station. Normal operation of the safety relief valve is independent of the lifting device.

Please specify actual required conditions, otherwise the device will be supplied to operate with at least 75% of set pressure under the disc in accordance with the ASME Code.

Requirements for special application: valve size, set pressure, minimum pressure at which the valve must be kept open, air pressure for operator, or electrical characteristics for solenoid operation.

Regulated air, not to exceed 100 psig, is required for operation.

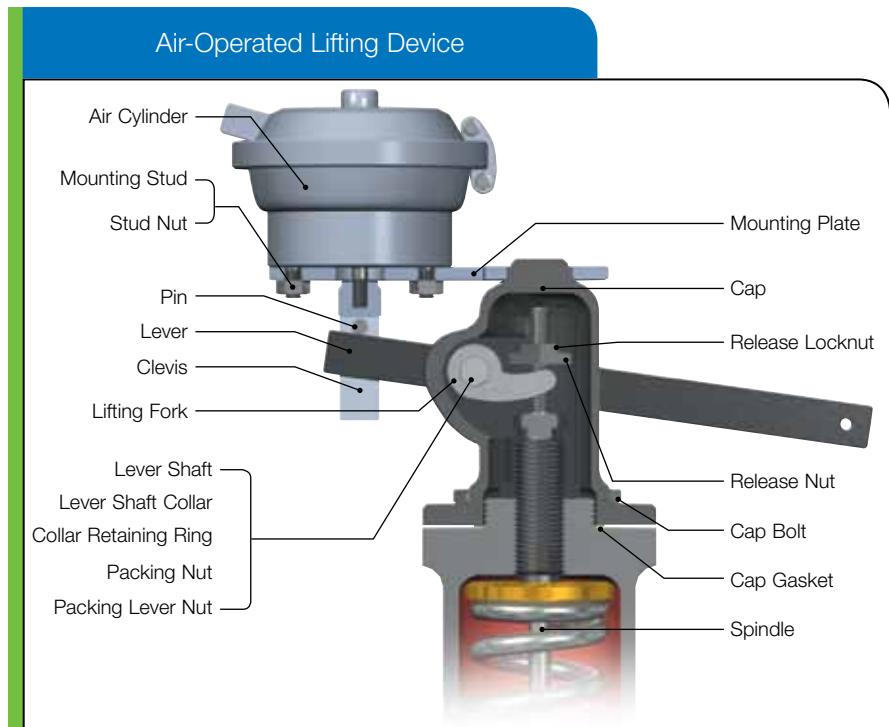

### Valve Position Indicators

Valve Position Indicators in general, are a micro switch apparatus used for remote indication of the opening of a Safety Relief Valve. It is designed to activate warning devices such as control panel lights or auditory indicators. This option enhances control function of operators located in remote control stations. Please advise voltage requirements for proper selection of micro switch when ordering.



**Slotted Bonnet**



**Steam Jacket**



**Vent Bug Screen**  
(Available in 1900-30 bellows valve only)




**Forged Body**  
(Severe Service, Special Materials, Special Dimensions)

# Accessories (Contd.)



## Packed Lever

As indicated by the name, this lifting lever assembly is packed around the lever shaft, so that leakage will not occur around the upper part of the valve when the valve is open or when back pressure is present. The packed lifting lever should be used when positive protection against leakage is required.

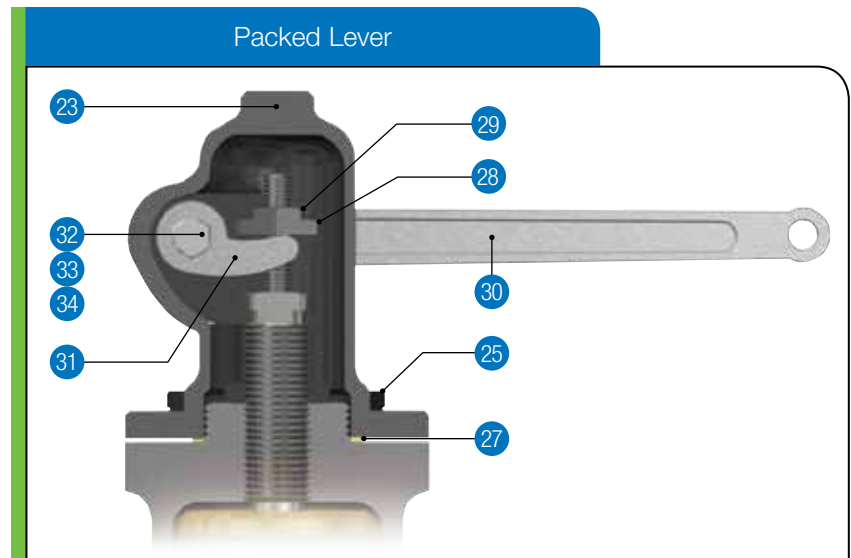

## Plain Lever


This lever assembly is not pressure-tight and should not be used where back pressure is present or where the escape of vapor discharging from an open valve is undesirable around the lever assembly. It is designed with either a one or two-piece lever as illustrated below. The design is based on valve size and/or valve set pressure.

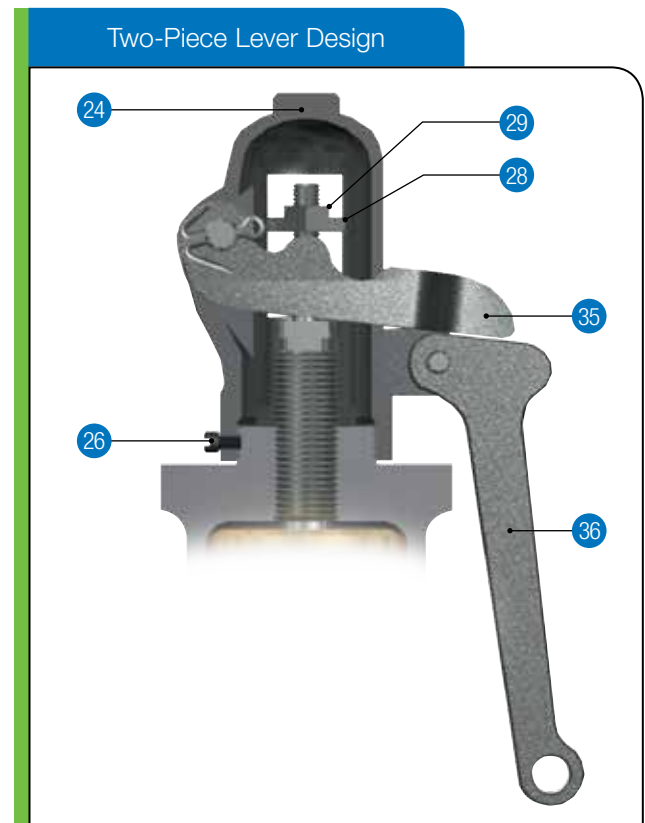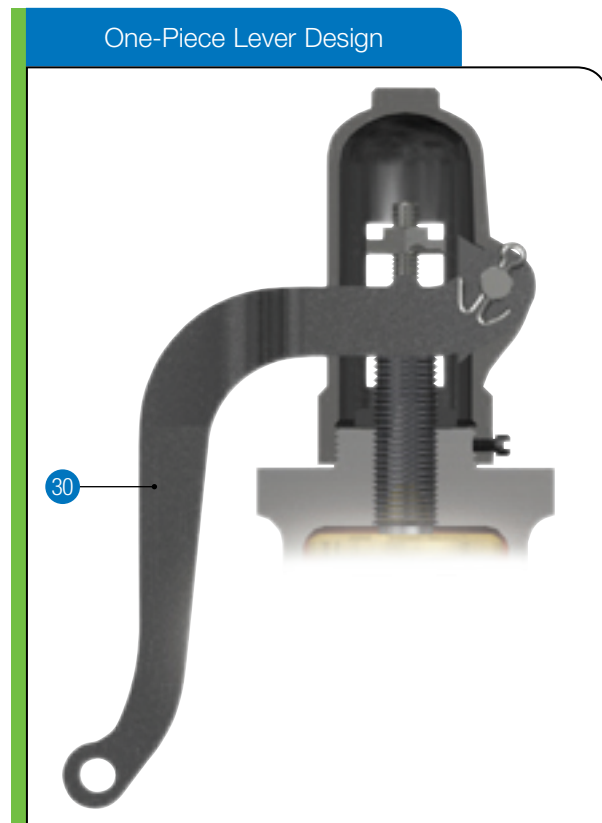


# Accessories (Contd.)

## Bolted Cap

Consolidated standard safety relief valves are supplied with screwed caps, but bolted caps are available.

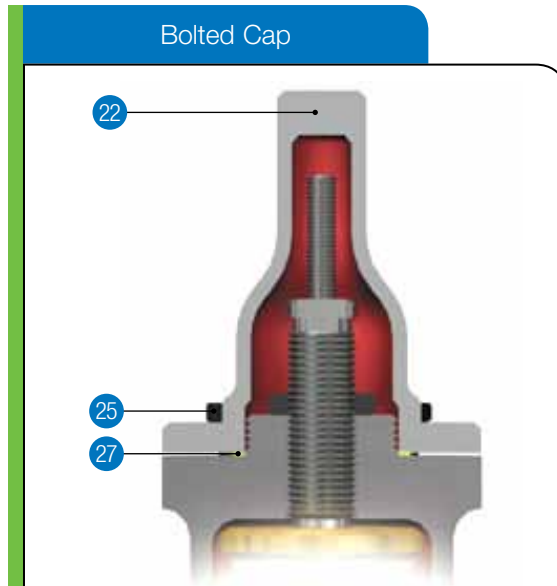

## Cap with Gag

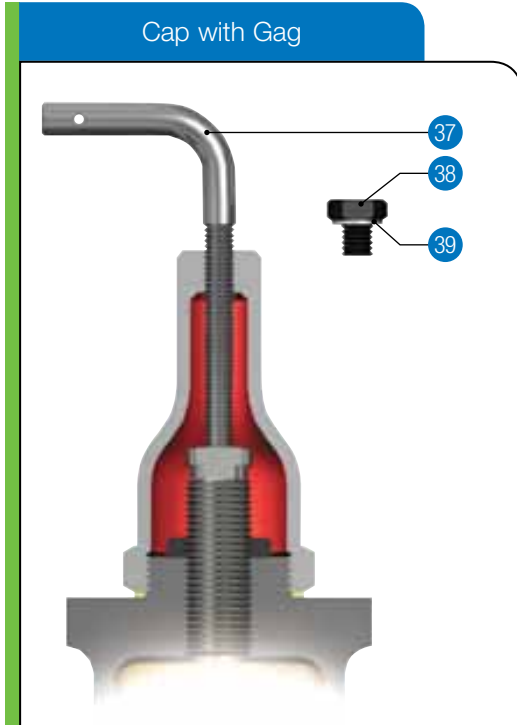

The purpose of the gag is to hold the safety relief valve closed while equipment is being subjected to an operational hydrostatic test. This is the only purpose for which the gag is intended, and it can be accomplished by pulling the gag hand-tight. Force should never be used. The gag should never be left in the valve during the operation of the equipment. It should be removed each time after using and hung in a safe, convenient location.

# Accessories (Contd.)

## Cap and Lever Construction

Standard, Alloy, Monel, Hastelloy and Duplex Material<sup>1</sup>

Cap Type	Component	Construction Variation			
		Std., A1, A2, H1, H2, L1, M1, MB, M2, D1, D2, S2, T1, T2	Alloy 20 A3 and A4	Hastelloy H3 and H4	HF Alky HA
Packed Lever	23 Cap	Carbon Steel	Alloy 20	Hastelloy C	Carbon Steel
	25 Cap Bolts	Carbon Steel	Alloy 20	Hastelloy C	Carbon Steel
	27 Cap Gasket	Soft Iron <sup>3</sup>	Monel	Monel	Monel
	30 Packed Lever	Malleable Iron	Malleable Iron	Malleable Iron	Malleable Iron
	32 Lever Shaft	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel	410/416 Stainless Steel
	33 Packing	316 Stainless Steel <sup>2</sup>	316 Stainless Steel <sup>2</sup>	316 Stainless Steel <sup>2</sup>	316 Stainless Steel <sup>4</sup>
	34 Packing Nut	410/416 SS	410/416 SS	410/416 SS	410/416 SS
	31 Lifting Fork	Malleable Iron	Malleable Iron	Malleable Iron	Malleable Iron
	28 Release Nut	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
	29 Release Lock Nut	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
Plain Lever	24 Cap	Malleable Iron	N/A	N/A	Malleable Iron
	26 Cap Set Screw	Carbon Steel	N/A	N/A	Carbon Steel
	35 Top Lever	Malleable Iron	N/A	N/A	Malleable Iron
	36 Drop Lever	Malleable Iron	N/A	N/A	Malleable Iron
	28 Release Nut	Carbon Steel	N/A	N/A	Carbon Steel
	29 Release Lock Nut	Carbon Steel	N/A	N/A	Carbon Steel
	30 Plain Lever (One Piece)	Malleable Iron	N/A	N/A	Malleable Iron
Bolted Cap	22 Cap	Carbon Steel	Alloy 20	Hastelloy C	Carbon Steel
	25 Cap Bolts	Carbon Steel	Alloy 20	Hastelloy C	Carbon Steel
	27 Cap Gasket	Soft Iron <sup>3</sup>	Monel	Monel	Monel
Gag	37 Gag Bolt	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
	38 Sealing Plug	Carbon Steel	Alloy 20	Hastelloy C	Carbon Steel
	39 Plug Gasket <sup>3</sup>	Soft Iron	Monel	Monel	Monel

### Notes:

- The materials in red denote variation from standard material construction.
- with Flexible Graphite Filler (Spiral Wound).
- Gasket material is Monel for A2, H2, MB, M2, D2 and S2 construction.
- or Graphlock

# Accessories (Contd.)

## Cap and Lever Construction (Contd.)

Monel, Stainless, and Low Temperature Material<sup>1</sup>

Cap Type	Component		Construction Variation			
			Monel	Duplex	Stainless Steel	Low Temperature
			M3 and M4	D3 and D4	S3 and S4	L2 and L3
Packed Lever	23	Cap	Monel	Duplex ASME SA479 <sup>3</sup>	316 Stainless Steel	316 Stainless Steel
	25	Cap Bolts	Monel K500	ASTM A193 B8M Stainless Steel	ASME SA193 B8M SS	ASME SA193 B8M SS
	27	Cap Gasket	Monel	Monel	Monel	Monel
	30	Packed Lever	Malleable Iron	Malleable Iron	Malleable Iron	Malleable Iron
	32	Lever Shaft	410/416 St.St.	410/416 Stainless Steel	316 Stainless Steel	410/416 St.St.
	33	Packing	316 Stainless Steel <sup>2</sup>	316 Stainless Steel <sup>2</sup>	316 Stainless Steel <sup>2</sup>	316 Stainless Steel <sup>2</sup>
	34	Packing Nut	410/416 St.St.	410/416 Stainless Steel	316 Stainless Steel	410/416 St.St.
	31	Lifting Fork	Malleable Iron	Malleable Iron	316 Stainless Steel	316 Stainless Steel
	28	Release Nut	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
	29	Release Lock Nut	Carbon Steel	Carbon Steel	316 Stainless Steel	316 Stainless Steel
Plain Lever	24	Cap	N/A	N/A	316 Stainless Steel	316 Stainless Steel
	26	Cap Set Screw	N/A	N/A	B8M Stainless Steel	316 Stainless Steel
	35	Top Lever	N/A	N/A	Malleable Iron	Malleable Iron
	36	Drop Lever	N/A	N/A	Malleable Iron	Malleable Iron
	28	Release Nut	N/A	N/A	Carbon Steel	Carbon Steel
	29	Release Lock Nut	N/A	N/A	Carbon Steel	Carbon Steel
	30	Plain Lever (One Piece)	N/A	N/A	Malleable Iron	Malleable Iron
Bolted Cap	22	Cap	Monel	Duplex ASME SA479 <sup>3</sup>	316 Stainless Steel	316 Stainless Steel
	25	Cap Bolts	Monel K500	ASTM A193 B8M Stainless Steel	ASME SA193 B8M SS	ASME SA193 B8M SS
	27	Cap Gasket	Monel	Monel	Monel	Monel
Gag	37	Gag Bolt	Carbon Steel	Carbon Steel	Carbon Steel	Carbon Steel
	38	Sealing Plug	Monel	Duplex ASME SA479 UNS S31803	316 Stainless Steel	316 Stainless Steel
	39	Plug Gasket	Monel	Monel	Monel	Monel

### Notes:

- 1 The materials in red denote variation from standard material construction.
- 2 with Flexible Graphite Filler (Spiral Wound).
- 3 Duplex ASME SA479 UNS 31803 or SA995 UNS J93345

# Accessories (Contd.)

## Bolt-on Jackets

### Jacketing of Relief Valves:

Consolidated valve offers simple solutions to your heating problems: **Bolt-on Jackets**.

Viscous materials that freeze or harden in relief valve nozzles create hazardous conditions. Process pipe jacketing or tracing may not provide sufficient heat to the area in and around the relief valve seat. During a pressure surge, some of the solid materials may stick in and around the seating area, keeping the valve from functioning and re-seating properly. This would result in leakage around the valve seating surface.

The solution to this problem is the Bolt-on Jacket. This jacket is a two piece aluminum casting with a steel pressure chamber embedded in the aluminum jacket casting. The pressure chamber is fabricated of standard pressure vessel materials for various heating fluids and service temperatures. The chamber is designed and tested in accordance with the ASME B & PVC, Section VIII, Div. I. The jacket casting conducts heat from the pressure chamber and rapidly distributes it evenly over the outer surface of the relief valve.

The aluminum casting distributes heat only. It carries no pressure load at any time. Heating fluid is transferred from one half of the jacket to the other by an external connector. A thin layer of heat transfer cement is used between the jacket and the relief valve to promote effective heat transfer by filling any air gaps between the jacket and the relief valve.

Bolt-on Jacket halves bolt together for quick installation and unbolt for ready access to the relief valve for easy maintenance. The jackets cover the jacket fully from flange to flange providing uniform heat to all process wetted surfaces. Standard service ratings for the jacket are 150 psig and 500°F. Higher ratings are available upon request.

Bolt-on Jackets may be ordered with adjacent flange coverage and with a variety of heating medium connections. Canadian Registration is available for all provinces.

Bolt-on Jackets are operating successfully on relief valves in many different process service applications world wide. Customers should consider jacketing the relief valves whenever the adjacent vessel or piping is heated in some manner. The following lists process applications that typically require jacketing of the relief valve:

- Acrylic Acid
- Ammonium Nitrate
- Coal Tars
- Caprolactam
- Cyanuric Chloride
- DMT
- DNT
- Fluoropolymers
- LLDPE
- Olefins
- Phosphorous
- Polypropylene
- Polystyrene Resins
- Phthalic Anhydride
- Sulphuric Acid
- Sulphur Dioxide
- Some Surfactants
- Tall Oils
- TMA

Typical Bolt-on Jacket



To ensure we provide the proper jacket coverage; please answer the following questions:

- (1) Is the process operating at elevated temperatures?
- (2) What is the process?
- (3) What is the temperature of the process being maintained?
- (4) What heating medium is being used in your jacket? What pressure and temperature is this medium?
- (5) What type of jacket connections are required?
- (6) How is the temperature being maintained on the process piping and other equipment (valves, pumps, meters, etc.)?


The relief valve will probably need a Bolt-on Jacket if it is operating in one of the process services listed above or if the adjacent piping and equipment is heated.

Contact the Factory for assistance.



# Dimensions & Weights

## 1900 Flanged Series

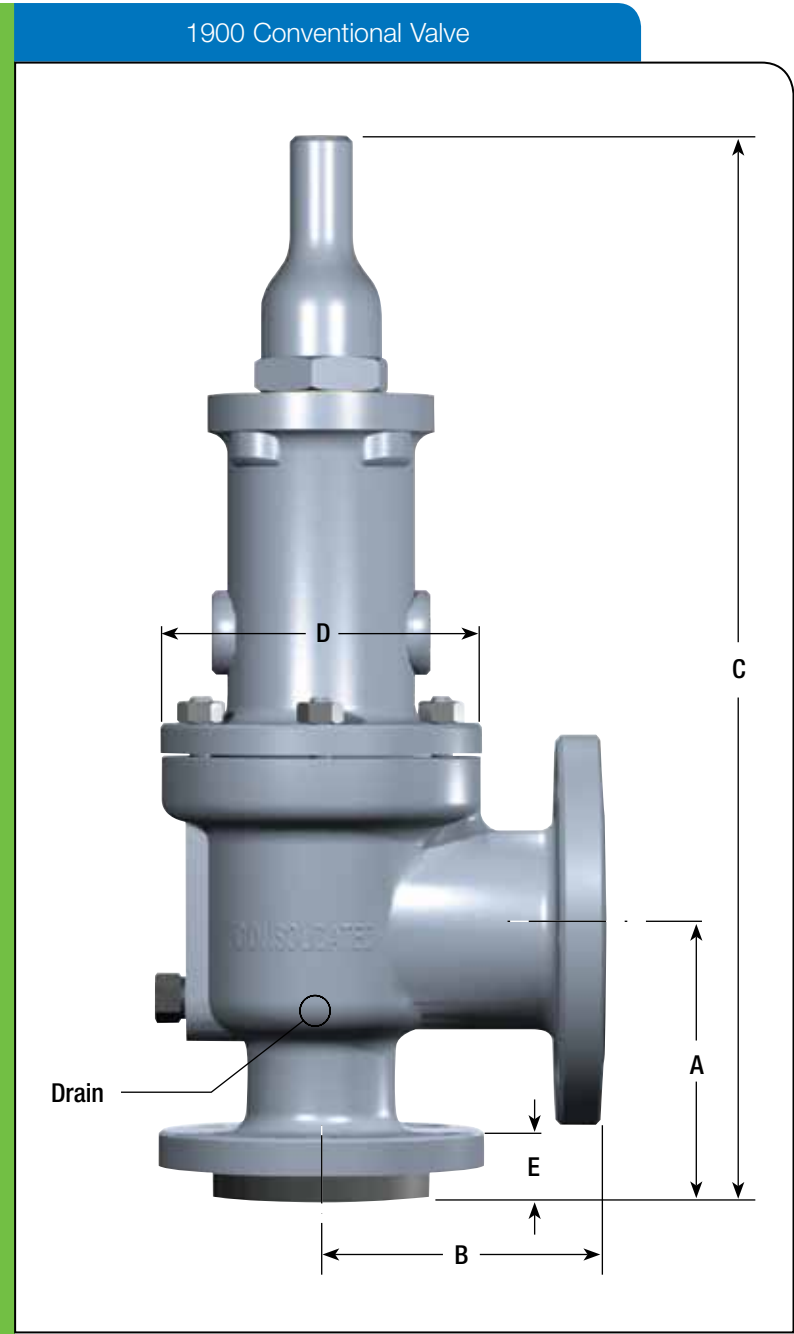

This table applies to the standard 1900 Series regardless of materials of construction.

The table provides overall dimensions for standard valve size and pressure class offerings as shown on pages 1900.5-1900.9.

If the valve you are reviewing has an inlet or outlet size different from standard valve offerings, the dimensions “A” through “E” and weight may not apply. Consult factory for non-standard valve dimensions.

**Note:**

Inlet and outlet combinations as well as orifices sizes shown in the following tables are compliant with API Standard 526, Sixth Edition, 2009. For replacement valves that do not comply with this edition, contact the factory for verification of dimensions and inlet and outlet combinations. The U, V & W orifice valves are not an API approved orifice size.


# Dimensions & Weights (Contd.)

Valve Data - D Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
	in.	mm	in.	mm	Standard		Bellows		in.	mm	in.	mm	lb.	kg
					in.	mm	in.	mm						
1905	4.13	104.9	4.50	114.3	17.00	431.8	18.00	457.2	5.44	138.2	1.13	28.7	40	18.1
1906	4.13	104.9	4.50	114.3	17.00	431.8	18.00	457.2	5.44	138.2	1.38	35.1	40	18.1
1910	4.13	104.9	4.50	114.3	17.50	444.5	18.50	469.9	5.44	138.2	1.38	35.1	50	22.7
1912	4.13	104.9	4.50	114.3	18.25	463.6	19.25	489.0	6.31	160.3	1.38	35.1	55	24.9
1914	4.13	104.9	5.50	139.7	21.75	552.5	22.75	577.9	7.81	198.4	1.94	49.3	95	43.1
1916	4.13	104.9	5.50	139.7	21.75	552.5	22.75	577.9	7.81	198.4	1.94	49.3	95	43.1
1918	5.50	139.7	7.00	177.8	26.50	673.1	27.50	698.5	8.88	225.6	2.44	62.0	150	68.0
1920	4.13	104.9	4.50	114.3	17.50	444.5	18.50	469.9	5.44	138.2	1.38	35.1	50	22.7
1922	4.13	104.9	4.50	114.3	17.50	444.5	18.50	469.9	5.44	138.2	1.38	35.1	50	22.7
1924	4.13	104.9	5.50	139.7	21.75	552.5	22.75	577.9	7.81	198.4	1.94	49.3	95	43.1
1926	4.13	104.9	5.50	139.7	21.75	552.5	22.75	577.9	7.81	198.4	1.94	49.3	95	43.1
1928	5.50	139.7	7.00	177.8	26.50	673.1	27.50	698.5	8.88	225.6	2.44	62.0	150	68.0

Valve Data - E Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
	in.	mm	in.	mm	Standard		Bellows		in.	mm	in.	mm	lb.	kg
					in.	mm	in.	mm						
1905	4.13	104.9	4.50	114.3	17.00	431.8	18.00	457.2	5.44	138.2	1.13	28.7	40	18.1
1906	4.13	104.9	4.50	114.3	17.00	431.8	18.00	457.2	5.44	138.2	1.38	35.1	40	18.1
1910	4.13	104.9	4.50	114.3	17.50	444.5	18.50	469.9	5.44	138.2	1.38	35.1	50	22.7
1912	4.13	104.9	4.50	114.3	18.25	463.6	19.25	489.0	6.31	160.3	1.38	35.1	55	24.9
1914	4.13	104.9	5.50	139.7	21.75	552.5	22.75	577.9	7.81	198.4	1.94	49.3	95	43.1
1916	4.13	104.9	5.50	139.7	21.75	552.5	22.75	577.9	7.81	198.4	1.94	49.3	95	43.1
1918	5.50	139.7	7.00	177.8	26.50	673.1	27.50	698.5	8.88	225.6	2.44	62.0	150	68.0
1920	4.13	104.9	4.50	114.3	17.50	444.5	18.50	469.9	5.44	138.2	1.38	35.1	50	22.7
1922	4.13	104.9	4.50	114.3	17.50	444.5	18.50	469.9	5.44	138.2	1.38	35.1	50	22.7
1924	4.13	104.9	5.50	139.7	21.75	552.5	22.75	577.9	7.81	198.4	1.94	49.3	95	43.1
1926	4.13	104.9	5.50	139.7	21.75	552.5	22.75	577.9	7.81	198.4	1.94	49.3	95	43.1
1928	5.50	139.7	7.00	177.8	26.50	673.1	27.50	698.5	8.88	225.6	2.44	62.0	150	68.0

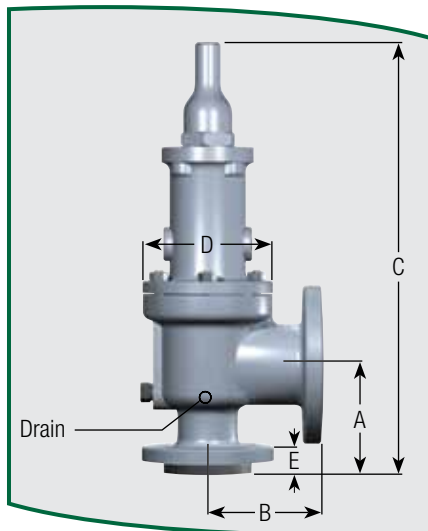


# Dimensions & Weights (Contd.)

Valve Data - F Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
					Standard		Bellows							
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg
1905	4.88	124.0	4.75	120.7	17.75	450.9	18.75	476.3	5.44	138.2	1.25	31.8	40	18.1
1906	4.88	124.0	4.75	120.7	17.75	450.9	18.75	476.3	5.44	138.2	1.50	38.1	45	20.4
1910	4.88	124.0	6.00	152.4	18.25	463.6	19.25	489.0	5.44	138.2	1.56	39.6	50	22.7
1912	4.88	124.0	6.00	152.4	19.00	482.6	20.00	508.0	6.31	160.3	1.56	39.6	60	27.2
1914	4.88	124.0	6.50	165.1	22.50	571.5	23.50	596.9	7.81	198.4	1.94	49.3	100	45.4
1916	4.88	124.0	6.50	165.1	22.50	571.5	23.50	596.9	7.81	198.4	1.94	49.3	100	45.4
1918	5.50	139.7	7.00	177.8	26.50	673.1	27.50	698.5	8.88	225.6	2.44	62.0	150	68.0
1920	4.88	124.0	6.00	152.4	18.25	463.6	19.25	489.0	5.44	138.2	1.56	39.6	50	22.7
1922	4.88	124.0	6.00	152.4	18.25	463.6	19.25	489.0	5.44	138.2	1.56	39.6	50	22.7
1924	4.88	124.0	6.50	165.1	22.50	571.5	23.50	596.9	7.81	198.4	1.94	49.3	100	45.4
1926	4.88	124.0	6.50	165.1	22.50	571.5	23.50	596.9	7.81	198.4	1.94	49.3	100	45.4
1928	5.50	139.7	7.00	177.8	26.50	673.1	27.50	698.5	8.88	225.6	2.44	62.0	150	68.0

Valve Data - G Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
					Standard		Bellows							
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg
1905	4.88	124.0	7.75	196.9	17.75	450.9	19.00	482.6	5.44	138.2	1.25	31.8	55	24.9
1906	4.88	124.0	4.75	120.7	17.75	450.9	19.00	482.6	5.44	138.2	1.50	38.1	55	24.9
1910	4.88	124.0	6.00	152.4	18.25	463.6	19.50	495.3	5.44	138.2	1.56	39.6	60	27.2
1912	4.88	124.0	6.00	152.4	19.00	482.6	20.25	514.4	6.31	160.3	1.56	39.6	65	29.5
1914	4.88	124.0	6.50	165.1	22.50	571.5	23.75	603.3	7.81	198.4	1.94	49.3	95	43.1
1916	6.13	155.7	6.75	171.5	23.75	603.3	25.00	635.0	7.81	198.4	2.19	55.6	100	45.4
1918	6.13	155.7	6.75	171.5	23.75	603.3	25.00	635.0	7.81	198.4	2.69	68.3	110	49.9
1920	4.88	124.0	6.00	152.4	18.25	463.6	19.50	495.3	5.44	138.2	1.56	39.6	60	27.2
1922	4.88	124.0	6.00	152.4	19.00	482.6	20.25	514.4	6.31	160.3	1.56	39.6	65	29.5
1924	4.88	124.0	6.50	165.1	22.50	571.5	23.75	603.3	7.81	198.4	1.94	49.3	95	43.1
1926	6.13	155.7	6.75	171.5	23.75	603.3	25.00	635.0	7.81	198.4	2.19	55.6	100	45.4
1928	6.13	155.7	6.75	171.5	23.75	603.3	25.00	635.0	7.81	198.4	2.69	68.3	110	49.9

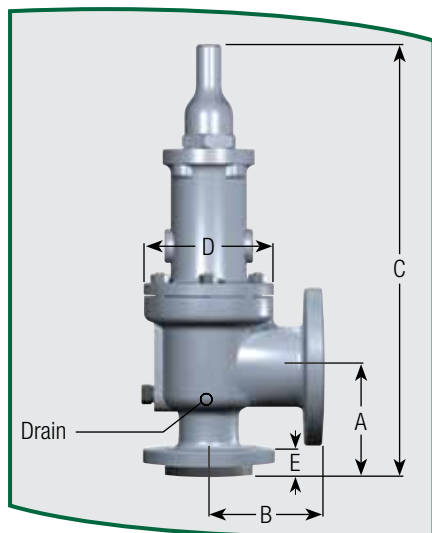


# Dimensions & Weights (Contd.)

Valve Data - H Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
					Standard		Bellows							
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg
1905	5.13	130.3	4.88	124.0	19.50	495.3	19.50	495.3	6.31	160.3	1.25	31.8	60	27.2
1906	5.13	130.3	4.88	124.0	19.50	495.3	19.50	495.3	6.31	160.3	1.56	39.6	60	27.2
1910	5.13	130.3	4.88	124.0	20.25	514.4	20.25	514.4	6.31	160.3	1.69	42.9	65	29.5
1912	6.06	153.9	6.38	162.1	23.00	584.2	23.00	584.2	7.00	177.8	1.69	42.9	85	38.6
1914	6.06	153.9	6.38	162.1	26.00	660.4	26.00	660.4	8.25	209.6	2.19	55.6	130	59.0
1916	6.06	153.9	6.38	162.1	26.00	660.4	26.00	660.4	8.25	209.6	2.19	55.6	140	63.5
1920	5.13	130.3	4.88	124.0	20.25	514.4	20.25	514.4	6.31	160.3	1.69	42.9	65	29.5
1922	5.13	130.3	4.88	124.0	20.25	514.4	20.25	514.4	6.31	160.3	1.69	42.9	65	29.5
1924	6.06	153.9	6.38	162.1	23.00	584.2	23.00	584.2	7.00	177.8	2.19	55.6	90	40.8
1926	6.06	153.9	6.38	162.1	26.00	660.4	26.00	660.4	8.25	209.6	2.19	55.6	140	63.5

Valve Data - G Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
					Standard		Bellows							
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg
1905	5.38	136.7	4.88	124.0	21.25	539.8	21.25	539.8	6.88	174.8	1.31	33.3	75	34.0
1906	5.38	136.7	4.88	124.0	21.25	539.8	21.25	539.8	6.88	174.8	1.56	39.6	75	34.0
1910	7.25	184.2	7.13	181.1	25.63	651.0	25.63	651.0	7.38	187.5	1.81	46.0	100	45.4
1912	7.25	184.2	7.13	181.1	29.88	759.0	29.88	759.0	9.00	228.6	1.81	46.0	170	77.1
1914	7.25	184.2	7.13	181.1	29.75	755.7	29.75	755.7	9.00	228.6	2.19	55.6	195	88.5
1916	7.25	184.2	7.13	181.1	29.75	755.7	29.75	755.7	9.00	228.6	2.56	65.0	220	99.8
1920	7.25	184.2	7.13	181.1	25.63	651.0	25.63	651.0	7.38	187.5	1.81	46.0	100	45.4
1922	7.25	184.2	7.13	181.1	25.63	651.0	25.63	651.0	7.38	187.5	1.81	46.0	100	45.4
1924	7.25	184.2	7.13	181.1	29.88	759.0	29.88	759.0	9.00	228.6	2.31	58.7	180	81.6
1926	7.25	184.2	7.13	181.1	29.75	755.7	29.75	755.7	9.00	228.6	2.56	65.0	220	99.8

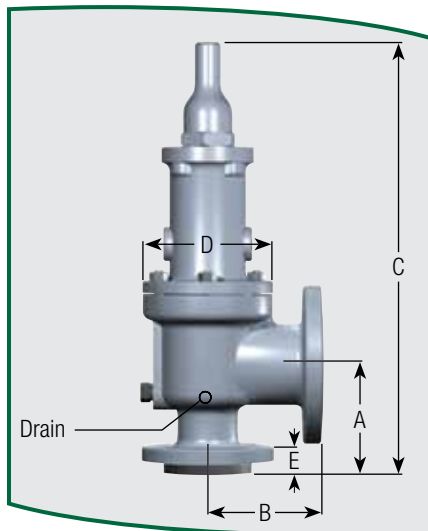


# Dimensions & Weights (Contd.)

Valve Data - K Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
					Standard		Bellows							
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg
1905	6.13	155.7	6.38	162.1	25.50	647.7	24.50	622.3	7.38	187.5	1.44	36.6	110	49.9
1906	6.13	155.7	6.75	171.5	24.50	622.3	24.50	622.3	7.38	187.5	1.81	46.0	115	52.2
1910	6.13	155.7	6.38	162.1	28.00	711.2	28.00	711.2	7.75	196.9	1.94	49.3	140	63.5
1912	7.25	184.2	7.13	181.1	29.25	743.0	29.25	743.0	7.75	196.9	1.94	49.3	150	68.0
1914	7.81	198.4	8.50	215.9	35.25	895.4	35.25	895.4	10.50	266.7	2.19	55.6	300	136.1
1916	7.75	196.9	8.50	215.9	35.25	895.4	35.25	895.4	10.50	266.7	2.56	65.0	320	145.1
1920	6.13	155.7	6.38	162.1	28.00	711.2	28.00	711.2	7.75	196.9	1.94	49.3	140	63.5
1922	6.13	155.7	6.38	162.1	28.00	711.2	28.00	711.2	7.75	196.9	1.94	49.3	140	63.5
1924	7.81	198.4	8.50	215.9	35.25	895.4	35.25	895.4	10.50	266.7	2.19	55.6	300	136.1
1926	7.75	196.9	8.50	215.9	35.25	895.4	35.25	895.4	10.50	266.7	2.56	65.0	320	145.1

Valve Data - L Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
					Standard		Bellows							
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg
1905	6.13	155.7	6.50	165.1	28.75	730.3	28.75	730.3	8.88	225.6	1.44	36.6	140	63.5
1906	6.13	155.7	6.50	165.1	28.75	730.3	28.75	730.3	8.88	225.6	1.81	46.0	145	65.8
1910	7.06	179.3	7.13	181.1	32.00	812.8	32.00	812.8	9.50	241.3	1.94	49.3	220	99.8
1912	7.06	179.3	8.00	203.2	32.00	812.8	32.00	812.8	9.50	241.3	2.19	55.6	230	104.3
1914	7.75	196.9	8.75	222.3	37.25	946.2	37.25	946.2	12.25	311.2	2.44	62.0	360	163.3
1916	7.75	196.9	8.75	222.3	37.25	946.2	37.25	946.2	12.25	311.2	2.81	71.4	370	167.8
1920	7.06	179.3	7.13	181.1	32.00	812.8	32.00	812.8	9.50	241.3	1.94	49.3	220	99.8
1922	7.06	179.3	8.00	203.2	32.00	812.8	32.00	812.8	9.50	241.3	2.19	55.6	230	104.3
1924	7.75	196.9	8.75	222.3	37.25	946.2	37.25	946.2	12.25	311.2	2.44	62.0	360	163.3
1926	7.75	196.9	8.75	222.3	37.25	946.2	37.25	946.2	12.25	311.2	2.81	71.4	370	167.8

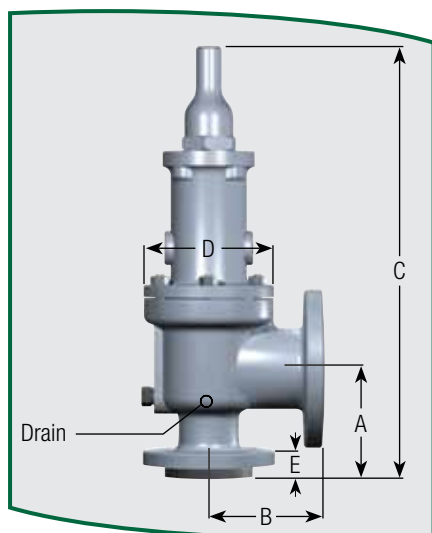


# Dimensions & Weights (Contd.)

Valve Data - M Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
	in.	mm	in.	mm	Standard		Bellows		in.	mm	in.	mm	lb.	kg
					in.	mm	in.	mm						
1905	7.00	177.8	7.25	184.2	29.75	755.7	29.75	755.7	9.38	238.3	1.63	41.4	185	83.9
1906	7.00	177.8	7.25	184.2	29.75	755.7	29.75	755.7	9.38	238.3	1.94	49.3	190	86.2
1910	7.00	177.8	7.25	184.2	32.00	812.8	32.00	812.8	9.38	238.3	1.94	49.3	230	104.3
1912	7.00	177.8	8.00	203.2	36.25	920.8	36.25	920.8	10.75	273.1	2.19	55.6	300	136.1
1914	7.75	196.9	8.75	222.3	37.00	939.8	37.00	939.8	10.75	273.1	2.44	62.0	340	154.2
1920	7.00	177.8	7.25	184.2	32.00	812.8	32.00	812.8	9.38	238.3	1.94	49.3	230	104.3
1922	7.00	177.8	8.00	203.2	36.25	920.8	36.25	920.8	10.75	273.1	2.19	55.6	300	136.1
1924	7.75	196.9	8.75	222.3	37.00	939.8	37.00	939.8	10.75	273.1	2.44	62.0	340	154.2

Valve Data - N Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
	in.	mm	in.	mm	Standard		Bellows		in.	mm	in.	mm	lb.	kg
					in.	mm	in.	mm						
1905	7.75	196.9	8.25	209.6	33.00	838.2	33.00	838.2	10.13	257.3	1.63	41.4	220	99.8
1906	7.75	196.9	8.25	209.6	33.00	838.2	33.00	838.2	10.13	257.3	1.94	49.3	225	102.1
1910	7.75	196.9	8.25	209.6	34.25	870.0	34.25	870.0	10.50	266.7	1.94	49.3	260	117.9
1912	7.75	196.9	8.75	222.3	39.00	990.6	39.00	990.6	11.75	298.5	2.19	55.6	360	163.3
1914	7.75	196.9	8.75	222.3	39.00	990.6	39.00	990.6	11.75	298.5	2.44	62.0	380	172.4
1920	7.75	196.9	8.25	209.6	34.25	870.0	34.25	870.0	10.50	266.7	1.94	49.3	260	117.9
1922	7.75	196.9	8.75	222.3	39.00	990.6	39.00	990.6	11.75	298.5	2.19	55.6	360	163.3
1924	7.75	196.9	8.75	222.3	39.00	990.6	39.00	990.6	11.75	298.5	2.44	62.0	380	172.4

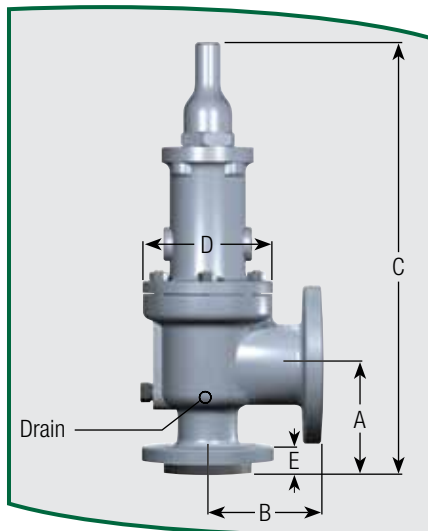


# Dimensions & Weights (Contd.)

Valve Data - P Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
					Standard		Bellows							
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg
1905	7.13	181.1	9.00	228.6	34.25	870.0	34.25	870.0	11.00	279.4	1.63	41.4	260	117.9
1906	7.13	181.1	9.00	228.6	24.25	616.0	34.25	870.0	11.00	279.4	1.94	49.3	270	122.5
1910	8.88	225.6	10.00	254.0	41.00	1041.4	41.00	1041.4	11.50	292.1	1.94	49.3	350	158.8
1912	8.88	225.6	10.00	254.0	43.50	1104.9	43.50	1104.9	13.88	352.6	2.19	55.6	530	240.4
1914	8.88	225.6	10.00	254.0	43.50	1104.9	43.50	1104.9	13.88	352.6	2.44	62.0	545	247.2
1920	8.88	225.6	10.00	254.0	41.00	1041.4	41.00	1041.4	11.50	292.1	1.94	49.3	350	158.8
1923	8.88	225.6	10.00	254.0	43.50	1104.9	43.50	1104.9	13.88	352.6	2.19	55.6	530	240.4
1924	8.88	225.6	10.00	254.0	43.50	1104.9	43.50	1104.9	13.88	352.6	2.44	62.0	545	247.2

Valve Data - Q Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
					Standard		Bellows							
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg
1905	9.44	239.8	9.50	241.3	41.00	1041.4	41.00	1041.4	13.63	346.2	1.81	46.0	430	195.0
1906	9.44	239.8	9.50	241.3	41.00	1041.4	41.00	1041.4	13.63	346.2	13.63	346.2	445	201.8
1910	9.44	239.8	9.50	241.3	43.25	1098.6	43.25	1098.6	14.00	355.6	2.25	57.2	530	240.4
1912	9.44	239.8	9.50	241.3	46.00	1168.4	46.00	1168.4	14.25	362.0	2.69	68.3	645	292.6
1920	9.44	239.8	9.50	241.3	41.00	1041.4	41.00	1041.4	13.63	346.2	2.25	57.2	445	201.8
1922	9.44	239.8	9.50	241.3	46.00	1168.4	46.00	1168.4	14.25	362.0	2.69	68.3	645	292.6

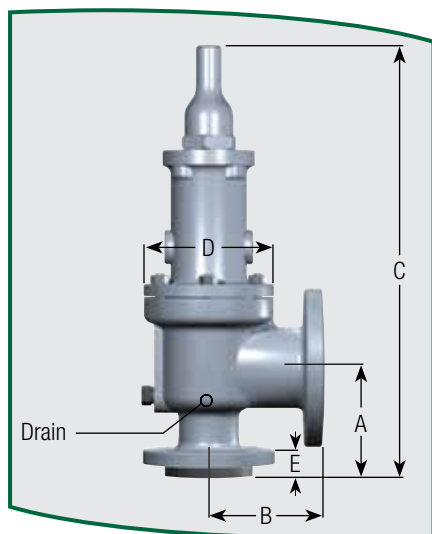




# Dimensions & Weights (Contd.)

Valve Data - R Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
	in.	mm	in.	mm	Standard		Bellows		in.	mm	in.	mm	lb.	kg
					in.	mm	in.	mm						
1905	9.44	239.8	9.50	241.3	43.00	1092.2	43.00	1092.2	14.50	368.3	1.81	46.0	495	224.5
1906	9.44	239.8	9.50	241.3	43.00	1092.2	43.00	1092.2	14.50	368.3	2.25	57.2	510	231.3
1910	9.44	239.8	10.50	266.7	45.50	1155.7	45.50	1155.7	14.50	368.3	2.25	57.2	550	249.5
1912	9.44	239.8	10.50	266.7	47.50	1206.5	47.50	1206.5	15.13	384.3	2.69	68.3	675	306.2
1920	9.44	239.8	9.50	241.3	43.00	1092.2	43.00	1092.2	14.50	368.3	2.25	57.2	510	231.3
1922	9.44	239.8	10.50	266.7	47.50	1206.5	47.50	1206.5	15.13	384.3	2.69	68.3	675	306.2

Valve Data - T Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
	in.	mm	in.	mm	Standard		Bellows		in.	mm	in.	mm	lb.	kg
					in.	mm	in.	mm						
1905	10.88	276.4	11.00	279.4	47.50	1206.5	47.50	1206.5	16.50	419.1	1.94	49.3	620	281.2
1906	10.88	276.4	11.00	279.4	47.25	1200.2	47.25	1200.2	16.50	419.1	2.44	62.0	640	290.3
1910	10.88	276.4	11.00	279.4	53.38	1355.9	53.38	1355.9	16.50	419.1	2.44	62.0	840	381.0
1912	10.88	276.4	11.00	279.4	53.38	1355.9	53.38	1355.9	16.50	419.1	2.44	62.0	840	381.0
1920	10.88	276.4	11.00	279.4	53.38	1355.9	53.38	1355.9	16.50	419.1	2.44	62.0	840	381.0
1922	10.88	276.4	11.00	279.4	53.38	1355.9	53.38	1355.9	16.50	419.1	2.44	62.0	840	381.0

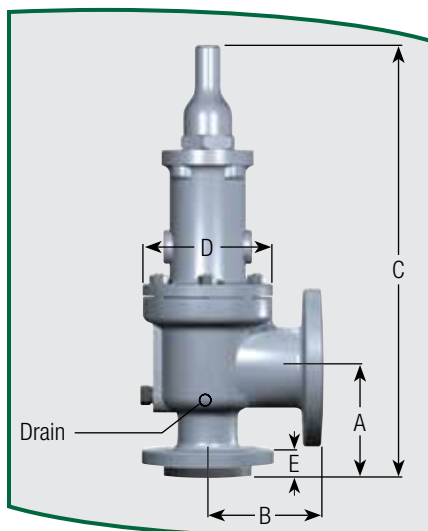

# Dimensions & Weights (Contd.)

Valve Data - U Orifice


Valve Type	A		B		C				D		E		Approximate Weight	
					Standard		Bellows							
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg
1905	10.88	276.4	11.00	279.4	47.50	1206.5	47.50	1206.5	16.50	419.1	1.94	49.3	620	281.2
1906	10.88	276.4	11.00	279.4	47.25	1200.2	47.25	1200.2	16.50	419.1	2.44	62.0	640	290.3
1910	10.88	276.4	11.00	279.4	53.38	1355.9	53.38	1355.9	16.50	419.1	2.44	62.0	840	381.0
1920	10.88	276.4	11.00	279.4	53.38	1355.9	53.38	1355.9	16.50	419.1	2.44	62.0	840	381.0

Valve Data - V Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
					Standard		Bellows							
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg
1905	12.00	304.8	16.00	406.4	62.00	1574.8	62.00	1574.8	21.75	552.5	2.00	50.8	1600	725.7
1906	12.00	304.8	16.00	406.4	62.00	1574.8	62.00	1574.8	21.75	552.5	2.69	68.3	1700	771.1
1910	12.00	304.8	16.00	406.4	66.00	1676.4	66.00	1676.4	24.50	622.3	2.69	68.3	2000	907.2
1920	12.00	304.8	16.00	406.4	66.00	1676.4	66.00	1676.4	24.50	622.3	2.69	68.3	2000	907.2

Valve Data - W Orifice

Valve Type	A		B		C				D		E		Approximate Weight	
					Standard		Bellows							
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lb.	kg
1905	14.00	355.6	16.00	406.4	70.00	1778.0	70.00	1778.0	24.50	622.3	2.81	71.4	2800	1270.1
1906	14.00	355.6	16.00	406.4	70.00	1778.0	70.00	1778.0	24.50	622.3	2.94	74.7	2860	1297.3
1910	14.00	355.6	16.00	406.4	70.00	1778.0	70.00	1778.0	24.50	622.3	2.94	74.7	2860	1297.3
1920	14.00	355.6	16.00	406.4	70.00	1778.0	70.00	1778.0	24.50	622.3	2.81	71.4	2800	1270.1

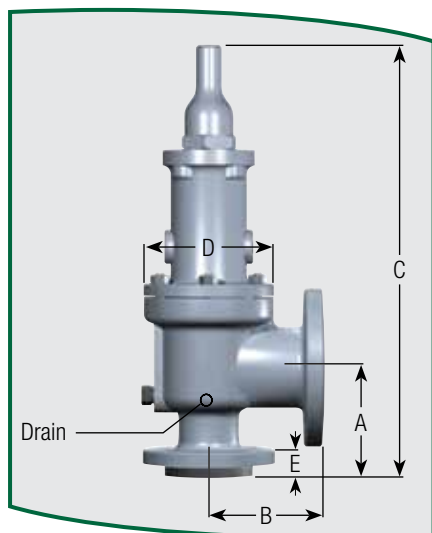

# Pressure / Temperature

## Pressure / Temperature Tables

### How To Use Rating Tables

The included tables specify important data about the valve including valve sizes, flange ratings, pressure and temperature limits, back pressure ratings, and materials with allowable temperature ranges.

After determining valve size from the Valve Sizing section, or capacity tables in this section, select the proper set of tables and graphs (in the following pages) for the size valve. Enter the pressure/temperature graphs and determine valve type. Review the table of data for that size valve to get other pertinent information.

**Note 1** The pressure/temperature limitations shown in the following tables are based on the limits specified in API526 applicable to the 1900 series supplied in standard materials of construction. For pressure/temperature limitations of valves made from special materials, consult the factory or the SRVS sizing program. (Note that 1900-30 bellows design valve supplied with the standard Inconel 625 bellows is limited to a temperature range of 400°F (204°C) to 1500°F (816°C).)

**Note 2** ASME Class 300 outlet flanges are permitted for mating purposes only on valves that are normally supplied with standard ASME Class 150 pressure rating. For back pressure applications exceeding the ASME Class 150 pressure rating use SRVS sizing program or contact the factory for assistance.

**Note 3** When soft seats are used, they may govern the valve pressure/temperature rating.

### Procedure

Example	
Valve Set Pressure	500 psig (34.47 barg)
Back Pressure	50 psig (3.45 barg)
Temperature	100°F (37.8°C)
Valve	"J"

Enter the graph on page 1900.71 for the "J" size, select set pressure on the bottom scale at 500 psig (34.47 barg), follow this line vertically upward until it intersects the 100°F (38°C) line. The selection is a 1910Jc valve.

### Results

Referring to the table on page 1900.70, the valve is 3" (76.2 mm) - 300 x 4" (101.6 mm) - 150 with a carbon steel body and spring. The back pressure limit is satisfactory for 50 psig (3.45 barg) back pressure.

### Springs

Within given temperature limits, alloy steel springs are specified. Because of material availability from vendors, most springs are of alloy steel construction which provides superior strength and corrosion resistant properties.

### Materials

The operating temperature should be used to select the materials in valves for fire sizing applications.

Minimum Set Pressures				
The minimum set pressures of the 1900 flanged valves are in accordance with the following table.				
Orifice	Low Set Pressure Limit <sup>2</sup>			
	Conventional Valve		Bellows Valve <sup>1</sup>	
	psig	barg	psig	barg
D	5	0.34	15	1.03
E	5	0.34	15	1.03
F	5	0.34	15	1.03
G	4	0.28	15	1.03
H	4	0.28	15	1.03
J	5	0.34	10	0.69
K	5	0.34	10	0.69
L	6	0.41	10	0.69
M	6	0.41	10	0.69
N	9	0.62	10	0.69
P	7	0.48	10	0.69
Q	7	0.48	10	0.69
R	7	0.48	10	0.69
T	9	0.62	10	0.69
V	15	1.03	15	1.03
W	7	0.48	15	1.03

### Notes

- 1 The bonnet must be vented when a bellows is used.
- 2 Valves with set pressure less than 15 psig cannot be stamped with the ASME stamp.

# Pressure / Temperature (Contd.)

Pressure Temperature Ratings for D Orifice

API Ratings (D Orifice - 0.110 in <sup>2</sup> (0.71 cm <sup>2</sup> ))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905D	1.00	25.4	2.00	50.80	285	19.65	185	12.76	80	5.52	-	-	285	19.65	128	8.83	230	15.86
1906D	1.00	25.4	2.00	50.80	285	19.65	285	19.65	285	19.65	-	-	285	19.65	128	8.83	230	15.86
1910D	1.00	25.4	2.00	50.80	740	51.02	615	42.40	410	28.27	-	-	285	19.65	128	8.83	230	15.86
1912D	1.00	25.4	2.00	50.80	1480	102.04	1235	85.15	825	56.88	-	-	285	19.65	128	8.83	230	15.86
1914D	1.50	38.1	2.00	50.80	2220	153.06	1845	127.21	1235	85.15	-	-	600	41.37	128	8.83	500	34.47
1916D	1.50	38.1	2.00	50.80	3705	255.45	3080	212.36	2060	142.03	-	-	600	41.37	128	8.83	500	34.47
1918D	1.50	38.1	3.00	76.20	6000	413.69	6000	413.69	3430	236.49	-	-	740	51.02	128	8.83	500	34.47
1920D	1.00	25.4	2.00	50.80	-	-	-	-	510	35.16	215	14.82	285	19.65	128	8.83	230	15.86
1922D	1.00	25.4	2.00	50.80	-	-	-	-	1015	69.98	430	29.65	285	19.65	128	8.83	230	15.86
1924D	1.50	38.1	2.00	50.80	-	-	-	-	1525	105.15	650	44.82	600	41.37	128	8.83	500	34.47
1926D	1.50	38.1	2.00	50.80	-	-	-	-	2540	175.13	1080	74.46	600	41.37	128	8.83	500	34.47
1928D	1.50	38.1	3.00	76.20	-	-	-	-	4230	291.65	1800	124.11	740	51.02	128	8.83	500	34.47


Pressure Temperature Ratings for D Orifice

ASME Ratings (D Orifice - 0.128 in <sup>2</sup> (0.825 cm <sup>2</sup> ) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905D	1.00	25.4	2.00	50.80	290	19.99	185	12.76	80	5.52	-	-	290	19.99	128	8.83	290	19.99
1906D	1.00	25.4	2.00	50.80	290	19.99	290	19.99	290	19.99	-	-	290	19.99	128	8.83	290	19.99
1910D	1.00	25.4	2.00	50.80	750	51.71	685	47.23	410	28.27	-	-	290	19.99	128	8.83	290	19.99
1912D	1.00	25.4	2.00	50.80	1500	103.42	1368	94.32	825	56.88	-	-	290	19.99	128	8.83	290	19.99
1914D	1.50	38.1	2.00	50.80	2250	155.13	2053	141.55	1235	85.15	-	-	750	51.71	128	8.83	750	51.71
1916D	1.50	38.1	2.00	50.80	3750	258.55	3423	236.01	2055	141.69	-	-	750	51.71	128	8.83	750	51.71
1918D	1.50	38.1	3.00	76.20	6250	430.92	5703	393.21	3430	236.49	-	-	750	51.71	128	8.83	750	51.71
1920D	-	-	-	-	-	-	-	-	510	35.16	215	14.82	290	19.99	128	8.83	290	19.99
1922D	-	-	-	-	-	-	-	-	1015	69.98	430	29.65	290	19.99	128	8.83	290	19.99
1924D	-	-	-	-	-	-	-	-	1525	105.15	650	44.82	750	51.71	128	8.83	750	51.71
1926D	-	-	-	-	-	-	-	-	2540	175.13	1080	74.46	750	51.71	128	8.83	750	51.71
1928D	-	-	-	-	-	-	-	-	4230	291.65	1800	124.11	750	51.71	128	8.83	750	51.71

# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 & 1900-30 Series, D Orifice - API area: 0.110 Sq. in.

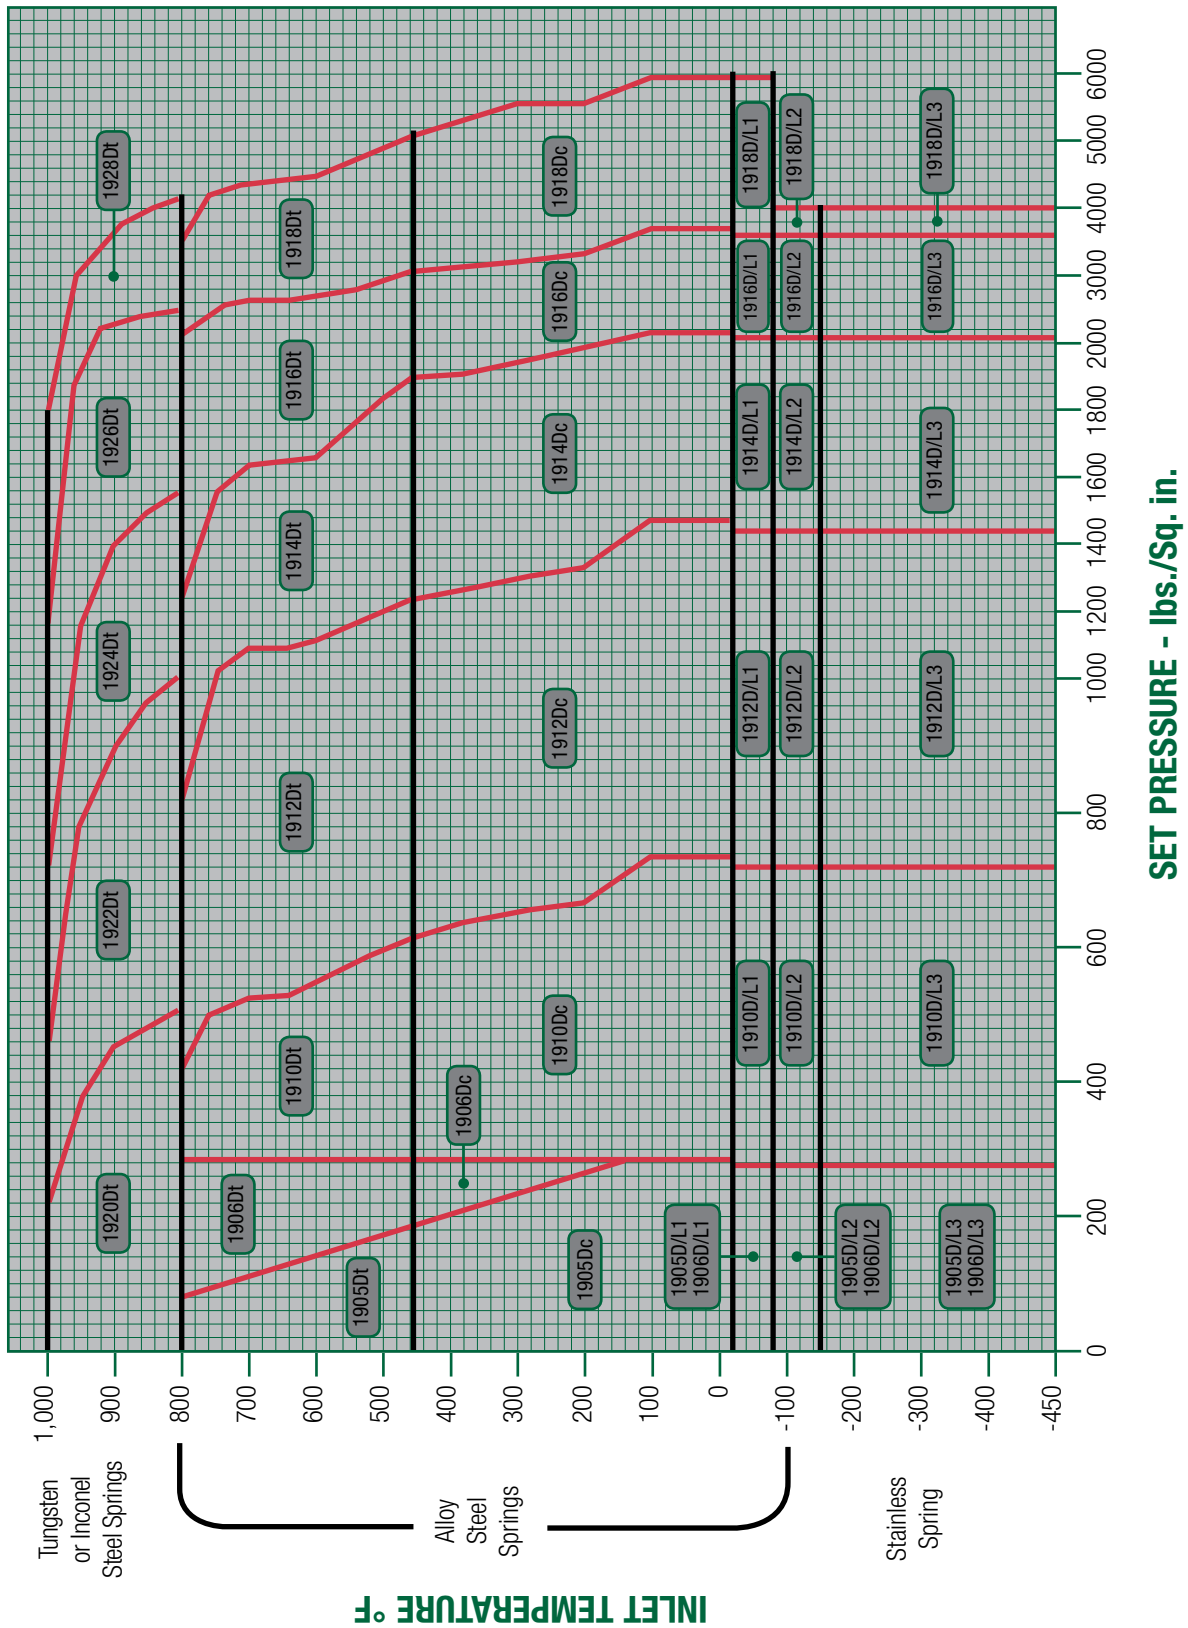

# Pressure / Temperature (Contd.)

Pressure Temperature Ratings for E Orifice

API Ratings (E Orifice - 0.196 in <sup>2</sup> (1.265 cm <sup>2</sup> ))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905E	1.00	25.4	2.00	50.80	285	19.65	185	12.76	80	5.52	-	-	285	19.65	128	8.83	230	15.86
1906E	1.00	25.4	2.00	50.80	285	19.65	285	19.65	285	19.65	-	-	285	19.65	128	8.83	230	15.86
1910E	1.00	25.4	2.00	50.80	740	51.02	615	42.40	410	28.27	-	-	285	19.65	128	8.83	230	15.86
1912E	1.00	25.4	2.00	50.80	1480	102.04	1235	85.15	825	56.88	-	-	285	19.65	128	8.83	230	15.86
1914E	1.50	38.1	2.00	50.80	2220	153.06	1845	127.21	1235	85.15	-	-	600	41.37	128	8.83	500	34.47
1916E	1.50	38.1	2.00	50.80	3705	255.45	3080	212.36	2060	142.03	-	-	600	41.37	128	8.83	500	34.47
1918E	1.50	38.1	3.00	76.20	6000	413.69	6000	413.69	3430	236.49	-	-	740	51.02	128	8.83	500	34.47
1920E	1.00	25.4	2.00	50.80	-	-	-	-	510	35.16	215	14.82	285	19.65	128	8.83	230	15.86
1922E	1.00	25.4	2.00	50.80	-	-	-	-	1015	69.98	430	29.65	285	19.65	128	8.83	230	15.86
1924E	1.50	38.1	2.00	50.80	-	-	-	-	1525	105.15	650	44.82	600	41.37	128	8.83	500	34.47
1926E	1.50	38.1	2.00	50.80	-	-	-	-	2540	175.13	1080	74.46	600	41.37	128	8.83	500	34.47
1928E	1.50	38.1	3.00	76.20	-	-	-	-	4230	291.65	1800	124.11	740	51.02	128	8.83	500	34.47


Pressure Temperature Ratings for E Orifice

ASME Ratings (E Orifice - 0.228 in <sup>2</sup> (1.470 cm <sup>2</sup> ) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905E	1.00	25.4	2.00	50.80	290	19.99	185	12.76	80	5.52	-	-	290	19.99	128	8.83	290	19.99
1906E	1.00	25.4	2.00	50.80	290	19.99	290	19.99	290	19.99	-	-	290	19.99	128	8.83	290	19.99
1910E	1.00	25.4	2.00	50.80	750	51.71	685	47.23	410	28.27	-	-	290	19.99	128	8.83	290	19.99
1912E	1.00	25.4	2.00	50.80	1500	103.42	1368	94.32	825	56.88	-	-	290	19.99	128	8.83	290	19.99
1914E	1.50	38.1	2.00	50.80	2250	155.13	2053	141.55	1235	85.15	-	-	750	51.71	128	8.83	750	51.71
1916E	1.50	38.1	2.00	50.80	3750	258.55	3423	236.01	2055	141.69	-	-	750	51.71	128	8.83	750	51.71
1918E	1.50	38.1	3.00	76.20	6250	430.92	5703	393.21	3430	236.49	-	-	750	51.71	128	8.83	750	51.71
1920E	-	-	-	-	-	-	-	-	510	35.16	215	14.82	290	19.99	128	8.83	290	19.99
1922E	-	-	-	-	-	-	-	-	1015	69.98	430	29.65	290	19.99	128	8.83	290	19.99
1924E	-	-	-	-	-	-	-	-	1525	105.15	650	44.82	750	51.71	128	8.83	750	51.71
1926E	-	-	-	-	-	-	-	-	2540	175.13	1080	74.46	750	51.71	128	8.83	750	51.71
1928E	-	-	-	-	-	-	-	-	4230	291.65	1800	124.11	750	51.71	128	8.83	750	51.71

# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, E Orifice - API Area: 0.196 Sq. in.

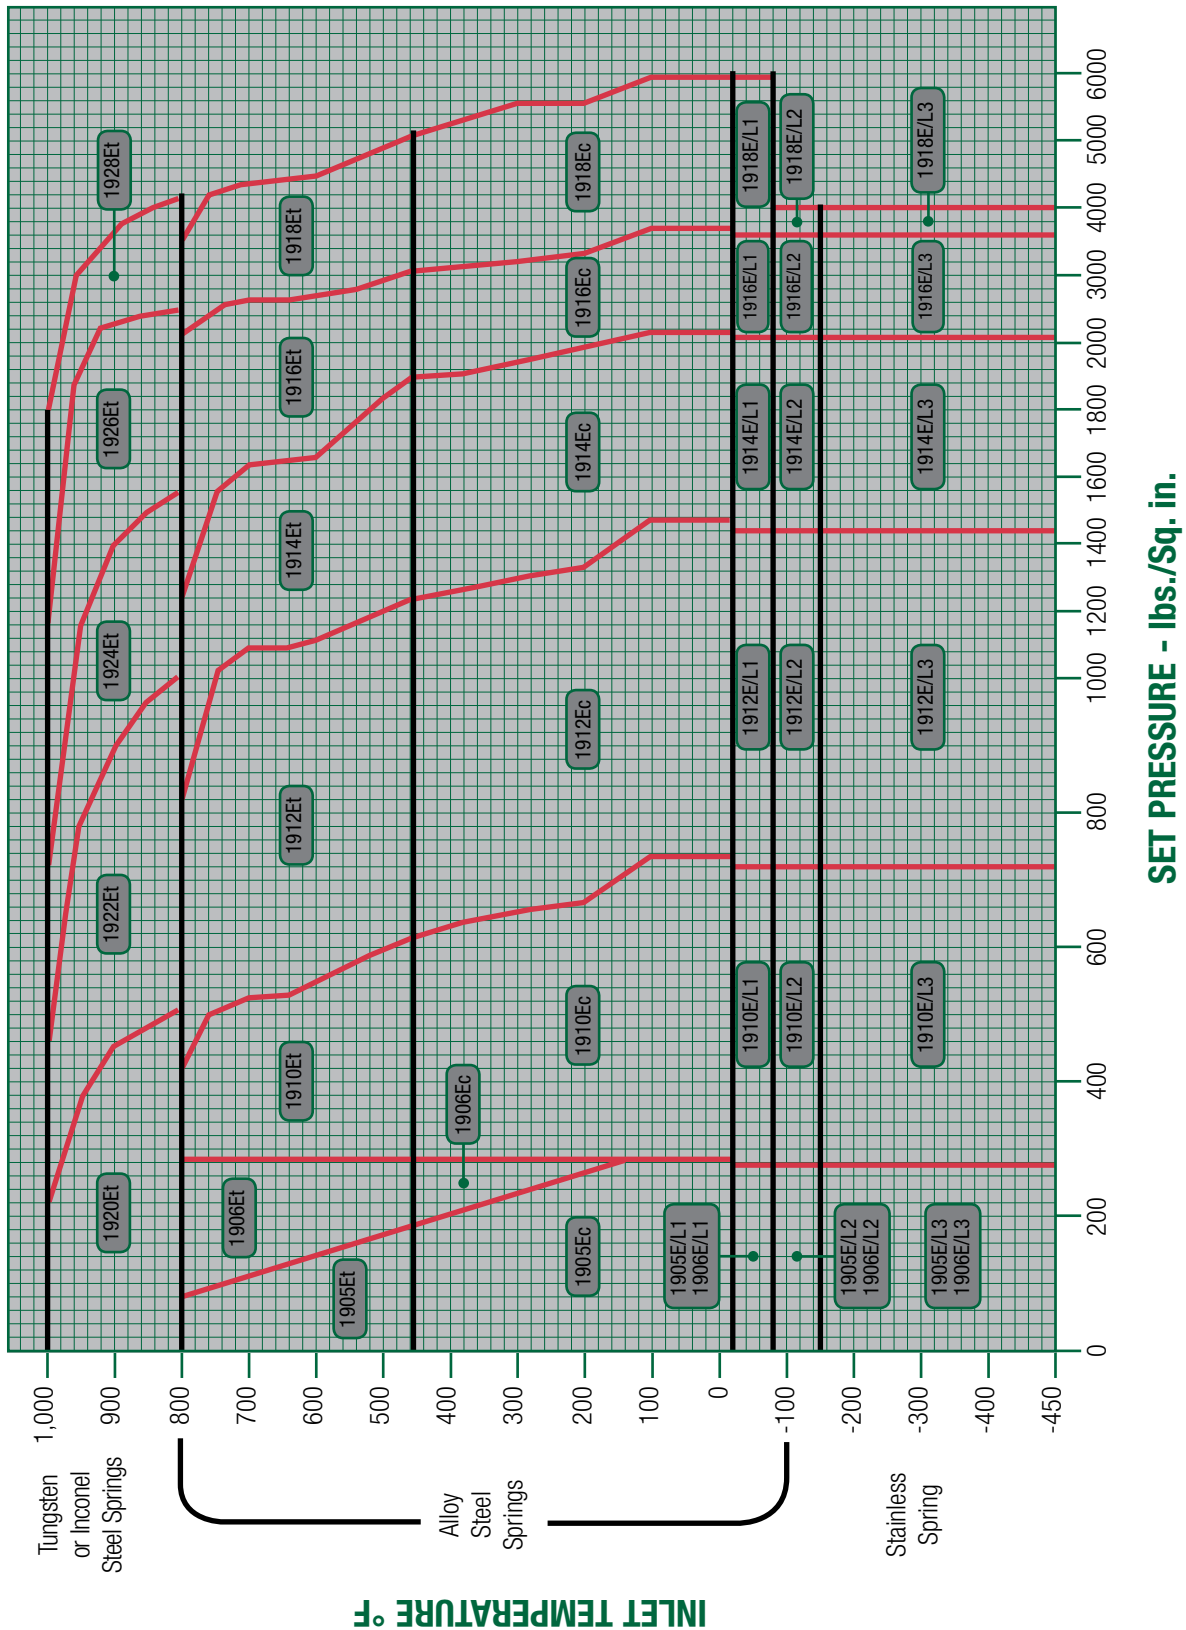

# Pressure / Temperature (Contd.)

Pressure Temperature Ratings for F Orifice

API Ratings (F Orifice - 0.307 in² (1.981 cm²))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905F	1.50	38.1	2.00	50.80	285	19.65	185	12.76	80	5.52	-	-	285	19.65	128	8.83	230	15.86
1906F	1.50	38.1	2.00	50.80	285	19.65	285	19.65	285	19.65	-	-	285	19.65	128	8.83	230	15.86
1910F	1.50	38.1	2.00	50.80	740	51.02	615	42.40	410	28.27	-	-	285	19.65	128	8.83	230	15.86
1912F	1.50	38.1	2.00	50.80	1480	102.04	1235	85.15	825	56.88	-	-	285	19.65	128	8.83	230	15.86
1914F	1.50	38.1	3.00	76.20	2220	153.06	1845	127.21	1235	85.15	-	-	740	51.02	128	8.83	500	34.47
1916F	1.50	38.1	3.00	76.20	3705	255.45	3080	212.36	2060	142.03	-	-	740	51.02	128	8.83	500	34.47
1918F	1.50	38.1	3.00	76.20	5000	344.74	5000	344.74	3430	236.49	-	-	740	51.02	128	8.83	500	34.47
1920F	1.50	38.1	2.00	50.80	-	-	-	-	510	35.16	215	14.82	285	19.65	128	8.83	230	15.86
1922F	1.50	38.1	2.00	50.80	-	-	-	-	1015	69.98	430	29.65	285	19.65	128	8.83	230	15.86
1924F	1.50	38.1	3.00	76.20	-	-	-	-	1525	105.15	650	44.82	740	51.02	128	8.83	500	34.47
1926F	1.50	38.1	3.00	76.20	-	-	-	-	2540	175.13	1080	74.46	740	51.02	128	8.83	500	34.47
1928F	1.50	38.1	3.00	76.20	-	-	-	-	4230	291.65	1800	124.11	740	51.02	128	8.83	500	34.47

Pressure Temperature Ratings for F Orifice


ASME Ratings (F Orifice - 0.357 in² (2.302 cm²) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905F	1.50	38.1	2.00	50.80	290	19.99	185	12.76	80	5.52	-	-	290	19.99	128	8.83	290	19.99
1906F	1.50	38.1	2.00	50.80	290	19.99	290	19.99	290	19.99	-	-	290	19.99	128	8.83	290	19.99
1910F	1.50	38.1	2.00	50.80	750	51.71	685	47.23	410	28.27	-	-	290	19.99	128	8.83	290	19.99
1912F	1.50	38.1	2.00	50.80	1500	103.42	1368	94.32	825	56.88	-	-	290	19.99	128	8.83	290	19.99
1914F	1.50	38.1	3.00	76.20	2250	155.13	2053	141.55	1235	85.15	-	-	750	51.71	128	8.83	750	51.71
1916F	1.50	38.1	3.00	76.20	3750	258.55	3423	236.01	2055	141.69	-	-	750	51.71	128	8.83	750	51.71
1918F	1.50	38.1	3.00	76.20	6250	430.92	5703	393.21	3430	236.49	-	-	750	51.71	128	8.83	750	51.71
1920F	1.50	38.1	2.00	50.80	-	-	-	-	510	35.16	215	14.82	290	19.99	128	8.83	290	19.99
1922F	1.50	38.1	2.00	50.80	-	-	-	-	1015	69.98	430	29.65	290	19.99	128	8.83	290	19.99
1924F	1.50	38.1	3.00	76.20	-	-	-	-	1525	105.15	650	44.82	750	51.71	128	8.83	750	51.71
1926F	1.50	38.1	3.00	76.20	-	-	-	-	2540	175.13	1080	74.46	750	51.71	128	8.83	750	51.71
1928F	1.50	38.1	3.00	76.20	-	-	-	-	4230	291.65	1800	124.11	750	51.71	128	8.83	750	51.71



# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, F Orifice - API Area: 0.307 Sq. in. (198 Sq. mm)

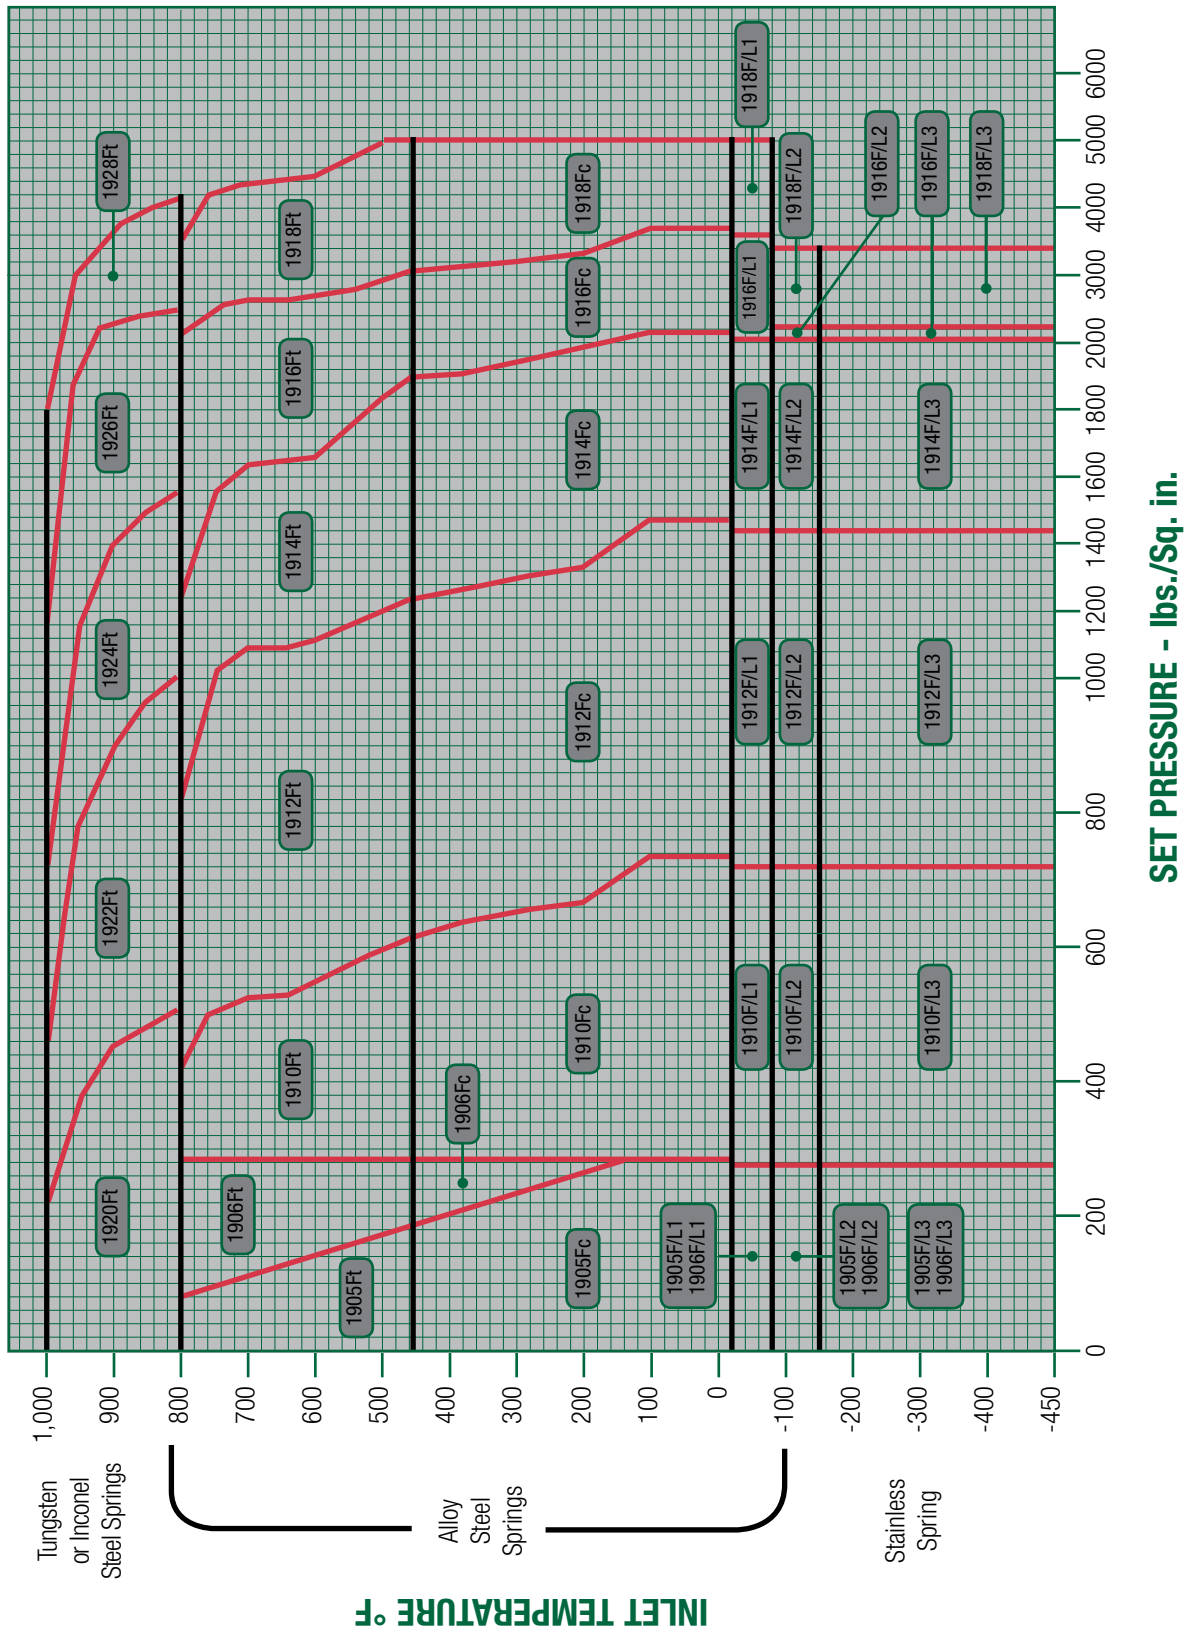

# Pressure / Temperature (Contd.)

Pressure Temperature Ratings for G Orifice

API Ratings (G Orifice - 0.110 in <sup>2</sup> (0.710 cm <sup>2</sup> ))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905G	1.50	38.1	3.00	76.20	285	19.65	185	12.76	80	5.52	-	-	285	19.65	140	9.65	230	15.86
1906G	1.50	38.1	3.00	76.20	285	19.65	285	19.65	285	19.65	-	-	285	19.65	140	9.65	230	15.86
1910G	1.50	38.1	3.00	76.20	740	51.02	615	42.40	410	28.27	-	-	285	19.65	140	9.65	230	15.86
1912G	1.50	38.1	3.00	76.20	1480	102.04	1235	85.15	825	56.88	-	-	285	19.65	140	9.65	230	15.86
1914G	1.50	38.1	3.00	76.20	2220	153.06	1845	127.21	1235	85.15	-	-	740	51.02	140	9.65	470	32.41
1916G	2.00	50.8	3.00	76.20	3705	255.45	3080	212.36	2060	142.03	-	-	740	51.02	140	9.65	470	32.41
1918G	2.00	50.8	3.00	76.20	6000	413.69	3705	255.45	3430	236.49	-	-	740	51.02	140	9.65	470	32.41
1920G	1.50	38.1	3.00	76.20	-	-	-	-	510	35.16	215	14.82	285	19.65	140	9.65	230	15.86
1922G	1.50	38.1	3.00	76.20	-	-	-	-	1015	69.98	430	29.65	285	19.65	140	9.65	230	15.86
1924G	1.50	38.1	3.00	76.20	-	-	-	-	1525	105.15	650	44.82	740	51.02	140	9.65	500	34.47
1926G	2.00	50.8	3.00	76.20	-	-	-	-	2540	175.13	1080	74.46	740	51.02	140	9.65	500	34.47
1928G	2.00	50.8	3.00	76.20	-	-	-	-	3705	255.45	1800	124.11	740	51.02	140	9.65	500	34.47


Pressure Temperature Ratings for G Orifice

ASME Ratings (G Orifice - 0.128 in² (0.825 cm²) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905G	1.50	38.1	3.00	76.20	290	19.99	185	12.76	80	5.52	-	-	290	19.99	140	9.65	290	19.99
1906G	1.50	38.1	3.00	76.20	290	19.99	290	19.99	290	19.99	-	-	290	19.99	140	9.65	290	19.99
1910G	1.50	38.1	3.00	76.20	750	51.71	685	47.23	410	28.27	-	-	290	19.99	140	9.65	290	19.99
1912G	1.50	38.1	3.00	76.20	1500	103.42	1368	94.32	825	56.88	-	-	290	19.99	140	9.65	290	19.99
1914G	1.50	38.1	3.00	76.20	2250	155.13	2053	141.55	1235	85.15	-	-	750	51.71	140	9.65	750	51.71
1916G	2.00	50.8	3.00	76.20	3750	258.55	3423	236.01	2055	141.69	-	-	750	51.71	140	9.65	750	51.71
1918G	2.00	50.8	3.00	76.20	5000	344.74	5000	344.74	3430	236.49	-	-	750	51.71	140	9.65	750	51.71
1920G	1.50	38.1	3.00	76.20	-	-	-	-	510	35.16	215	14.82	290	19.99	140	9.65	290	19.99
1922G	1.50	38.1	3.00	76.20	-	-	-	-	1015	69.98	430	29.65	290	19.99	140	9.65	290	19.99
1924G	1.50	38.1	3.00	76.20	-	-	-	-	1525	105.15	650	44.82	750	51.71	140	9.65	750	51.71
1926G	2.00	50.8	3.00	76.20	-	-	-	-	2540	175.13	1080	74.46	750	51.71	140	9.65	750	51.71
1928G	2.00	50.8	3.00	76.20	-	-	-	-	4230	291.65	1800	124.11	750	51.71	140	9.65	750	51.71

# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, G Orifice - API Area: 0.503 Sq. in.

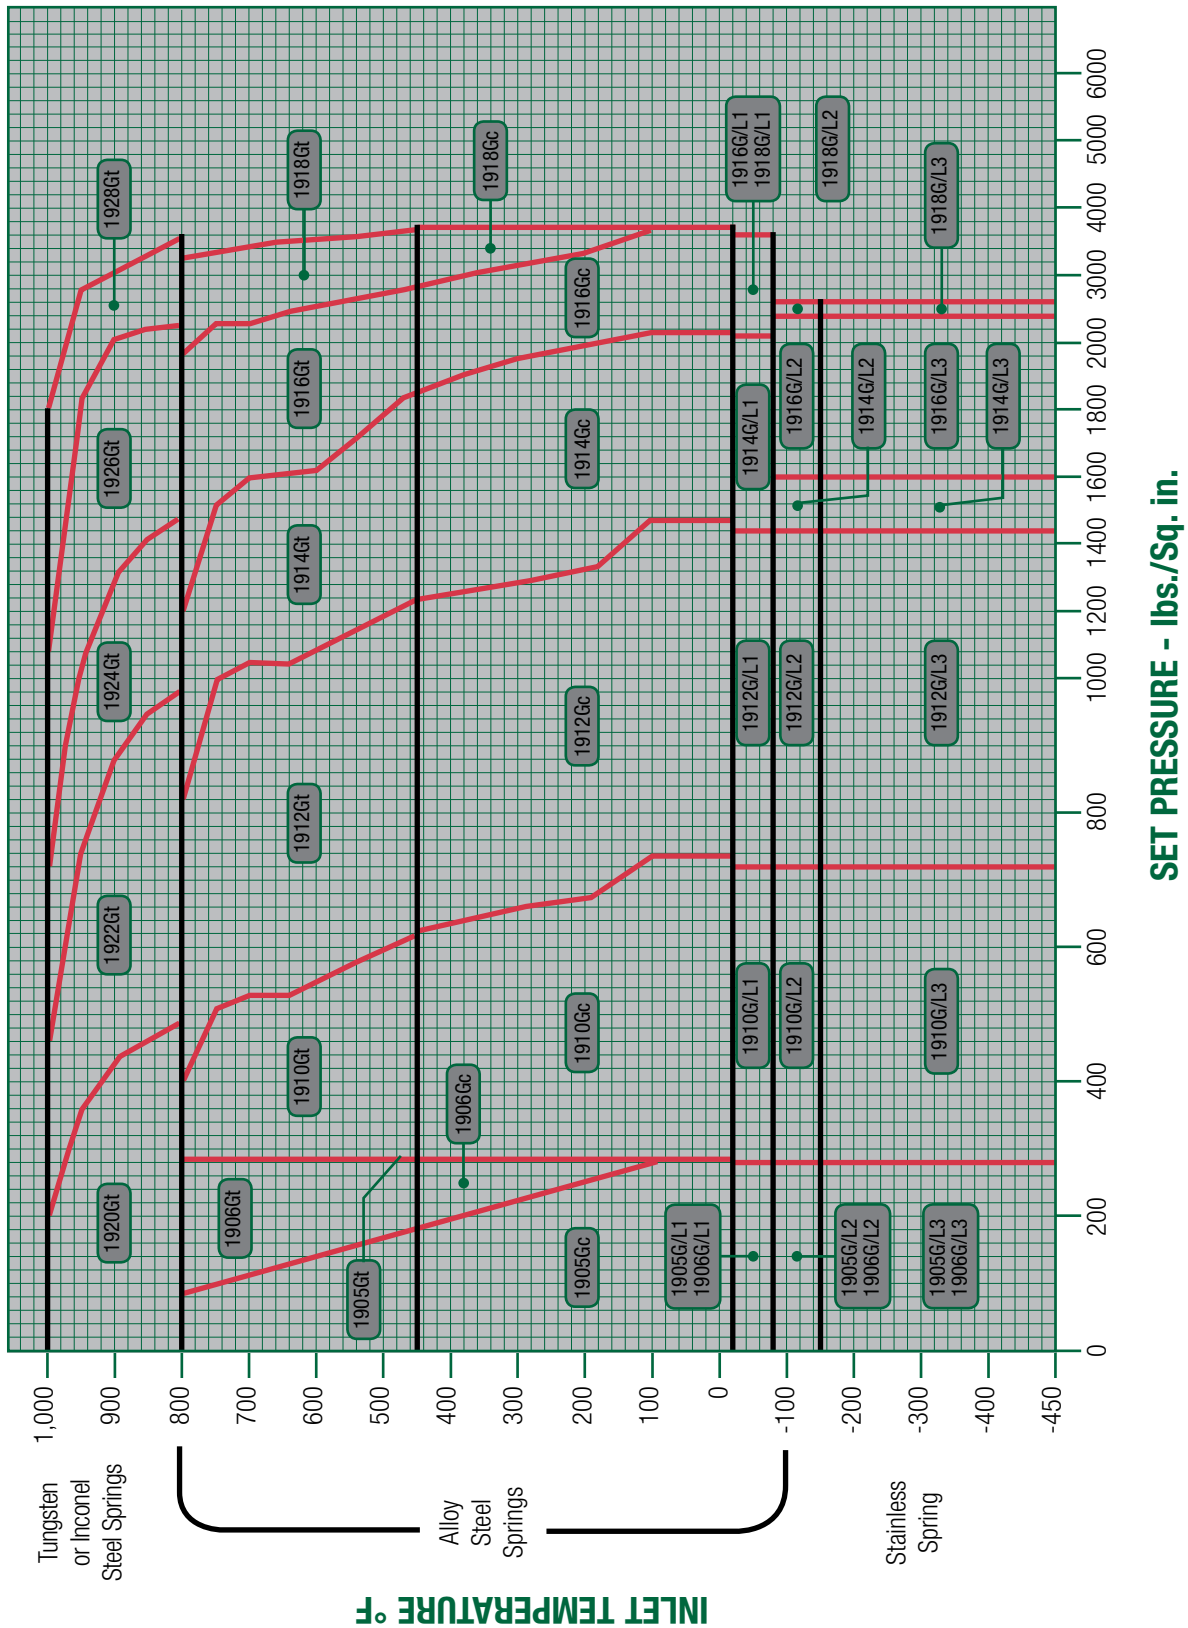

# Pressure / Temperature (Contd.)

Pressure Temperature Ratings for H Orifice

API Ratings (H Orifice - 0.785 in² (5.065 cm²))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905H	1.50	38.1	3.00	76.20	285	19.65	185	12.76	80	5.52	-	-	285	19.65	104	7.17	230	15.86
1906H	1.50	38.1	3.00	76.20	285	19.65	285	19.65	285	19.65	-	-	285	19.65	104	7.17	230	15.86
1910H	2.00	50.8	3.00	76.20	740	51.02	615	42.40	410	28.27	-	-	285	19.65	104	7.17	230	15.86
1912H	2.00	50.8	3.00	76.20	1480	102.04	1235	85.15	825	56.88	-	-	285	19.65	104	7.17	230	15.86
1914H	2.00	50.8	3.00	76.20	2220	153.06	1845	127.21	1235	85.15	-	-	285	19.65	104	7.17	230	15.86
1916H	2.00	50.8	3.00	76.20	2750	189.61	2750	189.61	2060	142.03	-	-	740	51.02	104	7.17	415	28.61
1920H	2.00	50.8	3.00	76.20	-	-	-	-	510	35.16	215	14.82	285	19.65	104	7.17	230	15.86
1922H	2.00	50.8	3.00	76.20	-	-	-	-	1015	69.98	430	29.65	285	19.65	104	7.17	230	15.86
1924H	2.00	50.8	3.00	76.20	-	-	-	-	1225	84.46	650	44.82	285	19.65	104	7.17	230	15.86
1926H	2.00	50.8	3.00	76.20	-	-	-	-	2540	175.13	1080	74.46	740	51.02	104	7.17	415	28.61


Pressure Temperature Ratings for H Orifice

ASME Ratings (H Orifice - 0.913 in <sup>2</sup> (5.888 cm <sup>2</sup> ) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905H	1.50	38.1	3.00	76.20	185	12.76	185	12.76	80	5.52	-	-	290	19.99	104	7.17	290	19.99
1906H	1.50	38.1	3.00	76.20	290	19.99	290	19.99	290	19.99	-	-	290	19.99	104	7.17	290	19.99
1910H	2.00	50.8	3.00	76.20	685	47.23	685	47.23	410	28.27	-	-	290	19.99	104	7.17	290	19.99
1912H	2.00	50.8	3.00	76.20	1368	94.32	1368	94.32	825	56.88	-	-	290	19.99	104	7.17	290	19.99
1914H	2.00	50.8	3.00	76.20	2053	141.55	2053	141.55	1235	85.15	-	-	290	19.99	104	7.17	750	51.71
1916H	2.00	50.8	3.00	76.20	3300	227.53	3300	227.53	2055	141.69	-	-	750	51.71	104	7.17	750	51.71
1920H	2.00	50.8	3.00	76.20	-	-	-	-	510	35.16	215	14.82	290	19.99	104	7.17	750	51.71
1922H	2.00	50.8	3.00	76.20	-	-	-	-	1015	69.98	430	29.65	290	19.99	104	7.17	290	19.99
1924H	2.00	50.8	3.00	76.20	-	-	-	-	1525	105.15	650	44.82	290	19.99	104	7.17	290	19.99
1926H	2.00	50.8	3.00	76.20	-	-	-	-	2540	175.13	1080	74.46	750	51.71	104	7.17	750	51.71

# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, H Orifice - API Area: 0.785 Sq. in.

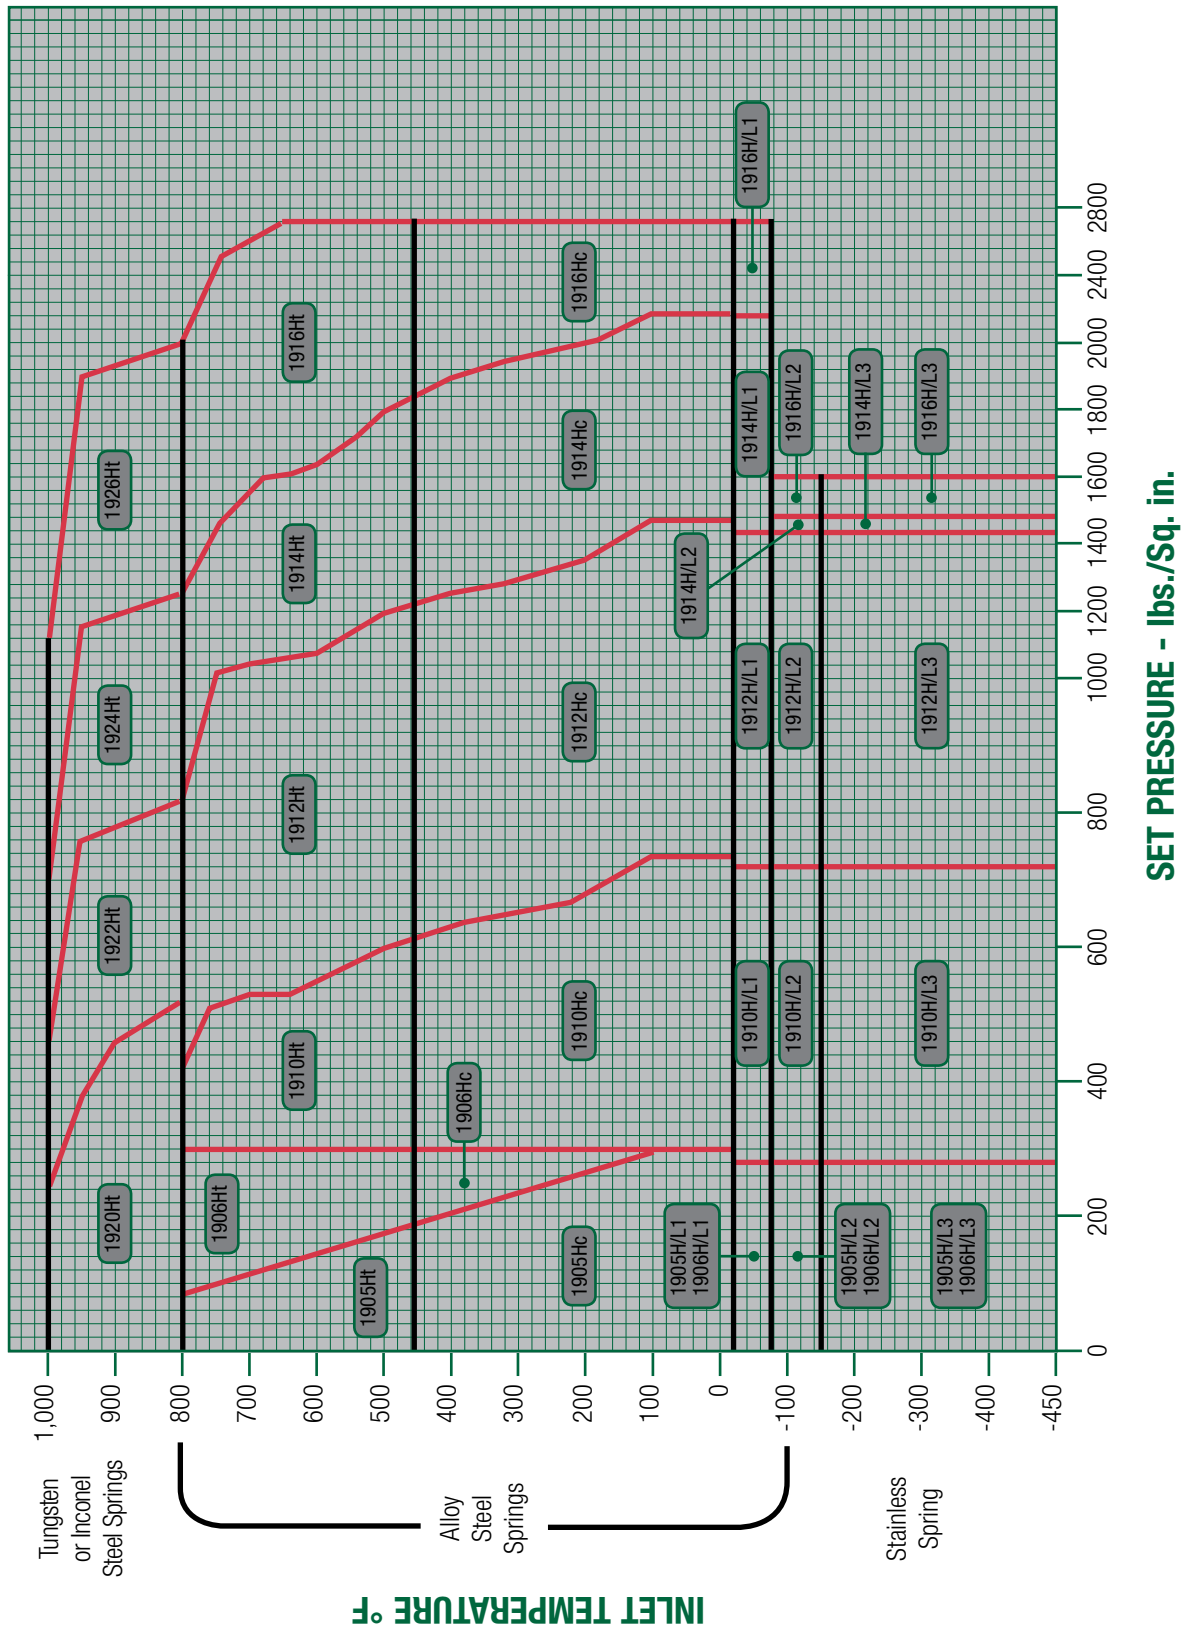

# Pressure / Temperature (Contd.)

Pressure Temperature Ratings for J Orifice

API Ratings (J Orifice - 1.287 in <sup>2</sup> (8.303 cm <sup>2</sup> ))														Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows				
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP		
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	
1905J	2.00	50.8	3.00	76.20	285	19.65	185	12.76	80	5.52	-	-	285	19.65	89	6.14	230	15.86	
1906J	2.00	50.8	3.00	76.20	285	19.65	285	19.65	285	19.65	-	-	285	19.65	89	6.14	230	15.86	
1910J	3.00	76.2	4.00	101.60	740	51.02	615	42.40	410	28.27	-	-	285	19.65	89	6.14	230	15.86	
1912J	3.00	76.2	4.00	101.60	1480	102.04	1235	85.15	825	56.88	-	-	285	19.65	89	6.14	230	15.86	
1914J	3.00	76.2	4.00	101.60	2220	153.06	1845	127.21	1235	85.15	-	-	285	19.65	89	6.14	230	15.86	
1916J	3.00	76.2	4.00	101.60	2700	186.16	2700	186.16	2060	142.03	-	-	600	41.37	89	6.14	230	15.86	
1920J	3.00	76.2	4.00	101.60	-	-	-	-	510	35.16	215	14.82	285	19.65	89	6.14	230	15.86	
1922J	3.00	76.2	4.00	101.60	-	-	-	-	1015	69.98	430	29.65	285	19.65	89	6.14	230	15.86	
1924J	3.00	76.2	4.00	101.60	-	-	-	-	1525	105.15	650	44.82	285	19.65	89	6.14	230	15.86	
1926J	3.00	76.2	4.00	101.60	-	-	-	-	2540	175.13	1080	74.46	600	41.37	89	6.14	230	15.86	


Pressure Temperature Ratings for J Orifice

ASME Ratings (J Orifice - 1.496 in <sup>2</sup> (9.652 cm <sup>2</sup> ) Actual)														Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows				
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP		
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	
1905J	2.00	50.8	3.00	76.20	185	12.76	185	12.76	80	5.52	-	-	290	19.99	89	6.14	290	19.99	
1906J	2.00	50.8	3.00	76.20	290	19.99	290	19.99	290	19.99	-	-	290	19.99	89	6.14	290	19.99	
1910J	3.00	76.2	4.00	101.60	685	47.23	685	47.23	410	28.27	-	-	290	19.99	89	6.14	290	19.99	
1912J	3.00	76.2	4.00	101.60	1368	94.32	1368	94.32	825	56.88	-	-	290	19.99	89	6.14	290	19.99	
1914J	3.00	76.2	4.00	101.60	2053	141.55	2053	141.55	1235	85.15	-	-	290	19.99	89	6.14	290	19.99	
1916J	3.00	76.2	4.00	101.60	3100	213.74	3100	213.74	2055	141.69	-	-	750	51.71	89	6.14	635	43.78	
1920J	3.00	76.2	4.00	101.60	-	-	-	-	510	35.16	215	14.82	290	19.99	89	6.14	290	19.99	
1922J	3.00	76.2	4.00	101.60	-	-	-	-	1015	69.98	430	29.65	290	19.99	89	6.14	290	19.99	
1924J	3.00	76.2	4.00	101.60	-	-	-	-	1525	105.15	650	44.82	290	19.99	89	6.14	290	19.99	
1926J	3.00	76.2	4.00	101.60	-	-	-	-	2540	175.13	1080	74.46	750	51.71	89	6.14	635	43.78	

# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, J Orifice - API Area: 1.287 Sq. in.

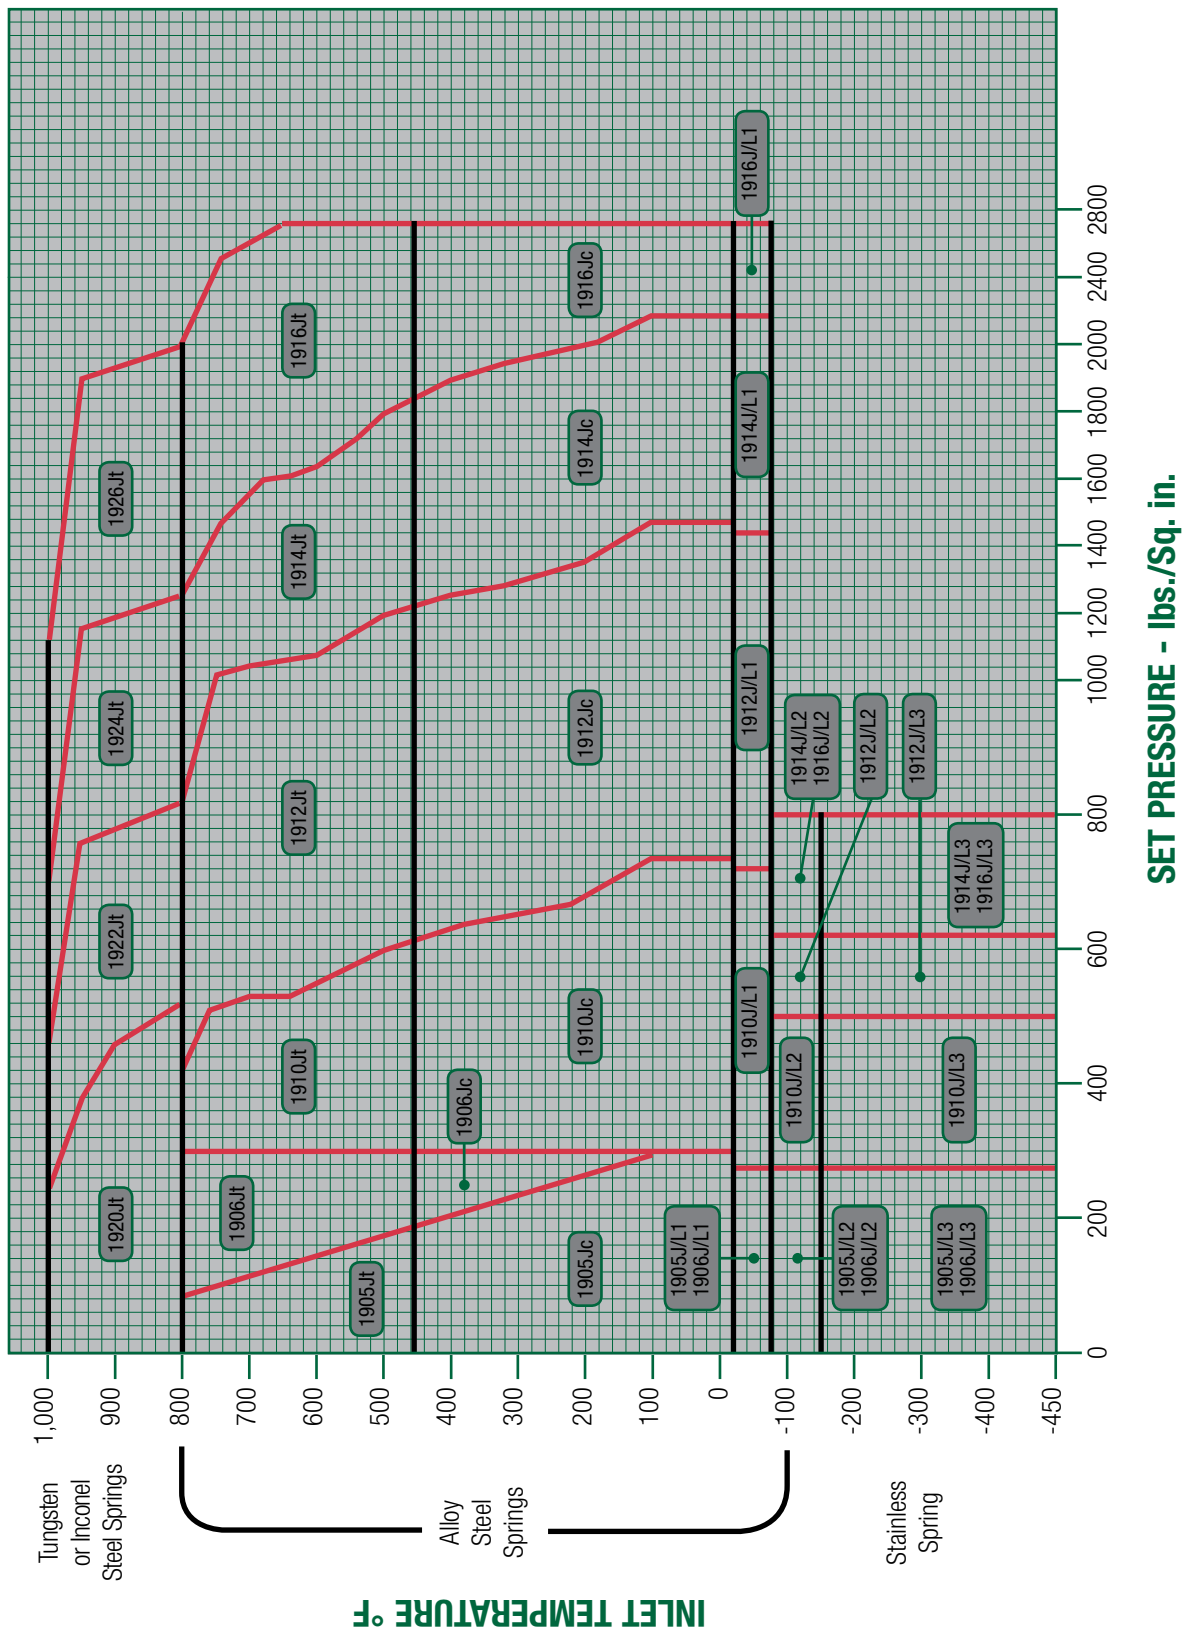

# Pressure / Temperature (Contd.)

## Pressure Temperature Ratings for K Orifice

API Ratings (K Orifice - 1.838 in <sup>2</sup> (11.858 cm <sup>2</sup> ))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905K	3.00	76.2	4.00	101.60	285	19.65	185	12.76	80	5.52	-	-	285	19.65	65	4.48	150	10.34
1906K	3.00	76.2	4.00	101.60	285	19.65	285	19.65	285	19.65	-	-	285	19.65	65	4.48	150	10.34
1910K	3.00	76.2	4.00	101.60	740	51.02	615	42.40	410	28.27	-	-	285	19.65	65	4.48	150	10.34
1912K	3.00	76.2	4.00	101.60	1480	102.04	1235	85.15	825	56.88	-	-	285	19.65	65	4.48	200	13.79
1914K	3.00	76.2	6.00	152.40	2220	153.06	1845	127.21	1235	85.15	-	-	285	19.65	65	4.48	200	13.79
1916K	3.00	76.2	6.00	152.40	2220	153.06	2220	153.06	2060	142.03	-	-	600	41.37	65	4.48	200	13.79
1920K	3.00	76.2	4.00	101.60	-	-	-	-	510	35.16	215	14.82	285	19.65	65	4.48	230	15.86
1922K	3.00	76.2	4.00	101.60	-	-	-	-	1015	69.98	430	29.65	285	19.65	65	4.48	230	15.86
1924K	3.00	76.2	6.00	152.40	-	-	-	-	1525	105.15	650	44.82	285	19.65	65	4.48	230	15.86
1926K	3.00	76.2	6.00	152.40	-	-	-	-	2220	153.06	1080	74.46	600	41.37	65	4.48	230	15.86

## Pressure Temperature Ratings for K Orifice


ASME Ratings (K Orifice - 2.138 in <sup>2</sup> (13.794 cm <sup>2</sup> ) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905K	3.00	76.2	4.00	101.60	185	12.76	185	12.76	80	5.52	-	-	290	19.99	89	6.14	290	19.99
1906K	3.00	76.2	4.00	101.60	290	19.99	290	19.99	290	19.99	-	-	290	19.99	89	6.14	290	19.99
1910K	3.00	76.2	4.00	101.60	685	47.23	685	47.23	410	28.27	-	-	290	19.99	89	6.14	290	19.99
1912K	3.00	76.2	4.00	101.60	1368	94.32	1368	94.32	825	56.88	-	-	290	19.99	89	6.14	290	19.99
1914K	3.00	76.2	6.00	152.40	2053	141.55	2053	141.55	1235	85.15	-	-	290	19.99	89	6.14	290	19.99
1916K	3.00	76.2	6.00	152.40	3000	206.84	3000	206.84	2055	141.69	-	-	750	51.71	89	6.14	535	36.89
1920K	3.00	76.2	4.00	101.60	-	-	-	-	510	35.16	215	14.82	290	19.99	89	6.14	290	19.99
1922K	3.00	76.2	4.00	101.60	-	-	-	-	1015	69.98	430	29.65	290	19.99	89	6.14	290	19.99
1924K	3.00	76.2	6.00	152.40	-	-	-	-	1525	105.15	650	44.82	290	19.99	89	6.14	290	19.99
1926K	3.00	76.2	6.00	152.40	-	-	-	-	2540	175.13	1080	74.46	750	51.71	89	6.14	535	36.89



# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, K Orifice - API Area: 1.838 Sq. in.

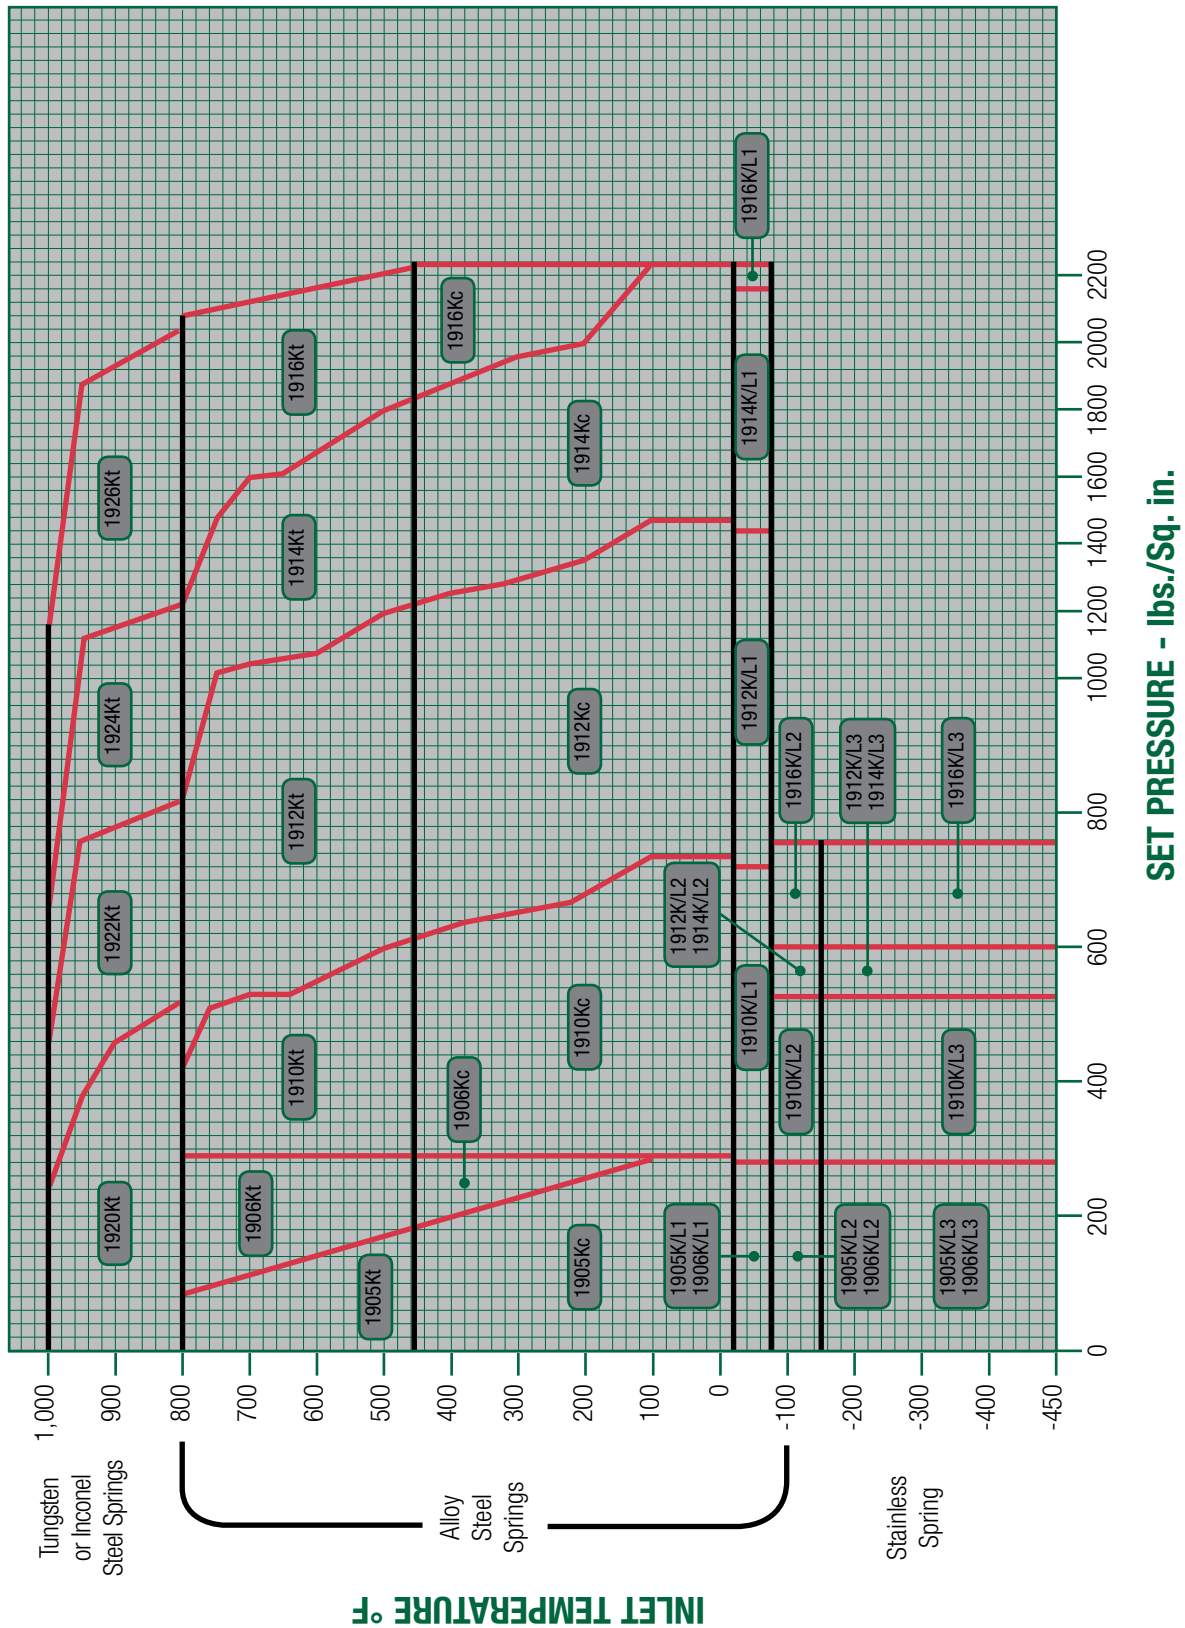

# Pressure / Temperature (Contd.)

Pressure Temperature Ratings for L Orifice

API Ratings (L Orifice - 2.853 in <sup>2</sup> (18.406 cm <sup>2</sup> ))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905L	3.00	76.2	4.00	101.60	285	19.65	185	12.76	80	5.52	-	-	285	19.65	53	3.65	100	6.89
1906L	3.00	76.2	4.00	101.60	285	19.65	285	19.65	285	19.65	-	-	285	19.65	53	3.65	100	6.89
1910L	4.00	101.6	6.00	152.40	740	51.02	615	42.40	410	28.27	-	-	285	19.65	53	3.65	170	11.72
1912L	4.00	101.6	6.00	152.40	1000	68.95	1000	68.95	825	56.88	-	-	285	19.65	53	3.65	170	11.72
1914L	4.00	101.6	6.00	152.40	1500	103.42	1500	103.42	1235	85.15	-	-	285	19.65	53	3.65	170	11.72
1916L	4.00	101.6	6.00	152.40	1500	103.42	1500	103.42	1500	103.42	-	-	285	19.65	53	3.65	170	11.72
1920L	4.00	101.6	6.00	152.40	-	-	-	-	510	35.16	215	14.82	285	19.65	53	3.65	170	11.72
1922L	4.00	101.6	6.00	152.40	-	-	-	-	1000	68.95	430	29.65	285	19.65	53	3.65	170	11.72
1924L	4.00	101.6	6.00	152.40	-	-	-	-	1500	103.42	650	44.82	285	19.65	53	3.65	170	11.72
1926L	4.00	101.6	6.00	152.40	-	-	-	-	1500	103.42	1080	74.46	600	41.37	53	3.65	170	11.72


Pressure Temperature Ratings for L Orifice

ASME Ratings (L Orifice - 3.317 in <sup>2</sup> (21.4 cm <sup>2</sup> ) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905L	3.00	76.2	4.00	101.60	185	12.76	185	12.76	80	5.52	-	-	290	19.99	53	3.65	290	19.99
1906L	3.00	76.2	4.00	101.60	290	19.99	290	19.99	290	19.99	-	-	290	19.99	53	3.65	290	19.99
1910L	4.00	101.6	6.00	152.40	685	47.23	685	47.23	410	28.27	-	-	290	19.99	53	3.65	290	19.99
1912L	4.00	101.6	6.00	152.40	1368	94.32	1368	94.32	825	56.88	-	-	290	19.99	53	3.65	290	19.99
1914L	4.00	101.6	6.00	152.40	1900	131.00	2053	141.55	1235	85.15	-	-	290	19.99	53	3.65	290	19.99
1916L	4.00	101.6	6.00	152.40	2900	199.95	3000	206.84	2055	141.69	-	-	290	19.99	53	3.65	535	36.89
1920L	4.00	101.6	6.00	152.40	-	-	-	-	510	35.16	215	14.82	290	19.99	53	3.65	290	19.99
1922L	4.00	101.6	6.00	152.40	-	-	-	-	1015	69.98	430	29.65	290	19.99	53	3.65	290	19.99
1924L	4.00	101.6	6.00	152.40	-	-	-	-	1525	105.15	650	44.82	290	19.99	53	3.65	290	19.99
1926L	4.00	101.6	6.00	152.40	-	-	-	-	2540	175.13	1080	74.46	290	19.99	53	3.65	535	36.89

# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, L Orifice - API Area: 2.853 Sq. in.

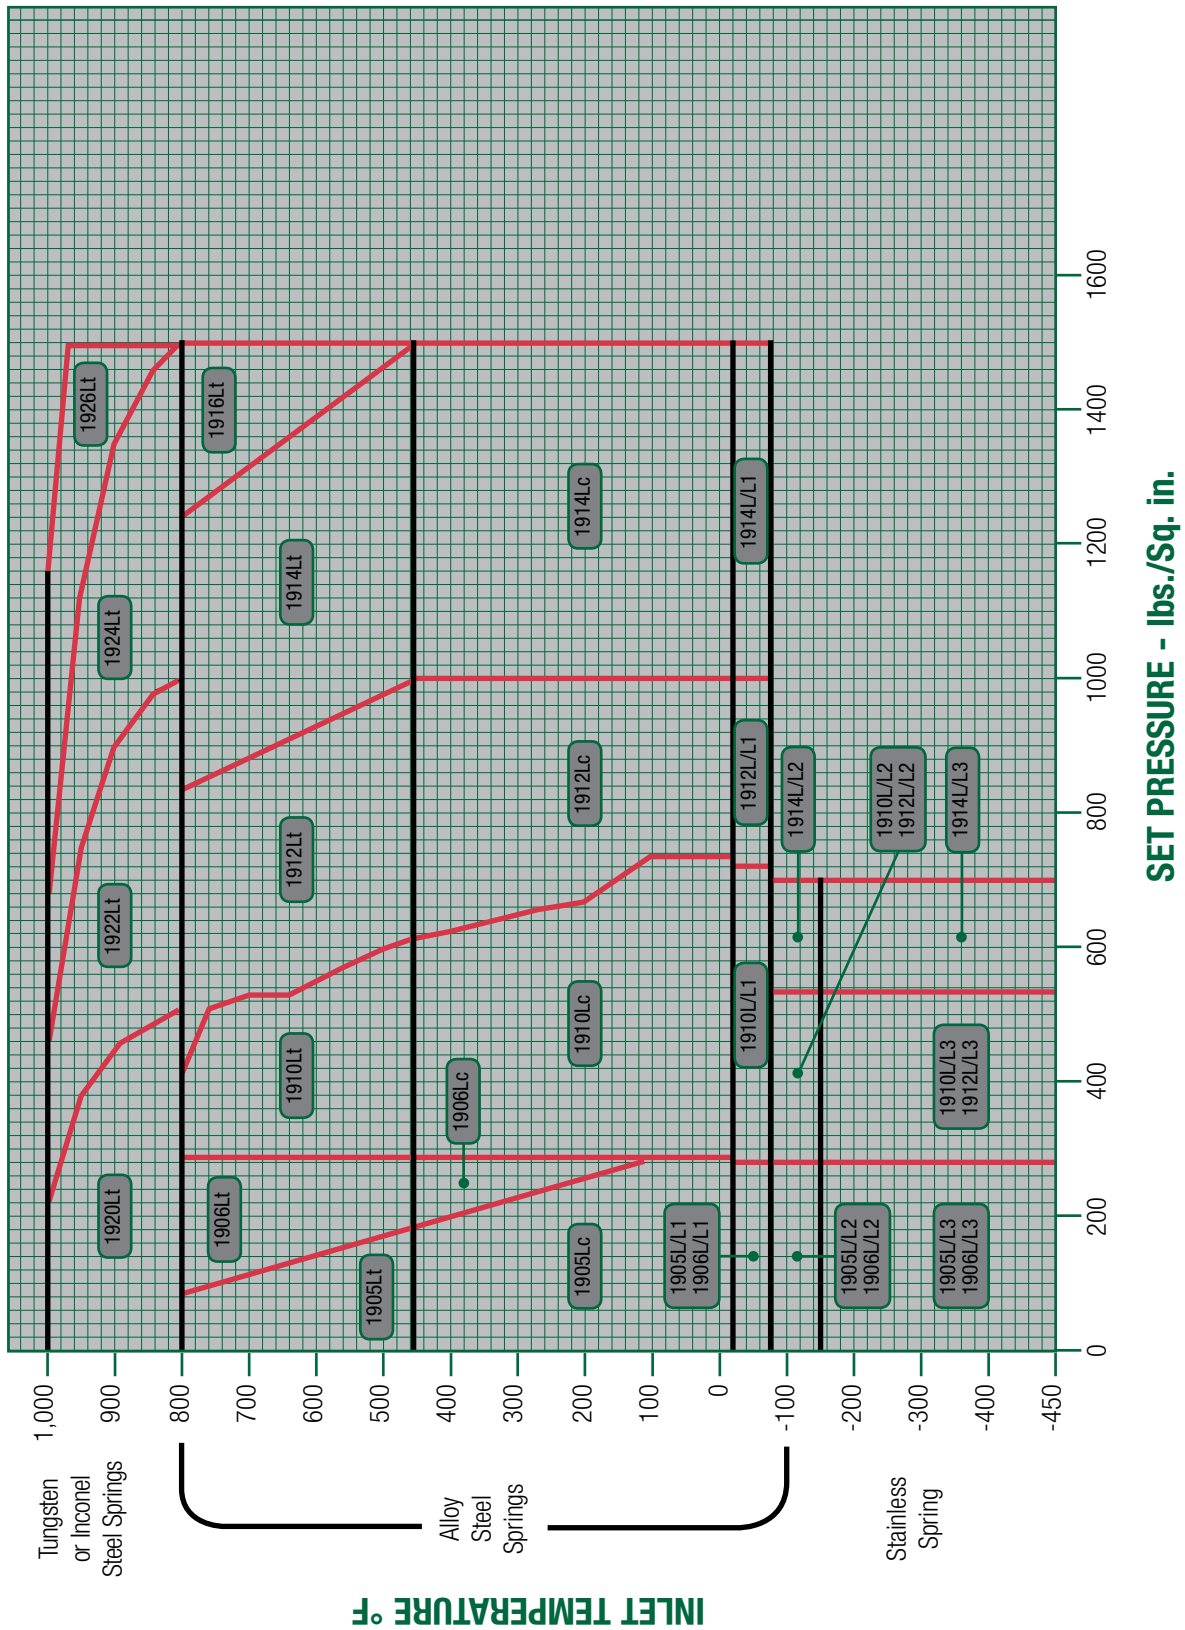

# Pressure / Temperature (Contd.)

Pressure Temperature Ratings for M Orifice

API Ratings (M Orifice - 3.6 in <sup>2</sup> (23.226 cm <sup>2</sup> ))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905M	4.00	101.6	6.00	152.40	285	19.65	185	12.76	80	5.52	-	-	285	19.65	66	4.55	80	5.52
1906M	4.00	101.6	6.00	152.40	285	19.65	285	19.65	285	19.65	-	-	285	19.65	66	4.55	80	5.52
1910M	4.00	101.6	6.00	152.40	740	51.02	615	42.40	410	28.27	-	-	285	19.65	66	4.55	160	11.03
1912M	4.00	101.6	6.00	152.40	1100	75.84	1100	75.84	825	56.88	-	-	285	19.65	66	4.55	160	11.03
1914M	4.00	101.6	6.00	152.40	1100	75.84	1100	75.84	1100	75.84	-	-	285	19.65	66	4.55	160	11.03
1920M	4.00	101.6	6.00	152.40	-	-	-	-	510	35.16	215	14.82	285	19.65	66	4.55	160	11.03
1922M	4.00	101.6	6.00	152.40	-	-	-	-	1000	68.95	430	29.65	285	19.65	66	4.55	160	11.03
1924M	4.00	101.6	6.00	152.40	-	-	-	-	1100	75.84	650	44.82	285	19.65	66	4.55	160	11.03


Pressure Temperature Ratings for M Orifice

ASME Ratings (M Orifice - 4.186 in <sup>2</sup> (27.006 cm <sup>2</sup> ) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905M	4.00	101.6	6.00	152.40	290	19.99	185	12.76	80	5.52	-	-	290	19.99	66	4.55	290	19.99
1906M	4.00	101.6	6.00	152.40	290	19.99	290	19.99	290	19.99	-	-	290	19.99	66	4.55	290	19.99
1910M	4.00	101.6	6.00	152.40	750	51.71	685	47.23	410	28.27	-	-	290	19.99	66	4.55	290	19.99
1912M	4.00	101.6	6.00	152.40	1500	103.42	1368	94.32	825	56.88	-	-	290	19.99	66	4.55	290	19.99
1914M	4.00	101.6	6.00	152.40	1600	110.32	1600	110.32	1235	85.15	-	-	290	19.99	66	4.55	290	19.99
1920M	4.00	101.6	6.00	152.40	-	-	-	-	510	35.16	215	14.82	290	19.99	66	4.55	290	19.99
1922M	4.00	101.6	6.00	152.40	-	-	-	-	1015	69.98	430	29.65	290	19.99	66	4.55	290	19.99
1924M	4.00	101.6	6.00	152.40	-	-	-	-	1525	105.15	650	44.82	290	19.99	66	4.55	290	19.99

# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, M Orifice - API Area: 3.60 Sq. in.

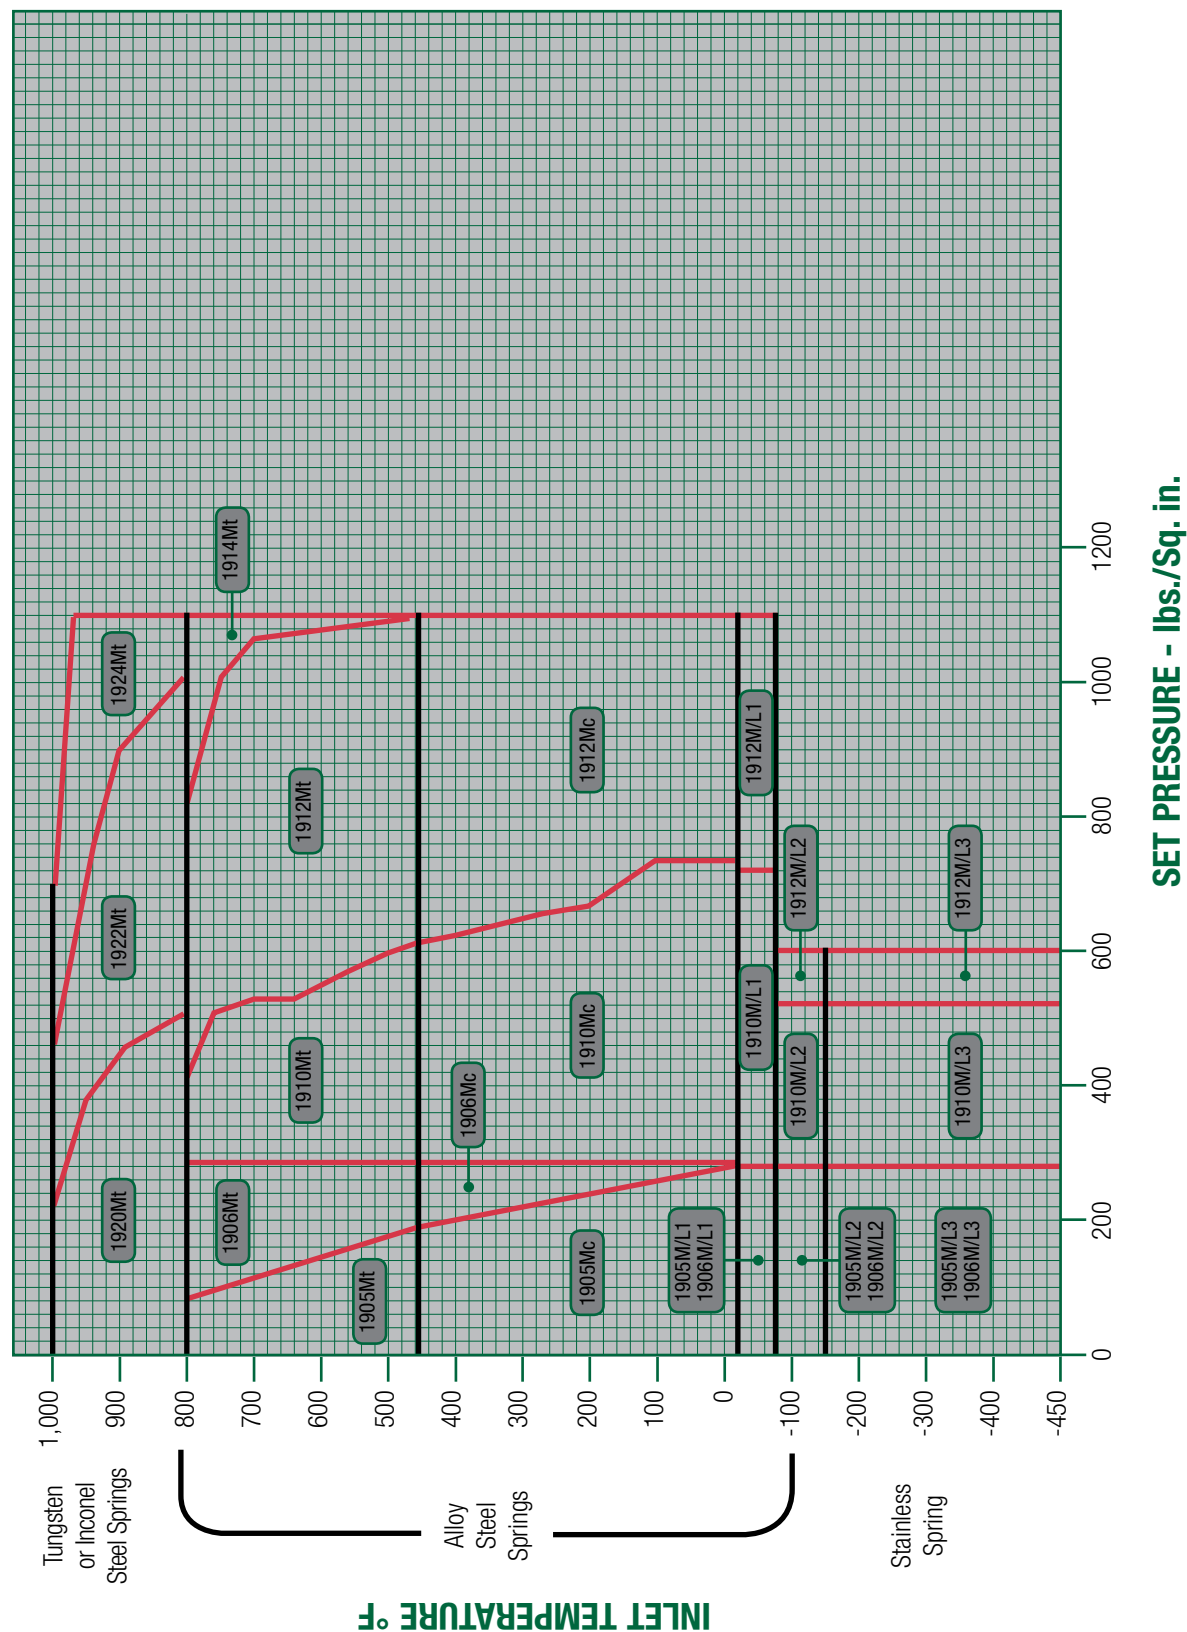

# Pressure / Temperature (Contd.)

## Pressure Temperature Ratings for N Orifice

API Ratings (N Orifice - 4.34 in <sup>2</sup> (28 cm <sup>2</sup> ))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905N	4.00	101.6	6.00	152.40	285	19.65	185	12.76	80	5.52	-	-	285	19.65	73	5.03	80	5.52
1906N	4.00	101.6	6.00	152.40	285	19.65	285	19.65	285	19.65	-	-	285	19.65	73	5.03	80	5.52
1910N	4.00	101.6	6.00	152.40	740	51.02	615	42.40	410	28.27	-	-	285	19.65	73	5.03	160	11.03
1912N	4.00	101.6	6.00	152.40	1000	68.95	1000	68.95	825	56.88	-	-	285	19.65	73	5.03	160	11.03
1914N	4.00	101.6	6.00	152.40	1000	68.95	1000	68.95	1000	68.95	-	-	285	19.65	73	5.03	160	11.03
1920N	4.00	101.6	6.00	152.40	-	-	-	-	510	35.16	215	14.82	285	19.65	73	5.03	160	11.03
1922N	4.00	101.6	6.00	152.40	-	-	-	-	1000	68.95	430	29.65	285	19.65	73	5.03	160	11.03
1924N	4.00	101.6	6.00	152.40	-	-	-	-	1000	68.95	650	44.82	285	19.65	73	5.03	160	11.03


## Pressure Temperature Ratings for N Orifice

ASME Ratings (N Orifice - 5.047 in² (32.561 cm²) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905N	4.00	101.6	6.00	152.40	290	19.99	185	12.76	80	5.52	-	-	290	19.99	73	5.03	290	19.99
1906N	4.00	101.6	6.00	152.40	290	19.99	290	19.99	290	19.99	-	-	290	19.99	73	5.03	290	19.99
1910N	4.00	101.6	6.00	152.40	750	51.71	685	47.23	410	28.27	-	-	290	19.99	73	5.03	290	19.99
1912N	4.00	101.6	6.00	152.40	1500	103.42	1368	94.32	825	56.88	-	-	290	19.99	73	5.03	290	19.99
1914N	4.00	101.6	6.00	152.40	1600	110.32	1600	110.32	1235	85.15	-	-	290	19.99	73	5.03	290	19.99
1920N	4.00	101.6	6.00	152.40	-	-	-	-	510	35.16	215	14.82	290	19.99	73	5.03	290	19.99
1922N	4.00	101.6	6.00	152.40	-	-	-	-	1015	69.98	430	29.65	290	19.99	73	5.03	290	19.99
1924N	4.00	101.6	6.00	152.40	-	-	-	-	1525	105.15	650	44.82	290	19.99	73	5.03	290	19.99

# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, N Orifice - API Area: 4.34 Sq. in.

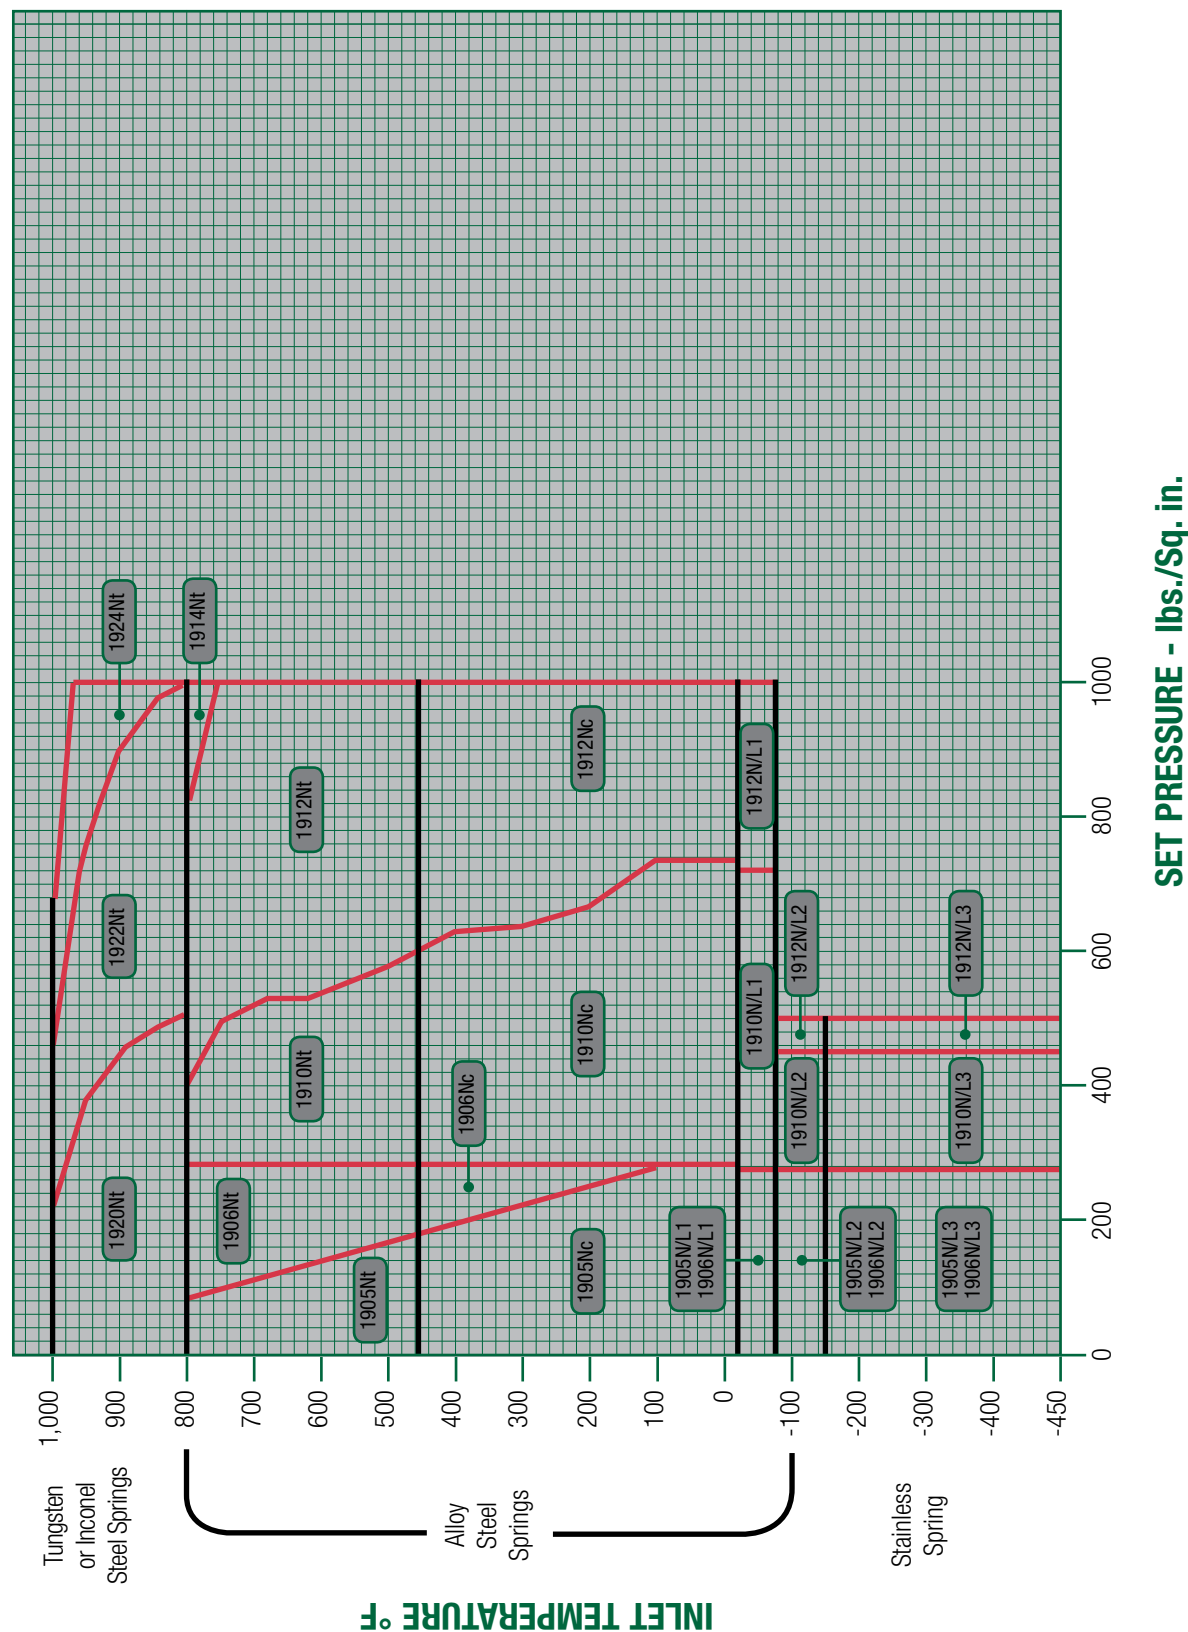

# Pressure / Temperature (Contd.)

Pressure Temperature Ratings for P Orifice

API Ratings (P Orifice - 6.38 in² (41.161 cm²))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905P	4.00	101.6	6.00	152.40	285	19.65	185	12.76	80	5.52	-	-	285	19.65	56	3.86	80	5.52
1906P	4.00	101.6	6.00	152.40	285	19.65	285	19.65	285	19.65	-	-	285	19.65	56	3.86	80	5.52
1910P	4.00	101.6	6.00	152.40	525	36.20	525	36.20	410	28.27	-	-	285	19.65	56	3.86	150	10.34
1912P	4.00	101.6	6.00	152.40	1000	68.95	1000	68.95	825	56.88	-	-	285	19.65	56	3.86	150	10.34
1914P	4.00	101.6	6.00	152.40	1000	68.95	1000	68.95	1000	68.95	-	-	285	19.65	56	3.86	150	10.34
1920P	4.00	101.6	6.00	152.40	-	-	-	-	510	35.16	215	14.82	285	19.65	56	3.86	160	11.03
1923P	4.00	101.6	6.00	152.40	-	-	-	-	1000	68.95	430	29.65	285	19.65	56	3.86	160	11.03
1924P	4.00	101.6	6.00	152.40	-	-	-	-	1000	68.95	650	44.82	285	19.65	56	3.86	160	11.03

Pressure Temperature Ratings for P Orifice


ASME Ratings (P Orifice - 7.417 in² (47.852 cm²) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905P	4.00	101.6	6.00	152.40	290	19.99	185	12.76	80	5.52	-	-	290	19.99	56	3.86	290	19.99
1906P	4.00	101.6	6.00	152.40	290	19.99	290	19.99	290	19.99	-	-	290	19.99	56	3.86	290	19.99
1910P	4.00	101.6	6.00	152.40	750	51.71	685	47.23	410	28.27	-	-	290	19.99	56	3.86	290	19.99
1912P	4.00	101.6	6.00	152.40	1500	103.42	1368	94.32	825	56.88	-	-	290	19.99	56	3.86	290	19.99
1914P	4.00	101.6	6.00	152.40	1700	117.21	1700	117.21	1235	85.15	-	-	290	19.99	56	3.86	290	19.99
1920P	4.00	101.6	6.00	152.40	-	-	-	-	510	35.16	215	14.82	290	19.99	56	3.86	290	19.99
1923P	4.00	101.6	6.00	152.40	-	-	-	-	1015	69.98	430	29.65	290	19.99	56	3.86	290	19.99
1924P	4.00	101.6	6.00	152.40	-	-	-	-	1525	105.15	650	44.82	290	19.99	56	3.86	290	19.99



# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, P Orifice - API Area: 6.38 Sq. in.

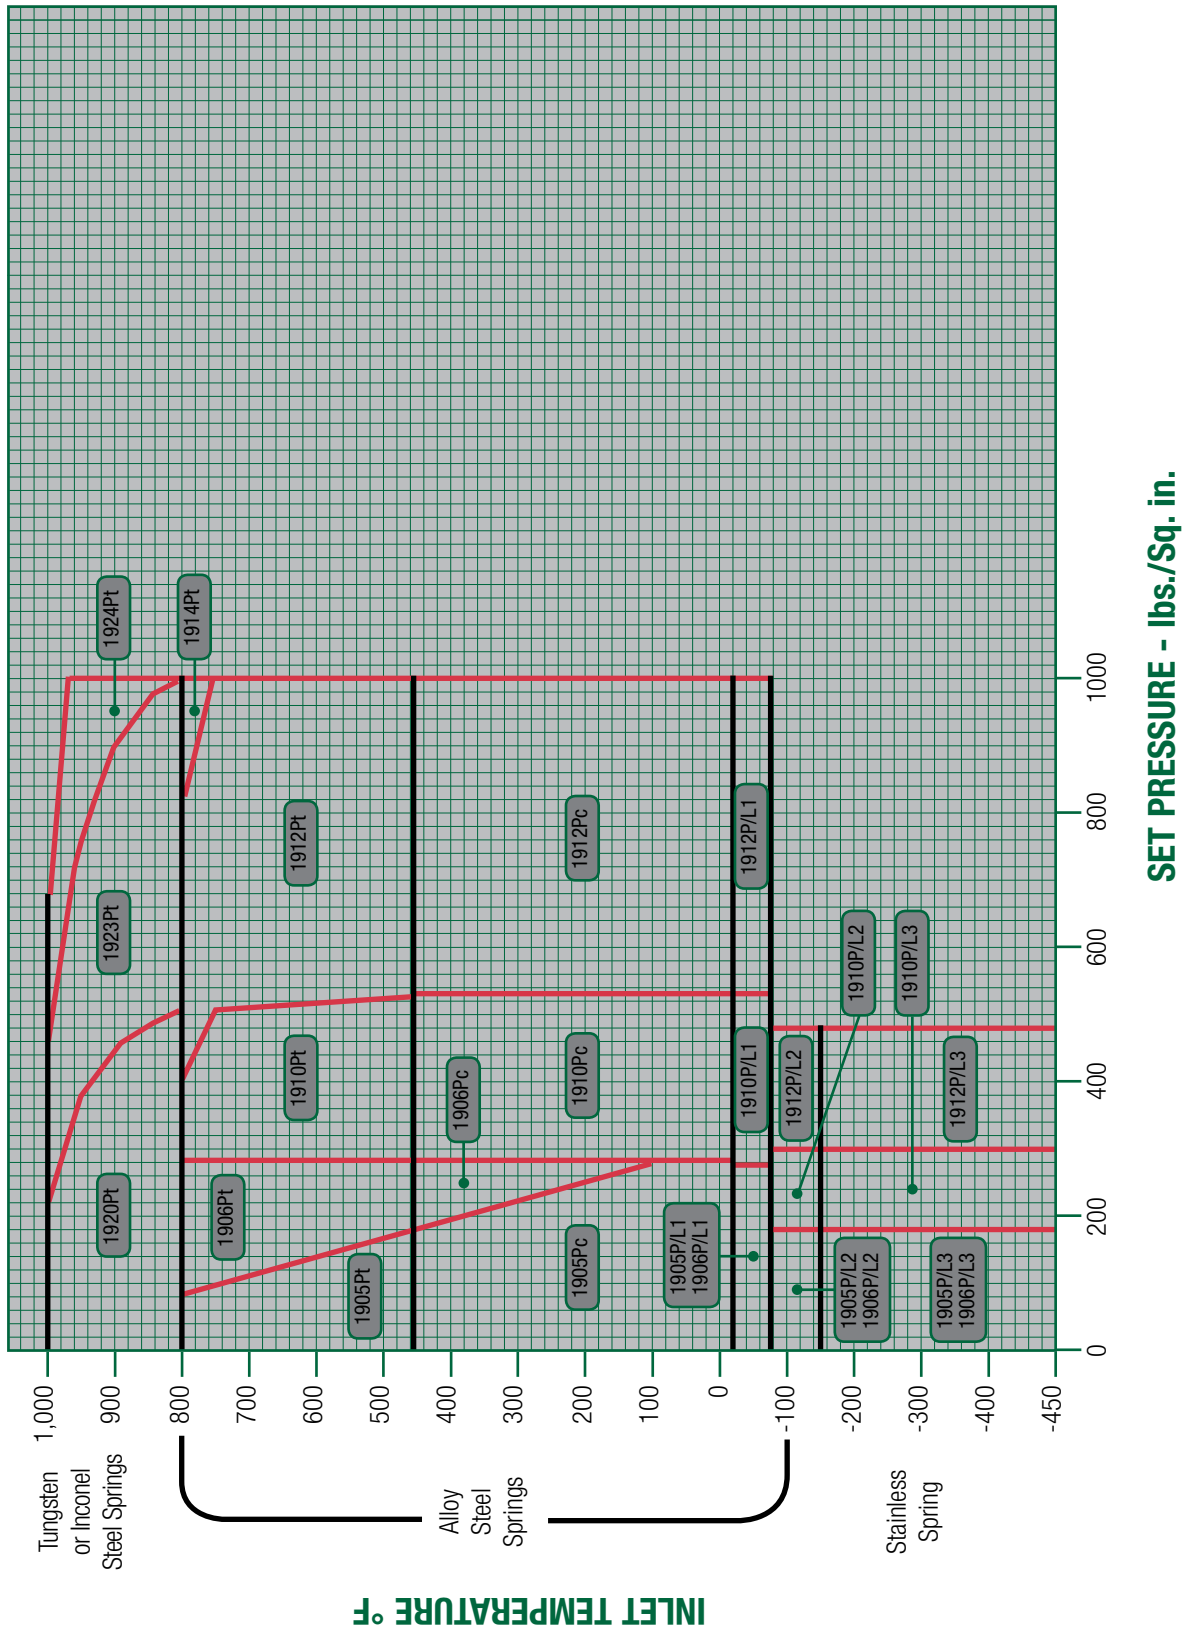

# Pressure / Temperature (Contd.)

## Pressure Temperature Ratings for Q Orifice

API Ratings (Q Orifice - 11.05 in² (71.29 cm²))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905Q	6.00	152.4	8.00	203.20	165	11.38	165	11.38	80	5.52	-	-	285	19.65	56	3.86	80	5.52
1906Q	6.00	152.4	8.00	203.20	165	11.38	165	11.38	165	11.38	-	-	285	19.65	56	3.86	80	5.52
1910Q	6.00	152.4	8.00	203.20	300	20.68	300	20.68	300	20.68	-	-	285	19.65	56	3.86	150	10.34
1912Q	6.00	152.4	8.00	203.20	600	41.37	600	41.37	600	41.37	-	-	285	19.65	56	3.86	150	10.34
1920Q	6.00	152.4	8.00	203.20	-	-	-	-	165	11.38	165	11.38	285	19.65	56	3.86	150	10.34
1922Q	6.00	152.4	8.00	203.20	-	-	-	-	600	41.37	430	29.65	285	19.65	56	3.86	160	11.03


## Pressure Temperature Ratings for Q Orifice

ASME Ratings (Q Orifice - 12.85 in <sup>2</sup> (82.903 cm <sup>2</sup> ) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905Q	6.00	152.4	8.00	203.20	290	19.99	185	12.76	80	5.52	-	-	290	19.99	52	3.59	205	14.13
1906Q	6.00	152.4	8.00	203.20	290	19.99	290	19.99	290	19.99	-	-	290	19.99	52	3.59	205	14.13
1910Q	6.00	152.4	8.00	203.20	650	44.82	650	44.82	410	28.27	-	-	290	19.99	52	3.59	205	14.13
1912Q	6.00	152.4	8.00	203.20	900	62.05	900	62.05	825	56.88	-	-	290	19.99	52	3.59	205	14.13
1920Q	6.00	152.4	8.00	203.20	-	-	-	-	510	35.16	215	14.82	290	19.99	52	3.59	205	14.13
1922Q	6.00	152.4	8.00	203.20	-	-	-	-	900	62.05	430	29.65	290	19.99	52	3.59	205	14.13

# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, Q Orifice - API Area: 11.05 Sq. in.

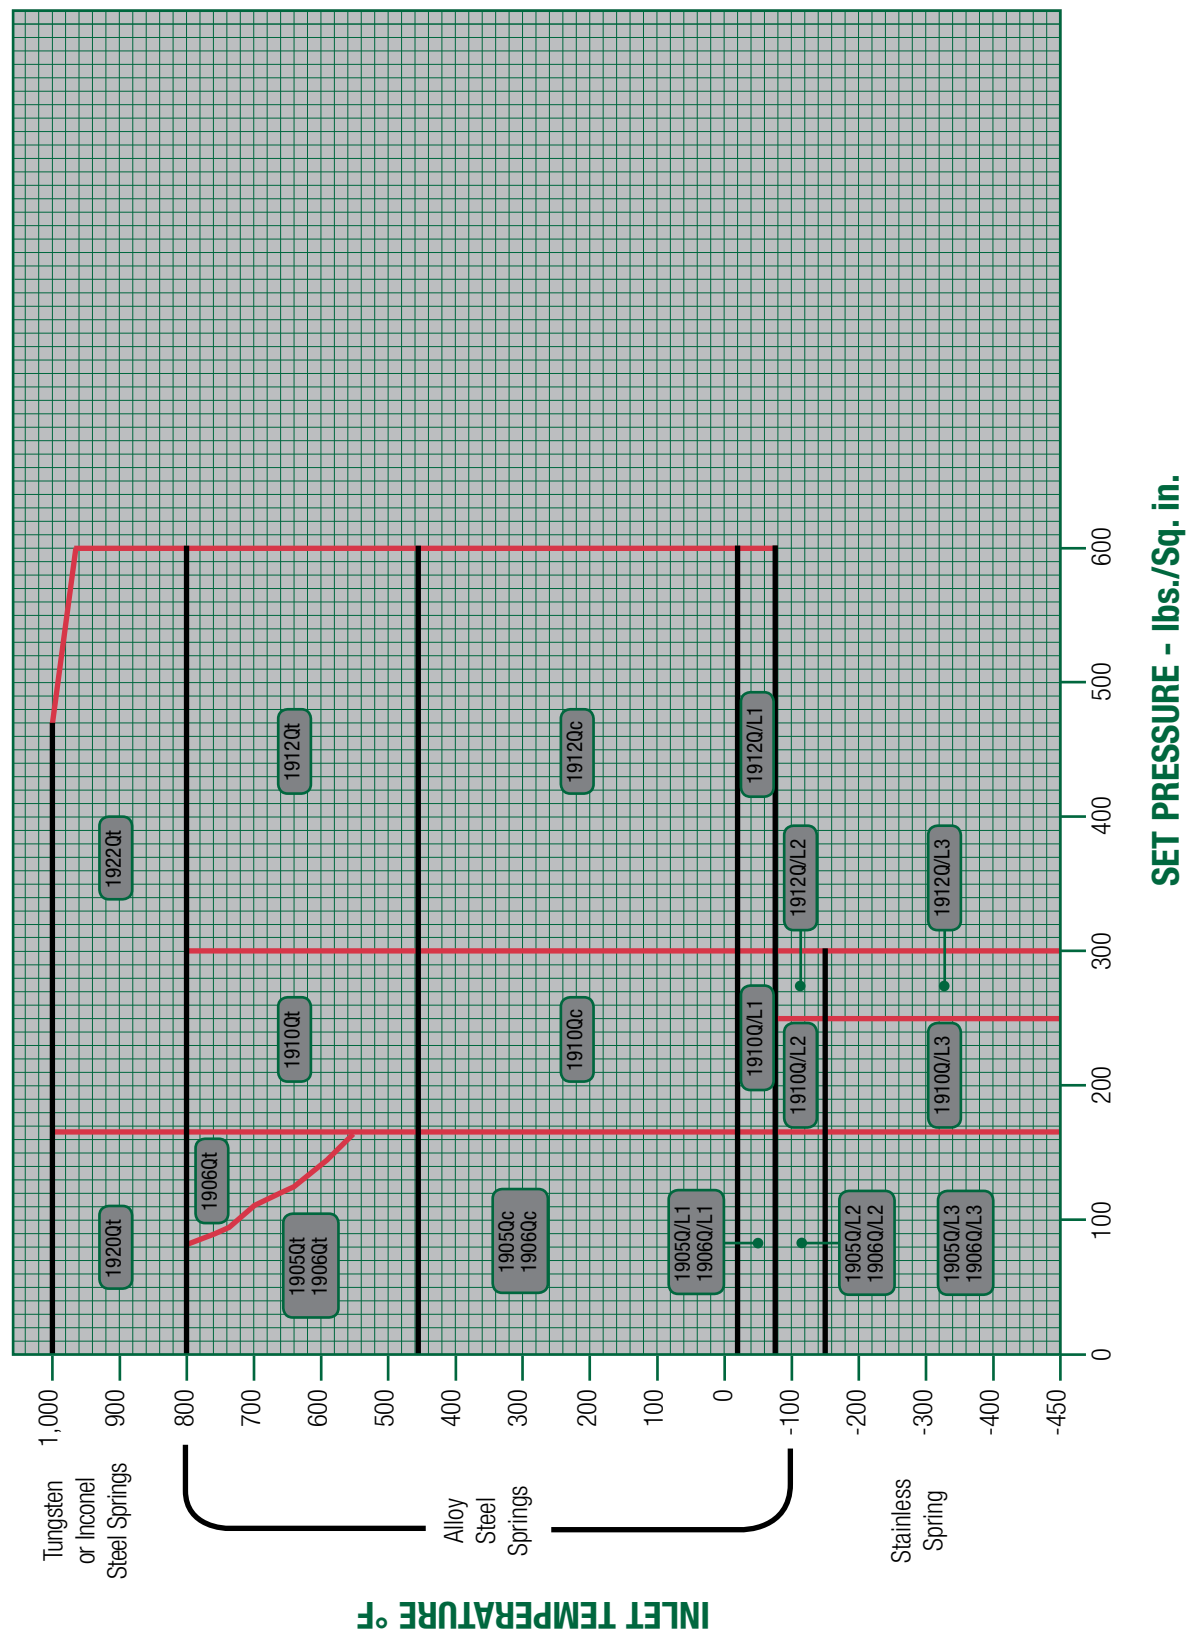

# Pressure / Temperature (Contd.)

Pressure Temperature Ratings for R Orifice

API Ratings (R Orifice - 16 in <sup>2</sup> (103.226 cm <sup>2</sup> ))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905R	6.00	152.4	8.00	203.20	100	6.89	100	6.89	80	5.52	-	-	60	4.14	52	3.59	60	4.14
1906R	6.00	152.4	8.00	203.20	100	6.89	100	6.89	100	6.89	-	-	60	4.14	52	3.59	60	4.14
1910R	6.00	152.4	10.00	254.00	230	15.86	230	15.86	230	15.86	-	-	100	6.89	52	3.59	100	6.89
1912R	6.00	152.4	10.00	254.00	300	20.68	300	20.68	300	20.68	-	-	100	6.89	52	3.59	100	6.89
1920R	6.00	152.4	8.00	203.20	-	-	-	-	100	6.89	100	6.89	100	6.89	52	3.59	100	6.89
1922R	6.00	152.4	10.00	254.00	-	-	-	-	300	20.68	300	20.68	100	6.89	52	3.59	100	6.89


Pressure Temperature Ratings for R Orifice

ASME Ratings (R Orifice - 18.6 in <sup>2</sup> (120 cm <sup>2</sup> ) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905R	6.00	152.4	8.00	203.20	150	10.34	150	10.34	80	5.52	-	-	150	10.34	52	3.59	145	10.00
1906R	6.00	152.4	8.00	203.20	150	10.34	150	10.34	150	10.34	-	-	150	10.34	52	3.59	145	10.00
1910R	6.00	152.4	10.00	254.00	450	31.03	450	31.03	410	28.27	-	-	290	19.99	52	3.59	145	10.00
1912R	6.00	152.4	10.00	254.00	650	44.82	650	44.82	650	44.82	-	-	290	19.99	52	3.59	145	10.00
1920R	6.00	152.4	8.00	203.20	-	-	-	-	450	31.03	215	14.82	290	19.99	52	3.59	145	10.00
1922R	6.00	152.4	10.00	254.00	-	-	-	-	650	44.82	430	29.65	290	19.99	52	3.59	145	10.00

# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, R Orifice - API Area: 16.0 Sq. in.

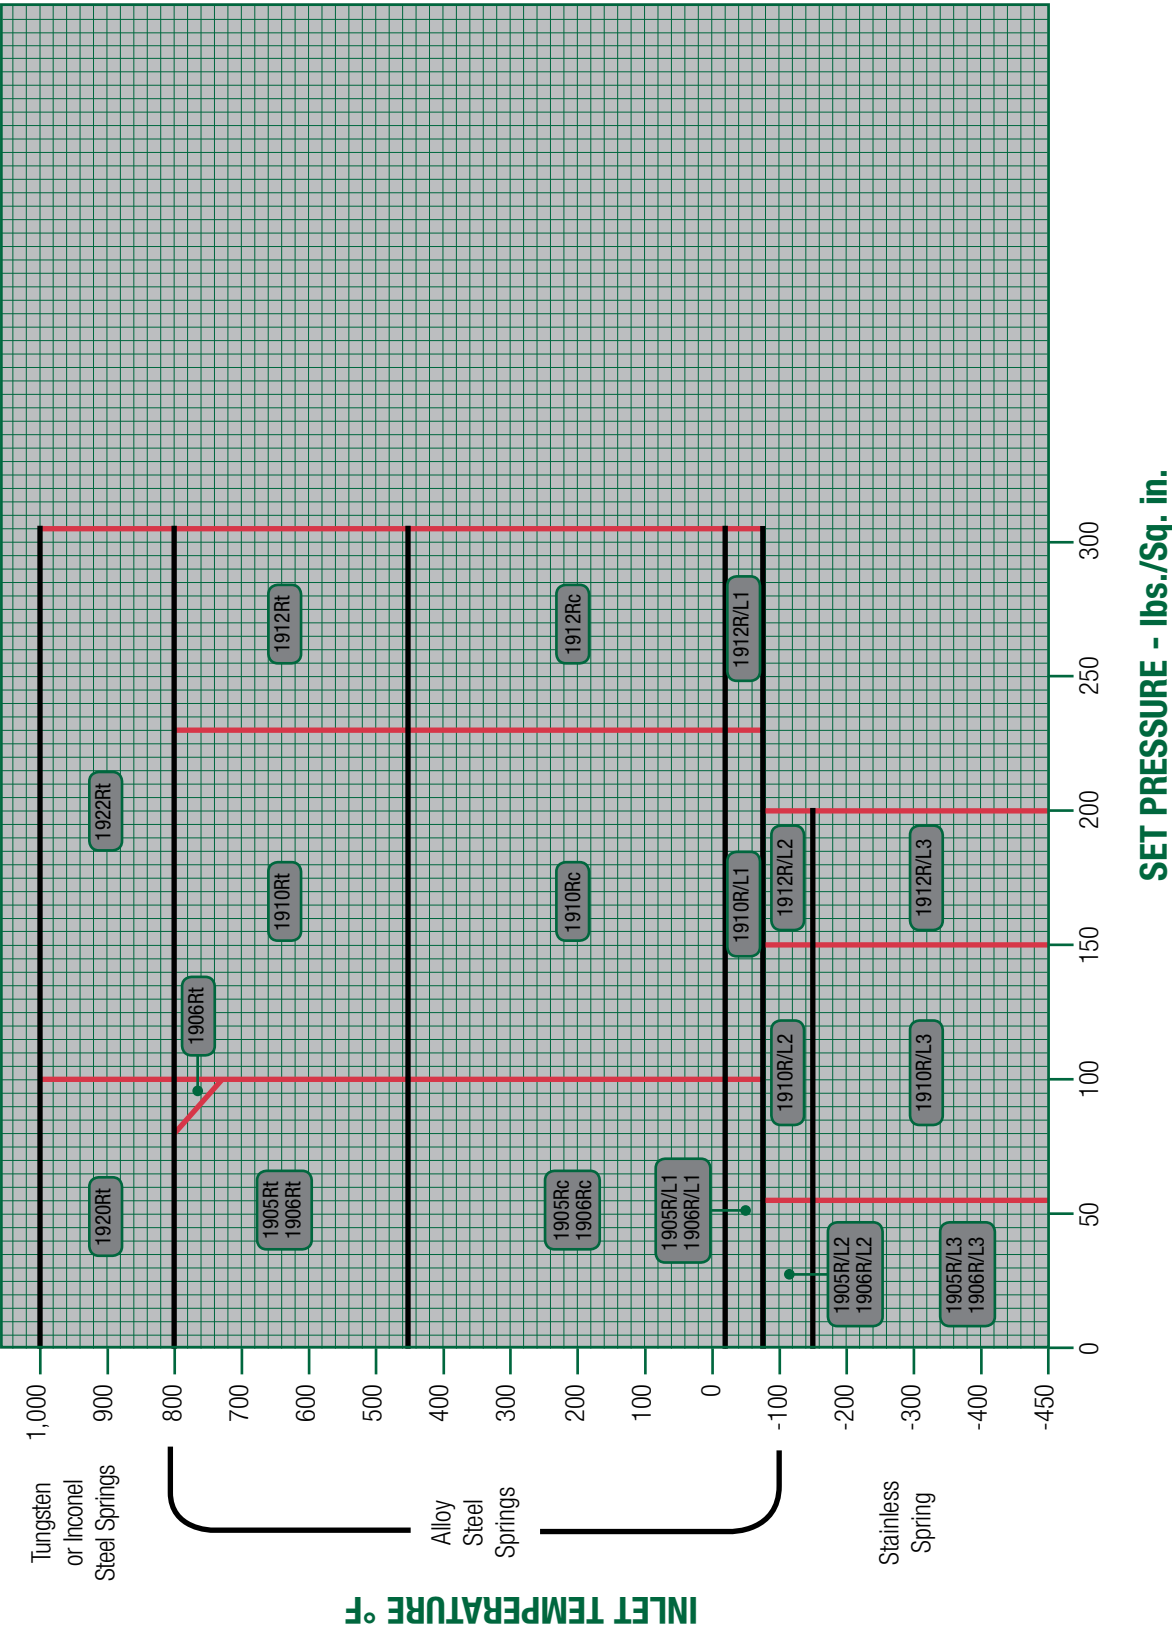

# Pressure / Temperature (Contd.)

Pressure Temperature Ratings for T Orifice

API Ratings (T Orifice - 26 in <sup>2</sup> (167.742 cm <sup>2</sup> ))													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905T	8.00	203.2	10.00	254.00	65	4.48	65	4.48	65	4.48	-	-	60	4.14	52	3.59	60	4.14
1906T	8.00	203.2	10.00	254.00	65	4.48	65	4.48	65	4.48	-	-	60	4.14	52	3.59	60	4.14
1910T	8.00	203.2	10.00	254.00	120	8.27	120	8.27	120	8.27	-	-	100	6.89	52	3.59	100	6.89
1912T	8.00	203.2	10.00	254.00	300	20.68	300	20.68	300	20.68	-	-	100	6.89	52	3.59	100	6.89
1920T	8.00	203.2	10.00	254.00	-	-	-	-	120	8.27	100	6.89	100	6.89	52	3.59	100	6.89
1922T	8.00	203.2	10.00	254.00	-	-	-	-	300	20.68	300	20.68	100	6.89	52	3.59	100	6.89


Pressure Temperature Ratings for T Orifice

ASME Ratings (T Orifice - 30.21 in² (194.903 cm²) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905T	8.00	203.2	10.00	254.00	125	8.62	125	8.62	80	5.52	-	-	125	8.62	41	2.83	125	8.62
1906T	8.00	203.2	10.00	254.00	125	8.62	125	8.62	125	8.62	-	-	125	8.62	41	2.83	125	8.62
1910T	8.00	203.2	10.00	254.00	360	24.82	360	24.82	360	24.82	-	-	290	19.99	41	2.83	145	10.00
1912T	8.00	203.2	10.00	254.00	360	24.82	360	24.82	360	24.82	-	-	290	19.99	41	2.83	145	10.00
1920T	8.00	203.2	10.00	254.00	-	-	-	-	360	24.82	215	14.82	290	19.99	41	2.83	145	10.00
1922T	8.00	203.2	10.00	254.00	-	-	-	-	360	24.82	430	29.65	290	19.99	41	2.83	145	10.00

# Pressure / Temperature (Contd.)

## Selection Chart for Vapors, Gases and Liquids

1900 and 1900-30 Series, T Orifice - Area: 30.21 Sq. in.

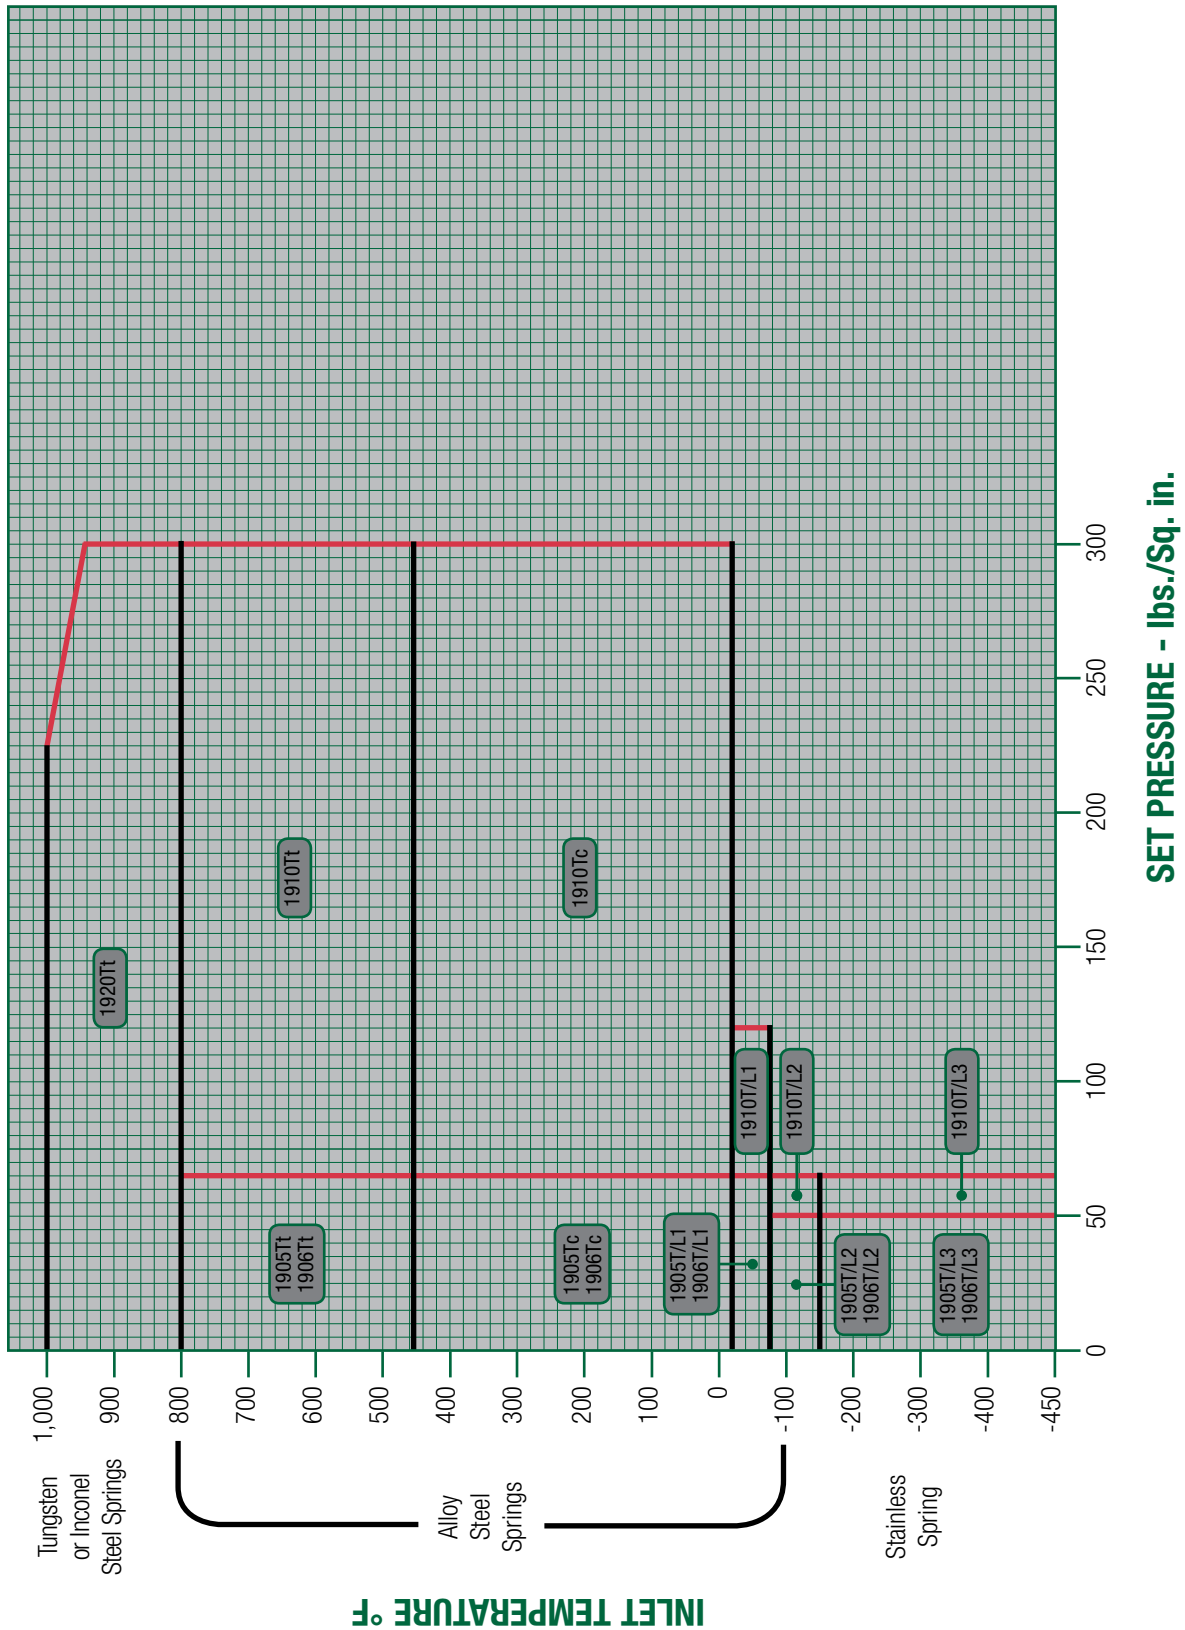

# Pressure / Temperature (Contd.)

## Pressure Temperature Ratings for U Orifice<sup>1</sup>

ASME Ratings (U Orifice - 35.01 in² (225.871 cm²) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905U	8.00	203.2	10.00	254.00	125	8.62	125	8.62	80	5.52	-	-	125	8.62	41	2.83	125	8.62
1906U	8.00	203.2	10.00	254.00	125	8.62	125	8.62	125	8.62	-	-	125	8.62	41	2.83	125	8.62
1910U	8.00	203.2	10.00	254.00	360	24.82	360	24.82	360	24.82	-	-	290	19.99	41	2.83	145	10.00
1920U	8.00	203.2	10.00	254.00	-	-	-	-	360	24.82	215	14.82	290	19.99	41	2.83	145	10.00

## Pressure Temperature Ratings for V Orifice<sup>1</sup>

ASME Ratings (V Orifice - 50.26 in <sup>2</sup> (324.257 cm <sup>2</sup> ) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905V	10.00	254	14.00	355.60	154	10.62	154	10.62	80	5.52	-	-	154	10.62	-	-	72	4.96
1906V	10.00	254	14.00	355.60	154	10.62	154	10.62	154	10.62	-	-	154	10.62	-	-	72	4.96
1910V	10.00	254	14.00	355.60	300	20.68	300	20.68	300	20.68	-	-	290	19.99	-	-	72	4.96
1920V	10.00	254	14.00	355.60	-	-	-	-	300	20.68	154	10.62	290	19.99	-	-	72	4.96

## Pressure Temperature Ratings for W Orifice<sup>1</sup>

ASME Ratings (W Orifice - 78.996 in² (509.651 cm²) Actual)													Backpressure Ratings @ 100°F (37.8°C)					
Valve Type	Connection				Standard Material of Construction								Conventional		Bellows			
	Inlet		Outlet		-20 to 100°F (-28.9 to 37.8°C)		450°F (232.2°C)		800°F (426.7°C)		1000°F (537.8°C)				LP		HP	
	in.	mm	in.	mm	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg	psig	barg
1905W	12.00	304.8	16.00	406.40	154	10.62	154	10.62	80	5.52	-	-	154	10.62	-	-	72	4.96
1906W	12.00	304.8	16.00	406.40	154	10.62	154	10.62	154	10.62	-	-	154	10.62	-	-	72	4.96
1910W	12.00	304.8	16.00	406.40	300	20.68	300	20.68	300	20.68	-	-	290	19.99	-	-	72	4.96
1920W	12.00	304.8	16.00	406.40	-	-	-	-	300	20.68	154	10.62	290	19.99	-	-	72	4.96

### Note

1 This valve is not listed in API 526 standard



# Capacities

## Valve Capacity for ASME B&PV Code Section VIII, for Air<sup>1</sup> & 2

Capacities Based on Set Pressure plus 10% overpressure or 3 psig (0.21 barg), whichever is greater. Capacities in ft<sup>3</sup> (m<sup>3</sup>) of air per minute @ 60°F (15.6°C).

Orifice Designation		D		E		F		G		H		J		K		L	
Orifice Area		in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>
Set Pressure		0.128	0.825	0.228	1.470	0.357	2.302	0.585	3.774	0.913	5.888	1.496	9.652	2.138	13.794	3.317	21.400
		Orifice Capacity															
psig	barg	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min
15	1.03	65	2	116	3	183	5	300	8	468	13	767	22	1097	31	1702	48
20	1.38	75	2	134	4	211	6	346	10	539	15	885	25	1264	36	1962	56
30	2.07	95	3	170	5	267	8	437	12	683	19	1119	32	1600	45	2483	70
40	2.76	117	3	209	6	328	9	538	15	840	24	1378	39	1969	56	3055	87
50	3.45	139	4	249	7	390	11	639	18	998	28	1636	46	2338	66	3628	103
60	4.14	161	5	288	8	451	13	740	21	1155	33	1894	54	2707	77	4200	119
70	4.83	184	5	327	9	513	15	841	24	1313	37	2152	61	3076	87	4773	135
80	5.52	206	6	367	10	575	16	942	27	1470	42	2411	68	3445	98	5346	151
90	6.21	228	6	406	11	636	18	1043	30	1628	46	2669	76	3814	108	5918	168
100	6.89	250	7	445	13	698	20	1144	32	1786	51	2927	83	4183	118	6491	184
120	8.27	294	8	524	15	821	23	1346	38	2101	59	3444	98	4922	139	7636	216
140	9.65	338	10	603	17	944	27	1548	44	2416	68	3960	112	5660	160	8781	249
160	11.03	382	11	682	19	1067	30	1750	50	2731	77	4477	127	6398	181	9926	281
180	12.41	426	12	760	22	1190	34	1952	55	3046	86	4993	141	7136	202	11072	314
200	13.79	471	13	839	24	1314	37	2154	61	3361	95	5510	156	7874	223	12217	346
220	15.17	515	15	918	26	1437	41	2356	67	3676	104	6026	171	8612	244	13362	378
240	16.55	559	16	996	28	1560	44	2558	72	3991	113	6543	185	9351	265	14507	411
260	17.93	603	17	1075	30	1683	48	2760	78	4307	122	7059	200	10089	286	15652	443
280	19.31	647	18	1154	33	1806	51	2962	84	4622	131	7576	215	10827	307	16798	476
300	20.68	691	20	1232	35	1930	55	3163	90	4937	140	8092	229	11565	327	17943	508
320	22.06	736	21	1311	37	2053	58	3365	95	5252	149	8609	244	12303	348	19088	541
340	23.44	780	22	1390	39	2176	62	3567	101	5567	158	9125	258	13041	369	20233	573
360	24.82	824	23	1468	42	2299	65	3769	107	5882	167	9642	273	13779	390	21378	605
380	26.20	868	25	1547	44	2422	69	3971	112	6197	175	10158	288	14518	411	22524	638
400	27.58	912	26	1626	46	2546	72	4173	118	6512	184	10675	302	15256	432	23669	670
420	28.96	956	27	1704	48	2669	76	4375	124	6827	193	11191	317	15994	453	24814	703
440	30.34	1000	28	1783	50	2792	79	4577	130	7143	202	11708	332	16732	474	25959	735
460	31.72	1045	30	1862	53	2915	83	4779	135	7458	211	12224	346	17470	495	27104	767
480	33.09	1089	31	1940	55	3038	86	4981	141	7773	220	12741	361	18208	516	28250	800
500	34.47	1133	32	2019	57	3161	90	5183	147	8088	229	13257	375	18946	536	29395	832
600	41.37	1354	38	2413	68	3777	107	6193	175	9663	274	15840	449	22637	641	35121	995
700	48.26	1575	45	2806	79	4393	124	7202	204	11239	318	18422	522	26328	746	40847	1157
800	55.16	1795	51	3199	91	5009	142	8212	233	12815	363	21004	595	30019	850	46573	1319
900	62.05	2016	57	3593	102	5625	159	9222	261	14390	407	23587	668	33709	955	52299	1481
1000	68.95	2237	63	3986	113	6241	177	10231	290	15966	452	26169	741	37400	1059	58025	1643
1100	75.84	2458	70	4380	124	6857	194	11241	318	17541	497	28752	814	41091	1164	63751	1805
1200	82.74	2678	76	4773	135	7473	212	12251	347	19117	541	31334	887	44782	1268	69477	1967
1300	89.63	2899	82	5166	146	8089	229	13260	375	20692	586	33917	960	48472	1373	75203	2130
1400	96.53	3120	88	5560	157	8705	246	14270	404	22268	631	36499	1034	52163	1477	80929	2292
1500	103.42	3341	95	5953	169	9321	264	15280	433	23843	675	39082	1107	55854	1582	86655	2454
2000	137.90	4445	126	7920	224	12400	351	20328	576	31721	898	51994	1472	74308	2104	—	—
2500	172.37	5549	157	9887	280	15480	438	25377	719	39599	1121	64907	1838	—	—	—	—
3000	206.84	6653	188	11855	336	18560	526	30425	862	47477	1344	77819	2204	—	—	—	—
4000	275.79	8861	251	15789	447	24719	700	—	—	—	—	—	—	—	—	—	—
5000	344.74	11068	313	19723	558	30878	874	—	—	—	—	—	—	—	—	—	—
6000	413.69	13276	376	23657	670	—	—	—	—	—	—	—	—	—	—	—	—

### Note

**Note 1:** For temperatures other than 60°F (15.6°C) and specific gravities other than air, use formula sizing method.

**Note 2:** Sizing: Valves may be sized for either ASME or API applications

# Capacities (Contd.)

## Valve Capacity for ASME B&PV Code Section VIII, for Air<sup>1</sup> & 2

Capacities Based on Set Pressure plus 10% overpressure or 3 psig (0.21 barg), whichever is greater. Capacities in ft<sup>3</sup> (m<sup>3</sup>) of air per minute @ 60°F (15.6°C).

Orifice Designation		M		N		P		Q		R		T		U		V		W		
		in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	
Orifice Area		4.186	27.006	5.047	32.561	7.417	47.852	12.850	82.903	18.600	120.000	30.210	194.903	35.010	225.871	50.260	324.257	78.996	509.651	
Set Pressure		Orifice Capacity																		
psig	barg	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	
15	1.03	2148	61	2589	73	3806	108	6594	187	9544	270	15502	439	17966	509	25791	730	40538	1148	
20	1.38	2476	70	2985	85	4388	124	7602	215	11004	312	17873	506	20713	587	29735	842	46736	1323	
30	2.07	3133	89	3778	107	5552	157	9619	272	13923	394	22614	640	26207	742	37623	1065	59133	1674	
40	2.76	3856	109	4649	132	6832	193	11837	335	17134	485	27829	788	32251	913	46299	1311	72770	2061	
50	3.45	4578	130	5520	156	8112	230	14055	398	20345	576	33044	936	38294	1084	54975	1557	86407	2447	
60	4.14	5301	150	6391	181	9393	266	16273	461	23555	667	38259	1083	44338	1256	63651	1802	100044	2833	
70	4.83	6023	171	7263	206	10673	302	18492	524	26766	758	43474	1231	50381	1427	72327	2048	113680	3219	
80	5.52	6746	191	8134	230	11953	338	20710	586	29977	849	48689	1379	56425	1598	81003	2294	127317	3605	
90	6.21	7469	211	9005	255	13234	375	22928	649	33188	940	53904	1526	62469	1769	89680	2539	140954	3991	
100	6.89	8191	232	9876	280	14514	411	25146	712	36399	1031	59119	1674	68512	1940	98356	2785	154591	4378	
120	8.27	9637	273	11619	329	17075	484	29583	838	42820	1213	69549	1969	80600	2282	115708	3276	181864	5150	
140	9.65	11082	314	13361	378	19636	556	34019	963	49242	1394	79979	2265	92687	2625	133061	3768	209138	5922	
160	11.03	12527	355	15104	428	22196	629	38456	1089	55664	1576	90409	2560	104774	2967	150413	4259	236411	6694	
180	12.41	13972	396	16846	477	24757	701	42892	1215	62086	1758	100839	2855	116861	3309	167765	4751	263685	7467	
200	13.79	15417	437	18589	526	27318	774	47329	1340	68507	1940	111269	3151	128949	3651	185118	5242	290958	8239	
220	15.17	16863	478	20331	576	29879	846	51765	1466	74929	2122	121699	3446	141036	3994	202470	5733	318232	9011	
240	16.55	18308	518	22074	625	32439	919	56202	1591	81351	2304	132129	3741	153123	4336	219822	6225	345505	9784	
260	17.93	19753	559	23816	674	35000	991	60638	1717	87772	2485	142559	4037	165210	4678	237175	6716	372779	10556	
280	19.31	21198	600	25559	724	37561	1064	65075	1843	94194	2667	152990	4332	177298	5021	254527	7207	400052	11328	
300	20.68	22644	641	27301	773	40122	1136	69511	1968	100616	2849	163420	4628	189385	5363	271879	7699	427326	12101	
320	22.06	24089	682	29044	822	42682	1209	73948	2094	—	—	—	—	—	—	—	—	—	—	
340	23.44	25534	723	30786	872	45243	1281	78384	2220	—	—	—	—	—	—	—	—	—	—	
360	24.82	26979	764	32529	921	47804	1354	82821	2345	—	—	—	—	—	—	—	—	—	—	
380	26.20	28424	805	34271	970	50364	1426	87257	2471	—	—	—	—	—	—	—	—	—	—	
400	27.58	29870	846	36014	1020	52925	1499	91694	2596	—	—	—	—	—	—	—	—	—	—	
420	28.96	31315	887	37756	1069	55486	1571	96130	2722	—	—	—	—	—	—	—	—	—	—	
440	30.34	32760	928	39498	1118	58047	1644	100567	2848	—	—	—	—	—	—	—	—	—	—	
460	31.72	34205	969	41241	1168	60607	1716	105003	2973	—	—	—	—	—	—	—	—	—	—	
480	33.09	35651	1010	42983	1217	63168	1789	109440	3099	—	—	—	—	—	—	—	—	—	—	
500	34.47	37096	1050	44726	1266	65729	1861	113876	3225	—	—	—	—	—	—	—	—	—	—	
600	41.37	44322	1255	53438	1513	78533	2224	136058	3853	—	—	—	—	—	—	—	—	—	—	
700	48.26	51548	1460	62151	1760	91336	2586	—	—	—	—	—	—	—	—	—	—	—	—	
800	55.16	58774	1664	70863	2007	104140	2949	—	—	—	—	—	—	—	—	—	—	—	—	
900	62.05	66000	1869	79576	2253	116944	3311	—	—	—	—	—	—	—	—	—	—	—	—	
1000	68.95	73226	2074	88288	2500	129747	3674	—	—	—	—	—	—	—	—	—	—	—	—	
1100	75.84	80453	2278	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
1200	82.74	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
1300	89.63	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
1400	96.53	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
1500	103.42	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
2000	137.90	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
2500	172.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
3000	206.84	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
4000	275.79	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
5000	344.74	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
6000	413.69	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

### Note

**Note 1:** For temperatures other than 60°F (15.6°C) and specific gravities other than air, use formula sizing method.

**Note 2:** Sizing: Valves may be sized for either ASME or API applications

# Capacities (Contd.)

## Valve Capacity for ASME B&PV Code Section VIII, for Saturated Steam<sup>1 & 4</sup>

Capacities Based on Set Pressure plus 10% overpressure or 3 psig (0.21 barg), whichever is greater. Capacities in lbs./hr (kg/hr) of saturated steam

Orifice Designation		D		E		F		G		H		J		K		L	
Orifice Area		in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>
Set Pressure		Orifice Capacity															
psig	barg	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr	lb/hr	kg/hr
15	1.03	184	83	328	149	513	233	842	382	1314	596	2154	977	3078	1396	4776	2166
20	1.38	212	96	378	171	592	269	970	440	1515	687	2483	1126	3549	1610	5506	2497
30	2.07	268	122	478	217	749	340	1228	557	1916	869	3142	1425	4490	2037	6966	3160
40	2.76	330	150	589	267	922	418	1511	685	2359	1070	3866	1754	5526	2507	8573	3889
50	3.45	392	178	699	317	1095	497	1795	814	2801	1271	4591	2082	6561	2976	10180	4618
60	4.14	454	206	809	367	1267	575	2078	943	3243	1471	5315	2411	7597	3446	11786	5346
70	4.83	516	234	920	417	1440	653	2361	1071	3685	1671	6040	2740	8632	3915	13393	6075
80	5.52	578	262	1030	467	1613	732	2644	1199	4127	1872	6765	3069	9668	4385	14999	6803
90	6.21	640	290	1140	517	1786	810	2928	1328	4569	2072	7489	3397	10703	4855	16606	7532
100	6.89	702	318	1251	567	1959	889	3211	1456	5011	2273	8214	3726	11739	5325	18213	8261
120	8.27	826	375	1472	668	2304	1045	3778	1714	5895	2674	9663	4383	13810	6264	21426	9719
140	9.65	950	431	1692	767	2650	1202	4344	1970	6779	3075	11112	5040	15881	7204	24639	11176
160	11.03	1073	487	1913	868	2996	1359	4911	2228	7663	3476	12561	5698	17952	8143	27852	12633
180	12.41	1197	543	2134	968	3341	1515	5478	2485	8548	3877	14011	6355	20023	9082	31066	14091
200	13.79	1321	599	2355	1068	3687	1672	6044	2742	9432	4278	15460	7013	22095	10022	34279	15549
220	15.17	1445	655	2575	1168	4032	1829	6611	2999	10316	4679	16909	7670	24166	10962	37492	17006
240	16.55	1569	712	2796	1268	4378	1986	7177	3255	11200	5080	18358	8327	26237	11901	40705	18463
260	17.93	1693	768	3017	1368	4724	2143	7744	3513	12084	5481	19807	8984	28308	12840	43918	19921
280	19.31	1817	824	3238	1469	5069	2299	8311	3770	12968	5882	21257	9642	30379	13780	47132	21379
300	20.68	1941	880	3459	1569	5415	2456	8877	4027	13852	6283	22706	10299	32450	14719	50345	22836
320	22.06	2065	937	3679	1669	5761	2613	9444	4284	14737	6685	24155	10957	34521	15658	53558	24294
340	23.44	2189	993	3900	1769	6106	2770	10010	4540	15621	7086	25604	11614	36592	16598	56771	25751
360	24.82	2312	1049	4121	1869	6452	2927	10577	4798	16505	7487	27053	12271	38663	17537	59985	27209
380	26.20	2436	1105	4342	1969	6798	3084	11144	5055	17389	7888	28503	12929	40735	18477	63198	28666
400	27.58	2560	1161	4562	2069	7143	3240	11710	5312	18273	8288	29952	13586	42806	19416	66411	30124
420	28.96	2684	1217	4783	2170	7489	3397	12277	5569	19157	8689	31401	14243	44877	20356	69624	31581
440	30.34	2808	1274	5004	2270	7834	3553	12843	5825	20041	9090	32850	14901	46948	21295	72838	33039
460	31.72	2932	1330	5225	2370	8180	3710	13410	6083	20926	9492	34299	15558	49019	22235	76051	34496
480	33.09	3056	1386	5445	2470	8526	3867	13977	6340	21810	9893	35749	16215	51090	23174	79264	35954
500	34.47	3180	1442	5666	2570	8871	4024	14543	6597	22694	10294	37198	16873	53161	24113	82477	37411
600	41.37	3799	1723	6770	3071	10600	4808	17376	7882	27115	12299	44444	20159	63517	28811	98543	44698
700	48.26	4419	2004	7874	3572	12328	5592	20209	9167	31535	14304	51690	23446	73872	33508	114609	51986
800	55.16	5038	2285	8978	4072	14056	6376	23042	10452	35956	16309	58936	26733	84228	38205	130676	59274
900	62.05	5658	2566	10082	4573	15784	7160	25875	11737	40377	18315	66182	30020	94583	42902	146742	66561
1000	68.95	6277	2847	11186	5074	17512	7943	28708	13022	44798	20320	73428	33306	104939	47600	162808	73848
1100	75.84	6897	3128	12289	5574	19241	8728	31541	14307	49218	22325	80674	36593	115295	52297	178874	81136
1200	82.74	7516	3409	13393	6075	20969	9511	34374	15592	53639	24330	87920	39880	125650	56994	194940	88423
1300	89.63	8136	3690	14497	6576	22697	10295	37207	16877	58060	26336	95166	43167	136006	61691	211006	95711
1400	96.53	8755	3971	15601	7076	24425	11079	40040	18162	62481	28341	102412	46453	146361	66388	227072	102998
1423 <sup>2</sup>	98.11	8898	4036	15855	7192	24823	11260	40692	18458	63497	28802	104078	47209	148743	67469	230768	104675
1500	103.42	9420	4273	16785	7614	26279	11920	43079	19540	67222	30491	110183	49978	157468	71426	244304	110814
2000	137.90	13024	5908	23207	10527	36334	16481	59562	27017	92943	42158	152343	69102	217721	98757	—	—
2500	172.37	17235	7818	30711	13930	48082	21810	78821	35753	122995	55790	201601	91445	—	—	—	—
2903 <sup>3</sup>	200.15	21551	9775	38401	17418	60121	27270	98557	44705	—	—	—	—	—	—	—	—

### Note

**Note 1:** Refer to page 1900.95 for correction factor applied for superheated steam.

**Note 2:** The following Napier factor is applied to the capacity of pressures greater than 1423 psig (98.11 barg):  $(0.1906 \times P_{\text{psia}} - 1000) / (0.2292 \times P_{\text{psia}} - 1061)$

**Note 3:** Maximum permissible set pressure on steam is 2903 psig (200.15 barg). Value is interpolated.

**Note 4:** Sizing: Valves may be sized for either ASME or API applications

# Capacities (Contd.)

## Valve Capacity for ASME B&PV Code Section VIII, for Saturated Steam<sup>1 & 4</sup>

Capacities Based on Set Pressure plus 10% overpressure or 3 psig (0.21 barg), whichever is greater. Capacities in lbs./hr (kg/hr) of saturated steam

Orifice Designation		M		N		P		Q		R		T		U		V		W		
Orifice Area		in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	
		4.186	27.006	5.047	32.561	7.417	47.852	12.850	82.903	18.600	120.000	30.210	194.903	35.010	225.871	50.260	324.257	78.996	509.651	
Set Pressure		Orifice Capacity																		
psig	barg	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	ft <sup>3</sup> /min	m <sup>3</sup> /min	
15	1.03	6027	2734	7266	3296	10679	4844	18502	8392	26781	12148	43498	19730	50409	22865	72367	32825	113743	51593	
20	1.38	6948	3152	8378	3800	12312	5585	21331	9676	30876	14005	50149	22747	58117	26361	83432	37844	131135	59482	
30	2.07	8792	3988	10600	4808	15578	7066	26989	12242	39066	17720	63451	28781	73533	33354	105563	47883	165919	75260	
40	2.76	10819	4907	13045	5917	19170	8695	33213	15065	48075	21806	78084	35418	90490	41046	129907	58925	204181	92615	
50	3.45	12847	5827	15489	7026	22763	10325	39437	17888	57084	25893	92716	42055	107447	48737	154251	69967	242443	109970	
60	4.14	14874	6747	17934	8135	26355	11954	45661	20711	66093	29979	107348	48692	124405	56429	178595	81009	280706	127326	
70	4.83	16902	7667	20378	9243	29948	13584	51885	23535	75102	34066	121981	55330	141362	64121	202938	92051	318968	144681	
80	5.52	18929	8586	22823	10352	33540	15213	58109	26358	84111	38152	136613	61967	158320	71813	227282	103093	357230	162037	
90	6.21	20957	9506	25267	11461	37133	16843	64333	29181	93120	42239	151246	68604	175277	79504	251626	114136	395493	179393	
100	6.89	22984	10425	27712	12570	40725	18473	70557	32004	102129	46325	165878	75241	192234	87196	275970	125178	433755	196748	
120	8.27	27039	12265	32601	14788	47910	21732	83005	37650	120147	54498	195143	88515	226149	102579	324657	147262	510280	231459	
140	9.65	31094	14104	37490	17005	55095	24991	95453	43297	138166	62671	224408	101790	260064	117963	373345	169346	586804	266170	
160	11.03	35149	15943	42379	19223	62280	28250	107901	48943	156184	70844	253673	115064	293978	133346	422033	191431	663329	300881	
180	12.41	39204	17783	47268	21440	69465	31509	120349	54589	174202	79017	282938	128339	327893	148730	470720	213515	739853	335592	
200	13.79	43259	19622	52157	23658	76650	34768	132797	60236	192220	87190	312203	141613	361808	164113	519408	235600	816378	370303	
220	15.17	47314	21461	57046	25876	83835	38027	145245	65882	210238	95362	341467	154887	395723	179497	568095	257684	892903	405014	
240	16.55	51369	23301	61936	28094	91020	41286	157693	71528	228256	103535	370732	168161	429637	194880	616783	279768	969427	439725	
260	17.93	55425	25140	66825	30311	98205	44545	170141	77175	246274	111708	399997	181436	463552	210264	665471	301853	1045952	474436	
280	19.31	59480	26980	71714	32529	105390	47804	182589	82821	264292	119881	429262	194710	497467	225647	714158	323937	1122476	509147	
300	20.68	63535	28819	76603	34747	112575	51063	195037	88467	282310	128054	458527	207984	531381	241030	762846	346021	1199001	543858	
320	22.06	67590	30658	81492	36964	119760	54322	207485	94114	—	—	—	—	—	—	—	—	—	—	
340	23.44	71645	32498	86381	39182	126945	57581	219933	99760	—	—	—	—	—	—	—	—	—	—	
360	24.82	75700	34337	91270	41399	134130	60840	232381	105406	—	—	—	—	—	—	—	—	—	—	
380	26.20	79755	36176	96159	43617	141315	64099	244829	111053	—	—	—	—	—	—	—	—	—	—	
400	27.58	83810	38016	101048	45835	148500	67358	257277	116699	—	—	—	—	—	—	—	—	—	—	
420	28.96	87865	39855	105938	48053	155685	70618	269725	122345	—	—	—	—	—	—	—	—	—	—	
440	30.34	91920	41694	110827	50270	162869	73876	282173	127992	—	—	—	—	—	—	—	—	—	—	
460	31.72	95975	43534	115716	52488	170054	77135	294621	133638	—	—	—	—	—	—	—	—	—	—	
480	33.09	100030	45373	120605	54706	177239	80394	307069	139284	—	—	—	—	—	—	—	—	—	—	
500	34.47	104085	47212	125494	56923	184424	83653	319517	144930	—	—	—	—	—	—	—	—	—	—	
600	41.37	124360	56409	149939	68011	220349	99949	381757	173162	—	—	—	—	—	—	—	—	—	—	
700	48.26	144635	65605	174385	79100	256274	116244	—	—	—	—	—	—	—	—	—	—	—	—	
800	55.16	164911	74802	198830	90188	292199	132539	—	—	—	—	—	—	—	—	—	—	—	—	
900	62.05	185186	83999	223276	101276	328124	148835	—	—	—	—	—	—	—	—	—	—	—	—	
1000	68.95	205461	93196	247722	112365	364048	165129	—	—	—	—	—	—	—	—	—	—	—	—	
1100	75.84	225736	102392	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
1200	82.74	246011	111589	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
1300	89.63	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
1400	96.53	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
1423 <sup>2</sup>	98.11	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
1500	103.42	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
2000	137.90	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
2500	172.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	
2903 <sup>3</sup>	200.15	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	

### Note

**Note 1:** Refer to page 1900.95 for correction factor applied for superheated steam.

**Note 2:** The following Napier factor is applied to the capacity of pressures greater than 1423 psig (98.11 barg):  $(0.1906 \times P_{\text{psia}} - 1000) / (0.2292 \times P_{\text{psia}} - 1061)$

**Note 3:** Maximum permissible set pressure on steam is 2903 psig (200.15 barg). Value is interpolated.

**Note 4:** Sizing: Valves may be sized for either ASME or API applications

# Capacities (Contd.)

## Valve Capacity for ASME B&PV Code Section VIII, for Water<sup>1</sup>

Capacities Based on Set Pressure plus 10% overpressure or 3 psig (0.21 barg), whichever is greater. Capacities in gpm (L/min) of water

Orifice Designation		D		E		F		G		H		J		K		L	
Orifice Area		in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>
Set Pressure		0.128	0.825	0.228	1.470	0.357	2.302	0.585	3.774	0.913	5.888	1.496	9.652	2.138	13.794	3.317	21.400
		Orifice Capacity															
psig	barg	gpm	L/min	gpm	L/min	gpm	L/min	gpm	L/min	gpm	L/min	gpm	L/min	gpm	L/min	gpm	L/min
15	1.03	13	8	24	15	38	24	63	40	98	62	161	102	230	145	358	226
20	1.38	15	9	27	17	43	27	71	45	111	70	182	115	261	165	404	255
30	2.07	18	11	33	21	52	33	85	54	133	84	218	138	312	197	485	306
40	2.76	21	13	38	24	60	38	98	62	154	97	252	159	361	228	560	353
50	3.45	24	15	43	27	67	42	110	69	172	109	282	178	403	254	626	395
60	4.14	26	16	47	30	73	46	120	76	188	119	309	195	442	279	686	433
70	4.83	28	18	50	32	79	50	130	82	203	128	334	211	477	301	741	467
80	5.52	30	19	54	34	85	54	139	88	217	137	357	225	510	322	792	500
90	6.21	32	20	57	36	90	57	148	93	231	146	378	238	541	341	840	530
100	6.89	34	21	60	38	95	60	156	98	243	153	399	252	570	360	885	558
120	8.27	37	23	66	42	104	66	171	108	266	168	437	276	625	394	970	612
140	9.65	40	25	72	45	112	71	184	116	288	182	472	298	675	426	1047	661
160	11.03	43	27	76	48	120	76	197	124	308	194	505	319	722	455	1120	707
180	12.41	45	28	81	51	127	80	209	132	326	206	535	338	765	483	1188	749
200	13.79	48	30	86	54	134	85	220	139	344	217	564	356	807	509	1252	790
220	15.17	50	32	90	57	141	89	231	146	361	228	592	373	846	534	1313	828
240	16.55	52	33	94	59	147	93	241	152	377	238	618	390	884	558	1372	866
260	17.93	55	35	98	62	153	97	251	158	392	247	644	406	920	580	1428	901
280	19.31	57	36	101	64	159	100	261	165	407	257	668	421	955	602	1482	935
300	20.68	59	37	105	66	165	104	270	170	422	266	691	436	988	623	1534	968
320	22.06	61	38	108	68	170	107	279	176	435	274	714	450	1021	644	1584	999
340	23.44	62	39	112	71	175	110	287	181	449	283	736	464	1052	664	1633	1030
360	24.82	64	40	115	73	180	114	296	187	462	291	757	478	1083	683	1680	1060
380	26.20	66	42	118	74	185	117	304	192	475	300	778	491	1112	702	1726	1089
400	27.58	68	43	121	76	190	120	312	197	487	307	798	503	1141	720	1771	1117
420	28.96	69	44	124	78	195	123	320	202	499	315	818	516	1169	738	1815	1145
440	30.34	71	45	127	80	199	126	327	206	511	322	837	528	1197	755	1857	1172
460	31.72	73	46	130	82	204	129	334	211	522	329	856	540	1224	772	1899	1198
480	33.09	74	47	133	84	208	131	342	216	533	336	875	552	1250	789	1940	1224
500	34.47	76	48	136	86	213	134	349	220	544	343	893	563	1276	805	1980	1249
600	41.37	83	52	149	94	233	147	382	241	596	376	978	617	1398	882	2169	1368
700	48.26	90	57	161	102	252	159	413	261	644	406	1056	666	1510	953	2343	1478
800	55.16	96	61	172	109	269	170	441	278	689	435	1129	712	1614	1018	2505	1580
900	62.05	102	64	182	115	285	180	468	295	731	461	1198	756	1712	1080	2657	1676
1000	68.95	107	68	192	121	301	190	493	311	770	486	1263	797	1805	1139	2800	1766
1100	75.84	113	71	201	127	315	199	517	326	808	510	1324	835	1893	1194	2937	1853
1200	82.74	118	74	210	132	330	208	541	341	844	532	1383	873	1977	1247	3068	1936
1300	89.63	123	78	219	138	343	216	563	355	878	554	1440	908	2058	1298	3193	2014
1400	96.53	127	80	227	143	356	225	584	368	911	575	1494	943	2136	1348	3313	2090
1500	103.42	132	83	235	148	368	232	604	381	943	595	1547	976	2211	1395	3430	2164
2000	137.90	152	96	272	172	426	269	698	440	1089	687	1786	1127	2553	1611	—	—
2500	172.37	170	107	304	192	476	300	780	492	1218	768	1997	1260	—	—	—	—
3000	206.84	187	118	333	210	521	329	855	539	1334	842	2187	1380	—	—	—	—
4000	275.79	215	136	215	136	602	380	987	623	—	—	—	—	—	—	—	—
5000	344.74	241	152	241	152	673	425	—	—	—	—	—	—	—	—	—	—
6000	413.69	264	167	264	167	—	—	—	—	—	—	—	—	—	—	—	—

### Note

Note 1: Sizing: Valves may be sized for either ASME or API applications

# Capacities (Contd.)

## Valve Capacity for ASME B&PV Code Section VIII, for Water<sup>1</sup>

Capacities Based on Set Pressure plus 10% overpressure or 3 psig (0.21 barg), whichever is greater. Capacities in gpm (L/min) of water

Orifice Designation		M		N		P		Q		R		T		U		V		W	
Orifice Area		in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>
Set Pressure		4.186	27.006	5.047	32.561	7.417	47.852	12.850	82.903	18.600	120.000	30.210	194.903	35.010	225.871	50.260	324.257	78.996	509.651
Set Pressure		Orifice Capacity																	
psig	barg	gpm	L/Sec	gpm	L/Sec	gpm	L/Sec	gpm	L/Sec	gpm	L/Sec	gpm	L/Sec	gpm	L/Sec	gpm	L/Sec	gpm	L/Sec
15	1.03	452	285	545	344	801	505	1387	875	2009	1267	3263	2059	3780	2385	5428	3424	8532	5383
20	1.38	511	322	616	389	905	571	1568	989	2271	1433	3688	2327	4273	2696	6136	3871	9645	6085
30	2.07	612	386	738	466	1084	684	1879	1185	2720	1716	4418	2787	5118	3229	7350	4637	11553	7289
40	2.76	706	445	852	538	1252	790	2170	1369	3141	1982	5101	3218	5910	3729	8487	5354	13340	8416
50	3.45	790	498	952	601	1400	883	2426	1531	3511	2215	5703	3598	6608	4169	9489	5986	14915	9410
60	4.14	865	546	1043	658	1534	968	2657	1676	3847	2427	6248	3942	7239	4567	10395	6558	16338	10307
70	4.83	935	590	1127	711	1656	1045	2870	1811	4155	2621	6749	4258	7819	4933	11228	7084	17648	11134
80	5.52	999	630	1205	760	1771	1117	3068	1936	4442	2802	7215	4552	8359	5274	12003	7573	18866	11902
90	6.21	1060	669	1278	806	1878	1185	3255	2054	4711	2972	7652	4828	8866	5593	12731	8032	20010	12624
100	6.89	1117	705	1347	850	1980	1249	3431	2165	4966	3133	8066	5089	9345	5896	13420	8466	21093	13307
120	8.27	1224	772	1476	931	2169	1368	3758	2371	5440	3432	8836	5574	10237	6458	14701	9275	23106	14577
140	9.65	1322	834	1594	1006	2343	1478	4059	2561	5876	3707	9544	6021	11057	6976	15879	10018	24958	15746
160	11.03	1413	891	1704	1075	2505	1580	4340	2738	6282	3963	10203	6437	11821	7458	16975	10709	26681	16833
180	12.41	1499	946	1808	1141	2657	1676	4603	2904	6663	4204	10822	6827	12538	7910	18005	11359	28299	17853
200	13.79	1580	997	1905	1202	2800	1766	4852	3061	7023	4431	11407	7196	13216	8338	18979	11974	29830	18819
220	15.17	1657	1045	1998	1261	2937	1853	5089	3211	7366	4647	11964	7548	13861	8745	19905	12558	31286	19738
240	16.55	1731	1092	2087	1317	3068	1936	5315	3353	7694	4854	12496	7884	14478	9134	20790	13116	32677	20615
260	17.93	1802	1137	2173	1371	3193	2014	5532	3490	8008	5052	13007	8206	15069	9507	21639	13652	34012	21458
280	19.31	1870	1180	2255	1423	3313	2090	5741	3622	8310	5243	13498	8516	15638	9866	22456	14167	35296	22268
300	20.68	1935	1221	2334	1472	3430	2164	5942	3749	8602	5427	13971	8814	16187	10212	23244	14664	36534	23049
320	22.06	1999	1261	2410	1520	3542	2235	6137	3872	—	—	—	—	—	—	—	—	—	—
340	23.44	2061	1300	2484	1567	3651	2303	6326	3991	—	—	—	—	—	—	—	—	—	—
360	24.82	2120	1337	2556	1613	3757	2370	6510	4107	—	—	—	—	—	—	—	—	—	—
380	26.20	2178	1374	2627	1657	3860	2435	6688	4219	—	—	—	—	—	—	—	—	—	—
400	27.58	2235	1410	2695	1700	3960	2498	6862	4329	—	—	—	—	—	—	—	—	—	—
420	28.96	2290	1445	2761	1742	4058	2560	7031	4436	—	—	—	—	—	—	—	—	—	—
440	30.34	2344	1479	2826	1783	4154	2621	7197	4540	—	—	—	—	—	—	—	—	—	—
460	31.72	2397	1512	2890	1823	4247	2679	7359	4643	—	—	—	—	—	—	—	—	—	—
480	33.09	2448	1544	2952	1862	4339	2737	7517	4742	—	—	—	—	—	—	—	—	—	—
500	34.47	2499	1577	3013	1901	4428	2794	7672	4840	—	—	—	—	—	—	—	—	—	—
600	41.37	2737	1727	3301	2083	4851	3060	8404	5302	—	—	—	—	—	—	—	—	—	—
700	48.26	2957	1866	3565	2249	5239	3305	9078	5727	—	—	—	—	—	—	—	—	—	—
800	55.16	3161	1994	3811	2404	5601	3534	9704	6122	—	—	—	—	—	—	—	—	—	—
900	62.05	3353	2115	4042	2550	5941	3748	10293	6494	—	—	—	—	—	—	—	—	—	—
1000	68.95	3534	2230	4261	2688	6262	3951	10850	6845	—	—	—	—	—	—	—	—	—	—
1100	75.84	3707	2339	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1200	82.74	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1300	89.63	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1400	96.53	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
1500	103.42	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2000	137.90	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
2500	172.37	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
3000	206.84	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
4000	275.79	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
5000	344.74	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
6000	413.69	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

### Note

Note 1: Sizing: Valves may be sized for either ASME or API applications

# Capacities (Contd.)

Superheat Correction Factor <sup>1&amp;2</sup>																	
Total Temp. (°F)	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
Flowing Pressure <sup>3</sup> (psia)	Superheat Correction Factor K <sub>sh</sub>																
50	0.987	0.957	0.93	0.905	0.882	0.861	0.841	0.823	0.805	0.789	0.774	0.759	0.745	0.732	0.719	0.708	0.696
100	0.998	0.963	0.935	0.909	0.885	0.864	0.843	0.825	0.807	0.79	0.775	0.76	0.746	0.733	0.72	0.708	0.697
150	0.984	0.97	0.94	0.913	0.888	0.866	0.846	0.826	0.808	0.792	0.776	0.761	0.747	0.733	0.721	0.709	0.697
200	0.979	0.977	0.945	0.917	0.892	0.869	0.848	0.828	0.81	0.793	0.777	0.762	0.748	0.734	0.721	0.709	0.698
250	-	0.972	0.951	0.921	0.895	0.871	0.85	0.83	0.812	0.794	0.778	0.763	0.749	0.735	0.722	0.71	0.698
300	-	0.968	0.957	0.926	0.898	0.874	0.852	0.832	0.813	0.796	0.78	0.764	0.75	0.736	0.723	0.71	0.699
350	-	0.968	0.963	0.93	0.902	0.877	0.854	0.834	0.815	0.797	0.781	0.765	0.75	0.736	0.723	0.711	0.699
400	-	-	0.963	0.935	0.906	0.88	0.857	0.836	0.816	0.798	0.782	0.766	0.751	0.737	0.724	0.712	0.7
450	-	-	0.961	0.94	0.909	0.883	0.859	0.838	0.818	0.8	0.783	0.767	0.752	0.738	0.725	0.712	0.7
500	-	-	0.961	0.946	0.914	0.886	0.862	0.84	0.82	0.801	0.784	0.768	0.753	0.739	0.725	0.713	0.701
550	-	-	0.962	0.952	0.918	0.889	0.864	0.842	0.822	0.803	0.785	0.769	0.754	0.74	0.726	0.713	0.701
600	-	-	0.964	0.958	0.922	0.892	0.867	0.844	0.823	0.804	0.787	0.77	0.755	0.74	0.727	0.714	0.702
650	-	-	0.968	0.958	0.927	0.896	0.869	0.846	0.825	0.806	0.788	0.771	0.756	0.741	0.728	0.715	0.702
700	-	-	-	0.958	0.931	0.899	0.872	0.848	0.827	0.807	0.789	0.772	0.757	0.742	0.728	0.715	0.703
750	-	-	-	0.958	0.936	0.903	0.875	0.85	0.828	0.809	0.79	0.774	0.758	0.743	0.729	0.716	0.703
800	-	-	-	0.96	0.942	0.906	0.878	0.852	0.83	0.81	0.792	0.774	0.759	0.744	0.73	0.716	0.704
850	-	-	-	0.962	0.947	0.91	0.88	0.855	0.832	0.812	0.793	0.776	0.76	0.744	0.73	0.717	0.704
900	-	-	-	0.965	0.953	0.914	0.883	0.857	0.834	0.813	0.794	0.777	0.76	0.745	0.731	0.718	0.705
950	-	-	-	0.969	0.958	0.918	0.886	0.86	0.836	0.815	0.796	0.778	0.761	0.746	0.732	0.718	0.705
1000	-	-	-	0.974	0.959	0.923	0.89	0.862	0.838	0.816	0.797	0.779	0.762	0.747	0.732	0.719	0.706
1050	-	-	-	-	0.96	0.927	0.893	0.864	0.84	0.818	0.798	0.78	0.763	0.748	0.733	0.719	0.707
1100	-	-	-	-	0.962	0.931	0.896	0.867	0.842	0.82	0.8	0.781	0.764	0.749	0.734	0.72	0.707
1150	-	-	-	-	0.964	0.936	0.899	0.87	0.844	0.821	0.801	0.782	0.765	0.749	0.735	0.721	0.708
1200	-	-	-	-	0.966	0.941	0.903	0.872	0.846	0.823	0.802	0.784	0.766	0.75	0.735	0.721	0.708
1250	-	-	-	-	0.969	0.946	0.906	0.875	0.848	0.825	0.804	0.785	0.767	0.751	0.736	0.722	0.709
1300	-	-	-	-	0.973	0.952	0.91	0.878	0.85	0.826	0.805	0.786	0.768	0.752	0.737	0.723	0.709
1350	-	-	-	-	0.977	0.958	0.914	0.88	0.852	0.828	0.807	0.787	0.769	0.753	0.737	0.723	0.71
1400	-	-	-	-	0.982	0.963	0.918	0.883	0.854	0.83	0.808	0.788	0.77	0.754	0.738	0.724	0.71
1450	-	-	-	-	0.987	0.968	0.922	0.886	0.857	0.832	0.809	0.79	0.771	0.754	0.739	0.724	0.711
1500	-	-	-	-	0.993	0.97	0.926	0.889	0.859	0.833	0.811	0.791	0.772	0.755	0.74	0.725	0.711
1550	-	-	-	-	-	0.972	0.93	0.892	0.861	0.835	0.812	0.792	0.773	0.756	0.74	0.726	0.712
1600	-	-	-	-	-	0.973	0.934	0.894	0.863	0.836	0.813	0.792	0.774	0.756	0.74	0.726	0.712
1650	-	-	-	-	-	0.973	0.936	0.895	0.863	0.836	0.812	0.791	0.772	0.755	0.739	0.724	0.71
1700	-	-	-	-	-	0.973	0.938	0.895	0.863	0.835	0.811	0.79	0.771	0.754	0.738	0.723	0.709
1750	-	-	-	-	-	0.974	0.94	0.896	0.862	0.835	0.81	0.789	0.77	0.752	0.736	0.721	0.707
1800	-	-	-	-	-	0.975	0.942	0.897	0.862	0.834	0.81	0.788	0.768	0.751	0.735	0.72	0.705
1850	-	-	-	-	-	0.976	0.944	0.897	0.862	0.833	0.809	0.787	0.767	0.749	0.733	0.718	0.704
1900	-	-	-	-	-	0.977	0.946	0.898	0.862	0.832	0.807	0.785	0.766	0.748	0.731	0.716	0.702
1950	-	-	-	-	-	0.979	0.949	0.898	0.861	0.832	0.806	0.784	0.764	0.746	0.729	0.714	0.7
2000	-	-	-	-	-	0.982	0.952	0.899	0.861	0.831	0.805	0.782	0.762	0.744	0.728	0.712	0.698
2050	-	-	-	-	-	0.985	0.954	0.899	0.86	0.83	0.804	0.781	0.761	0.742	0.726	0.71	0.696
2100	-	-	-	-	-	0.988	0.956	0.9	0.86	0.828	0.802	0.779	0.759	0.74	0.724	0.708	0.694
2150	-	-	-	-	-	-	0.956	0.9	0.859	0.827	0.801	0.778	0.757	0.738	0.722	0.706	0.692
2200	-	-	-	-	-	-	0.955	0.901	0.859	0.826	0.799	0.776	0.755	0.736	0.72	0.704	0.69
2250	-	-	-	-	-	-	0.954	0.901	0.858	0.825	0.797	0.774	0.753	0.734	0.717	0.702	0.687
2300	-	-	-	-	-	-	0.953	0.901	0.857	0.823	0.795	0.772	0.751	0.732	0.715	0.699	0.685
2350	-	-	-	-	-	-	0.952	0.902	0.856	0.822	0.794	0.769	0.748	0.729	0.712	0.697	0.682
2400	-	-	-	-	-	-	0.952	0.902	0.855	0.82	0.791	0.767	0.746	0.727	0.71	0.694	0.679
2450	-	-	-	-	-	-	0.951	0.902	0.854	0.818	0.789	0.765	0.743	0.724	0.707	0.691	0.677
2500	-	-	-	-	-	-	0.951	0.902	0.852	0.816	0.787	0.762	0.74	0.721	0.704	0.688	0.674
2550	-	-	-	-	-	-	0.951	0.902	0.851	0.814	0.784	0.759	0.738	0.718	0.701	0.685	0.671
2600	-	-	-	-	-	-	0.951	0.903	0.849	0.812	0.782	0.756	0.735	0.715	0.698	0.682	0.664
2650	-	-	-	-	-	-	0.952	0.903	0.848	0.809	0.779	0.754	0.731	0.712	0.695	0.679	0.664
2700	-	-	-	-	-	-	0.952	0.903	0.846	0.807	0.776	0.75	0.728	0.708	0.691	0.675	0.661
2750	-	-	-	-	-	-	0.953	0.903	0.844	0.804	0.773	0.747	0.724	0.705	0.687	0.671	0.657
2800	-	-	-	-	-	-	0.956	0.903	0.842	0.801	0.769	0.743	0.721	0.701	0.684	0.668	0.653
2850	-	-	-	-	-	-	0.959	0.902	0.839	0.798	0.766	0.739	0.717	0.697	0.679	0.663	0.649
2900	-	-	-	-	-	-	0.963	0.902	0.836	0.794	0.762	0.735	0.713	0.693	0.675	0.659	0.645
2950	-	-	-	-	-	-	-	0.902	0.834	0.79	0.758	0.731	0.708	0.688	0.671	0.655	0.64


## Note

Note 1: For capacity on superheated steam, multiply saturated steam capacity by correction factor.

Note 2: Convert set pressure from (psig) to (psia) flowing pressure.

Note 3: psia flowing = [set pressure psig x overpressure] + 14.7

# Valve Configuration Code

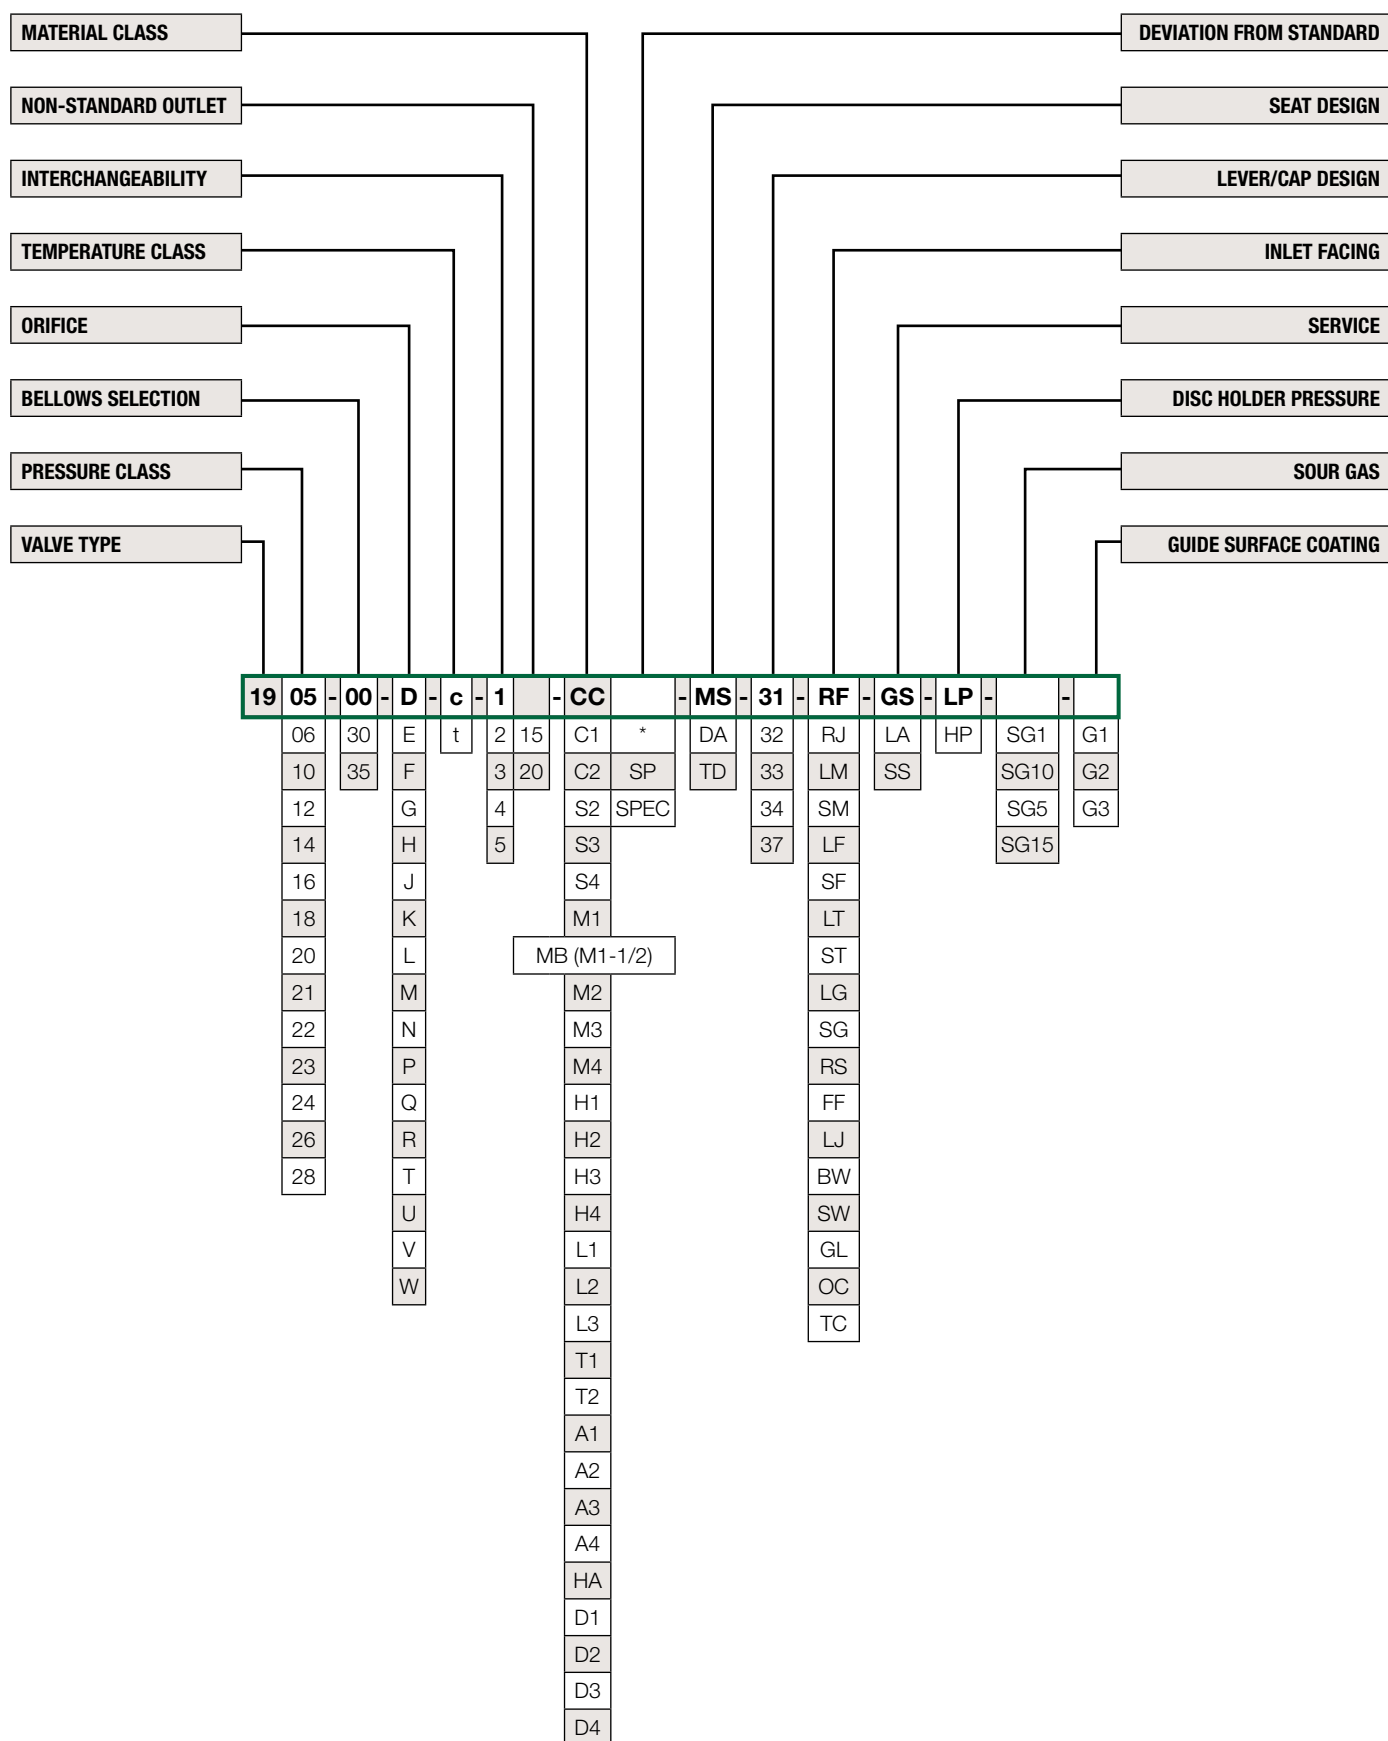



# Valve Configuration Code (Contd.)

Pressure Class	
Designation	Class
05	150
06	300
10	300
12	600
14	900
16	1500
18	2500
20	300
21 (-2T Only)	300
22	600
23 (P-2 Only)	900
24	900
26	1500
28	2500

Bellows Selection	
Designation	Range
00	Non Bellows
30	Bellows
35	Balanced Bellows

Interchangeability Number	
Designation	Valve Type
1 to 4	Numerical values vary by Orifice
5	Universal Media

Non-Standard Outlet	
Designation	Type
	Standard Outlet Rating
15	Mating Outlet Flange
20	Full Rated Outlet

Seat Design	
Designation	Type
MS	Metal Seat
DA	O-Ring
TD	Thermodisc

Standard Valve Connection				
Orifice	Area (API)		Area (ASME)	
	in <sup>2</sup>	cm <sup>2</sup>	in <sup>2</sup>	cm <sup>2</sup>
D	0.110	0.710	0.128	0.825
E	0.196	1.265	0.228	1.470
F	0.307	1.981	0.357	2.302
G	0.503	3.245	0.585	3.774
H	0.785	5.065	0.913	5.888
J	1.287	8.303	1.496	9.652
K	1.838	11.858	2.138	13.794
L	2.853	18.406	3.317	21.400
M	3.600	23.226	4.186	27.006
N	4.340	28.000	5.047	32.561
P	6.380	41.161	7.417	47.852
Q	11.050	71.290	12.850	82.903
R	16.000	103.226	18.600	120.000
T	26.000	167.742	30.210	194.903
U	N/A	N/A	35.000	225.806
V	N/A	N/A	50.260	324.257
W	N/A	N/A	78.996	509.651

Temperature Range	
Designation	Range
c	to 450°F (232.2°C)
t	451°F (232.8°C) & Above

Material Trim	
Designation	Trim
CC	Standard Material
C1	Ambient Temp. to -50°F [LCC Construction]
C2	Ambient Temp. To -50°F [St. St. Construction]
S2	Stainless St. [Internals, Except Spring Assy.]
S3	Stainless St. [All except Spring Assy.]
S4	Stainless St. [Complete Valve]
M1	Monel [Nozzle & Disc]
MB (M1-1/2)	Monel [M1+Disc Holder, Adj. Ring & Ring Pin]
M2	Monel [Internals, except Spring Assy.]
M3	Monel [All except Spring Assy.]
M4	Monel [Complete Valve]
H1	Hastelloy C [Nozzle & Disc]
H2	Hastelloy C [Internals, except Spring Assy.]
H3	Hastelloy C [All except Spring Assy.]
H4	Hastelloy C [Complete Valve]
L1	Low Temperature Service [-21°F To -75°F]
L2	Low Temperature Service [-76°F To -150°F]
L3	Low Temperature Service [-151°F To -450°F]
T1	High Temperature Service [1001°F To 1200°F]
T2	High Temperature Service [1201°F To 1500°F]
A1	Alloy 20 [Nozzle & Disc]
A2	Alloy 20 [Internals, except Spring Assy.]
A3	Alloy 20 [All except Spring Assy.]
A4	Alloy 20 [Complete Valve]
HA	Hydrofluoric Acid [Anhydrous Hf Alky]
D1	Duplex [Nozzle & Disc]
D2	Duplex [Internals, except Spring Assy.]
D3	Duplex [All except Spring Assy., Stud/Nut & Bellows Assy.]
D4	Duplex [All except Stud/Nut & Bellows Assy.]

# Valve Configuration Code (Contd.)

Lever/Cap Design	
Designation	Type
31	Screwed
32	Bolted
33	Packed
34	Plain
37	Air Operated

Service	
Designation	Type
GS	Gas
LA	Liquid
SS	Steam

Inlet Flange Facing	
Designation	Facing
RF	Raised Face Serrated
RJ	Ring Joint
LM	Large Male
SM	Small Male
LF	Large Female
SF	Small Female
LT	Large Tongue
ST	Small Tongue
LG	Large Groove
SG	Small Groove
RS	Raised Face, Smooth
LJ	Lens Joint
BW	Butt Weld
SW	Socket Weld
GL	Grayloc
OC	Oteco
TC	Tri-Clamp

Disc Holder Pressure Design	
Designation	Pressure Range
LP	Low Pressure
HP	High Pressure
Pressure Ranges vary per Orifice	

Sour Gas Applications	
Designation	Type
SG1	Non-Bellows
SG10	Non-Bellows [Crca Spring]
SG5	Bellows
SG15	Bellows [Crca Spring]

Guide Surface Coating	
Designation	Part Coated
G1	Glide-Aloy™ Disc Holder
G2	Glide-Aloy™ Guide
G3	Glide-Aloy™ Disc Holder and Guide

# How to Order a 1900 Safety Relief Valve

Specification Sheet			
		Page ____ of ____	
Requisition No.			
Job No.			
Date			
Revised By			
<b>General</b>			
1. Item Number:			
2. Tag Number:			
3. Service, Line or Equipment No:			
4. Number Required:			
<b>Basis of Selection</b>			
5. Code:			
<input type="checkbox"/> ASME Sec. I (1900/P series only)			
<input type="checkbox"/> ASME Sec. III			
<input type="checkbox"/> ASME Sec. VIII			
<input type="checkbox"/> OTHER Specify:			
6. Comply with API 526: <input type="checkbox"/> YES <input type="checkbox"/> NO			
7. <input type="checkbox"/> Fire <input type="checkbox"/> OTHER Specify:			
8. Rupture Disk: <input type="checkbox"/> YES <input type="checkbox"/> NO			
<b>Valve Design</b>			
9. Type: Safety Relief			
10. Design: <input type="checkbox"/> Conventional <input type="checkbox"/> Bellows			
<input type="checkbox"/> Closed Bonnet <input type="checkbox"/> Yoke/Open Bonnet			
<input type="checkbox"/> Metal Seat <input type="checkbox"/> Resilient Seat			
<input type="checkbox"/> API 527 Seat Tightness			
<input type="checkbox"/> OTHER Specify:			
<b>Connections</b>			
11. Inlet Size:	Rating:	Facing:	
Outlet Size:	Rating:	Facing:	
12. <input type="checkbox"/> OTHER Specify:			
<b>Materials</b>			
13. Body/Bonnet:			
14. Guide/Rings:			
15. Seat Material:			
Metal:			
Resilient:			
16. Bellows:			
17. Spring:			
18. Comply with NACE MRO 175 <input type="checkbox"/> YES <input type="checkbox"/> NO			
19. <input type="checkbox"/> OTHER Specify:			
20. Cap and Lever Selection			
<input type="checkbox"/> Screwed Cap (Standard) <input type="checkbox"/> Bolted Cap			
<input type="checkbox"/> Plain Lever <input type="checkbox"/> Packed Lever <input type="checkbox"/> Gag			
21. <input type="checkbox"/> OTHER Specify:			
<b>Service Conditions</b>			
22. Fluid and State:			
23. Required Capacity per Valve & Units:			
24. Molecular Weight or Specific Gravity:			
25. Viscosity at Flowing Temperature & Units:			
26. Operating Pressure & Units:			
27. Blowdown: <input type="checkbox"/> Standard <input type="checkbox"/> Other			
28. Latent Heat of Vaporization & Units:			
29. Operating Temperature & Units:			
30. Relieving Temperature & Units:			
31. Built-up Back Pressure & Units:			
32. Superimposed Back Pressure & Units:			
33. Cold differential Test Pressure & Units:			
34. Allowable Overpressure in Percent or Units:			
35. Compressibility Factor, Z:			
36. Ratio of Specific Heats:			
<b>Sizing and Selection</b>			
37. Calculated Orifice Area (square inches):			
38. Selected Orifice Area (square inches):			
39. Orifice Designation (letter):			
40. Manufacturer:			
41. Model Number:			
42. Vendor Calculations Required: <input type="checkbox"/> YES <input type="checkbox"/> NO			

