



O.S.H.A. SAFETY NET
OVER SKYLIGHT HUMAN ARREST

INSTALLATION INSTRUCTIONS

MODEL: 4' X 8' SKYLIGHT SAFETY NET

SAFETY AT ANY HEIGHT



SYSTEM COMPONENTS



Safety Net



Ratchet Strap



Storage Bag



QR Code





O.S.H.A. SAFETY NET
OVER SKYLIGHT HUMAN ARREST

PRE-INSTALLATION CHECKLIST



Ensure the skylight curb has a minimum 2-inch vertical surface with a lip suitable for securing the ratchet strap.



Inspect the skylight edge for sharp surfaces or protrusions. Remove or pad as needed to avoid damage to the strap or net.



Confirm net and strap are undamaged, properly sized, and include all components.



An installation training video can be viewed:
training.skylightsafet.net/install



WATCH INSTALLATION VIDEO



O.S.H.A. SAFETY NET OVER SKYLIGHT HUMAN ARREST

INSTALLATION INSTRUCTIONS

1

Unpack & Inspect


- ▶ Remove the net and strap from the storage bag.
- ▶ Inspect for damage, wear, or missing parts.
- ▶ Scan the QR code for digital registration and inspection log access.



2

Position the Net


- ▶ Lay the net evenly over the skylight opening, centering it so all edges hang evenly.

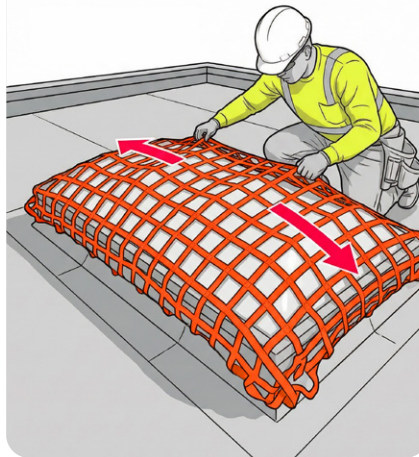

3

Wrap the Ratchet Strap

- ▶ Feed the strap through all the net's perimeter loops.
- ▶ Verify the strap is properly oriented with the ratchet handle facing outward.

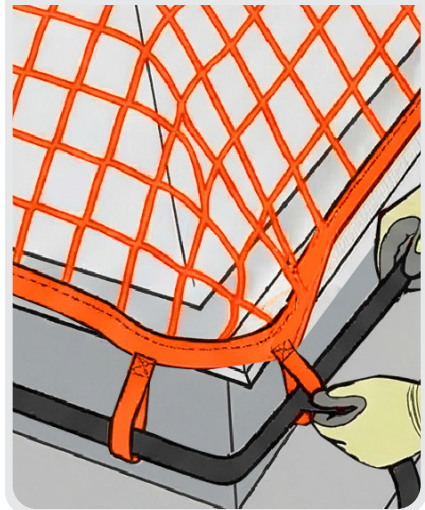

4

Secure the Net


- ▶ Position the strap around the skylight ensuring it rests against the skylight curb below the skylight counterflashing.
- ▶ On vented skylights, position the strap below the venting and counterflashing or above the venting but below the skylight frame edge. Do NOT position the strap over the skylight venting.
- ▶ Tighten the ratchet handle until the net is firmly secured but not so tight that it deforms or cracks the curb or damages the skylight or roofing material.
- ▶ Ensure at least three full wraps of the strap on the ratchet spool when secured.



5

Verify Fit & Tension

- ▶ Confirm that the net edges drop below the skylight frame on all sides.
- ▶ Check that the strap is snug and will not loosen over time.
- ▶ Give the net a light tug to verify it's locked in place.

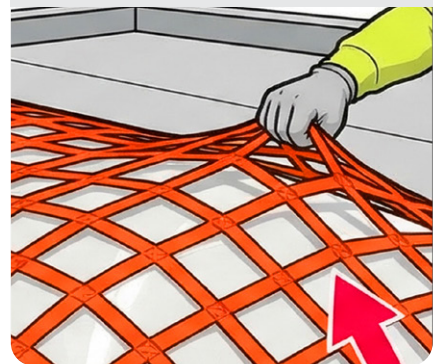



MAINTENANCE & INSPECTION

- ▶ An inspection training video can be viewed:
training.skylightsafetynet.net/inspection
- ▶ O.S.H.A. SAFETY NETS are required to be visually inspected and logged in the **SkylightSafety.Net digital logging application**.
- ▶ **DAILY** (User): Visually scan net for tears, cuts, damage to ratchet assembly and secure fit.
- ▶ **WEEKLY** (Competent Person): Scan the QR code on the O.S.H.A. SAFETY NET and complete the Digital Inspection Report via the App.
- ▶ **REMOVAL:** Scan QR code to log location and status.
- ▶ **Service Life:** 3 year maximum.
- ▶ **Fall Arrest:** If used for a fall arrest, scan QR code after rescue, remove and destroy net and replace with new net as soon as possible.

SAFETY NOTES

- ▶ This system is **not rated for anchorage** and should never be used as part of a travel restraint system.
- ▶ Only trained personnel should install or inspect O.S.H.A Skylight safety netting.
- ▶ The product complies with OSHA 1910.28(b)(3)(i)(A) and 1926.501(b)(4) requirements for fall protection at skylights.

QUESTIONS OR SUPPORT?

