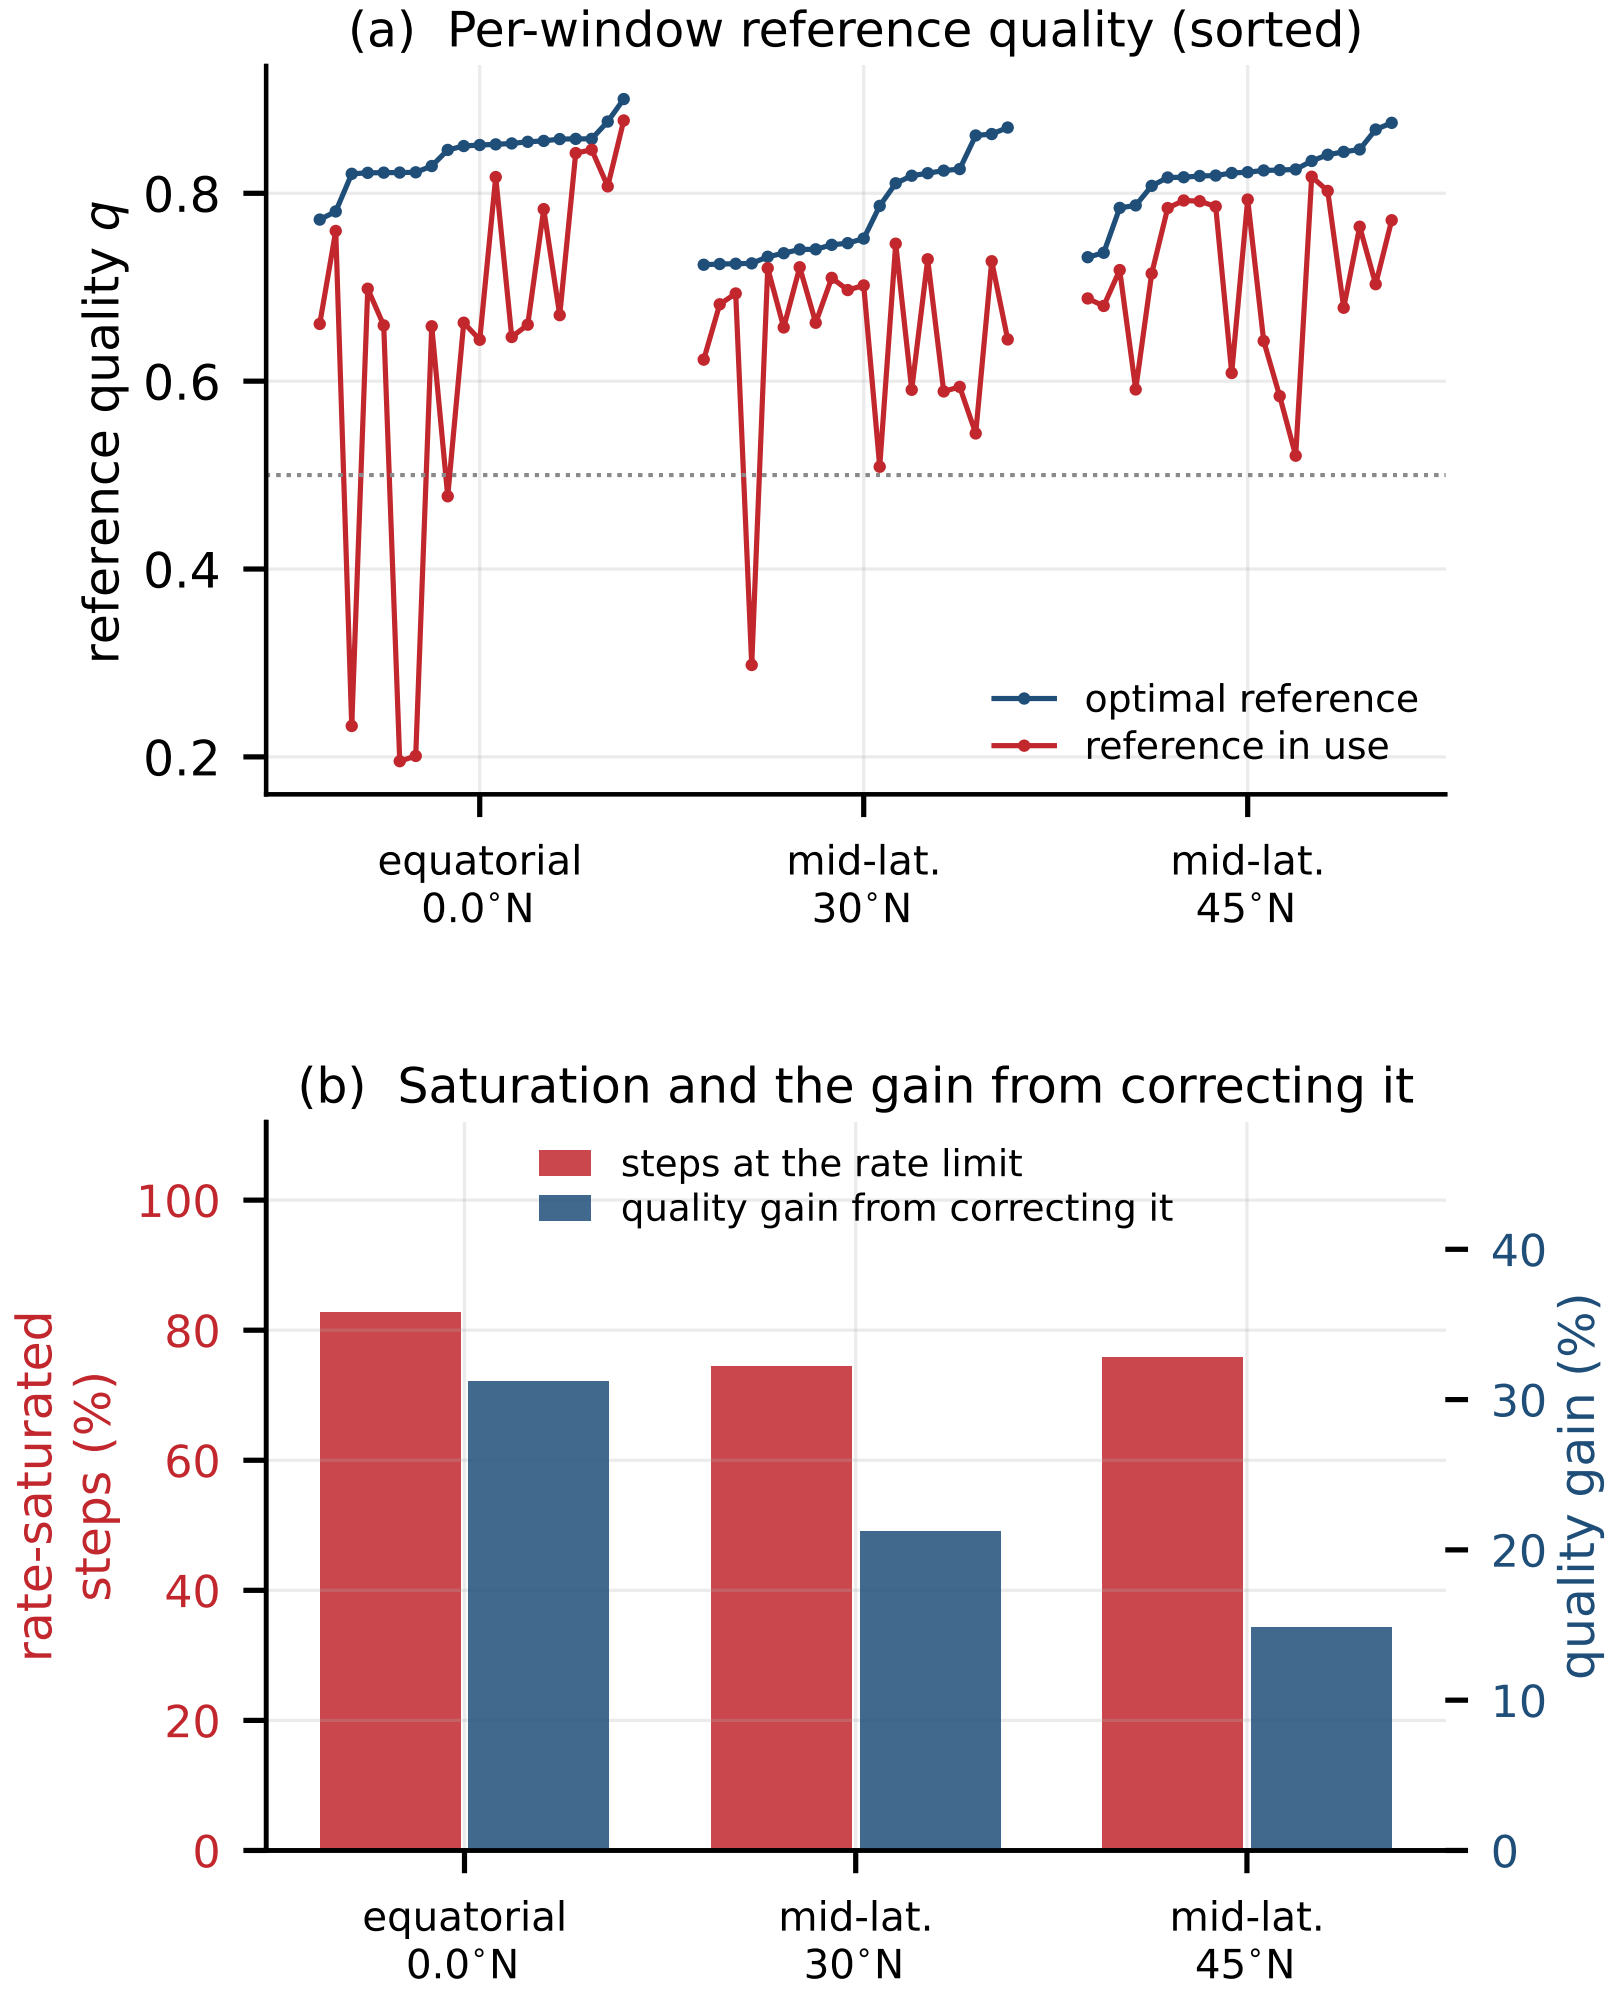
(a) Per-window reference quality (sorted)
reference quality q
0.8
0.6
0.4
0.2
optimal reference
reference in use
equatorial
0.0°N
mid-lat.
30°N
mid-lat.
45°N
(b) Saturation and the gain from correcting it
steps at the rate limit
quality gain from correcting it
rate-saturated
steps (%)
100
80
60
40
20
0
quality gain (%)
40
30
20
10
0
equatorial
0.0°N
mid-lat.
30°N
mid-lat.
45°N