



Detector-coupled Monte Carlo estimate of background and unresolved-line sensitivity for a balloon-borne 511 keV Laue-lens TES telescope

Authors omitted for review

Affiliations omitted for review

Abstract Background determines the sensitivity of a balloon-borne 511 keV Laue-lens telescope with a transition-edge-sensor (TES) microcalorimeter. We developed an end-to-end Geant4/MEGAlib model transporting focused signal, all eight prompt families, production-position-sampled activation decays, and an explicit atmospheric 511 keV line through one detector–cryostat geometry. All streams share a 510.58–511.42 keV window, active anticoincidence, and topology/field-of-view selection. In the mass-complete reference, the selected prompt-plus-delayed diagnostic background was $(4.643 \pm 0.543) \times 10^{-2} \text{ s}^{-1}$; this differently scoped reference budget is used to locate sources, not as a like-for-like measure of shield gain. Positrons and neutrons supplied 96.8% of the prompt component, and cold-copper ^{64}Cu and ^{61}Cu accounted for 24 and two of 26 delayed records. This source map led to a directionally graded BGO shield with 40, 30, and 10 mm side, bottom, and top coverage and an open optical aperture. After a 420 eV FWHM pixel-level response convolution, the active veto reduced the prompt rate from 2.849×10^{-2} to $4.072 \times 10^{-3} \text{ s}^{-1}$. Complete selection gave background and signal rates of 6.965×10^{-3} and $9.862 \times 10^{-4} \text{ s}^{-1}$ at a top-of-atmosphere flux of $10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$. A fixed-45°-elevation, 20 d trajectory fold yielded a central counting significance of 15.20 and a 3σ flux threshold of $1.974 \times 10^{-5} \text{ ph cm}^{-2} \text{ s}^{-1}$. The conditional component-wise transport-counting endpoint gave 5.67 and $5.293 \times 10^{-5} \text{ ph cm}^{-2} \text{ s}^{-1}$; it is a finite-transport diagnostic, not full 95% coverage.

Keywords Gamma-ray instrumentation, 511 keV annihilation line, transition-edge sensors, Laue lens, balloon-borne telescope, activation background

1 Introduction

Galactic 511 keV annihilation radiation is a direct observational probe of the origin of Galactic positrons. Its spectrum contains a two-photon line near 511 keV and an ortho-positronium continuum at lower energy. Positrons annihilate directly with electrons or form para-positronium, producing two photons near 511 keV, whereas ortho-positronium decays into a three-photon continuum. The line intensity, profile, and positronium continuum therefore carry information about the medium in which positrons slow down and annihilate [1, 2]. The total Galactic 511 keV flux measured by INTEGRAL/SPI corresponds, in an approximate steady state, to an annihilation rate of a few $\times 10^{43} \text{ e}^+ \text{ s}^{-1}$ [1, 3]. Candidate positron sources include β^+ -unstable nuclei synthesized in stellar explosions, compact objects that produce electron–positron pairs, and non-standard particle processes, but the existing measurements do not uniquely identify the dominant channel [1, 4, 5].

Wide-field observations have established the diffuse morphology of the line. INTEGRAL/SPI finds a bright central bulge and a weaker disk, and a recent 20-year analysis recovers central, broad-bulge, and disk components while the evidence for additional correlated structures remains marginal [4, 6, 7]. The 2016 COSI balloon flight independently detected the bulge and found evidence that the emission is more extended than a single point source [3, 8]. Spectroscopy also constrains the annihilation medium and kinematics: the SPI spectrum can be decomposed into a narrow component with about 1.3 keV FWHM and a broad component with about 5.4 keV FWHM, and spatial variations in centroid energy and width have been sought across the inner Galaxy [2, 9]. The annihilation map, however, records where positrons slow down and annihilate, not necessarily where they were created. Propagation through a magnetized, multiphase interstellar medium means that diffuse morphology

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。

红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮

1 P01-01 | A00 | 总评与阅读说明

使用方法：左侧每个彩色标注旁都有编号；在本页右栏找到同一编号，直接按“修改动作”处理。颜色表示优先级，不表示具体修改方式。
优先顺序：先处理阈值与击中存储、死时间和屏蔽计数率、Laue 物理验证、源流归一化、同口径比较、有限统计与似然、真实观测几何及投稿可复现性。

2 P01-02 | J02 | 期刊 | 摘要与图件

问题：摘要长度和关键词数量合格，但结论强度与图件仍需修改
为什么标这里：本处标题过长，而且给人的灵敏度成熟度高于当前部分本底模型所能支持的程度；应缩短并明确范围。
修改动作：采用审阅报告给出的重写思路，定义缩写，并在缺失物理完成前保留范围限制句；图尽可能提供矢量 PDF/EPS，或满足线图/组合图分辨率要求；图注应补单位、箱宽、归一化状态和统计区间。

3 P01-03 | N08 | 第二轮新增 | 中等 | 摘要可比性

当前状态：当前摘要已明确参考数值是不同口径的瞬发加延迟来源诊断预算，不作为屏蔽增益的同口径比较；当前条目只保留核算边界问题。
问题：摘要并列的参考率与最终率具有不同核算边界，不能解释为纯屏蔽增益
为什么标这里：两套模拟现均为全入射族活化；剩余差别是参考预算不含显式大气线且用于来源诊断，而最终预算包含大气线并采用另一响应链。摘要须明确这不是纯屏蔽增益。
修改动作：在摘要中明确前者是不同口径的来源诊断预算、不是同口径屏蔽增益；若要量化屏蔽增益，仍需给出相同源流、响应、阈值和选择下的成对计算。

and spectroscopy alone cannot recover the dominant source class or the complete pre-annihilation transport history [1].

Wide-field Compton and coded-mask instruments are well suited to the total bulge and disk emission. A complementary pointed instrument is needed to test whether the central region also contains an unresolved central enhancement, compact sources, or measurable line-kinematic structure. A detection of a point-like or narrowly concentrated feature would show that part of the annihilation is spatially localized; a non-detection would constrain a compact component without excluding source populations whose positrons escape and annihilate diffusely. An INTEGRAL/IBIS compact-source search found no Galactic 511 keV point sources and set a 2σ upper limit of about $1.6 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ for a ~ 10 Ms Galactic-centre exposure [10]. This limit sets both the comparison scale of earlier compact-source searches and a sensitivity target for a new narrow-field pointing instrument.

Laue optics offer one route to such pointed observations by using transmission-mode Bragg diffraction to focus photons from a known direction onto a small focal plane [11, 12]. Concentrating the flux collected over a large aperture onto a smaller sensitive detector area can improve point-source sensitivity when detector-related background dominates [13]. The focal plane must then combine a narrow energy response with sufficient stopping efficiency at 511 keV. Transition-edge-sensor (TES) microcalorimeters use the steep resistive transition of a superconductor to measure small temperature changes from deposited energy and can provide sub-keV resolution at 511 keV [14, 15]. An array covers the focal spot, while thick absorbers and a multilayer layout raise the full-energy efficiency. Laue focusing compresses the accepted phase space, and the TES response permits a narrow line window and detailed line-profile measurements. The resulting instrument trades field of view for a concentrated beam and high-resolution spectroscopy, complementing rather than replacing wide-field bulge and disk measurements.

Focusing and energy resolution do not determine the useful sensitivity by themselves because MeV line spectrometers are usually limited by local instrumental background. Cosmic rays and atmospheric secondaries generate prompt continua, local annihilation photons, and activation products that accumulate with time in the detector and surrounding materials [16, 17]. Recent COSI work illustrates the required analysis sequence: construct the transported payload mass model, separate prompt and activation components, include anticoincidence, and connect the result to the flight environment and its time variation [18–23]. The DIXE TES background study likewise starts from a detailed payload model and explains the detected spectrum by incident particle, production region, and physical process [24]. These studies show that the design question is not only how much shielding surrounds the focal plane, but which directions and materials generate the events that actually enter the science window.

We adopt the same source-to-detector approach. EXPACS/PARMA supplies the balloon radiation field, and a 10 m Ge(111) Laue model supplies the focused reference signal. Prompt particles, production-position-sampled activation decays, an explicit atmospheric 511 keV line, and focused photons enter the same generated detector–cryostat geometry and pass through the same response and event selection. The analysis first identifies the dominant particle and material origins of the background, then uses those origins to define the final directionally graded active shield, and finally folds the selected signal and background rates over a 20 d reference trajectory. This order connects the background physics, the shield architecture, and the observing performance in one traceable chain.

1.1 Science and instrument requirements

The simulated instrument is aimed at 511 keV point-source or unresolved-central-excess components from the Galactic-center region that have not been detected by previous instruments. INTEGRAL/SPI measurements establish a sky dominated by diffuse bulge and disk emission [4, 7]. The dedicated INTEGRAL/IBIS compact-source search by De Cesare found no Galactic 511 keV point sources and reported a 2σ upper limit for a 10 Ms Galactic-center exposure [10]. For comparison with the 3σ sensitivities reported here, we linearly rescale that published limit under the Gaussian approximation to obtain an IBIS-based 3σ -equivalent above-atmosphere upper limit of $2.4 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$. At the day-15 altitude, the retained vertical residual depth is 3.461 g cm^{-2} . For the fixed 45° -elevation axis the plane-parallel slant depth is 4.895 g cm^{-2} ; with an effective dry-air attenuation coefficient $0.08736 \text{ cm}^2 \text{ g}^{-1}$, consistent with NIST XCOM near 511 keV, the transmission is $T_{15,45} = 0.6520$. Applying this transmission defines the single payload-plane observational reference flux,

1 P02-01 | M06 | 重大 | 科学用例 | 补充正式条目

问题：标题灵敏度只适用于未分辨的单色窄线
为什么标这里：原标注 PDF 没有对应的行内高亮；现补充为相关页面的侧栏便笺。
修改动作：报告灵敏度随本征线宽和质心偏移的优化结果，至少包括未分辨、1.3 keV 和 5.4 keV 三种情况；完成之前，每次引用阈值都应明确写“未分辨线”或“单色线”。

2 P02-02 | N07 | 第二轮新增 | 中等 | 引用支持

当前状态：第 1.1 节以 IBIS 的 3σ 等效上限 $2.4 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ 乘 $T=0.6520$ ，得到唯一的载荷平面观测参考通量 $1.565 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ ；该数值不参与模拟归一化。
问题：SPI 的“ 10^{-4} 量级点源上限”被归给了弥散发射论文
为什么标这里：本处以 IBIS 已发表 2σ 上限为依据，按高斯近似得到 3σ 等效上限 $2.4 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ ，再乘 $T=0.6520$ ，定义唯一的载荷平面观测参考通量 $1.565 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ 。
修改动作：由 IBIS 紧致源检索单独承担观测依据：先将已发表的 2σ 上限按高斯近似线性换算为 3σ 等效上限 $2.4 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ ，再乘固定 45° 方向的大气透过率 0.6520，得到唯一的载荷平面观测参考通量 $1.565 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ 。

3 P02-03 | N02 | 第二轮新增 | 重大 | 信号透射几何

当前状态：已按固定 45° 仰角把垂直柱改为 $\sqrt{2}$ 倍斜程柱：第 15 天 $T=0.652034$ ，并用同一规则重折叠全部 81 个时间箱；本条作为已实施修改的审阅追踪保留。
问题： $T=0.739$ 必须对应明确的剩余大气柱和视角；若把垂直柱用于 45° 侧向几何，信号约高估 12%
为什么标这里：本处现已写明 45° 平面平行斜程柱 4.895 g cm^{-2} 和 $T=0.6520$ ；本条作为已完成修订的追踪保留。
修改动作：说明 $T=0.739$ 与 $T_{\text{atm},511(t)}$ 使用的大气柱、衰减数据源和视角；若锚点是垂直值，应按实际源仰角重算或给出理由。该项与 M05 的银河中心仰角问题直接耦合。

4 P02-04 | M18 | 中等 | 通量约定

当前状态：第 1.1 节现仅以 IBIS 的 3σ 等效上限和 $T=0.6520$ 定义唯一的载荷平面观测参考通量 $1.565 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ ；本段不再引入模拟归一化数值。
问题：大气透射与有效面积术语不一致
为什么标这里：本处只定义载荷平面的观测参考通量： $2.4 \times 10^{-4} \times 0.6520 = 1.565 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ ；不再在本段引入模拟注入通量及其载荷换算值。
修改动作：统一定义顶层大气和载荷处通量，说明天顶/斜程大气柱与透射模型，并把仪器有效面积与大气折叠后的计数—通量换算分开。

$F_{0,\text{ref}} = (2.4 \times 10^{-4}) \times 0.6520 = 1.565 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$. This reference is used only to compare the reported sensitivity with the IBIS upper limit and is independent of the Monte Carlo signal normalization used later. Compared with the wide-field spectroscopic and coded-mask searches performed by INTEGRAL, the modeled payload adds Laue focusing to improve the point-source response and uses a high-energy-resolution, multilayer thick-absorber TES microcalorimeter array as the focal-plane detector to sharpen the 511 keV line measurement [14, 25].

This work first considers a balloon payload as an early test platform, with the expectation that the approach can later be extended to a satellite observing platform.

This goal imposes four requirements on the instrument and the simulation: first, the telescope must concentrate 511 keV photons collected by a large lens aperture onto a small focal plane, **increasing the collecting-area-to-detector-area ratio** and reducing detector-associated background; this is a narrow-field pointed configuration rather than a means of increasing sky coverage. Second, the focal-plane detector must provide sub-keV energy response sufficient to resolve detailed line structure. Third, the detector and shield model must suppress atmospheric, activation, and side-entry backgrounds. Fourth, the simulation chain must treat prompt background, delayed activation, focused signal, vetoes, event topology, and mission-time variation consistently, so that signal and background are evaluated under the same detector selection.

The remainder of this paper is organized as follows. Section 2 describes the detector and cryostat mass model; Section 3 the simulation framework—the workflow, optics coupling, background sources, event selection, and the mission-time trajectory fold (Section 3.5); Section 4 the selected-rate and sensitivity results together with the normalization, convergence, and boundary checks; and Section 5 the discussion and conclusions.

2 Detector and cryostat mass model

The detector mass model is the generated, mass-complete Geant4/MEGAlib reference geometry. It contains a balloon-borne multilayer TES array at the cold end of a compact dilution refrigerator (DR), together with the thermal stages, magnetic and passive shields, side-entry windows, collimator, copper thermal links, active scintillator, and cryogenic service structures [14, 26]. Figure 1 is rendered directly from the semantic OBJ/MTL export of that generated geometry. The complete view and the detector-bay view therefore show the model used for transport rather than an idealized drawing.

The TES detector concept uses an absorber-coupled AlMn film structure developed in our laboratory; the advantages of AlMn alloy include transition-temperature tunability through composition and annealing, suitability for array fabrication, and relatively low magnetic-field sensitivity [27, 28]. In the present concept, the TES thermometer film is an AlMn film of order 200 nm thickness, whereas the γ -ray absorber is a millimetre-scale metal body. The absorber uses $1.5 \times 1.5 \times 3.0 \text{ mm}^3$ Ta pixels; the high atomic number of Ta increases the interaction efficiency for 511 keV photons. At 511 keV, a 3.0 mm Ta layer has an **estimated interaction efficiency of about** 49%, and the corresponding six-layer efficiency approaches unity. In the current geometry, the center-to-center spacing between adjacent Ta array layers is 12 mm; this spacing is designed with the efficiency of the subsequent Compton-based kinematic-track veto mechanism in mind. The choice of Ta also considers its low-temperature low-specific-heat properties as a superconductor (this paper uses an order-of-magnitude estimate of $10^{-2} \text{ J K}^{-1} \text{ m}^{-3}$) and a relatively high photoelectric-to-Compton interaction ratio; based on NIST XCOM cross sections near 511 keV, this ratio is about 0.731 [29]. For the detector-response model, we adopt $\Delta E_{\text{FWHM}} \simeq 420 \text{ eV}$ at 511 keV as an **estimated energy resolution and simulation input**.

Because the TES film and Ta absorber differ greatly in size and mass, and because the TES film itself does not contribute significant 511 keV interactions, the transport geometry uses the Ta absorber to represent the main sensitive volume of a TES pixel. The explicit sensitive volume has six layers, 376 Ta absorber pixels per layer, and 2256 pixels in total, with 1.5 mm length and width and 3 mm thickness. A Si substrate proxy is placed below each Ta pixel, using Si to represent the SiO2-SiNx-Si substrate because this simulation does not model detailed thermal conduction. TES-film, wiring, and readout details are not built layer by layer as explicit interaction volumes; instead, they enter the model through the assumed energy response and service-mass proxies. Separately from the response FWHM, the retained W2 analysis selection uses the 511 keV line window $W_{511} = 511 \text{ keV} \pm 420 \text{ eV}$, i.e. 510.58–511.42 keV.

The TES array is mounted on copper support and thermal-link structures. A copper thermal finger passes through the rear of the sample box and joins the 50 mK stage. The near-field box contains a 2 mm Nb inner

1 P03-01 | M17 | 中等 | 探测器物理

当前状态：正文保留单层约 49% 和六层接近 1 的原有简洁表述，仅将“探测效率”改为“相互作用效率”；同时已删除扩大天空立体角的表述。
问题：“探测效率”容易与系统探测效率混淆
为什么标这里：本处现准确表述聚焦收益为提高收集面积与探测器面积之比、降低探测器相关本底，并明确 Laue 透镜仍是窄视场定向光学，不再声称扩大天空覆盖。
修改动作：仅将“探测效率”改为“相互作用效率”；本段无需追加其他效率解释。

2 P03-02 | M17 | 中等 | 探测器物理

当前状态：正文保留单层约 49% 和六层接近 1 的原有简洁表述，仅将“探测效率”改为“相互作用效率”；同时已删除扩大天空立体角的表述。
问题：“探测效率”容易与系统探测效率混淆
为什么标这里：本处仅作术语替换：单层约 49% 和六层接近 1 均称为相互作用效率，不追加其他效率解释。
修改动作：仅将“探测效率”改为“相互作用效率”；本段无需追加其他效率解释。

3 P03-03 | M16 | 中等 | 探测器响应

当前状态：正文已将 420 eV FWHM 简要标为预估能量分辨率和模拟响应输入，不再把它写成由热容证明的完整系统性能。
问题：420 eV 应明确标为预估能量分辨率
为什么标这里：本处现只简要说明 420 eV FWHM 是响应模型采用的预估能量分辨率，不再由热容推导或表述为已实测系统性能。
修改动作：在正文中简要说明 420 eV FWHM 是响应模型采用的预估能量分辨率；具体响应实现仍在方法部分交代。

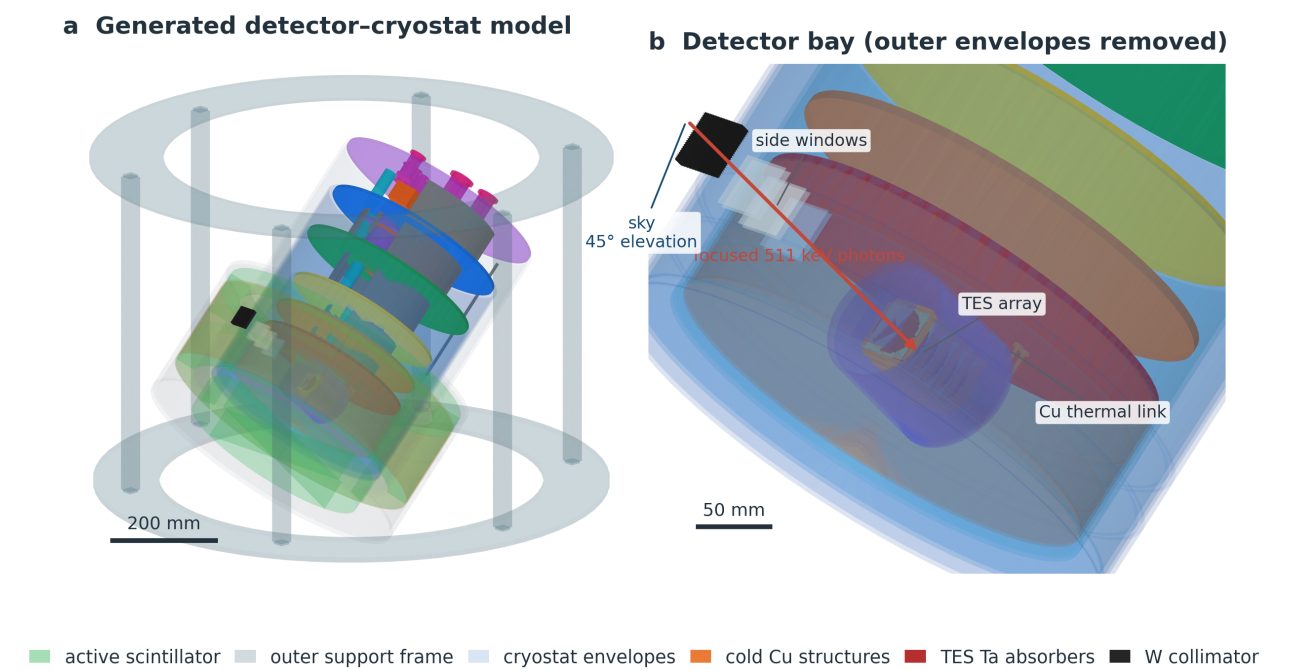


Figure 1: Generated mass-complete reference geometry used in the detector transport. (a) Complete detector-cryostat model, including the outer support frame, active scintillator, cryostat stages, and service structures. (b) Detector-bay view with the outer envelopes removed to expose the TES Ta array, copper thermal link, side-window stack, and W collimator. The aperture axis points toward the sky at 45° elevation; the red arrow follows focused 511 keV photons from the sky-facing collimator down to the TES array. Colours follow the semantic geometry export; selected outer volumes are translucent only for visualization.

magnetic shield and a 2 mm MuMetal outer layer, represented as Ni:Fe = 4:1. Along the optical path, the generated model contains 300 μm Al thermal-shield windows, a 25 μm Be vacuum window, and an 8 mm W multihole collimator aligned with the TES pixels. The side openings are Boolean cuts through every surrounding shell. The reference geometry uses segmented CsI on the side and end surfaces; the final optimized geometry replaces this outer active layer with BGO while leaving the detector, cryostat, side aperture, and internal material layout unchanged. The full instrument frame is rotated by 45°, so the local side window points 45° above the horizontal in the zenith-frame source coordinates.

The **optimized BGO transport records shield hits** with its native 80 keV threshold, while the common detector-level selection applies the specified 50 keV shield-deposit veto to the recorded event information. Both values are **kept fixed throughout the final-geometry calculation**.

3 Simulation framework

Detector-coupled Monte Carlo transport through detailed mass models is a mature method for predicting the response and background of gamma-ray spectrometers [16]. This section describes the full end-to-end simulation chain from source generation to flight-performance assessment. The focusing optics and detector system start from independent mass models: the optics-branch mass model takes the target point source and records focused photons reaching the **focal-plane plane** as the focused-source input to the detector branch; the detector branch then directly transports, in the detector/cryostat mass model of Section 2, prompt atmospheric particles, delayed decays generated from activation products according to recorded production positions, and the focused sources described above. The focused source, prompt source, and delayed source are simulated stepwise and normalized onto one time axis through Poisson-statistics-based time-axis sampling and renormalization, then the background is further suppressed by scintillator-based active veto and Compton-kinematics-based veto. The chain subsequently enters detailed background-analysis statistics, analysis of signal and background intensity variation caused by mission flight-time trajectory changes, and the overall flight-performance assessment and design-optimization recommendations. Because the focused signal and the two background streams all pass through the same response and veto definitions before any background decomposition or sensitivity statement,



- 1 P04-01 | M14 | 重大 | 可复现性 | 补充正式条目

问题：关键运输与响应配置缺失

为什么标这里：原标注 PDF 没有对应的行内高亮；现补充为相关页面的侧栏便笺。

修改动作：投稿时归档并引用带版本的快照，纳入配置、几何与源文件、曝光表、轨迹数组、响应与选择代码、环境锁文件、种子以及可重建全部表图的脚本。
- 2 P04-02 | M02 | 重大 | 科学准确性

问题：80 keV 的记录阈值与事后 50 keV 反符合阈值不相容

为什么标这里：若 80 keV 以下沉积没有存储，就无法在后处理中实现 50 keV 反符合；需澄清并在必要时以不高于 50 keV 的原生阈值重跑。

修改动作：说明 80 keV 只是原生触发标志，还是硬性的击中存储阈值；若低能沉积确被丢弃，应把原生阈值降到不高于 50 keV 后重跑。还应给出阈值扫描以及假定的 BGO 光产额和能量分辨响应。
- 3 P04-03 | Re-M02 | 第二轮复核

复核结论与动作：第二轮复核同意 M02，并补充偏差方向：若未存储 80 keV 以下 BGO 沉积，50-80 keV 组会被错误保留，因此相对真正 50 keV 反符合，报告本底偏高；但“50 keV 反符合”标签和 CsI-BGO 可比性仍无效，直至说明击中序列化。
- 4 P04-04 | S02 | 结构 | 写作与行文

问题：文字可理解，但过于围绕开发过程且信息压缩过度

为什么标这里：删除重复词，改为 focal plane。

修改动作：按科学功能拆分长句，删除起草/开发者旁白，直接陈述结果；统一 event/record/group/hit、分析窗术语、FoV 与 Laue 大小写，并统一美式或英式英语。

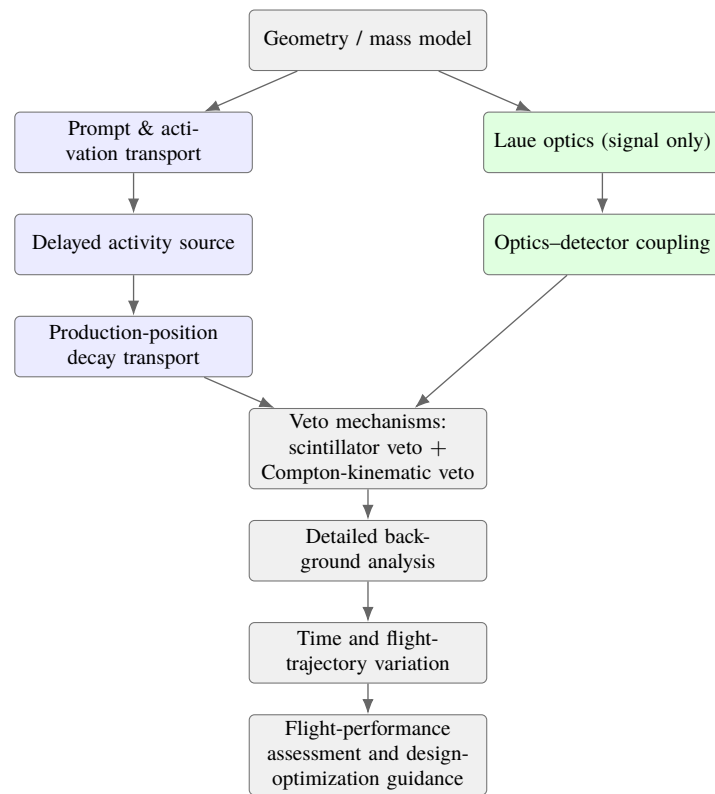


Figure 2: Simulation chain used in this work. Blue nodes are the prompt and delayed background streams, green nodes the focused-signal optics, and grey nodes the shared geometry, veto mechanisms, detailed background analysis, time/trajectory variation, and final flight-performance assessment. The focused signal and all background streams are evaluated under the same detector response and veto definitions before background decomposition, mission-time variation, and design-optimization judgments are made.

the subsequent results rest on a consistent event selection.

Figure 2 expands this chain by computational layer: geometry definition, prompt and activation-accumulation transport, delayed-source construction, focused-optics transport, detector-coupled signal replay, veto mechanisms, detailed background analysis, time/flight-trajectory variation, and flight-performance assessment with design-optimization recommendations. The following subsections describe each layer's inputs, operations, and outputs.

Day-scale flights sample a continuum of altitude and geomagnetic states, so a single Monte Carlo snapshot cannot be linearly stretched in time. The mission-time trajectory fold—its motivation, analytic definitions, multi-point transport tests, and the resulting performance curves—is developed in Section 3.5.

3.1 Laue optics and detector-coupled signal replay

This simulation adopts a laue-lens system based on mosaic Ge(111) crystals [11, 12]. Through optical design, it realizes a 10 m focal length, a 511 keV single-ring reference response, and an effective area of 20.1 cm² at 511 keV; the effective area is calculated as

$$A_{\text{eff}}(E) = A_{\text{inc}} \frac{N_{\text{fp}}(E)}{N_{\text{inc}}(E)} \quad (1)$$

where A_{inc} is the Monte Carlo incident sampling area, $N_{\text{inc}}(E)$ is the number of incident photons, and $N_{\text{fp}}(E)$ is the number of photons satisfying the focusing/focal-plane interception condition. The mosaic system is adopted to make the Monte Carlo calculation convenient while satisfying the expected focusing performance; other candidate schemes are also possible for actual engineering adaptation.

In this simulation, the laue optical branch gives the focusing-performance simulation and transports the focused signal through the Ge crystal mass.

1 P05-01 | M08 | 重大 | 光学物理

问题：自定义 Laue 衍射过程需要晶片级物理验证

为什么标这里：计算方便不是物理理由；应说明科学设计依据并验证响应。

修改动作：推导竞争风险构造；在角度和能量维度把反射、透射、吸收及出射角分布与 XOP/CRYSTAL 对比；证明步长收敛，并给出晶体尺寸、环几何、入射面积、模型版本和镶嵌抽样规则。

For this purpose, the diffraction probability of photons by the crystal is no longer superposed onto photons as an efficiency parameter, but is defined as a discrete process at the Geant4 application layer [30,31]. The process takes the diffraction probability $R(|\Delta\theta|)$ according to the angular deviation of the current photon relative to the crystal plane, and converts it into a finite equivalent diffraction mean free path λ_{diff} , so that the accumulated diffraction probability when the photon crosses a crystal path ℓ reproduces this value: $1 - \exp(-\ell/\lambda_{\text{diff}}) = R(|\Delta\theta|)$, namely $\lambda_{\text{diff}} = -\ell / \ln[1 - R(|\Delta\theta|)]$; **to avoid double counting with standard photoelectric absorption**, R is first normalized by the unabsorbed fraction ($R/(1 - A)$) and then converted into a mean free path. After this mean free path is returned to Geant4, the diffraction process and the standard electromagnetic processes (photoelectric absorption and Compton scattering) **each sample interaction lengths in the same competition framework**, and the shortest one decides which process occurs first, rather than forcibly intercepting photons at the crystal boundary. Photons not selected to undergo diffraction still continue transport according to the standard electromagnetic physics, and may be absorbed, scattered, or directly transmitted.

The diffraction probability is preferentially given by interpolation in an external XOP/CRYSTAL rocking-curve map as a function of angular deviation: this curve is calculated offline once in the preprocessing stage by the CRYSTAL/diff_pat module of the XOP toolkit (called through xoppylib, with DABAX crystallographic data as input) [32], and gives the Ge(111) reflectivity/transmissivity/absorption curves as a function of angular deviation; during transport, the angular deviation is calculated in real time for every step inside the crystal, and the current diffraction probability is obtained by interpolation on that curve, namely “offline library tabulation, probability used by angle during transport”. The mosaic orientation is implemented by applying a Gaussian angular perturbation to the ideal Bragg-plane normal, with the perturbation width given by the 30 arcsec mosaic FWHM; after diffraction occurs, the outgoing direction is mirror-reflected according to the perturbed plane normal, and the photon energy is unchanged. This split in which the “process class only handles the transport interface, and the independent model class handles probability and direction decisions” follows the idea of existing crystal Bragg-reflection extensions in Geant4 [33,34], and extends it to the energy band needed here.

Here the reference signal is a monochromatic 511 keV point source whose rounded top-of-atmosphere flux scale ($F_0 = 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$, Section 1.1) is motivated by the dedicated INTEGRAL/IBIS compact-source upper limit [10], rather than by any single observed object. It is constructed as a MEGALib far-field source [35], with the detailed construction given in Section 3.2.3. The signal is transported through the optics branch and injected into the detector mass model as a parallel-beam source; prompt cosmic-ray background and activation decays are transported directly in the detector/cryostat mass model. The **primary background budget** is therefore defined for the detector/cryostat branch, while the optics branch supplies the transported focal-plane signal phase space.

3.2 Source construction

After the focusing optics have been defined in Section 3.1, the optical input and the subsequent detector input **require three source layers**: the prompt atmospheric particle field incident on the payload, the delayed radioactive population accumulated in the instrument by that particle field, and the reference signal point source. These three layers are constructed separately, rather than running transport by directly invoking MEGALib’s buildup function for them at the same time, to reduce computational cost.

3.2.1 Prompt atmospheric source

The prompt atmospheric field is derived from EXPACS/PARMA. **PARMA3.0** is an analytical model parameterized from PHITS atmospheric-shower calculations and benchmarked against terrestrial cosmic-ray measurements, and EXPACS is its public tabulation and software interface [36,37]. PHITS supplies the underlying particle-transport physics: primary cosmic rays interact with air nuclei, the secondary hadrons, leptons, photons, and neutrons are transported through the atmospheric column, and the resulting fluences are parameterized by altitude, geomagnetic cutoff, solar modulation, energy, and direction. In this work EXPACS/PARMA provides the differential incident flux as a function of particle species, kinetic energy, zenith angle, geographic position, altitude, cutoff rigidity, and solar activity, and is used only to construct the external radiation fields; detector response, vetoing, topology selection, and mission-time counting are applied downstream. The reference source definitions use latitude 34° , longitude 100° , altitude 38 km, vertical cutoff rigidity $R_c = 11.6 \text{ GV}$,

- 1

P06-01 | M08 | 重大 | 光学物理

问题：自定义 Laue 衍射过程需要晶片级物理验证
为什么标这里：竞争过程构造不会自动重现目标 XOP 反射/透射/吸收；需给推导和晶片基准。
修改动作：推导竞争风险构造；在角度和能量维度把反射、透射、吸收及出射角分布与 XOP/CRYSTAL 对比；证明步长收敛，并给出晶体尺寸、环几何、入射面积、模型版本和镶嵌抽样规则。
- 2

P06-02 | Re-M08 | 第二轮复核

复核结论与动作：第二轮细化 M08：竞争框架中的首次相互作用概率为 $LD/(LD+LA) \times [1-\exp(-(LD+LA))]$ ；除弱吸收极限外，经 $R/(1-A)$ 缩放后不会化为目标 R 。XOP 镶嵌反射率已含微晶吸收和镶嵌宽度，额外高斯晶面扰动可能重复计算。应以 XOP 对比晶片 $R/T/A$ 和出射角，并给出 Λ_{inc} 。
- 3

P06-03 | M01 | 重大 | 科学范围

问题：报告的本底只覆盖探测器—低温恒温器子系统，而非完整载荷
为什么标这里：这里明确排除了光学系统和其他载荷质量，因此任务级总本底表述必须收窄，或先输运/约束遗漏贡献。
修改动作：要么在包含光学系统和主要支撑质量的载荷模型中输运全部本底族，要么给出有依据的上限。完成之前，标题、摘要、结果和结论应统一使用“探测器—低温恒温器子系统本底”。
- 4

P06-04 | N03 | 第二轮新增 | 重大 | 源流记账

问题：第四个本底流缺失于源枚举、源表和公共时间轴
为什么标这里：摘要承诺四个流且大气线占 26.59%，这里却只有三层、表 1 只有三项、符合轴也只有瞬发/延迟/信号；需说明第四流在哪里进入以及表 5 两列如何产生。
修改动作：将该流加入第 3.2 节、表 1 和公共时间轴，并补齐 M04 要求的来源与归一化；若它确实不经过公共轴，则必须明确解释表 5 的主动反符合和拓扑列如何生成。
- 5

P06-05 | M19 | 中等 | 源归一化

问题：PARMA 模型版本与角分布/源面归一化需要分开说明
为什么标这里：应区分 PARMA 能谱模型版本与所引天顶角扩展，并记录准确 EXPACS 版本。
修改动作：区分能谱模型和角分布模型版本，公开微分通量单位与源面约定，并推导含立体角和投影面积因子的分箱积分速率。

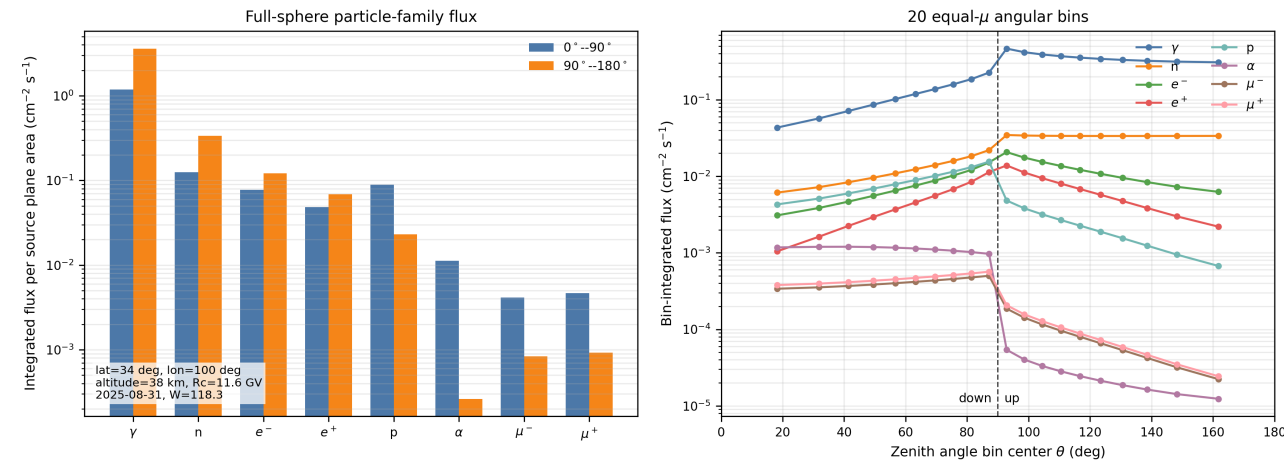


Figure 3: EXPACS/PARMA full-sphere atmospheric flux field used to generate the prompt and activation-production transport inputs. Left: energy- and solid-angle-integrated fluxes for the eight transported particle families, separated into down-going and up-going hemispheres. Right: bin-integrated flux in the 20 equal- μ differential zenith bins used by the MEGALib far-field source. The plot is generated from the source-definition inputs for latitude 34° , longitude 100° , altitude 38 km, $R_c = 11.6$ GV, and $W = 118.3$.

and the 2025-08-31 solar condition corresponding to $W = 118.3$.

The prompt source includes photons, neutrons, electrons, positrons, protons, alpha particles, and negative and positive muons. For each particle family the EXPACS/PARMA differential spectrum is converted into a MEGALib far-field area source covering the full zenith range $\theta = 0^\circ - 180^\circ$ and full azimuth range $\phi = 0^\circ - 360^\circ$. The zenith dependence is represented by 20 differential equal- μ angular bins, where $\mu = \cos \theta$ and each bin subtends $\Delta\Omega = 0.6283185307$ sr: the first ten bins cover down-going particles, the last ten up-going or albedo-like particles. Both hemispheres are retained in the prompt transport and in the activation-production transport, so upward albedo particles are not discarded at source construction. Figure 3 shows the resulting full-sphere flux field.

The integrated source-plane fluxes are approximately $4.80, 0.462, 0.199, 0.117, 0.112, 0.0115, 0.0050$, and $0.0056 \text{ cm}^{-2} \text{ s}^{-1}$ for $\gamma, n, e^-, e^+, p, \alpha, \mu^-,$ and μ^+ , respectively; the non-photon families together carry about $0.91 \text{ cm}^{-2} \text{ s}^{-1}$, or 16% of the total. If Monte Carlo counts were allocated strictly in proportion to flux, the detector and activation statistics of these minority families would be poor, so the non-photon families are generated with replicated samples and de-weighted in the rate normalization. All particles are then transported through the detector/cryostat mass model with Geant4/MEGALib [30,31,35]; the prompt run and the activation-production run each generated 25,210,216 incident primaries. Each particle species is normalized with its own transported exposure,

$$r_{\text{event},j} = \left(\sum_i \mathcal{T}_{ij} \right)^{-1}, \quad (2)$$

where $\mathcal{T}_{ij}$ is the transported exposure of subsample i for species j . This per-species normalization is required because the photon and non-photon streams have different sampling and exposure structures; the normalization check enforces $r_{\text{event},j} \sum_i \mathcal{T}_{ij} = 1$ for every species, so over-sampling changes the Monte Carlo variance but not the expected physical rate.

3.2.2 Delayed activation source

For the delayed simulation, a separate activation-production stream is run by enabling BUILDUP during the prompt-background transport. This activation-production stream is not counted as an immediate detector background. Instead, it records the isotope, material volume, and production position of each radioactive product. These records are converted through the production-decay accumulation equation into a radioactive population fixed to a chosen reference time during the flight, with ground-state half-lives checked against NUBASE2020

1 P07-01 | N10 | 第二轮新增 | 中等 | 定义

问题: $W=118.3$ 与“2025-08-31 太阳条件”需要定义和来源

为什么标这里: 定义 W 的物理含义、单位和 2025-08-31 数据来源, 并说明八族通量对飞行期太阳条件的敏感性。

修改动作: 定义 W , 给出所述日期的来源, 并说明飞行时间窗内太阳条件变化对八族通量的敏感性。

2 P07-02 | N04 | 第二轮新增 | 中等 | 蒙特卡洛分配

问题: 抽样设计使主导保守界限的粒子族统计最贫乏

为什么标这里: 该分配在下游适得其反: 非光子族每族约 1500 s 等效曝光, 光子仅约 184 s, 零计数光子反而主导保守界限; 需报告逐族曝光并把统计资源转向瞬发光子。

修改动作: 在权重旁报告各族等效曝光; 后续输运应明显增加瞬发光子样本, 必要时对线附近光子按能量和角度分层抽样。若仍为零计数, 光子曝光增加十倍可把其端点量级约降十倍。

3 P07-03 | N06 | 第二轮新增 | 中等 | 同核异能态

问题: 活化累积没有说明同核异能态的处理方式

为什么标这里: 记录按激发态匹配, 却只说明核对基态半衰期; 需写明同核异能态采用独立衰变常数、迅速退激还是排除, 并报告其 day-15 份额。

修改动作: 说明同核异能态采用独立衰变常数、迅速退激到基态还是排除; 报告 day-15 库存中是否存在同核异能态及其活度份额。

[38]. For isotope k ,

$$A_k(t_{\text{flight}}) = P_k \left[1 - \exp \left(-\lambda_k t_{\text{flight}} \right) \right], \quad \lambda_k = \frac{\ln 2}{t_{1/2,k}}, \tag{3}$$

where P_k is the production rate inferred from the activation-production transport and $t_{\text{flight}} = 15 \text{ d}$ for the reference state. The fixed delayed total activity used by the mass-complete reference delayed-source construction is 141.83 Bq. This reference value is retained for the background-origin comparison below; the final directionally graded chain has its own all-eight-family inventory and normalization.

The position information does not come from the aggregate isotope store alone. The standard store records volume names and isotope counts; the production-position construction adds a custom recording hook in the MEGAlib stepping-action layer. Whenever a delayed isotope is stored during activation buildup, the hook writes a production-position record at the same moment, including the logical volume name, pre-step position (x, y, z) , isotope identifier $1000Z + A$, excitation energy, time, process, and track-ancestry information. The fixed day-15 population is then matched to these records by volume, isotope, and excitation state, so the delayed source can use the simulated production coordinates rather than only volume-integrated activities. The reference-detector inventory is summarized by production volume, nuclide, incident family, material category, and production coordinate. These are source-construction quantities rather than detector counts; detector response is applied only after the delayed decays are transported through the common geometry and event selection.

Whether the production positions are worth preserving can be tested from the same table. Delayed decays are emitted locally, so downstream attenuation, active-shield veto probability, and event topology all depend on where the isotope was produced, and different incident families—with their different energy-loss, stopping, and capture histories—need not deposit their activation in the same materials. To quantify this, the weighted production rows are grouped by incident particle family and material category, and the activity-normalized category distributions of two families a and b are compared with the total-variation distance

$$D_{\text{TV}}(a, b) = \frac{1}{2} \sum_c |f_{a,c} - f_{b,c}|, \tag{4}$$

where $f_{a,c}$ is the fraction of delayed activity from family a produced in material category c . Production volumes are grouped as active CsI, outer mechanical structures, cold plates, passive tungsten/collimator material, window material, TES volumes, and other internal structures. A volume-integrated or axisymmetric radial source could preserve the total activity, but it would erase these incident-family, material, nuclide, and coordinate correlations; the production-position construction keeps them in the source before detector transport.

The delayed-decay source is therefore emitted from sampled production positions rather than from an axisymmetric distribution. Let row j in the weighted production table have activity weight w_j , with total activity $A = \sum_j w_j$. During construction, M production positions are drawn with replacement using probability $p_j = w_j/A$, and each sampled point source is assigned the same flux A/M . The expected activity assigned to row j is

$$\mathbb{E} \left[N_j \frac{A}{M} \right] = M p_j \frac{A}{M} = w_j, \tag{5}$$

so the estimator preserves the total activity and is unbiased for the weighted spatial distribution. Here M is the number of equal-activity sampled point sources; it is a sampling size, not the number of physical production rows. The reference delayed source preserves the fixed total activity at the source-definition level and is replayed through the same detector/cryostat geometry as the prompt stream. The nominal calculation transports 10^6 delayed decays; the corresponding Cosima live time is only the transport record used to generate the decay sequence and is not used as the physical balloon exposure time.

Table 1 summarizes the source layers used in the current detector-coupled calculation. It is placed in the source-model section because this section defines incident particle fields and delayed radioactive populations; detector vetoes and topology selections are applied only in the subsequent selection section.

This production-position representation does not create one sampled point source for every production row. Each positive-family realization uses $M = 50,000$ sampled positions and transports 10^6 delayed triggers. We first verify activity conservation and source serialization, then propagate the same realization through the detector response and event selection. The resulting selected rate and its nuclide/volume decomposition are reported in Section 4.1.

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。
红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮

1 P08-01 | S02 | 结构 | 写作与行文

问题：文字可理解，但过于围绕开发过程且信息压缩过度
为什么标这里：实现细节可以保留，但应写成可复现的科学数据采集方法，而不是开发者措辞。
修改动作：按科学功能拆分长句，删除起草/开发者旁白，直接陈述结果；统一 event/record/group/hit、分析窗术语、FoV 与 Laue 大小写，并统一美式或英式英语。

2 P08-02 | M04 | 重大 | 源模型

问题：大气 511 keV 分量给出了结果，却没有可复现的源模型方法
为什么标这里：下表漏列后来占最终本底 26.59% 的大气 511 keV 流；需补来源、归一化、曝光及角谱定义。
修改动作：新增第四源流的方法小节和流程节点，给出来源、能谱、角分布、绝对归一化、生成计数、曝光、cut-flow 与轨迹规则；并说明在加入显式窄线前，PARMA/EXPACS 连续谱中的湮没特征是被移除、保留还是已证明可忽略。

Table 1: Background-source layers used by the current detector-coupled chain. The table defines source construction only; anticoincidence, topology selection, and the line window are applied later in Section 3.4.

Layer		Physical role	Current implementation
Prompt transport	atmospheric	Direct detector hits from atmospheric secondaries	EXPACS/PARMA full-sphere source definitions at 34° latitude, 100° longitude, 38 km altitude, $R_c = 11.6$ GV, and $W = 118.3$; γ , n , $e^\pm$, p , α , and $\mu^\pm$ over 20 equal- μ differential zenith bins including both down-going and up-going hemispheres; 25,210,216 generated primaries.
Activation production		Radioisotope production and production-position history	Same atmospheric field transported as a BUILDUP activation-production stream, again retaining both hemispheres and all eight particle families; 25,210,216 generated primaries.
Fixed delayed population		Radioactive activity at the adopted day-15 state after continuous exposure	Production–decay accumulation with NUBASE-checked ground-state half-lives; 141.83 Bq for the mass-complete reference and 36.4525153 Bq for the final directionally graded configuration.
Production-position decay transport		Delayed decay particles emitted from sampled production positions	Equal-activity sampled point sources from the weighted production table; the final configuration transports 10^6 delayed triggers for each of seven positive activation families, while the electron-minus family is a finite-buildup zero observation with no fictitious transport exposure.

The 141.83 Bq all-family day-15 inventory above is used to identify the activation origins of the mass-complete reference geometry, whose 26 selected delayed records remain 24 ^{64}Cu and two ^{61}Cu records. The final graded-shield calculation instead uses the NUBASE-corrected all-eight-family inventory of 36.4525153 Bq at day 15. The seven positive activation families with delayed transports are α , e^+ , γ , μ^- , μ^+ , n , and p ; the finite BUILDUP sample for e^- observed no production, so its central delayed contribution is zero and no transport exposure or Garwood bound is invented. The primary response realization retains 78 delayed records after the complete detector selection (1 α , 5 μ^- , 60 n , and 12 p ; the other positive transported families retain zero final records).

The finite M sampling is an additional source-level boundary rather than a Poisson counting interval. In the dominant neutron realization, undrawn low-probability nuclide–volume species carry 0.157388 Bq, or 0.515% of the neutron activity. This missed sampled-species fraction is reported explicitly and is not covered by the componentwise Garwood endpoint. One retained neutron event also begins in the SIM record as the daughter ^{182}W ; its production position uniquely maps it back to the radioactive source parent ^{182}Ta . Mission-time activity and response are therefore keyed to the ^{182}Ta parent, while the ^{182}W IA INIT identity is retained as transport-lineage evidence.

3.2.3 Reference point-source construction

The focused signal stream is defined by a monochromatic 511 keV reference point source. Its flux scale is set not by any single observed object but by a rounded comparison to the dedicated INTEGRAL/IBIS compact-source

本页没有单独修改项。

limit: $F_0 = 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ at the top of the atmosphere (Section 1.1) [10].

Because such a source lies at astronomical distance, it is modelled as an ideal on-axis point: in the optics run it is a monochromatic 511 keV far-field beam whose photons arrive parallel to the optical axis and are sampled uniformly over the incident aperture A_{inc} of Eq. (1). No finite angular size is assigned to the source itself; the angular structure that reaches the focal plane is produced entirely by the lens—the 30 arcsec mosaic spread, the XOP/CRYSTAL rocking curve, and the $f = 10 \text{ m}$ focusing geometry—so that the replayed beam converges to within about 0.4° of the axis and forms a focused spot rather than a single ray. Three independent seeds of 5×10^4 primaries each give 1.5×10^5 transported photons, of which 37,256 are diffracted and cross the focal plane; 37,194 of these (99.8%) fall within the $r = 1.898 \text{ cm}$ Be entrance window, with focused-spot radii $r_{90} = 1.03 \text{ cm}$ and $r_{99} = 1.25 \text{ cm}$. The within-window crossings form the event list that is replayed through the Be aperture into the detector/cryostat model with the recorded positions and directions.

The normalization ties this replay to the reference flux. At the detector entrance the focused stream carries the rate

$$R_{\text{fp}} = F_{\text{TOA}} A_{\text{eff}}(511 \text{ keV}) T_{\text{atm},45}. \tag{6}$$

Here $A_{\text{eff}}(511 \text{ keV}) = 20.1 \text{ cm}^2$ is the on-axis Laue effective area, F_{TOA} is defined at the top of the atmosphere, and $T_{\text{atm},45} = 0.6520$ is the day-15 transmission along the fixed 45° -elevation axis; numerically this is $1.31 \times 10^{-3} \text{ s}^{-1}$ at the reference flux. Equivalently, the generating run corresponds to an observation time $N_{\text{fp}}/[F_{\text{TOA}} A_{\text{eff}} T_{\text{atm},45}]$, and each replayed event carries the inverse of that exposure as its rate weight; in the intermediate cut-flow bookkeeping of Section 3.4 the same sample appears as a unit replay before this scale is applied. After the common detector response and event selection, the **surviving signal rate** is $9.86228 \times 10^{-4} \text{ s}^{-1}$. Dividing out the atmosphere gives an instrument-only selected effective area $A_{\text{sel,instr}} = S_{W_{511}}/(F_0 T_{\text{atm},45}) = 15.1254 \text{ cm}^2$; the atmosphere-folded conversion from top-of-atmosphere flux to selected rate is $S_{W_{511}}/F_0 = 9.8623 \text{ cm}^2$. Because the optics run contains only source photons, the replayed stream is signal-pure; all backgrounds enter through the streams of Section 3.2.

The effective area quoted above is the on-axis value, representing best-case pointing. A point source offset from the optical axis, or residual attitude jitter during flight, reduces and shifts the focused response through the finite angular acceptance (field of view) of the Laue lens [11, 13]; this off-axis dependence is treated as a pointing systematic on the signal effective area rather than as a change to the on-axis reference construction. The current side-entry response is a fixed 45° -elevation reference, not a simulated low-elevation Galactic-centre observation.

3.3 Background-led geometry design and statistical treatment

The geometry design begins with the background that reaches the science window. For the mass-complete reference calculation, we group final events by incident particle family and, for delayed events, by parent isotope and production volume. The prompt map identifies the directions that require active coverage; the delayed map identifies nearby materials that feed the line window after activation. This is the same component-first logic used in detailed COSI and DIXE background studies [19, 24]. It leads to the final graded-shield geometry used for the full calculation: 40 mm BGO around the side, a 30 mm bottom disk, and a 10 mm top annulus. The side optical aperture, 3 mm Al mechanical shell, Kapton layer, detector, and cryostat are retained, and there is no external W layer. The final geometry is thus described by one physical question: where is active coverage most useful for the line-window background?

Before these stages, Cosima energy deposits are aggregated by TES pixel. Each pixel readout then receives an independent Gaussian energy response with $\Delta E_{\text{FWHM}} = 0.420 \text{ keV}$ ($\sigma = 0.17836 \text{ keV}$); measured hits below 0.3 keV are discarded, and the surviving measured hits are summed before the line window, active veto, and topology tests. The primary result uses the fixed response seed 26071301. A response-off replay reproduces the retained transport cut-flow exactly, and a 64-seed response ensemble tests numerical stability; the ensemble is a response-integration audit rather than an added physical systematic.

All signal and background streams are summarized at three common stages: after the energy window, after the active veto, and after the topology/field-of-view test. For stream k and stage j , the physical rate and its

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。

红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮

1 P10-01 | M18 | 中等 | 通量约定

当前状态：第 1.1 节现仅以 IBIS 的 3σ 等效上限和 $T=0.6520$ 定义唯一的载荷平面观测参考通量 $1.565 \times 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ ；本段不再引入模拟归一化数值。

问题：大气透射与有效面积术语不一致

为什么标这里：随后由计数换算的面积已含大气透射，应另报仪器本身选择后面积。

修改动作：统一定义顶层大气和载荷处通量，说明天顶/斜程大气柱与透射模型，并把仪器有效面积与大气折叠后的计数—通量换算分开。

Monte Carlo counting error are

$$\hat{R}_{k,j} = \sum_{i \in (k,j)} w_i, \quad \sigma_{k,j} = \left(\sum_{i \in (k,j)} w_i^2 \right)^{1/2}, \quad N_{\text{eff},k,j} = \frac{\hat{R}_{k,j}^2}{\sigma_{k,j}^2}, \quad (7)$$

where w_i is the physical rate carried by record i . We also report the stage survival $q_{k,j} = \hat{R}_{k,j} / \hat{R}_{k,\text{window}}$ and the final background share $f_k = \hat{R}_{k,\text{final}} / \sum_b \hat{R}_{b,\text{final}}$. Counts and rates are both shown because the streams have different exposure weights: counts measure Monte Carlo support, whereas rates measure the physical background.

Within an independently normalized transported component the event weights are constant, so a two-sided 95% Garwood interval for the Poisson count can be multiplied by the component weight to obtain an exact rate interval. A zero selected count with a defined transport exposure is treated in the same way and therefore gives an upper limit rather than a zero-background claim. The finite- BUILDUP e^- family is different: no delayed source or transport exposure exists, so no fictitious Garwood limit is assigned. Focused-signal acceptance is binomial; its two-sided 95% interval is Clopper–Pearson. The central mission projection uses the estimated rates. A second, conditional componentwise transport-counting endpoint uses the upper Garwood endpoint for every transported background component and the lower Clopper–Pearson endpoint for the signal. Summing these component endpoints is not a joint-coverage interval and is not full 95-percent coverage; it excludes BUILDUP-yield, finite- M position sampling, zero-family, nuclide-mixture, radiation-field, cross-section, and detector systematics. These calculations used SciPy 1.8.0.

For time bin ℓ , live fraction L_ℓ , and duration Δt_ℓ , the cumulative signal and background counts are

$$N_s(T) = \sum_{\ell \leq T} S_\ell L_\ell \Delta t_\ell, \quad N_b(T) = \sum_{\ell \leq T} B_\ell L_\ell \Delta t_\ell. \quad (8)$$

We use the transparent **counting metric** $Z(T) = N_s(T) / \sqrt{N_b(T)}$. Because the signal rate is linear in source flux, the corresponding diagnostic threshold is $F_{3\sigma}(T) = F_0 3/Z(T)$. The central curve and the conditional componentwise transport-counting endpoint are propagated through the same 81-bin trajectory. Their separation measures finite transported Monte Carlo support under the stated conditioning; it is not a confidence band for atmospheric fields, cross sections, or detector calibration.

3.4 Detector event selection and veto definitions

The detector-level selection chain places the focused-signal, prompt atmospheric, and delayed-activation streams on one common time axis and applies two veto layers in sequence. Because both veto layers are defined through time coincidence, the time axis and its rate normalization are established first, and the vetoes are defined on top of it.

3.4.1 Time axis and rate normalization

Each stream enters with a per-record rate weight r_{kj} from the source normalization of Section 3.2, where k labels the stream and j labels a record in that stream's event catalogue; the stream total rate is $R_k = \sum_j r_{kj}$. To place three independently normalized catalogues on one physical time axis, the **streams are combined by a** Poisson superposition: for stream k the number of instances is drawn as

$$N_k \sim \text{Pois}(R_k T), \quad (9)$$

records are selected with probabilities r_{kj}/R_k with replacement, each is assigned a uniform random time in the reference window $[0, T]$, and all streams are merged and time-ordered into a **single detector time axis carrying the three** physical rates. Event instances separated by no more than $\tau = 1 \mu\text{s}$ are grouped into a coincidence **candidate group** c . In the baseline (Figure 4) the full-band detector rates superposed on this axis are about 928 s^{-1} (prompt), 97.1 s^{-1} (delayed activation), and 0.987 s^{-1} (focused signal), so the coincidence axis is strongly prompt-dominated; over the reference exposure the 7,215,233 **event instances yield 1275 mixed-stream coincidences**, giving an accidental live factor $\simeq 0.9990$ (the line window and shield threshold below then act

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。

红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮

1 P11-01 | M12 | 重大 | 统计

问题：S/√B 只是计数代理量，还不是发现显著性或正式通量阈值
为什么标这里：S/√B 在本底精确已知时只是诊断代理，并非正式发现显著性；应使用似然或改名。
修改动作：使用含本底干扰参数并结合预定空间/控制区信息的信号加本底似然；在此之前，把 Z 称为计数性能代理，把 $F_{3\sigma}$ 称为基于计数的参考阈值。

2 P11-02 | M09 | 重大 | 归一化

问题：公共符合时间轴把单位重放信号速率称为物理速率
为什么标这里：0.987 s⁻¹ 的信号后来被说明为单位重放，而非参考源物理速率；构造符合前必须分开两种归一化。
修改动作：构造不含信号的本底符合轴，或按被测试的物理通量注入信号；说明参考时长、最终全带宽速率、混合组归因规则、同流/混流计数，以及死时间/活时间因子的精确定义；单位重放图表必须醒目标注。

3 P11-03 | Re-M09 | 第二轮复核

复核结论与动作：第二轮复核 M09：“三个物理速率”对信号并不成立，信号在该轴上以约 660 倍物理速率单位重放。它只占轴速率约 0.1%，对活时间影响很小；真正需要修正的是措辞、混合组归因规则，并从本底偶然符合记账中排除信号。

4 P11-04 | M10 | 重大 | 探测器时序

问题：1 μs 符合窗和活时间因子缺少探测器/读出依据
为什么标这里：需从 TES 脉冲、触发、屏蔽、复用和死时间说明 1 μs 窗，并做时间窗扫描。
修改动作：把符合窗和反符合窗绑定到明确的探测器/读出架构，加入逐像素脉冲与死时间行为，并给出时间窗灵敏度；不要把当前偶然活时间因子解释为硬件死时间模型。

5 P11-05 | N09 | 第二轮新增 | 中等 | 参考曝光

问题：参考曝光时长和逐流实例计数没有给出
为什么标这里：数字自洽但文档不完整：只有取 $T \simeq 7000 \text{ s}$ 才能由 $2\tau T \Sigma R_{\text{KR}_1}$ 重现 1275；应给参考时长、逐流实例数、组大小分布和混合组归因规则。
修改动作：说明 T、逐流实例计数和分组统计，并在同一段给出 M09 要求的混合组归因规则。

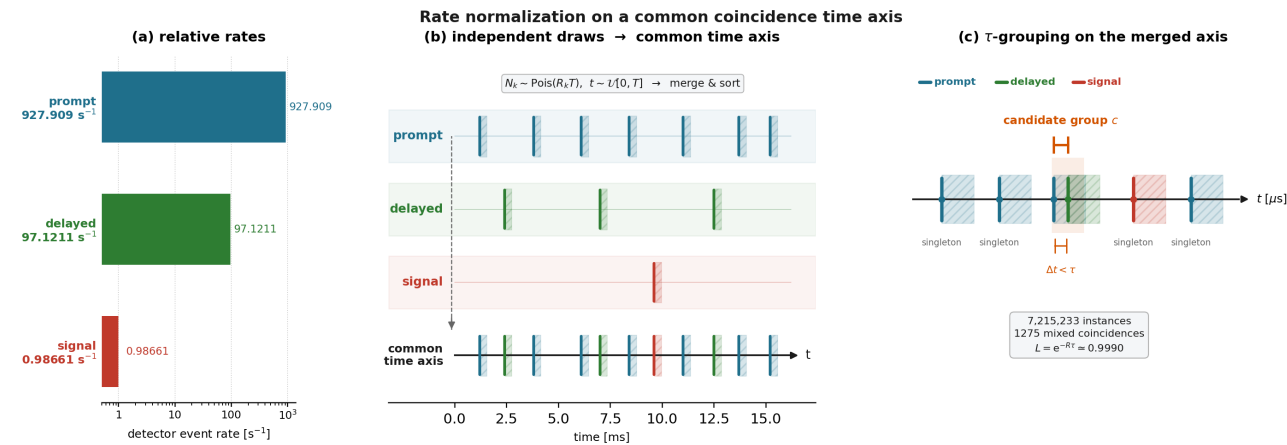


Figure 4: Rate normalization on a common coincidence time axis. (a) Full-band detector event rates (928, 97.1, and 0.987 s⁻¹). (b) Independent Poisson draws of the three streams are merged and time-ordered; color marks stream identity and hatched bands mark each event’s temporal footprint. (c) Events with $\Delta t \leq \tau = 1 \mu\text{s}$ form one candidate group; the box gives the reference-exposure accidental bookkeeping. Tick positions are schematic.

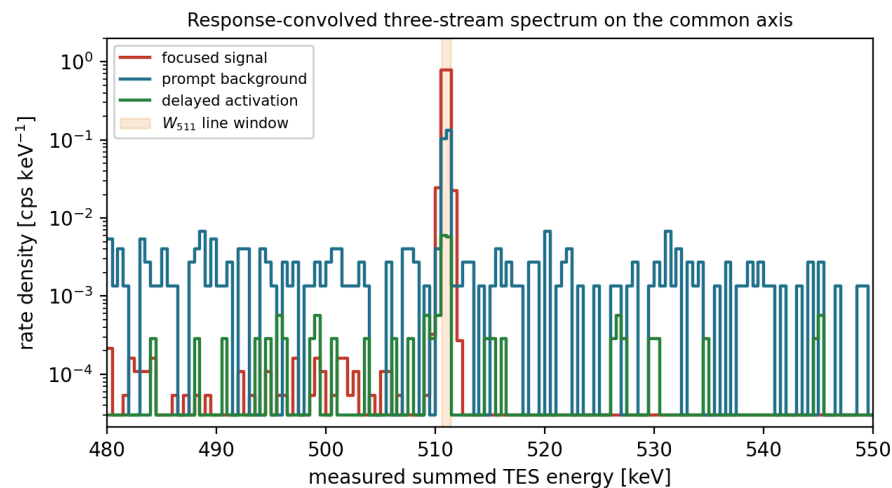


Figure 5: Response-convolved summed-energy spectra of the three streams on the common axis before vetoes. The focused signal, prompt, and delayed streams all concentrate at the 511 keV line while the continuum is starved. Absolute selected line-window rates are given in Table 2.

on the resulting candidate groups). The normalized summed-energy spectrum of the three streams is shown in Figure 5: the window is line-dominated, with a **starved continuum**.

This post-processing superposition, rather than the native trigger/veto flags present in the geometry description, defines the rate for two reasons. First, both veto layers are defined by time coincidence: the active anticoincidence gate compares the TES and active-shield deposits within the same τ window, and the topology reconstruction must first decide which hits belong to the same incident photon; both require a common time axis carrying all three streams at their physical rates. Second, the common post-processing definition forces the prompt, delayed, and focused-signal streams through the same coincidence window τ and the same shield threshold, so that production-stage trigger flags do not silently become the rate definition. The superposition is licensed by a stationarity assumption: within the adopted reference exposure each stream rate is treated as constant. The reference window is short compared with the timescales over which the physical rates drift—the atmospheric column and the activation inventory evolve on the mission-day scale, whereas on the microsecond-to-second scale relevant to coincidence the three rates are effectively stationary. A constant-rate arrival process is a homogeneous Poisson process, and the superposition of independent homogeneous Poisson processes is again Poisson with rate $\sum_k R_k$, which is exactly what licenses drawing $N_k \sim \text{Pois}(R_k T)$ and merging. The

1 P12-01 | S02 | 结构 | 写作与行文

问题：文字可理解，但过于围绕开发过程且信息压缩过度

为什么标这里：表述口语且含糊；根据真实含义改为“蒙特卡洛抽样稀疏的连续谱”或“物理上较弱的连续谱”。

修改动作：按科学功能拆分长句，删除起草/开发者旁白，直接陈述结果；统一 event/record/group/hit、分析窗术语、FoV 与 Laue 大小写，并统一美式或英式英语。

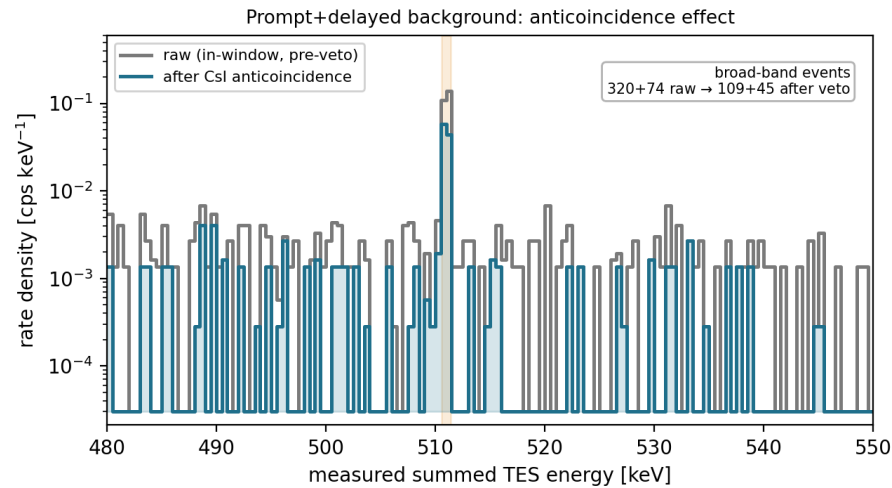


Figure 6: Effect of the CsI anticoincidence gate on the prompt+delayed background spectrum (in-window pre-veto vs after the shield gate). Shape-diagnostic re-derivation on the surviving reference-detector catalogues.

mission-time significance accordingly uses the expectation values of these rates rather than adding a fresh random draw to every mission bin; the Poisson realization only validates the grouping and accidental-coincidence bookkeeping.

3.4.2 Active anticoincidence gate

The first layer is an active anticoincidence gate on this common time axis. For each candidate group c the TES and active-shield energy sums are

$$E_{\text{TES}}^{(c)} = \sum_{j \in c} E_{\text{TES},j}, \quad E_{\text{sh}}^{(c)} = \sum_{j \in c} E_{\text{sh},j}. \quad (10)$$

The group enters the hard line window if $E_{\text{TES}}^{(c)}$ falls in

$$W_{511} = [510.58, 511.42] \text{ keV} \quad (511 \text{ keV} \pm 420 \text{ eV}), \quad (11)$$

which is the primary reference selection window, retaining most of the line response while suppressing continuum background. The group passes the active shield if

$$E_{\text{sh}}^{(c)} < E_{\text{veto}}, \quad E_{\text{veto}} = 50 \text{ keV}, \quad (12)$$

where for the baseline CsI configuration the shield sum is read from the CsI active-shield volumes in post-processing. This layer is the dominant source of rate-level background suppression. After the per-pixel detector response and threshold are applied, it reduces the prompt background from 148 to 68 events ($0.1146 \rightarrow 0.04612 \text{ s}^{-1}$, 40.24% surviving) and delayed activation from 40 to 26 events (65.00%), while retaining all 28534 focused-signal events (zero shield deposit, 100%); see Table 2. Its effect on the background spectrum is shown in Figure 6.

The quoted flux thresholds apply to a line whose intrinsic width, after detector response, remains small compared with this window; a substantially broadened source line would require convolving the source line profile with the response and re-optimizing the window.

3.4.3 Compton topology and field-of-view consistency

The second layer applies a Compton-kinematic topology and field-of-view consistency test to the TES hits that survive the active-shield gate; its physical basis is Compton-camera cone reconstruction [35]. An incident

本页没有单独修改项。

photon of energy E_0 Compton-scatters at a first interaction point $\mathbf{r}_1$, depositing E_1 , and the scattered photon of energy $E_{\text{sc}} = E_0 - E_1$ propagates to a second interaction point $\mathbf{r}_2$; the scattering angle follows from

$$\cos \theta_C = 1 - m_e c^2 \left(\frac{1}{E_{\text{sc}}} - \frac{1}{E_1 + E_{\text{sc}}} \right). \quad (13)$$

Given the scattered-photon direction $\hat{\mathbf{u}}_{12} = (\mathbf{r}_2 - \mathbf{r}_1)/|\mathbf{r}_2 - \mathbf{r}_1|$, the source direction is constrained to a reconstruction cone with apex $\mathbf{r}_1$, axis $-\hat{\mathbf{u}}_{12}$, and half-angle θ_C , whose projection on the sky is the event circle. We use this first-scatter cone as an aperture-consistency test: the event is retained when the cone intersects the side Be-window disk (radius 1.898 cm), i.e. whether the reconstructed arrival direction is consistent with entry through the aperture.

Because the interaction position within a single TES pixel ($1.5 \times 1.5 \times 3.0$ mm) is unresolved, each hit is represented not by its centroid alone but by $8 + 1 = 9$ representative points—the eight pixel corners and the centroid—carrying the sub-pixel position uncertainty explicitly into the geometric reconstruction. A two-hit event in a given scatter order therefore enumerates $9 \times 9 = 81$ first/second position combinations and constructs one reconstruction cone per combination (each cone sampled at 24 azimuths, propagated to the Be-window plane, and tested against the disk by both its sampled points and the connecting segments); the order is deemed field-of-view consistent **if any of these 81 trajectories** yields a cone that intersects the disk. This is a deliberately permissive consistency test: an event is retained if any sub-pixel interaction position is consistent with entry through the aperture. The layer consequently retains about 95% of the in-window multi-hit events and removes only about 10–14% of the background, consistent with its role as a loose consistency veto rather than an imaging reconstruction.

The three event classes are handled accordingly. Single-pixel events have no scatter topology and are retained as calorimetric line candidates. A two-hit event provides two positions and energies but no internal information to order the interactions, so both scatter orders are enumerated over the 81 trajectories above, and the event is retained if either order is field-of-view consistent and rejected only if neither order admits any kinematically valid cone. Three-hit and higher-multiplicity events contain internal scatter vertices and can be ordered from geometric–kinematic consistency: at each internal vertex the scattering angle can be obtained both from the deposited energies through the Compton formula and from the angle between successive flight directions, and the two should agree for the correct order. All orders are enumerated (up to six TES hits; higher multiplicities are **retained without ordering**), the best order minimizes the Compton sequence residual

$$Q = \sum_{i=1}^{n-2} (\cos \theta_{C,i} - \hat{\mathbf{u}}_{i-1,i} \cdot \hat{\mathbf{u}}_{i,i+1})^2 \quad (14)$$

(ties broken by the longest first-scatter lever arm), and the same 81-trajectory cone–disk test is applied to its first two points. Events with no valid order are classified as unreconstructed. In the response-convolved baseline, events that pass the active shield are sorted by the topology test into single-site, field-of-view-consistent reconstructed multi-hit, and vetoed classes: the prompt stream comprises 42 single-site, 21 reconstructed multi-hit, and 5 vetoed events (68 total); the delayed stream 19, 7, and 0 (26 total); and the focused signal 17267 single-site, 10726 reconstructed multi-hit, and 541 vetoed events (28534 total), giving 63, 26, and 27993 selected events, respectively. In the 480–550 keV broad band, the same response and selection resolve the selected focused-signal groups into 17602 single-site, 9793 two-hit, and 2338 ≥ 3 -hit events (with 370 two-hit and 262 ≥ 3 -hit events Compton-vetoed); the corresponding selected multiplicities are 62/27/6 for prompt and 28/12/3 for delayed events (Figure 7).

Unreconstructed events remain in the baseline rate accounting but are not labelled as field-of-view-passing candidates. The role of multi-hit acceptance can be quantified directly: a single-site-only selection would retain 61.68% of the focused-signal rate and 67.17% of the selected background rate in W_{511} , reducing the simple $S/\sqrt{B}$ figure to 0.753 of the baseline value. The adopted permissive multi-hit policy therefore preserves statistical reach while using topology as a consistency veto rather than as an imaging cut.

Table 2 summarizes the reference-geometry event flow with the same TES energy window, CsI veto, and Compton/field-of-view test. The first stage is the line-window sample before either veto, and the uncertainties are the quadrature sums of the event-rate weights.

1 P14-01 | M20 | 中等 | 事件选择

问题：拓扑/FoV 检验较宽松，边界处理含糊

为什么标这里：“任一即通过”是刻意宽松的存在性规则，不是不确定性边缘化；需展示信号一本底权衡和亚像素敏感性。

修改动作：为每种多重度定义精确布尔规则，在实际分析几何中重跑基准，展示方位角/亚像素收敛，并报告信号一本底效率或 ROC 型权衡；相关时应纳入位置/能量不确定性和多普勒展宽。

2 P14-02 | M20 | 中等 | 事件选择

问题：拓扑/FoV 检验较宽松，边界处理含糊

为什么标这里：应明确该分支是否通过最终选择，并量化其信号/本底贡献。

修改动作：为每种多重度定义精确布尔规则，在实际分析几何中重跑基准，展示方位角/亚像素收敛，并报告信号一本底效率或 ROC 型权衡；相关时应纳入位置/能量不确定性和多普勒展宽。

3 P14-03 | M20 | 中等 | 事件选择

问题：拓扑/FoV 检验较宽松，边界处理含糊

为什么标这里：边界规则含糊；需明确不可重建事件是进入还是未通过 FoV 选择速率。

修改动作：为每种多重度定义精确布尔规则，在实际分析几何中重跑基准，展示方位角/亚像素收敛，并报告信号一本底效率或 ROC 型权衡；相关时应纳入位置/能量不确定性和多普勒展宽。

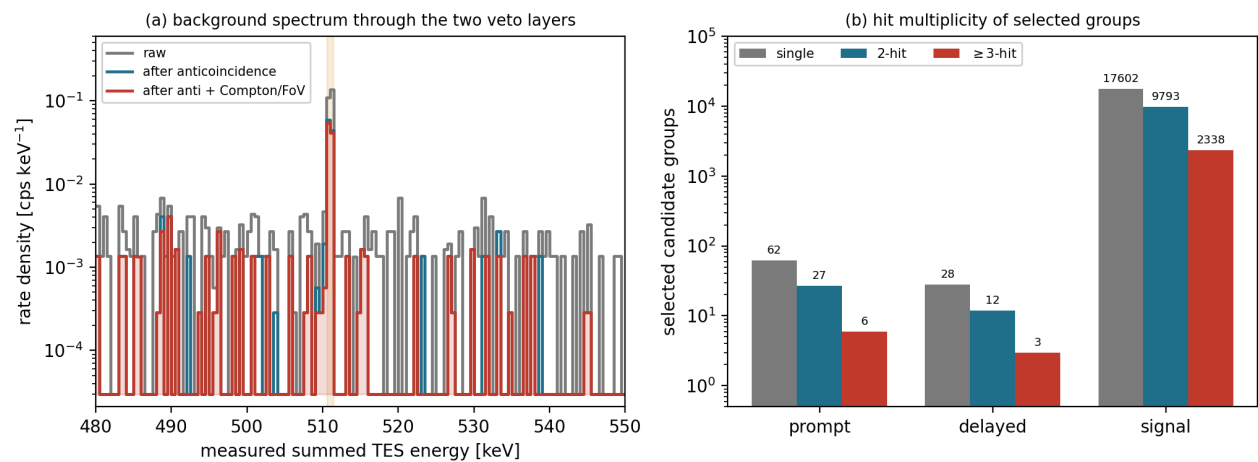


Figure 7: (a) Response-convolved background spectrum through the two veto layers (raw; after anticoincidence; after anticoincidence+Compton/FoV). (b) Hit multiplicity of the selected candidate groups per stream in the 480–550 keV band. Absolute line-window rates are given in Table 2.

Table 2: Reference-geometry event-level W_{511} cut-flow. The focused-signal rows use the unit replay rate; the physical point-source rate is scaled separately.

Stream	Stage	Events	Rate / s ⁻¹	Statistical uncertainty / s ⁻¹
Prompt background	Line-window pre-veto	148	1.14624×10^{-1}	1.24549×10^{-2}
Prompt background	After CsI veto	68	4.61248×10^{-2}	5.59345×10^{-3}
Prompt background	Topology/FOV selected	63	4.27321×10^{-2}	5.38374×10^{-3}
Delayed activation	Line-window pre-veto	40	5.69229×10^{-3}	9.00030×10^{-4}
Delayed activation	After CsI veto	26	3.69999×10^{-3}	7.25627×10^{-4}
Delayed activation	Topology/FOV selected	26	3.69999×10^{-3}	7.25627×10^{-4}
Focused signal	Line-window pre-veto	28534	7.67167×10^{-1}	4.54160×10^{-3}
Focused signal	After CsI veto	28534	7.67167×10^{-1}	4.54160×10^{-3}
Focused signal	Topology/FOV selected	27993	7.52621×10^{-1}	4.49834×10^{-3}

The focused-signal rows are unit-replay rates used to show veto survival behavior; the point-source signal rate in Table 7 is scaled separately by the Laue effective area, reference flux, and atmospheric transmission.

An independent topology benchmark uses the MEGAlib `revan` Compton event reconstructor on 37,065 focused-signal events from a **retained legacy geometry** [35]. Its energy-window population is not mixed with the response-convolved reference-detector rate budget above; the benchmark is used for interaction ordering and angular-resolution diagnostics. For two-hit ordering it gives two quantitative results. First, the fraction of two-hit events with at least one kinematically valid order is 100.0% (10,421/10,421), as expected analytically—for a fully absorbed 511 keV two-hit event the scattered-photon energy cannot fall below the $E_0/3$ Compton edge, so at least one order is always valid—confirming the premise for retaining two-hit events. Second, the best order chosen by the Klein–Nishina cross section with a kinematic quality factor agrees with the order that points more nearly toward the source only 78.4% of the time, so committing to a single estimated order (as an imaging chain would) would use the wrong Compton cone for about 22% of two-hit events, whereas enumerating both orders and accepting either field-of-view-consistent one avoids this misassignment. The median $|\text{ARM}|$ of in-window Compton events relative to the true beam direction is about 24° (two-hit 23.6°; three-hit and higher 26.3°; only about 32% have $|\text{ARM}| < 10^\circ$), driven by the millimetre-scale scatter lever arms and pixel quantization; this explains why the topology/field-of-view layer removes only about 10–14% of the background and cannot be sharpened into an imaging-level discriminant. Finally, the fraction of unorderable events is very small (61 of 37,065, i.e. 0.16%, in `revan`; one in the analytic classifier), so the unreconstructed class is a small boundary population.

1

P15-01 | M20 | 中等 | 事件选择

问题：拓扑/FoV 检验较宽松，边界处理含糊

为什么标这里：不同几何不能直接验证当前 ARM 和排序性能；应证明等价性或在当前几何重跑。

修改动作：为每种多重度定义精确布尔规则，在实际分析几何中重跑基准，展示方位角/亚像素收敛，并报告信号一本底效率或 ROC 型权衡；相关时应纳入位置/能量不确定性和多普勒展宽。

3.5 Mission-time trajectory and analytic rate folding

MeV balloon observations are background dominated: atmospheric secondaries and cosmic-ray-induced activation set the rate floor, and both respond to the flight environment [18, 19]. Detector-coupled Monte Carlo through a fixed mass model already provides the selected day-15 signal and background rates under a common veto and energy window (Sections 3.2–3.4). Those rates, however, are defined at a single longitude, latitude, and altitude. On a multi-day float the residual atmospheric depth, geomagnetic cutoff, and activation inventory evolve, so a constant-rate extrapolation of the day-15 snapshot is not a substitute for a trajectory fold. As in other balloon MeV programmes (for example COSI’s use of PARMA/EXPACS fields and time-dependent light curves along the flight [19]), we therefore introduce an analytic mission-time trajectory curve that maps the reference rates onto a continuous 20 d performance estimate, and we test the fold with direct Cosima transports at selected trajectory states rather than re-running full statistics at every time bin.

The trajectory used here is a **synthetic reference profile**, not balloon telemetry and not a source-visibility schedule. It comprises 81 bins from day 0 to day 20 (0.25 d spacing) with a mild mid-latitude float envelope: altitude $h = 38.75 \pm 2.5$ km, latitude $34^\circ \pm 0.25^\circ$, and longitude $100^\circ \pm 0.25^\circ$, all phase-referenced to the day-15 anchor. Altitude is retained because zero-pressure-class and related long-duration balloons experience float-altitude excursions that change residual atmospheric depth by several g cm^{-2} ; depth controls both the atmospheric particle spectra that drive prompt background and activation, and the 511 keV atmospheric transmission that multiplies the focused science rate. Latitude and longitude are retained only as a *reference* geomagnetic/geographic modulation of cutoff rigidity on that same synthetic track; they do not encode Earth occultation, target elevation limits, or repointing losses. The resulting fold therefore supports a reference-exposure statistical sensitivity under a controlled trajectory envelope, **not a flight forecast for a named launch campaign**.

The analytic fold is defined by five physically separate layers; atmospheric transmission multiplies only the celestial signal and never rescales the local particle field that drives prompt background and activation.

(1) *Signal*. For a monochromatic point source with top-of-atmosphere flux F_{511} ,

$$R_{\text{sig}}(t) = F_{511} A_{\text{eff}} T_{\text{atm},511}(t) \varepsilon_{\text{det}}, \quad (15)$$

where A_{eff} is the on-axis Laue effective area, $T_{\text{atm},511}(t)$ is the 511 keV atmospheric transmission at the trajectory state, and ε_{det} collects detector and selection efficiency at the reference response. Relative to the day-15 anchor this is equivalent to $S_{\text{sig}}(t) = S_{15} T_{\text{atm},511}(t)/T_{15,45}$ with $T_{15,45} = 0.6520$. In every bin the fixed 45° elevation (45° zenith angle) gives $T_{\text{atm},511}(t) = \exp[-\mu_{\text{air}} X_{\text{vertical}}(t)/\cos 45^\circ]$, with $\mu_{\text{air}} = 0.08736 \text{ cm}^2 \text{ g}^{-1}$. This corrects the legacy vertical-column scaling; it remains a fixed-axis reference rather than a source-visibility calculation.

(2) *Prompt background*. At particle-family resolution the selected prompt rate is the source–response sum

$$R_{\text{prompt},j}(t) = \sum_b \Phi_b(t) K_{j,b}, \quad (16)$$

where b runs over atmospheric particle families (protons, neutrons, $e^\pm$, γ , $\mu^\pm$, ...), $\Phi_b(t)$ is the local PARMA/EXPACS flux at the trajectory state, and $K_{j,b}$ is a detector response coefficient fixed once from the day-15 reference transport for selection j . Relative to the reference state this reweights family contributions by $\Phi_b(t)/\Phi_b(\text{REF})$. Within a line window the same structure may be refined to $K_{b,E,\theta}$ when energy–angle response matrices are available.

(3) *Activation production*. For each incident family a and radioactive source-parent nuclide k in the final all-eight-family delayed inventory,

$$P_{a,k}(t) = \Phi_a(t) Y_{a,k}, \quad (17)$$

where $Y_{a,k}$ is the family-resolved yield fixed by the corresponding day-15 inventory and $\Phi_a(t)$ is that family’s live-PARMA driver. The 141.83 Bq all-family inventory of the mass-complete reference geometry is used for the background-origin analysis, not substituted into this final-geometry fold; the fold uses the final directionally graded configuration’s 36.4525153 Bq inventory.

(4) *Delayed inventory*. With decay constant λ_k , each family–parent inventory is advanced by

$$N_{a,k}(t + \Delta t) = N_{a,k}(t) e^{-\lambda_k \Delta t} + \frac{P_{a,k}(t)}{\lambda_k} (1 - e^{-\lambda_k \Delta t}), \quad A_{a,k}(t) = \lambda_k N_{a,k}(t). \quad (18)$$



1

1 P16-01 | M21 | 中等 | 轨迹模型 | 补充正式条目

问题：轨迹离散和活化初始条件定义不足

为什么标这里：原标注 PDF 没有对应的行内高亮；现补充为相关页面的侧栏便笺。

修改动作：公开 81 点数组和各区间时长，说明 $N_k(0)$ 、数值更新方法与单位，并定义每个活时间比例如何计算和应用。

2 P16-02 | M05 | 重大 | 科学用例

问题：当前曝光折叠并不代表一次银河中心气球观测

为什么标这里：这个标签正确，应在摘要、结果、图注和结论中保持；它不是飞行预报或可见性日程。

修改动作：将真实或参数化星历与斜程大气柱、源可见性、占空比、指向抖动和离轴响应共同折叠；否则把所有任务级说法改成“连续照射、轴上参考曝光”。

3 P16-03 | M05 | 重大 | 科学用例

问题：当前曝光折叠并不代表一次银河中心气球观测

为什么标这里：固定 45° 轴已纠正斜程透过率，但仍未折叠真实源可见性、指向损失和离轴响应；该限制必须贯穿任务和灵敏度表述。

修改动作：将真实或参数化星历与斜程大气柱、源可见性、占空比、指向抖动和离轴响应共同折叠；否则把所有任务级说法改成“连续照射、轴上参考曝光”。

(5) Delayed selected rate.

$$R_{\text{delayed},j}(t) = \sum_a \sum_k A_{a,k}(t) \varepsilon_{j,a,k}, \quad (19)$$

where $\varepsilon_{j,a,k}$ is the selected-rate response of source-parent nuclide k produced by family a under selection j . A SIM IA INIT daughter identity is retained as lineage evidence but does not replace the radioactive source parent in this sum. Equations (15)–(19) keep atmospheric transmission, prompt-particle modulation, activation production, and radioactive decay as separate physical steps.

To test the analytic predictions we freeze four trajectory states—the day-15 reference (REF), a low-altitude early point (L1), a high-altitude point (H1), and a low-altitude late point (L2)—and rebuild live PARMA spectra and Cosima atmospheric sources at those coordinates without using the analytic scale as a free parameter. For a predicted scale S^{pred} from Equation (16) we report

$$Q = \frac{R^{\text{MC}}/R_{\text{REF}}^{\text{MC}}}{S^{\text{pred}}}. \quad (20)$$

Ideal agreement gives $Q \simeq 1$. The final implementation applies separate live-PARMA flux ratios to the day-15 response coefficient of each of the eight prompt particle families and advances each retained delayed family–parent nuclide with its matching family flux ratio. Direct trajectory transports **validate the combined** e^+ , n , and γ modulation in the broad TES 480–550 keV band within 2σ (maximum $|z| \simeq 0.51$ across the off-reference points); for the high-statistics e^+ band alone, Q follows the live-PARMA e^+ flux scale to within about 1%. These multi-point results anchor the tested families, while the other prompt-family modulation remains an analytic source-field reweighting; all final 511 keV-window response coefficients are supplied by the day-15 detector chain.

With the final-geometry day-15 rates fixed by the full detector chain, these trajectory scales provide $S(t)$, $B(t)$, and the cumulative counts in Equation (8). Section 4 presents the resulting central curve and conditional componentwise transport-counting endpoint together, so the reader can see both the expected mission performance and the effect of limited Monte Carlo support on the same time axis.

4 Results

4.1 What sets the 511 keV line-window background?

The mass-complete reference calculation tells us which interactions must be controlled before a shield is specified. In the 510.58–511.42 keV window, the common response, active-veto, and topology/field-of-view selection leaves 63 prompt and 26 delayed Monte Carlo records. Because the streams represent different physical exposures, their weights differ; the selected records correspond to a total rate of $(4.64320 \pm 0.54324) \times 10^{-2} \text{ s}^{-1}$. Table 3 gives both the record counts and the weighted rates.

Figure 8 makes the prompt result easy to read. Incident positrons contribute $2.917 \times 10^{-2} \text{ s}^{-1}$ and neutrons contribute $1.221 \times 10^{-2} \text{ s}^{-1}$. Together they supply 96.84% of the prompt rate and 89.13% of the full reference background. The atmospheric 511 keV line is then carried as a separate final component because it is spectrally identical to the science line and is **not present as a narrow feature in the EXPACS continuum**. All eight prompt families remain in the final transport; the decomposition is used to understand the physics, not to remove source classes from the calculation.

The delayed events show a different source-level and detector-selected distribution. Of the corrected 141.83 Bq day-15 inventory, neutron-induced products contribute 94.25% and μ^- -induced products 5.38%. The source activity is distributed mainly among CsI (63.08%), outer mechanical structures (15.71%), and cold plates (9.43%); the neutron and μ^- material distributions have $D_{\text{TV}} = 0.823$. After detector response and selection, 24 of the 26 line-window records are ^{64}Cu decays and the other two are ^{61}Cu decays, all in cold copper structures near the TES. The source inventory and selected line-window background therefore identify different material priorities: active coverage controls the dominant prompt and **atmospheric paths**, while copper close to the focal plane supplies the local delayed component.

The final directionally graded configuration uses a separate all-eight-family activation calculation. Its NUBASE-corrected day-15 activity is 36.4525153 Bq: neutron, μ^- , proton, and α production contribute 83.83%, 10.82%, 4.64%, and 0.69%, respectively, with smaller positive e^+ , γ , and μ^+ inventories; e^- is the

1 P17-01 | M13 | 重大 | 验证

问题：轨迹折叠验证过于宽泛，且没有给出数值证据

为什么标这里：宽带验证不能证明窄窗重加权；应给四状态数据并验证 511 keV 附近的能量—角度响应。

修改动作：在结果中列出四状态比较，并在分析窗内或附近验证能量/角度分辨的重加权；量化未测试粒子族的偏差，不要把解析源场缩放表述成已验证的输运。

2 P17-02 | M04 | 重大 | 源模型

问题：大气 511 keV 分量给出了结果，却没有可复现的源模型方法

为什么标这里：PARMA3 原始论文报告约 0.5 MeV 的湮没小峰；必须明确证明额外窄线没有重复计数。

修改动作：新增第四源流的方法小节和流程节点，给出来源、能谱、角分布、绝对归一化、生成计数、曝光、cut-flow 与轨迹规则；并说明在加入显式窄线前，PARMA/EXPACS 连续谱中的湮没特征是被移除、保留还是已证明可忽略。

3 P17-03 | M23 | 中等 | 物理解读

问题：图示 cut-flow 不支持“屏蔽控制大气线”的解释

为什么标这里：最终大气线 cut-flow 为 100% 存活；屏蔽控制结论只能用于确实被降低的分量。

修改动作：把屏蔽结论限制在有数据支持的瞬发/延迟分量；大气线的抑制应单独讨论孔径设计、指向调制、控制区和空间—能谱建模。

Table 3: Primary-window background decomposition for the reference detector. Relative uncertainties are Monte Carlo counting standard errors. Counts from independently normalized components are not directly proportional to their rate contributions.

Component	Selected records	Rate / s ⁻¹	MC σ / s ⁻¹	Relative MC σ / %	Total rate / %	Selected-event origin
Prompt e ⁺	43	2.91730×10^{-2}	4.44885×10^{-3}	15.2	62.83	incident-family tag
Prompt n	18	1.22099×10^{-2}	2.87791×10^{-3}	23.6	26.30	incident-family tag
Prompt μ^+	2	1.34910×10^{-3}	9.53958×10^{-4}	70.7	2.91	incident-family tag
Prompt subtotal	63	4.27321×10^{-2}	5.38374×10^{-3}	12.6	92.03	eight-family transport
Delayed activation	26	3.69999×10^{-3}	7.25627×10^{-4}	19.6	7.97	24 ⁶⁴ Cu, 2 ⁶¹ Cu
Total	89	4.64320×10^{-2}	5.43242×10^{-3}	11.7	100.00	prompt plus delayed

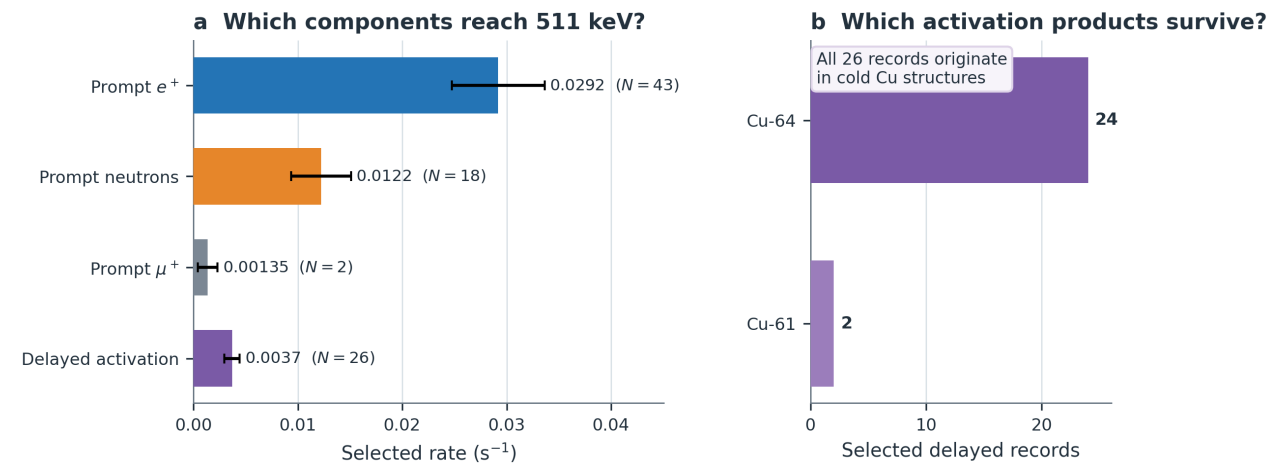


Figure 8: Physical origin of the selected background in the mass-complete reference geometry. (a) Weighted rate by prompt particle family and delayed activation; error bars are Monte Carlo counting standard errors from Equation (7). (b) Parent isotope of the 26 selected delayed records. Positrons and neutrons provide 89.13% of the total selected rate, while the delayed records all originate in cold copper structures.

finite-BUILDUP zero observation. The 78 final delayed records are carried by 60 neutron, 12 proton, five μ^- , and one α event. Their time fold is resolved jointly by incident family and exact-source parent nuclide. In particular, the one SIM lineage that starts as ¹⁸²W is assigned to its position-matched radioactive ¹⁸²Ta source parent rather than treating stable ground-state ¹⁸²W as an activity.

4.2 Final directionally graded active-shield geometry

The final active shield converts the background map into a simple geometry. The side is the **most important active surface** because it surrounds the long cryostat wall and the side optical opening, so it retains 40 mm BGO coverage. The bottom uses a 30 mm BGO disk, while the top uses a 10 mm annulus around the service opening. The focused beam still enters through the aligned side aperture. A thin Al/Kapton outer enclosure remains, with no continuous external W layer. Figure 9 connects this layout to the event selection and final background budget; Table 4 lists the dimensions. These values define the **only optimized geometry** used in the following full-chain and mission calculations.

The resulting shield is directional rather than uniform: it places the deepest active layer around the side and uses smaller end layers where the geometry has a shorter exposed path. This design also keeps the optical route easy to read: the collimator remains a local element in the beam path, whereas the outer enclosure does not add a second continuous high-*Z* layer. The geometry drawing, cut-flow, and component budget are therefore three linked views of the same final design.

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。
红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮

1 P18-01 | M07 | 重大 | 设计逻辑

问题：40/30/10 mm BGO 方案是被选定的，而不是被证明为最优的
为什么标这里：应报告实际 BGO 和总载荷质量；表 4 粗算开孔前约 298 kg，气球可行性、结构和死时间代价是核心约束。
修改动作：给出候选几何的设计矩阵或响应面、清单中的真实材料质量、优化目标和约束，并用独立统计量评估所选点；否则把“优化”改为“选定的分级屏蔽构型”。

2 P18-02 | M07 | 重大 | 设计逻辑

问题：40/30/10 mm BGO 方案是被选定的，而不是被证明为最优的
为什么标这里：没有候选集合或目标函数；完成受质量约束的独立权衡前，应称“选定构型”。
修改动作：给出候选几何的设计矩阵或响应面、清单中的真实材料质量、优化目标和约束，并用独立统计量评估所选点；否则把“优化”改为“选定的分级屏蔽构型”。

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。
红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮



1 P19-01 | M15 | 重大 | 可比性 | 补充正式条目
当前状态：当前工作稿已处理“最终几何仅含中子活化”的一部分可比性问题，但屏蔽材料、源流集合、阈值和统计曝光是否同口径仍需逐项核对。
问题：参考几何与分级屏蔽几何的总量并非同口径比较
为什么标这里：原标注 PDF 没有对应的行内高亮；现补充为相关页面的侧栏便笺。
修改动作：在两套几何中使用相同的入射流、活化族、击中存储、响应、阈值、符合逻辑和统计曝光；解释几何效应前先给出成对的分量变化。

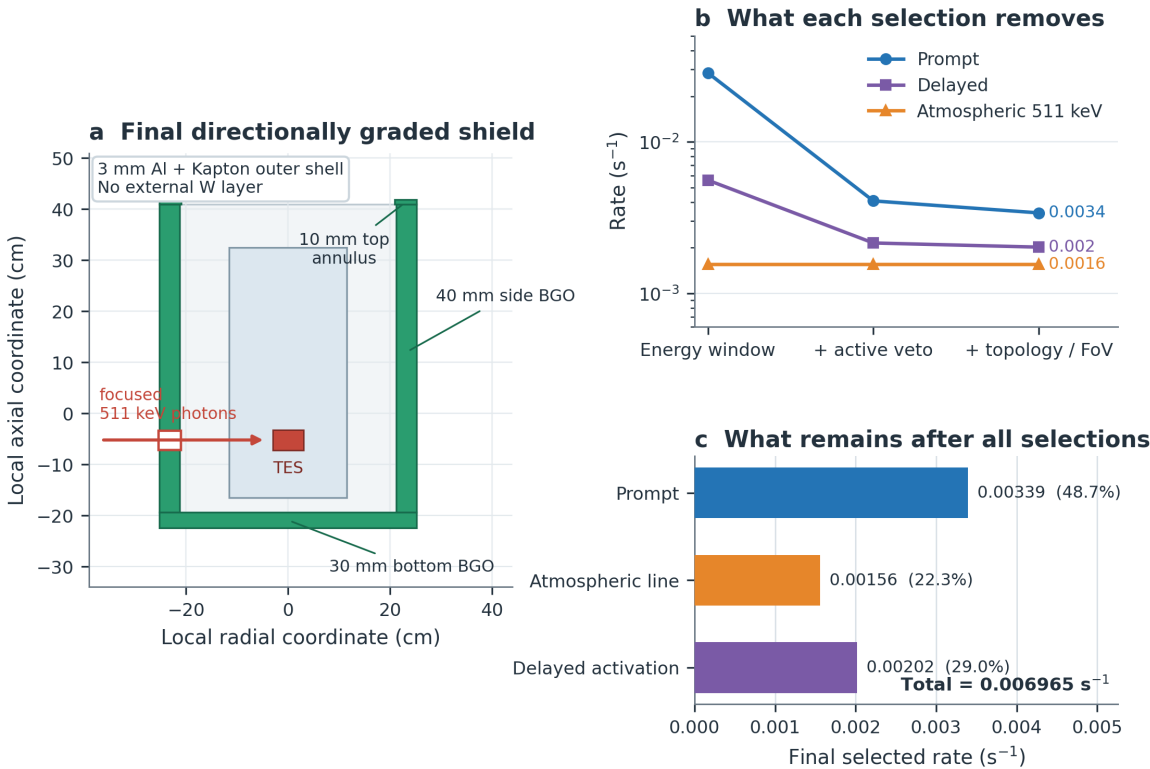


Figure 9: From the final graded-shield geometry to the selected background. (a) Cross-section of the directionally graded BGO shield; dimensions are read from the generated geometry manifest. The cryostat and TES symbols are simplified only to expose the shield layout and side beam path. (b) Prompt, delayed, and atmospheric-line rates after the energy window, active veto, and topology/field-of-view selection. (c) Composition of the final, response-convolved $6.96486 \times 10^{-3} s^{-1}$ background.

Table 4: Final directionally graded active-shield geometry. Radial and axial coordinates are local to the detector–cryostat frame.

Element	Final setting	Physical role
Side BGO	40 mm; $r = 21.2\text{--}25.2$ cm, $z = -19.4\text{--}40.9$ cm	Continuous active coverage around the long side wall while preserving the optical cut
Bottom BGO	30 mm; $r = 0\text{--}25.2$ cm, $z = -22.4\text{--}19.4$ cm	Active coverage of the lower end surface
Top BGO	10 mm annulus; $r = 20.9\text{--}25.2$ cm, $z = 40.9\text{--}41.9$ cm	Covers the outer top edge while leaving the central service opening
Side optical path	Existing Boolean aperture and aligned Al/Be windows plus W collimator	Carries the focused 511 keV beam to the TES array
Outer enclosure	3 mm Al plus Kapton; no continuous external W layer	Mechanical envelope and electrical insulation
BGO thresholds	80 keV native recording; 50 keV analysis veto	Records shield energy deposits and applies the common event veto

4.3 Full-chain background and statistical support

Table 5 follows each final-geometry stream through the same event sequence shown in Figure 9b. “Pre-veto” means that the TES energy already lies in the primary line window. Record counts show the Monte Carlo support at each step; final rates give the physical result after the different source exposures have been applied.

The active shield does most of the prompt rejection. It lowers the response-convolved line-window prompt rate from 2.84914×10^{-2} to $4.07188 \times 10^{-3} s^{-1}$, so only 14.29% survives that stage. The topology/field-of-view test then lowers it to $3.39303 \times 10^{-3} s^{-1}$. For delayed activation, the corresponding rates are 5.58116×10^{-3} , 2.14813×10^{-3} , and $2.01657 \times 10^{-3} s^{-1}$; because the delayed families have different event weights, the active and topology survivals in Table 5 are rate ratios (38.49% and 93.88%), not record-count ratios. The atmospheric

Table 5: Response-convolved primary-window cut-flow for the final graded-shield geometry. The signal rate is scaled to $F_0 = 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$; background fractions use the total final background rate.

Stream	Pre-veto records	Active-veto pass	Final records	Active survival / %	Topology survival / %	Final rate / s^{-1}	Background / %
Eight-family prompt	42	6	5	14.29	83.33	3.39303×10^{-3}	48.72
All-eight-family delayed	346	83	78	38.49	93.88	2.01657×10^{-3}	28.95
Atmospheric 511 keV line	8	8	8	100.00	100.00	1.55526×10^{-3}	22.33
Focused signal	28566	28566	28010	100.00	98.05	9.86228×10^{-4}	–
Total background	396	97	91	–	–	6.96486×10^{-3}	100.00

line is unchanged at $1.55526 \times 10^{-3} \text{ s}^{-1}$ after it enters the measured line window, because a 511 keV photon entering through the open path can look exactly like a source photon. The focused signal behaves differently: all 28566 line-window records pass the active veto, and 28010 (98.05%) pass the final topology test.

After all selections, prompt particles contribute 48.72% of the background, the atmospheric line 22.33%, and delayed activation 28.95%. Thus the active shield removes most charged-particle and neutron-associated events without rejecting the focused beam, while the remaining budget naturally becomes a mixture of prompt leakage, a line-like atmospheric term, and local activation.

The five final prompt records comprise two e^+ and three neutron records. The other six prompt families have zero selected records in the available sample. Table 6 retains those zeros and their different event weights, because zero selected records give a rate upper limit. The photon family has the largest event weight and therefore sets most of the conditional componentwise prompt endpoint.

Table 6: Transport-counting precision of the optimized final background. For components with defined transport exposure, intervals are two-sided 95% Garwood intervals scaled by the listed event weight. Subtotal and total upper values are componentwise endpoint sums, not a joint-coverage interval or detector systematic uncertainty. The finite-BUILDUP e^- zero has no fictitious exposure or Garwood endpoint.

Component	Final records	Weight / s^{-1}	Central rate / s^{-1}	Exact 95% rate interval / s^{-1}	Total central / %
Prompt α	0	6.78971×10^{-4}	0	$[0, 2.50464 \times 10^{-3}]$	0
Prompt e^-	0	6.78761×10^{-4}	0	$[0, 2.50387 \times 10^{-3}]$	0
Prompt e^+	2	6.78847×10^{-4}	1.35769×10^{-3}	$[1.64423 \times 10^{-4}, 4.90446 \times 10^{-3}]$	19.49
Prompt γ	0	5.42680×10^{-3}	0	$[0, 2.00188 \times 10^{-2}]$	0
Prompt μ^-	0	6.77164×10^{-4}	0	$[0, 2.49798 \times 10^{-3}]$	0
Prompt μ^+	0	6.77705×10^{-4}	0	$[0, 2.49997 \times 10^{-3}]$	0
Prompt n	3	6.78446×10^{-4}	2.03534×10^{-3}	$[4.19736 \times 10^{-4}, 5.94812 \times 10^{-3}]$	29.22
Prompt p	0	6.77234×10^{-4}	0	$[0, 2.49824 \times 10^{-3}]$	0
Prompt subtotal	5	–	3.39303×10^{-3}	upper sum: 4.33761×10^{-2}	48.72
Delayed α	1	3.48183×10^{-7}	3.48183×10^{-7}	$[8.81522 \times 10^{-9}, 1.93995 \times 10^{-6}]$	0.005
Delayed e^-	0	–	0	finite-BUILDUP zero; no interval	0
Delayed e^+	0	2.15006×10^{-9}	0	$[0, 7.93131 \times 10^{-9}]$	0
Delayed γ	0	5.46390×10^{-9}	0	$[0, 2.01557 \times 10^{-8}]$	0
Delayed μ^-	5	4.20909×10^{-6}	2.10454×10^{-5}	$[6.83339 \times 10^{-6}, 4.91130 \times 10^{-5}]$	0.30
Delayed μ^+	0	7.94287×10^{-10}	0	$[0, 2.93003 \times 10^{-9}]$	0
Delayed n	60	3.28039×10^{-5}	1.96823×10^{-3}	$[1.50197 \times 10^{-3}, 2.53351 \times 10^{-3}]$	28.26
Delayed p	12	2.24533×10^{-6}	2.69439×10^{-5}	$[1.39223 \times 10^{-5}, 4.70656 \times 10^{-5}]$	0.39
Delayed subtotal	78	–	2.01657×10^{-3}	upper sum: 2.63166×10^{-3}	28.95
Atmospheric 511 keV line	8	1.94408×10^{-4}	1.55526×10^{-3}	$[6.71451 \times 10^{-4}, 3.06448 \times 10^{-3}]$	22.33
Total background	91	–	6.96486×10^{-3}	componentwise upper endpoint: 4.90722×10^{-2}	100.00

The 64 deterministic response seeds provide a separate numerical-integration check. Their day-15 background has mean $6.94643 \times 10^{-3} \text{ s}^{-1}$ and sample standard deviation $3.89046 \times 10^{-4} \text{ s}^{-1}$; the preregistered primary value $6.96486 \times 10^{-3} \text{ s}^{-1}$ differs from that mean by 0.047 sample standard deviations. We therefore retain the fixed-seed result for the headline calculation and keep the response-seed ensemble distinct from the conditional componentwise transport-counting endpoint in Table 6.

4.4 Mission performance of the final geometry

The final rates were folded through all 81 trajectory bins. The accidental-coincidence live factor remains between 0.97165 and 0.97985. At 20 d, the central curve contains 1650.29 focused-signal counts and 11789.08 background counts, giving $Z = 15.199$. Figure 10 shows how the significance accumulates rather than reporting only the endpoint.

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。

红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮

1 P20-01 | M22 | 中等 | 不确定性 | 补充正式条目

问题：最终图中缺少主导解释的不确定性
为什么标这里：原标注 PDF 没有对应的行内高亮；现补充为相关页面的侧栏便笺。
修改动作：在最终分量图和 cut-flow 中加入蒙特卡洛区间，把联合不确定带传播到曝光曲线，按证据支持的精度取舍数字，并扫描辐射场、物理列表、几何、响应、阈值、透射和指向假设。

2 P20-02 | N05 | 第二轮新增 | 中等 | 选择物理

问题：窗内 511 keV 光子对主动反符合的 100% 存活是能量守恒恒等关系，不是抽样结果
为什么标这里：不仅是“可能相似”：窗内单色 511 keV 光子最多留下约 0.4 keV 未计能量，不可能同时产生 50 keV 屏蔽沉积；信号和大气线的 100% 存活是结构性恒等关系。
修改动作：在第 4.3 节明确写出这一恒等关系，并改写所有暗示主动覆盖可控制大气线的句子；可作用于该分量的是孔径/准直、指向调制和空间一能谱建模。

3 P20-03 | M11 | 重大 | 统计

问题：瞬发本底中心值只由五条最终记录支撑
为什么标这里：五条记录不足以支撑当前显示精度；需增加输运，优先高权重瞬发光子，并传播联合蒙特卡洛不确定性。
修改动作：增加输运统计，尤其是瞬发光子；按各模拟设计使用正确的二项/泊松似然，并在联合似然或后验中加入蒙特卡洛干扰参数；把端点和标为有意保守的有限样本界限，而不是精确总区间。

4 P20-04 | S02 | 结构 | 写作与行文

问题：文字可理解，但过于围绕开发过程且信息压缩过度
为什么标这里：除非存在可引用的正式预注册，否则改为“预先指定的固定种子值”。
修改动作：按科学功能拆分长句，删除起草/开发者旁白，直接陈述结果；统一 event/record/group/hit、分析窗术语、FoV 与 Laue 大小写，并统一美式或英式英语。

5 P20-05 | N01 | 第二轮新增 | 重大 | 死时间与屏蔽计数率

问题：任务活时间因子暗示未报告的约 $2\text{--}3 \times 10^4 \text{ s}^{-1}$ 时间轴速率，反符合损失随假定 $1 \text{ }\mu\text{s}$ 窗线性增长
为什么标这里：若 $\tau = 1 \text{ }\mu\text{s}$ ，此活时间范围暗示未报告的 $2.0\text{--}2.9 \times 10^4 \text{ s}^{-1}$ 最终轴速率。偶然反符合损失约每微秒 2–3%，需报告屏蔽速率、定义 L 并扫描 τ 。
修改动作：报告最终几何全带宽和屏蔽计数率，在正文定义活时间因子，把反符合窗与明确的读出时序架构绑定，并展示 $1\text{--}100 \text{ }\mu\text{s}$ 窗下的任务性能。该项应与 M02、M10 同列最高优先级。

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。
红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮

- 1

P21-01 | S02 | 结构 | 写作与行文

问题：文字可理解，但过于围绕开发过程且信息压缩过度
为什么标这里：删除元话语，直接说明两列各自采用的假设。
修改动作：按科学功能拆分长句，删除起草/开发者旁白，直接陈述结果；统一 event/record/group/hit、分析窗术语、FoV 与 Laue 大小写，并统一美式或英式英语。
- 2

P21-02 | M11 | 重大 | 统计

问题：瞬发本底中心值只由五条最终记录支撑
为什么标这里：逐分量区间可在给定抽样下精确，但其上端点之和不是总本底的精确联合 95% 区间；应称保守界限。
修改动作：增加输运统计，尤其是瞬发光子；按各模拟设计使用正确的二项/泊松似然，并在联合似然或后验中加入蒙特卡洛干扰参数；把端点和标为有意保守的有限样本界限，而不是精确总区间。

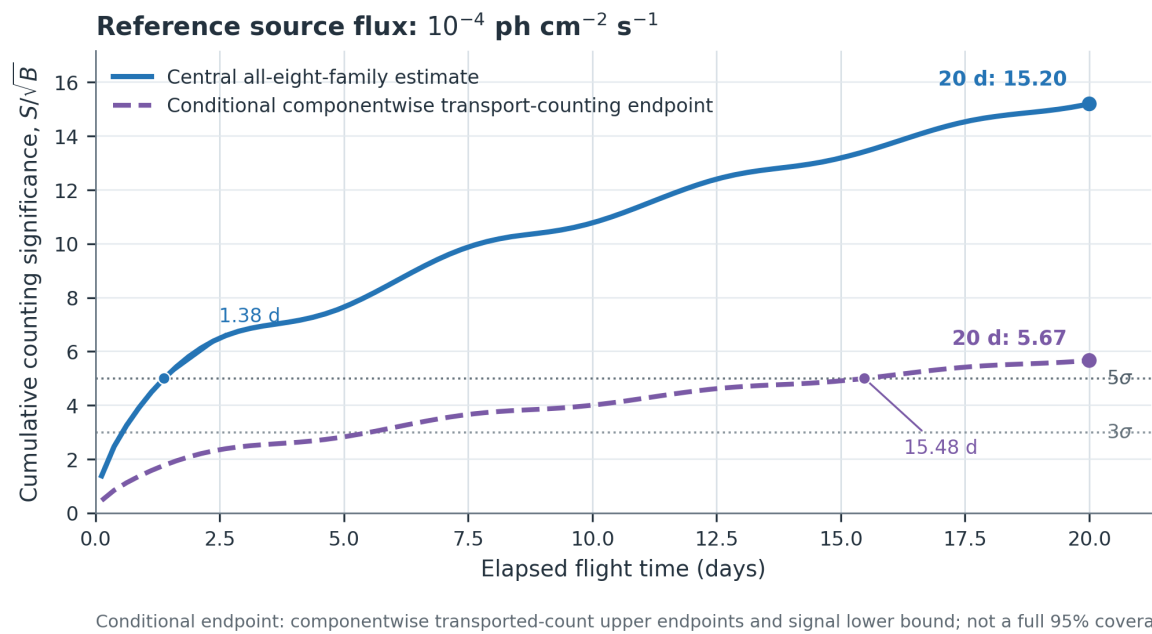


Figure 10: Cumulative counting significance of the final graded-shield geometry for a continuously observed $10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$ point source along the 20 d reference trajectory. The solid curve uses the central selected rates. The dashed curve uses the upper exact 95% counting endpoints for every background component and the lower exact 95% signal-acceptance endpoint. Their componentwise combination is conditional, not a joint 95% interval. The curves reach 5σ at 1.38 and 15.48 d, respectively, and end at 15.20 and 5.67.

Table 7: Final graded-shield mission projection. The endpoint column propagates componentwise Garwood background upper endpoints and the Clopper–Pearson signal lower endpoint through the same trajectory. It is conditional on the transported samples and selected family–nuclide mixture and is not a joint-coverage interval.

Quantity	Central estimate	Conditional componentwise transport-counting endpoint
Day-15 background / s^{-1}	6.96486×10^{-3}	4.90722×10^{-2}
Day-15 signal at F_0 / s^{-1}	9.86228×10^{-4}	9.80445×10^{-4}
$T_{3\sigma}$ / d	0.545	5.519
$T_{5\sigma}$ / d	1.382	15.476
$Z_{20\text{d}}$	15.199	5.667
$F_{3\sigma}(20 \text{ d})$ / $\text{ph cm}^{-2} \text{ s}^{-1}$	1.9738×10^{-5}	5.2934×10^{-5}

The two columns answer two useful questions. The central estimate is the expected result from the simulated rates: it reaches 3σ in 0.545 d, 5σ in 1.382 d, and a 20 d flux threshold of $1.9738 \times 10^{-5} \text{ ph cm}^{-2} \text{ s}^{-1}$. The conditional endpoint asks how the answer changes if every transported background component is moved to its exact upper counting endpoint and the signal acceptance to its lower endpoint. It reaches 5σ in 15.476 d and gives a 20 d threshold of $5.2934 \times 10^{-5} \text{ ph cm}^{-2} \text{ s}^{-1}$. This endpoint does not have 95% joint coverage: the componentwise sum has no joint-coverage guarantee and omits finite-BUILDUP zero-family, finite- M source sampling, and nuclide-mixture uncertainty. The large separation between the curves is driven mainly by the zero-count, high-weight prompt-photon component in Table 6; it shows exactly where additional Monte Carlo statistics would most improve the precision of the prediction.

5 Discussion

The main result is a connected physical explanation of the final design. In the reference geometry, positrons and neutrons dominate the selected prompt rate, while the selected activation events come from copper close to the TES rather than from the volumes with the largest total activity. The final graded-shield geometry responds to the first pattern with deep side BGO coverage and treats the second as a local activation term in the same detector selection. After the common veto and topology test, the background is $6.965 \times 10^{-3} \text{ s}^{-1}$ and the focused signal retains 98.05% of its line-window records. The geometry, background budget, and mission curve are therefore

three views of the same result.

This ordering follows the **strongest lesson** from recent instrument-background work. COSI builds its balloon background from the transported payload, separates prompt and activation components, and compares their spectral and time behaviour with flight data [19]. DIXE likewise begins with a detailed TES payload model and asks which incident particles, production regions, and processes make the detected spectrum [24]. In our case that decomposition is especially important because source inventory and selected line-window background lead to different answers: ^{128}I dominates the reference activity, but cold-Cu isotopes dominate the selected delayed records. Designing from selected events rather than from inventory alone keeps the optimization tied to the science window.

The final component mix also shows what each instrument layer contributes. Active BGO removes most prompt and delayed events that are accompanied by shield energy. The topology test provides a smaller additional reduction while retaining nearly all focused events. The atmospheric 511 keV component survives because its energy and single-photon topology can match the source. That 22.33% residual is not a **failure of anticoincidence**; it is the line-like sky-facing term that must be carried through the trajectory and, eventually, separated by pointing and background modelling.

The observing role of this telescope is complementary to INTEGRAL/SPI and COSI, which measure the diffuse bulge, disk, and broader Galactic emission [3, 4, 7, 8, 39]. The Laue-lens TES concept exchanges sky coverage for a concentrated beam and a sub-keV window. Its natural targets are compact 511 keV sources, an unresolved central component, and pointed follow-up observations. The 20 d values in Table 7 quantify that narrow-line, continuously observed reference case.

5.1 Scope and next steps

The mission values are statistical projections for the generated engineering detector–cryostat geometry and the synthetic, continuously on-source trajectory. They use the simulated 80 keV native BGO recording threshold, the common 50 keV analysis veto, a detector-level topology test, and all-eight-family activation in the final delayed stream. Seven families have positive delayed transports; e^- is a finite-BUILDUP zero observation, not a physical-zero claim. The veto is applied to recorded shield deposits in post-processing, and the present budget covers the detector–cryostat branch. These choices define the calculation represented by the central curve and conditional componentwise transport-counting endpoint. The latter does not represent joint 95% coverage or radiation-field, cross-section, finite- M , nuclide-mixture, calibration, or reconstruction systematics.

The next validation can focus on the terms that matter most in the figures: increase the prompt-photon exposure that controls the conditional endpoint, repeat the all-family activation position sampling to quantify finite- M convergence, replace the reference trajectory with a flight plan and visibility history, and calibrate the energy response and veto thresholds in the final detector design. A spatial–spectral likelihood can then use the focused spot and control regions while profiling background nuisance parameters [40]. This sequence extends the present component model without changing its source-to-geometry logic.

5.2 Conclusions

The generated mass-complete reference geometry shows where the focused beam, TES array, cold copper, and active shield meet. Its selected-event map identifies positrons and neutrons as the main prompt sources and cold-Cu isotopes as the delayed line-window source. Those findings lead to the final directionally graded BGO shield with 40/30/10 mm side/bottom/top coverage. The final-geometry full chain gives $B = 6.965 \times 10^{-3} \text{ s}^{-1}$ and $S = 9.862 \times 10^{-4} \text{ s}^{-1}$ at the top-of-atmosphere reference flux $F_0 = 10^{-4} \text{ ph cm}^{-2} \text{ s}^{-1}$. Over the fixed-45°-elevation, 20 d reference trajectory, the central and conditional componentwise transport-counting results reach $Z = 15.20$ and 5.67, corresponding to 3σ thresholds of 1.974×10^{-5} and $5.293 \times 10^{-5} \text{ ph cm}^{-2} \text{ s}^{-1}$. The result demonstrates how a particle- and material-resolved background model can be turned into a clear final geometry and a mission-scale 511 keV performance prediction.

Data and software availability

Before publication, a versioned public repository or institutional archive should provide the geometry and source definitions, random seeds, analysis and figure-generation scripts, LaTeX source, and derived validation products needed to reproduce the tables and figures in this paper.

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。
红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮

1 P22-01 | S02 | 结构 | 写作与行文

问题：文字可理解，但过于围绕开发过程且信息压缩过度
为什么标这里：这是评价性措辞；应直接陈述有引用支持的本底研究比较。
修改动作：按科学功能拆分长句，删除起草/开发者旁白，直接陈述结果；统一 event/record/group/hit、分析窗术语、FoV 与 Laue 大小写，并统一美式或英式英语。

2 P22-02 | M23 | 中等 | 物理解读

问题：图示 cut-flow 不支持“屏蔽控制大气线”的解释
为什么标这里：避免防御性表述；中性说明该分量在当前能量和拓扑选择下不可区分。
修改动作：把屏蔽结论限制在有数据支持的瞬发/延迟分量；大气线的抑制应单独讨论孔径设计、指向调制、控制区和空间一能谱建模。

3 P22-03 | S01 | 结构 | 稿件逻辑

问题：方法与结果交叉混排，遮蔽了证据链
为什么标这里：改名为“局限与下一步”，并说明每项局限如何影响标题结果。
修改动作：建议顺序为：引言与目标；仪器和假设；源/响应/选择/统计方法；验证和设计协议；结果；讨论与局限；简短结论。F₀ 只定义一次，除必要归一化核查外，把结果数值移出方法。

4 P22-04 | J01 | 期刊 | Experimental Astronomy 投稿规范

问题：选题适合 Experimental Astronomy，但稿件尚未达到投稿状态
为什么标这里：这是内部承诺，不是数据可用性声明；投稿时应给出现有版本化归档和持久标识符。
修改动作：改用当前 Springer Nature LaTeX 模板；按期刊要求处理作者一年份、字母排序参考文献和 DOI URL；核实已发表/接收版本；补全标题页、Statements and Declarations、经费、利益冲突、作者贡献以及现在时的数据可用性声明。

Declarations

Funding To be completed before journal submission.

Competing interests To be completed before journal submission.

Author contributions To be completed before journal submission.

Ethics approval and consent to participate Not applicable.

References

[1] N. Prantzos, C. Boehm, A.M. Bykov, R. Diehl, K. Ferriere, N. Guessoum, P. Jean, J. Knoedlseder, A. Marcowith, I.V. Moskalenko, A. Strong, G. Weidenspointner, The 511 keV emission from positron annihilation in the Galaxy, Rev. Mod. Phys. 83 (2011) 1001–1056, doi:10.1103/RevModPhys.83.1001.

[2] P. Jean, J. Knoedlseder, V. Lonjou, M. Allain, J.-P. Roques, G.K. Skinner, B.J. Teegarden, G. Vedrenne, P. von Ballmoos, B. Cordier, P. Caraveo, R. Diehl, P. Durouchoux, P. Leleux, R. Schanne, G. Weidenspointner, Spectral analysis of the Galactic e^+e^- annihilation emission, Astron. Astrophys. 445 (2006) 579–589, doi:10.1051/0004-6361:20053765.

[3] C.A. Kierans, S.E. Boggs, A. Zoglauer, A.W. Lowell, C. Sleator, J. Beechert, T.J. Brandt, P. Jean, H. Lazar, J. Roberts, T. Siegert, J.A. Tomsick, P. von Ballmoos, Detection of the 511 keV Galactic positron annihilation line with COSI, Astrophys. J. 895 (2020) 44, doi:10.3847/1538-4357/ab89a9.

[4] T. Siegert, R. Diehl, G. Khachatryan, M.G.H. Krause, F. Guglielmetti, J. Greiner, A.W. Strong, X. Zhang, Gamma-ray spectroscopy of positron annihilation in the Milky Way, Astron. Astrophys. 586 (2016) A84, doi:10.1051/0004-6361/201527510.

[5] T. Siegert, R. Diehl, J. Greiner, M.G.H. Krause, A.M. Beloborodov, M. Cadolle Bel, F. Guglielmetti, J. Rodriguez, A.W. Strong, X. Zhang, Positron annihilation signatures associated with the outburst of the microquasar V404 Cygni, Nature 531 (2016) 341–343, doi:10.1038/nature16978.

[6] J. Knoedlseder, P. Jean, V. Lonjou, G. Weidenspointner, N. Guessoum, R. Diehl, W. Gillard, M.J. Harris, G.K. Skinner, P. von Ballmoos, G. Vedrenne, P. Caraveo, B. Cordier, V. Schoenfelder, B.J. Teegarden, The all-sky distribution of 511 keV electron-positron annihilation emission, Astron. Astrophys. 441 (2005) 513–532, doi:10.1051/0004-6361:20042063.

[7] H. Yoneda, T. Siegert, S. Mittal, Imaging the positron annihilation line with 20 years of INTEGRAL/SPI observations, arXiv:2509.01066, 2025.

[8] T. Siegert, S.E. Boggs, J.A. Tomsick, A.C. Zoglauer, C.A. Kierans, C.C. Sleator, J. Beechert, T.J. Brandt, P. Jean, H. Lazar, A.W. Lowell, J.M. Roberts, P. von Ballmoos, Imaging the 511 keV positron annihilation sky with COSI, Astrophys. J. 897 (2020) 45, doi:10.3847/1538-4357/ab9607.

[9] T. Siegert, R. Diehl, G. Khachatryan, M.G.H. Krause, F. Guglielmetti, J. Greiner, A.W. Strong, X. Zhang, Constraints on positron annihilation kinematics in the inner Galaxy, Astron. Astrophys. 627 (2019) A126, doi:10.1051/0004-6361/201833856.

[10] G. De Cesare, Searching for the 511 keV annihilation line from galactic compact objects with the IBIS gamma ray telescope, Astron. Astrophys. 531 (2011) A56, doi:10.1051/0004-6361/201116516.

[11] N.M. Barriere, L. Natalucci, N. Abrosimov, P. von Ballmoos, P. Bastie, P. Courtois, M. Jentschel, J. Knoedlseder, J. Rousselle, P. Ubertini, Soft gamma-ray optics: new Laue lens design and performance estimates, arXiv:0910.0488, 2009.

[12] N.M. Barriere, J.A. Tomsick, S.E. Boggs, A. Lowell, P. von Ballmoos, Developing a second generation Laue lens prototype: high reflectivity crystals and accurate assembly, arXiv:1111.6700, 2011.

[13] G. Weidenspointner, C.B. Wunderer, N. Barriere, A. Zoglauer, P. von Ballmoos, Monte Carlo study of detector concepts for the MAX Laue Lens gamma-ray telescope, arXiv:astro-ph/0603152, 2006.



1

2

3

本页修改意见 | 第 23/25 页

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。

红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮

1 P23-01 | J03 | 期刊 | AI 使用披露 | 补充正式条目

问题：大量采用 AI 生成的实质性措辞可能需要披露
为什么标这里：原标注 PDF 没有对应的行内高亮；现补充为相关页面的侧栏便笺。
修改动作：投稿时复核期刊最新政策；如有要求，披露工具和用途，并声明全体作者已审阅、核实且对最终科学内容负责。

2 P23-02 | J01 | 期刊 | Experimental Astronomy 投稿规范

问题：选题适合 Experimental Astronomy，但稿件尚未达到投稿状态
为什么标这里：投稿前必须补全经费、利益冲突和作者贡献，并统一放入 Statements and Declarations。
修改动作：改用当前 Springer Nature LaTeX 模板；按期刊要求处理作者一年份、字母排序参考文献和 DOI URL；核实已发表/接收版本；补全标题页、Statements and Declarations、经费、利益冲突、作者贡献以及现在时的数据可用性声明。

3 P23-03 | J01 | 期刊 | Experimental Astronomy 投稿规范

问题：选题适合 Experimental Astronomy，但稿件尚未达到投稿状态
为什么标这里：按期刊要求处理作者一年份、字母排序和完整 DOI URL，并核实仅有 arXiv 条目的正式版本。
修改动作：改用当前 Springer Nature LaTeX 模板；按期刊要求处理作者一年份、字母排序参考文献和 DOI URL；核实已发表/接收版本；补全标题页、Statements and Declarations、经费、利益冲突、作者贡献以及现在时的数据可用性声明。

[14] F. Shirazi, E. Gau, M.A. Hossen, D. Becker, D. Schmidt, D. Swetz, D. Bennett, D. Braun, F. Kislat, J. Gard, J. Mates, J. Weber, N.R. Caverio, S. Chun, L. Lisalda, A. West, B. Dev, F. Ferrer, R. Bose, J. Ullom, H. Krawczynski, The 511-CAM Mission: A pointed 511 keV gamma-ray telescope with a focal plane detector made of stacked transition edge sensor microcalorimeter arrays, *J. Astron. Telesc. Instrum. Syst.* 9 (2023) 024006, doi:10.1117/1.JATIS.9.2.024006.

[15] S. Zhang, J.-K. Xia, T. Sun, et al., Transition edge sensor based detector: from X-ray to gamma-ray, *arXiv:2204.00010*, 2022.

[16] S.J. Sturmer, C.R. Shrader, G. Weidenspointner, B.J. Teegarden, D. Attie, B. Cordier, R. Diehl, C. Ferguson, P. Jean, A. von Kienlin, P. Paul, F. Sanchez, S. Schanne, P. Sizun, G. Skinner, C.B. Wunderer, Monte Carlo simulations and generation of the SPI response, *Astron. Astrophys.* 411 (2003) L81–L84, doi:10.1051/0004-6361:20031171.

[17] N. Gehrels, Instrumental background in balloon-borne gamma-ray spectrometers and techniques for its reduction, *Nucl. Instrum. Methods Phys. Res. A* 239 (1985) 324–349, doi:10.1016/0168-9002(85)90732-6.

[18] C.A. Kierans, S.E. Boggs, J.-L. Chiu, A. Lowell, C. Sleator, J.A. Tomsick, A. Zoglauer, M. Amman, H.-K. Chang, C.-H. Tseng, C.-Y. Yang, C.-H. Lin, P. Jean, P. von Ballmoos, The 2016 Super Pressure Balloon flight of the Compton Spectrometer and Imager, *arXiv:1701.05558*, 2017.

[19] S. Gallego, U. Oberlack, J. Lommler, C.M. Karwin, A. Zoglauer, P. Jean, P. von Ballmoos, C. Kierans, C.C. Sleator, J.A. Tomsick, S.E. Boggs, A complete background model for the COSI balloon-borne gamma-ray telescope, *Astrophys. J.* 988 (2025) 156, doi:10.3847/1538-4357/add6a0.

[20] S. Gallego, U. Oberlack, J. Lommler, C.M. Karwin, F. Fenu, V. Fioretti, A. Zoglauer, et al., Pre-flight background estimates for COSI, *arXiv:2510.25304*, 2025.

[21] J. Beechert, H. Lazar, S.E. Boggs, T.J. Brandt, Y.-C. Chang, C.-Y. Chu, H. Gulick, C. Kierans, A. Lowell, N. Pellegrini, J.M. Roberts, T. Siegert, C.C. Sleator, J.A. Tomsick, A. Zoglauer, Calibrations of the Compton Spectrometer and Imager, *Nucl. Instrum. Methods Phys. Res. A* 1031 (2022) 166510, doi:10.1016/j.nima.2022.166510.

[22] C.C. Sleator, A. Zoglauer, A.W. Lowell, C.A. Kierans, S.E. Boggs, J.A. Tomsick, H. Lazar, J. Beechert, T.J. Brandt, P. von Ballmoos, Benchmarking simulations of the Compton Spectrometer and Imager with calibrations, *Nucl. Instrum. Methods Phys. Res. A* 946 (2019) 162643, doi:10.1016/j.nima.2019.162643.

[23] A. Ciabattoni, V. Fioretti, J.A. Tomsick, A. Zoglauer, P. Patel, L. Mitchell, A. Bulgarelli, P. Jean, G. Panebianco, N. Parmiggiani, C. Vignali, P. von Ballmoos, E. Wulf, Benchmarking of Geant4 simulations for the COSI anticoincidence system, *Experimental Astronomy* (2025), doi:10.1007/s10686-025-10019-7.

[24] R. Tian, J. Mao, J. Liu, H. Jin, W. Cui, Simulation of non-X-ray background for the DIffuse X-ray Explorer (DIXE) mission, *arXiv:2604.13569*, 2026.

[25] R. Caputo, F. Kislat, J. Racusin, on behalf of the AMEGO Team, AMEGO: Simulations of the instrument performance, *Proc. 35th International Cosmic Ray Conference, PoS(ICRC2017)* 783 (2018), doi:10.22323/1.301.0783.

[26] L. Gottardi, K. Nagayoshi, A review of X-ray microcalorimeters based on superconducting transition edge sensors for astrophysics and particle physics, *Applied Sciences* 11 (2021) 3793, doi:10.3390/app11093793.

[27] L. Xie, Y. Zhang, Z. Li, Z. Liu, S. Shu, J. Zhou, X. Li, H. Li, H. Gao, Y. Gu, X. Lu, Y. Zhao, C. Liu, Beyond one-thousandth energy resolution with an AlMn TES detector, *arXiv:2602.11728*, 2026.

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。
红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮

本页没有单独修改项。

[28] E.M. Vavagiakis, S.W. Henderson, K. Zheng, H.-M. Cho, N.F. Cothard, B. Dober, S.M. Duff, P.A. Gallardo, G. Hilton, J. Hubmayr, K.D. Irwin, B.J. Koopman, D. Li, F. Nati, M.D. Niemack, C.D. Reintsema, S. Simon, J.R. Stevens, A. Suzuki, B. Westbrook, Magnetic sensitivity of AlMn TESes and shielding considerations for next-generation CMB surveys, arXiv:1710.08456, 2017.

[29] J.H. Hubbell, S.M. Seltzer, XCOM: Photon Cross Section Database, NIST Standard Reference Database 8 (XGAM), National Institute of Standards and Technology, doi:10.18434/T48G6X.

[30] S. Agostinelli, J. Allison, K. Amako, et al., Geant4—a simulation toolkit, Nucl. Instrum. Methods Phys. Res. A 506 (2003) 250–303, doi:10.1016/S0168-9002(03)01368-8.

[31] J. Allison, K. Amako, J. Apostolakis, et al., Recent developments in Geant4, Nucl. Instrum. Methods Phys. Res. A 835 (2016) 186–225, doi:10.1016/j.nima.2016.06.125.

[32] M. Sanchez del Rio, R.J. Dejus, XOP v2.4: recent developments of the x-ray optics software toolkit, Proc. SPIE 8141 (2011) 814115, doi:10.1117/12.893911.

[33] F. Guan, M. Asai, D.A. Bartkoski, M. Kleckner, Z. Harel, M. Salehpour, Adding the X-ray Bragg reflection physical process in crystal to the Geant4 Monte Carlo simulation toolkit, part I: reflection from a crystal slab, Precision Radiation Oncology 7(1) (2023) 59–66.

[34] R. Reiazi, D. Lee, D. Bartkoski, M. Kleckner, M. Salehpour, G4BraggReflection for accurate modeling of Bragg reflection in perfect and mosaic crystals, J. Phys. D: Appl. Phys. 58 (2025) 295102, doi:10.1088/1361-6463/aded1d.

[35] A. Zoglauer, R. Andritschke, F. Schopper, MEGALib: The Medium Energy Gamma-ray Astronomy Library, New Astron. Rev. 50 (2006) 629–632, doi:10.1016/j.newar.2006.06.049.

[36] T. Sato, Analytical model for estimating terrestrial cosmic ray fluxes nearly anytime and anywhere in the world: extension of PARMA/EXPACS, PLoS ONE 10 (2015) e0144679, doi:10.1371/journal.pone.0144679.

[37] T. Sato, Analytical model for estimating the zenith angle dependence of terrestrial cosmic ray fluxes, PLoS ONE 11 (2016) e0160390, doi:10.1371/journal.pone.0160390.

[38] F.G. Kondev, M. Wang, W.J. Huang, S. Naimi, G. Audi, The NUBASE2020 evaluation of nuclear physics properties, Chinese Phys. C 45 (2021) 030001, doi:10.1088/1674-1137/abddae.

[39] C.M. Karwin, T. Siebert, J. Beechert, J.A. Tomsick, T.A. Porter, M. Negro, C. Kierans, M. Ajello, I. Martinez Castellanos, A. Shih, A. Zoglauer, S.E. Boggs, Probing the Galactic diffuse continuum emission with COSI, arXiv:2310.12206, 2023.

[40] G. Cowan, K. Cranmer, E. Gross, O. Vitells, Asymptotic formulae for likelihood-based tests of new physics, Eur. Phys. J. C 71 (2011) 1554, doi:10.1140/epjc/s10052-011-1554-0.

左侧编号与右栏一一对应；每条均说明为什么标注、具体怎么改。
红=重大 橙=中等 蓝=结构 绿=期刊 紫/青=第二轮

本页没有单独修改项。