


NO OF TEETH 39
SPLINE PITCH 20/40
PRESSURE ANGLE 37°30'
MEASUREMENT BETWEEN
TWO PINS 46.548/46.502

- △ TO BE CHECKED WITH GO COMPOSITE PLUG GAUGE
△ TO BE CHECKED WITH NO GO SECTOR GAUGE



Notes:
Parts to be free from Burr,tool mark&Chattering mark

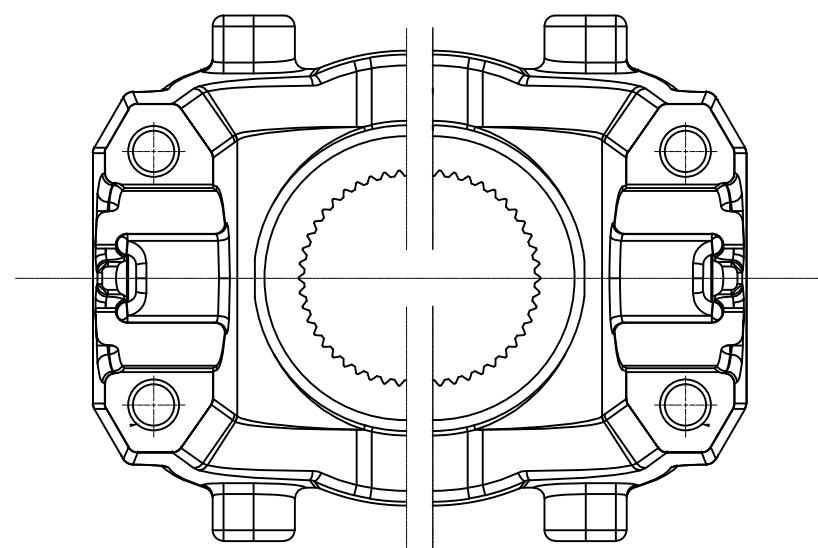


⊙ THIS SYMBOL REPRESENTS MAJOR CHARACTERISTICS

REVISION TABLE

SI NO	VARIANT	REV	PART NO/ SERIES
1	17TYS32-99	J	17TYS
2	17TYS32-100	F	

02	29.05.24	Tolerance Updated	NK
01	25.04.22	Dimension Updated	NK
00	24.07.19	New Release	NK

Revision Details

<div></div> <div>MADRAS ENGINEERING INDUSTRIES PVT LTD</div>	Customer MERITOR	Material Refer Casting Dwg		
	Dwg.No./Rev. Ref. Rev Table	DRAWN BY NPJ	NPJ	10.04.22
<div></div> <div>Dimension are in mm Scale NTS</div>	Part.No./Rev. Ref. Rev Table	CHECKED BY	KSN	25.04.22
		APPROVED BY	NK	25.04.22
TITLE OP30-SPLINE BROACHING YOKE - SPLINE		SHEET 01 of 01		
		Stage Dwg No. 17TYS32 - 30		

