
Figure 12-7. Johnson City Modular SMBus architecture

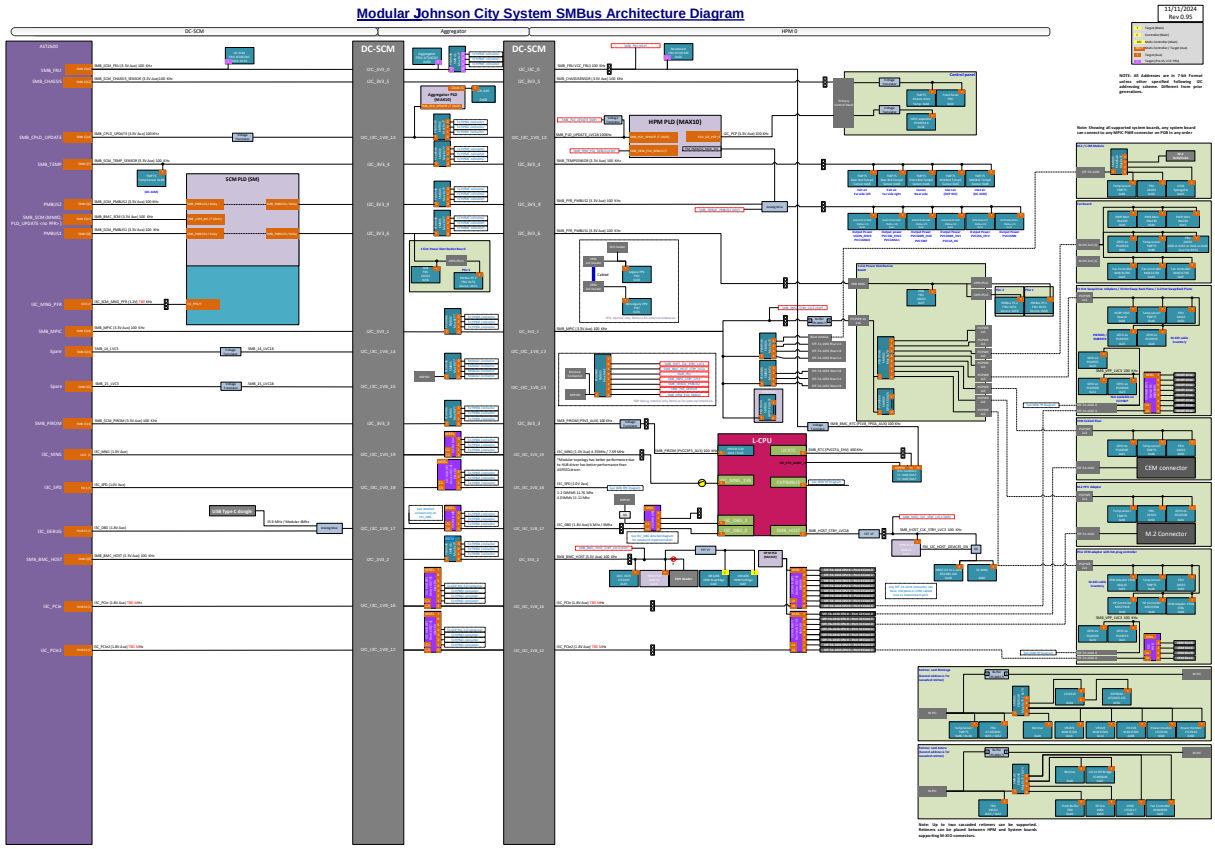

12.2.2.4 PPV FRU

A CCB was submitted in Oakstream so PPV can read both legacy and non-legacy FRU via the DIO header, a connector was added, and a new cable is required in the setup to connect SMBUs and provide addressing scheme as shown in below image, legacy node shall have 0x56 address and non-legacy node shall have 0x55 address.

14022356310 - PPV 2S support enhancements for OKS platforms (intel.com)