


# EVA 150S

L E D   S P O T



**EVA 150S** is a super bright led moving head with unique 150W led source, projected from a compact tiny body it can produce output brighter than a traditional discharge 575w unit. The efficient optical system provides a sharp cutting edge of the spot without any shadows. Effect features including saturated colors, fixed gobo wheel, rotating gobo wheel with replaceable positions and real indexing feature, rotating prism wheel with 3 facets, 8 facets prism and frost, motorized focus, full range dimmer, various strobe effect and extremely fast speed iris. Brightness, efficiency and compactness are what EVA 120S stands for, Small unit gives you nice performance!

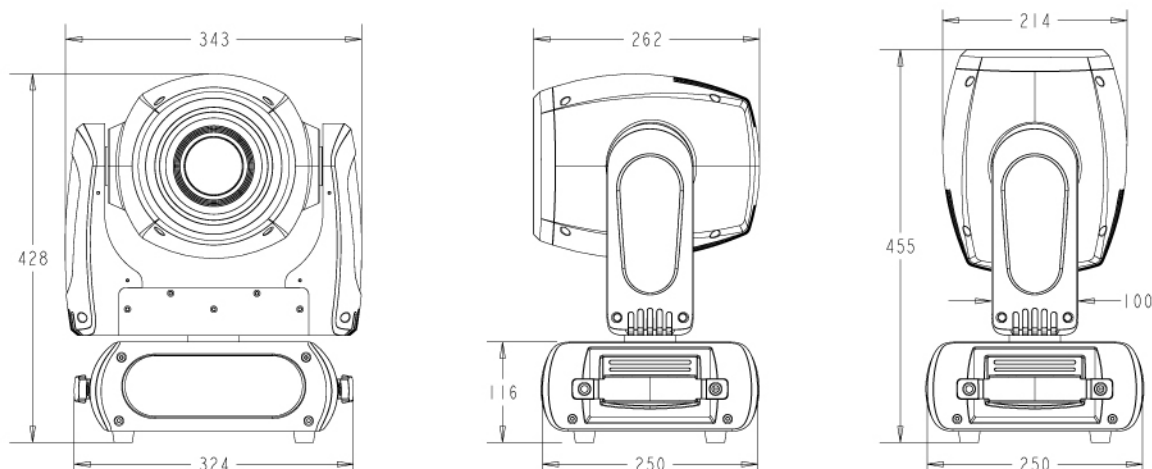

# Specification:

## Source

- \_ Light source: Advanced 150w white led
- \_ Led life: 60.000 hours
- \_ Luminous Flux: 8450lumen, 12920lux@2.5m
- \_ Control: Remote on/off via DMX
- \_ Ballast: switching mode power supply

## Optical System

- \_ Beam angle: 14°

## X/Y

- \_ Pan: 360° (4.0 sec) or 540°(3.58 sec),
- \_ Tilt: 265° (2.8 sec)
- \_ 16-bit resolution
- \_ Auto repositioning

## Colors

- \_ 8+open, interchangeable, indexable and bidirectional rainbow effect

## Gobos

- \_ Outside ∅27mm, inside ∅22mm
- \_ 7+ open custom interchangeable position for rotating gobo wheel
- \_ 7+ open fixed gobos
- \_ Real indexable and gobo shaking
- \_ Distinctive gobo animation effect

## Features

- \_ DMX channels: 19/21/22
- \_ Color wheel: 8+1 colors
- \_ Fixed gobo wheel: 7+1 gobos
- \_ Rotating gobo wheel: 7+1 gobos
- \_ Motorized focus
- \_ Full range 0-100% dimmer
- \_ Various strobe
- \_ Rotating Effect wheel with 3 facets,8 facets prism and frost
- \_ Fast speed iris
- \_ RDM function to change DMX address, display flip, X/Y Reverse and so on
- \_ Software upgrade via DMX
- \_ Hibernation when lost DMX for preset time
- \_ Indicate temperature info of base, arm and lamp
- \_ Fan speed auto change according to temperature

## Display

- \_ 24inch clear and big Color LCD display with friendly English menu
- \_ Auto lock
- \_ Flip
- \_ Back-up communicating IC

## Power


- \_ Max power consumption: 240W
- \_ Power supply: Electronic auto-ranging
- \_ Neutrik Powercon in and out
- \_ Input voltage range: 100–240V, 50-60Hz

## Dimension and Weight

- \_ Fixture: 343X250X455MM
- \_ Packing (carton): 550X410X420MM
- \_ Net Weight: 16KG
- \_ Gross Weight (carton): 19KG

## Rigging

- \_ Mounting points: 2 ¼-turn locks
- \_ 1 x Omega brackets with ¼-turn quick locks

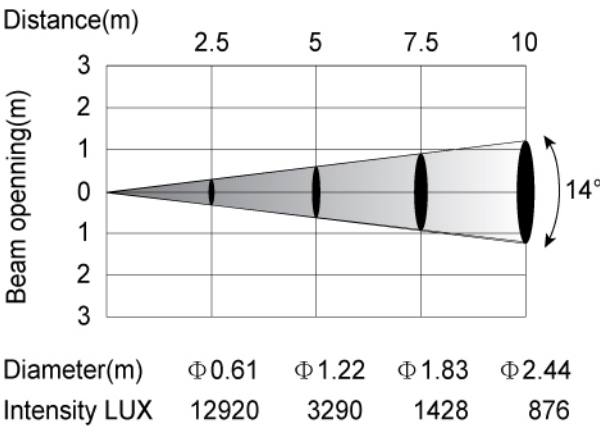

## Channel

CH1	Pan
CH2	Pan fine
CH3	Tilt
CH4	Tilt fine
CH5	Movement Speed
CH6	Movement Function
CH7	Shutter Function
CH8	Shutter
CH9	Dimmer
CH10	Color Function
CH11	Color
CH12	Rot Gobo Function
CH13	Rot Gobo
CH14	Gobo Rot Function
CH15	Gobo Rot
CH16	Gobo Function
CH17	Fixed Gobo
CH18	Prism
CH19	Prism Rot
CH20	Focus
CH21	Iris Function
CH22	Control

## COLORS



## STATIC GOBO



## ROTATING GOBO ∅ 22mm

