

Exhibit 41



Supermicro H14 & H13 Servers

Upgrade your AI data center with Supermicro

Leading performance and power efficiency with Supermicro rack-scale solutions featuring AMD EPYC™ 9005/9004 series processors.



Why Supermicro?



1 / 17






The Supermicro Advantage

Fastest Growing Provider of Server, Storage and Networking Solutions

Supermicro specializes in building rack-scale IT solutions, optimized for customer business goals at every step of our highly integrated supply chain with USA based program/manufacturing.

With 30 years of technology leadership, Supermicro meets the needs of the entire data center with a portfolio of application-optimized systems, cluster-level design, and on-site services.

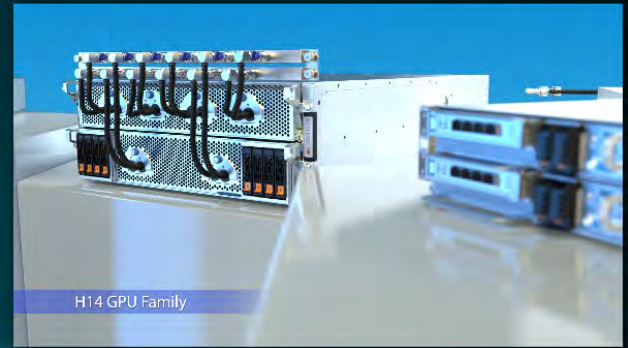

H14 GPU Family



Architecture

Extensive R&D capabilities to scaled up and scale out data center and enterprise clusters.



Solution Design

Building block solution offers gen-to-gen compatible server designs.



Production

5,000 (1,350 liquid cooled) racks per month worldwide accelerating time-to-market.



Deployment

L10 to L12 integration from design to validation to deployment with global service.



[View Servers](#)




2 / 17



Empowering Advancement in AI

Proven to Perform at Scale

Empower data center customers with industry-leading Supermicro Server Solutions powered by AMD.

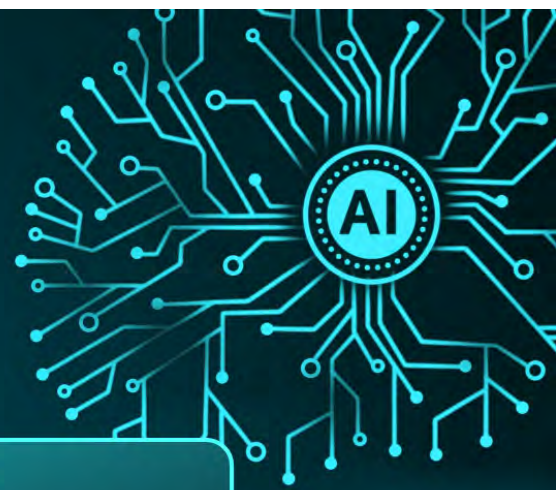

H14 Generation Systems

Supermicro H14 servers with AMD EPYC™ 9005/9004 processors provide AI-optimized performance, flexibility, and efficiency with up to 192 cores and advanced cooling.

[View Systems](#)



H13 Generation Systems

Supermicro H13 servers with AMD EPYC™ processors deliver versatile performance, scalability, and energy efficiency for enterprise and cloud workloads.

[View Systems](#)



3 / 17





H14 Generation Servers

Upgrade your AI data centers with Supermicro H14 Servers

The Supermicro H14 Servers are designed to bring maximum performance, efficiency, and scalability to data centers, ensuring readiness for AI-driven workloads. Powered by AMD EPYC™ 9005 series processors, these servers are engineered to handle the most demanding enterprise and cloud-native applications with an emphasis on high performance and power efficiency.

With support for Zen 5C and Zen 5 cores and 384 threads per socket, Supermicro's H14 Servers deliver a powerful compute platform ideal for dense high performance environments. Coupled with AMD Instinct™ accelerators, these systems are optimized for AI, machine learning, and high-performance computing (HPC) workloads.

These servers offer enhanced power efficiency, and a flexible, rack-scale architecture that allows customization for various enterprise applications.

[View Models](#)[H14 vs H13?](#)

► [Learn more about our featured AMD processors](#)

Key Value Propositions:



Maximum Performance, Efficiency, and Density

The Supermicro H14 Servers, powered by AMD EPYC™ 9005 processors, offer up to 192 cores and 384 threads, providing industry-leading compute density. This enables high core count and frequency for AI-optimized workloads and enterprise applications, making them ideal for cloud providers and high-performance computing environments.



Broadest Portfolio and Liquid Cooling Options

With Supermicro's Building Block Architecture, users can customize expansion, acceleration, networking, and storage. This broad portfolio supports AI, HPC, and cloud-native solutions, supporting Zen 4 and Zen 5 generation processors. In addition, liquid cooling options ensure efficiency and performance at rack scale.



Industry-Leading Time-to-Deployment

Supermicro's global production capabilities allow for rapid deployment, offering **up to 5,000+ racks per week**, including **1,350+ liquid-cooled racks**. Systems move from design to delivery in weeks, ensuring that companies can deploy AI and high-performance solutions quickly.

H14 Generation Server Family



8-GPU System

Maximum Acceleration for AI Training and LLM

► [View Server](#)



FlexTwin System

2U Liquid-cooled multi-node Architecture for high-density and efficiency

► [View Server](#)



GrandTwin® System

Leading Multi-Node Architecture with Front or Rear I/O

► [View Server](#)



Hyper System

Industry Leading IOPS Servers with Energy Efficiency and Flexibility

► [View Server](#)



CloudDC System

All-in-One Servers with Flexible I/O Options for Cloud Scale Data Centers

► [View Server](#)



5U PCIe GPU Systems

Universal GPU optimized for AI/ Deep Learning and HPC

► [View Server](#)

Why Upgrade to Supermicro H14 Systems with AMD EPYC™ 9005 CPUs?

Flexibility

The Supermicro H14 Servers, powered by AMD EPYC™ 9005 processors, offer up to 192 cores and 384 threads, providing



Hyper System

Industry Leading IOPS
Servers with Energy
Efficiency and Flexibility

▶ [View Server](#)



CloudDC System

All-in-One Servers with
Flexible I/O Options for
Cloud Scale Data Centers

▶ [View Server](#)



5U PCIe GPU Systems

Universal GPU optimized for
AI/ Deep Learning and HPC

▶ [View Server](#)

Why Upgrade to Supermicro H14 Systems with AMD EPYC™ 9005 CPUs?

Flexibility

The Supermicro H14 Servers, powered by AMD EPYC™ 9005 processors, offer up to 192 cores and 384 threads, providing industry-leading compute density. This enables high core count and frequency for AI-optimized workloads and enterprise applications, making them ideal for cloud providers and high-performance computing environments.

Core Performance


The H14 generation stands out with AMD EPYC™ 9005 CPUs processors that deliver the most powerful per core performance and the highest core counts ever seen in a Supermicro AMD EPYC™ system. This ensures superior processing power for intensive workloads, AI applications, and data-heavy tasks.

Compute Power

H14 systems offer the highest compute power for both consolidated CPU performance and distributed/virtualized per core performance. This makes it ideal for businesses that need to scale computing dynamically, supporting both large-scale consolidation and individual, and virtualized environments with seamlessly efficiency.

Thermal Design

With an optimized thermal design, H14 servers provide enhanced cooling efficiency saving valuable space in data centers. This leads to a lower total cost of ownership (TCO) minimizing energy consumption and maximizing operational efficiency.

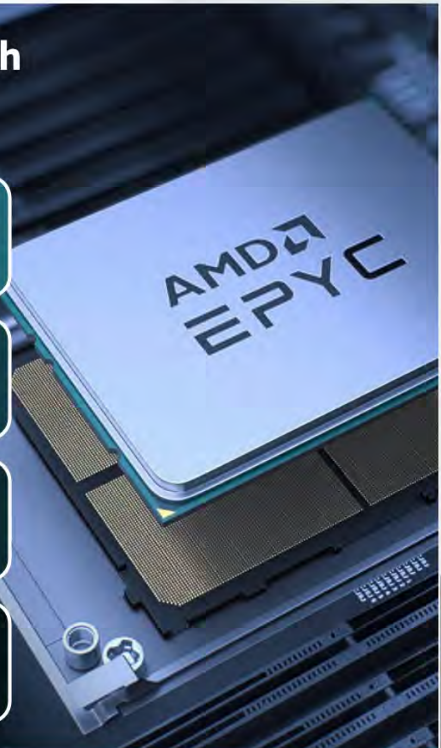

◀ [Back to Server Generations](#)

▶ [Explore Models](#)



EPYC Performance for Workload Optimized Solutions

Turn your data center into a competitive advantage with Supermicro & AMD – setting superior standards for performance, security and scalability for your most demanding workloads.



The AMD Advantage



AMD EPYC™

5th Gen EPYC™ processors are designed to deliver accelerated business results while lowering costs, power, and server footprint.

[Learn More](#)



AMD Ryzen™

Take on the most demanding games with the massive performance boost delivered by AMD Ryzen 7000X3D Series processors with AMD 3D V-Cache technology.

[Learn More](#)



Ryzen™ Threadripper™ PRO

Let AMD Ryzen™ Threadripper™ PRO processors be the productivity boosting engine at the heart of your next professional workstation.

[Learn More](#)



AMD Instinct™

AMD Instinct™ accelerators are engineered from the ground up for this new era of data center computing, supercharging HPC and AI workloads to propel new discoveries.

[Learn More](#)

▶ [Explore Models](#)



H14 8-GPU System

Next-Gen Large Scale AI Training Platform



When artificial intelligence (AI) workloads can tap into massive computational power, scientists and researchers can solve the unsolvable. Supermicro unleashes the power of large-scale infrastructure with a server built with our proven AI building-block system and powered by 5th Gen AMD EPYC™ processors and AMD Instinct™ MI3XX GPUs.

▶ View System Specs

▶ View Product Lines

Download Datasheet

System Highlights



AMD Instinct-Accelerated Server

The server hosts the AMD Instinct MI350 and MI325X Platforms, an industry-standard-based universal baseboard (UBB 2.0) model with 8 AMD Instinct accelerators and a total of 2 TB of HBM3 memory to help process the most demanding AI models. The Instinct MI325X boasts an improved HBM memory system with a 33% increase in HBM3 memory compared to the prior-generation MI300X, and 6 TB/s memory bandwidth. It is designed to hold a one-trillion parameter model in its memory. Along with a 25% improvement in FP8 throughput, it brings delivered teraFLOPS to 1565, speeding AI inference and model fine tuning. Native sparsity support helps save power, use fewer compute cycles, and reduce memory use. Each accelerator on the UBB platform connects to the other seven with 128 GB/s AMD Infinity Fabric™ Link technology for an aggregate 896 GB/s capacity. Each accelerator can connect to the host through 16 lanes of PCIe 5.0 bandwidth, and the AS-8126GS-TNMR2 is optimized for I/O throughput. Together, these features give the capacity to propel the most challenging AI workloads and large-language models.



Balanced System Design

You can achieve faster time to results when accelerators can consume the data they need—when they need it. AMD EPYC 9005 Series processors provide up to 192 cores per CPU and up to 9 TB of memory for the parallelism you need to manage data before and/or after processing by the GPU. For tasks requiring fast per-core speed with less parallelism, the 64-core, frequency-optimized, EPYC 9575F is AI-optimized to deliver exceptional performance per core and per thread.

This AI building-block server is designed to provide each accelerator with x16 connectivity to a dedicated 400-Gbps networking device and to the host CPU—so whether data is arriving from main memory or a networked-based data lake, it can transfer directly to accelerator memory. When buffering is needed, each GPU is switched to two x8 hot-swap NVMe drive slots for a total of 16 drives dedicated to GPUs per server.

The AMD EPYC CPU's system-on-chip (SoC) design supports built-in functions including IPMI-based management, on-board M.2 drive, and built-in SATA controllers for two drives. The SoC-oriented design reduces the number of external chip sets, helping to reduce complexity and power consumption. Titanium-Level power supplies keep the GPUs accelerating your workloads while dual-zone cooling with 10 counter-rotating fans keep the accelerators within their thermal envelopes.

Key Applications:

- Large Scale Deep Learning
- Large Language Model Training
- AI-fused HPC applications
- Industrial Automation
- Business Intelligence & Analytics



Streamline Deployment at Scale for the Largest AI and Large-Language Models

Proven 8U high-performance fabric 8-GPU system design with AMD Instinct™ MI325X accelerators:

- Industry-standard OCP accelerator module (OAM) with 8 GPUs interconnected on an AMD universal base board (UBB 2.0)
- Industry-leading 2TB of HBM3 memory in a single server node
- 400-Gbps networking dedicated to each GPU for large-scale AI and HPC clusters
- 2-socket design supports 4th and 5th Gen AMD EPYC™ Processors
- Up to 24 DIMMs for up to 9 TB of DDR5-6000 memory (with 5th Gen AMD EPYC processors)
- Flexible PCIe 5.0 options for I/O and networking
- Titanium-Level efficiency power supplies



Open Management

Regardless of your data center's management approach, our open management APIs and tools are ready to support you. In addition to a dedicated IPMI port, and a Web IPMI interface, Supermicro® SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, industry-standard Redfish® APIs provide access to higher-level tools and scripting languages.



Fast Time to Value with the AMD ROCm Platform

Whatever the source of your AI platforms, AMD ROCm™ software opens doors to new levels of freedom. With support for open frameworks like PyTorch and TensorFlow, ROCm simplifies AI model migration and deployment, optimizing hardware efficiency with minimal code changes. Through strategic partnerships with AI leaders such as OpenAI, PyTorch, Hugging Face, and Databricks, the ROCm ecosystem delivers high-performance, out-of-the-box AI solutions, empowering enterprises to meet their goals with seamless integration and robust partner support.

Featured System Specs



Memory Slots & Capacity
Up to 24 DIMMs for up to 9 TB of DDR5-6000 memory



Processor Support
- Dual SP5 sockets for AMD EPYC™ 9004 Series processors up to 400W or AMD EPYC 9005 Series processors up to 500W (two CPUs required)
- Up to 128 cores (EPYC 9004 Series) or 192 cores (EPYC 9005 Series) per CPU



I/O Ports
- 1 RJ45 Dedicated IPMI LAN port
- 2 USB 3.0 Ports (rear)
- 1 VGA Connector

or 2 TB of HBM3 memory to help process the most demanding AI models. The instance MI325X boasts an improved HBM memory system with a 33% increase in HBM3 memory compared to the prior-generation MI300X, and 6 TB/s memory bandwidth. It is designed to hold a one-trillion parameter model in its memory. Along with a 25% improvement in FP8 throughput, it brings delivered teraFLOPS to 1565, speeding AI inference and model fine tuning. Native sparsity support helps save power, use fewer compute cycles, and reduce memory use. Each accelerator on the UBB platform connects to the other seven with 128 GB/s AMD Infinity Fabric™ Link technology for an aggregate 896 GB/s capacity. Each accelerator can connect to the host through 16 lanes of PCIe 5.0 bandwidth, and the AS-8126GS-TNMR2 is optimized for I/O throughput. Together, these features give the capacity to propel the most challenging AI workloads and large-language models.



Balanced System Design

You can achieve faster time to results when accelerators can consume the data they need—when they need it. AMD EPYC 9005 Series processors provide up to 192 cores per CPU and up to 9 TB of memory for the parallelism you need to manage data before and/or after processing by the GPU. For tasks requiring fast per-core speed with less parallelism, the 64-core, frequency-optimized, EPYC 9575F is AI-optimized to deliver exceptional performance per core and per thread.

This AI building-block server is designed to provide each accelerator with x16 connectivity to a dedicated 400-Gbps networking device and to the host CPU—so whether data is arriving from main memory or a networked-based data lake, it can transfer directly to accelerator memory. When buffering is needed, each GPU is switched to two x8 hot-swap NVMe drive slots for a total of 16 drives dedicated to GPUs per server.

The AMD EPYC CPU's system-on-chip (SoC) design supports built-in functions including IPMI-based management, on-board M.2 drive, and built-in SATA controllers for two drives. The SoC-oriented design reduces the number of external chip sets, helping to reduce complexity and power consumption. Titanium-Level power supplies keep the GPUs accelerating your workloads while dual-zone cooling with 10 counter-rotating fans keep the accelerators within their thermal envelopes.

- 400-Gbps networking dedicated to each GPU for large-scale AI and HPC clusters
- 2-socket design supports 4th and 5th Gen AMD EPYC™ Processors
- Up to 24 DIMMs for up to 9 TB of DDR5-6000 memory (with 5th Gen AMD EPYC processors)
- Flexible PCIe 5.0 options for I/O and networking
- Titanium-Level efficiency power supplies



Open Management


Regardless of your data center's management approach, our open management APIs and tools are ready to support you. In addition to a dedicated IPMI port, and a Web IPMI interface, Supermicro® SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, industry-standard Redfish® APIs provide access to higher-level tools and scripting languages.



Fast Time to Value with the AMD ROCm Platform

Whatever the source of your AI platforms, AMD ROCm™ software opens doors to new levels of freedom. With support for open frameworks like PyTorch and TensorFlow, ROCm simplifies AI model migration and deployment, optimizing hardware efficiency with minimal code changes. Through strategic partnerships with AI leaders such as OpenAI, PyTorch, Hugging Face, and Databricks, the ROCm ecosystem delivers high-performance, out-of-the-box AI solutions, empowering enterprises to meet their goals with seamless integration and robust partner support.

Featured System Specs



Memory Slots & Capacity

Up to 24 DIMMs for up to 9 TB of DDR5-6000 memory



Processor Support

- Dual SP5 sockets for AMD EPYC™ 9004 Series processors up to 400W or AMD EPYC 9005 Series processors up to 500W (two CPUs required)
- Up to 128 cores (EPYC 9004 Series) or 192 cores (EPYC 9005 Series) per CPU



I/O Ports

- 1 RJ45 Dedicated IPMI LAN port
- 2 USB 3.0 Ports (rear)
- 1 VGA Connector



Shared Power

6x or 8x 3000W N+N redundant Titanium-Level power supplies



Storage

- 12 PCIe 5.0 x4 NVMe U.2 drives
- 4 PCIe 5.0 x4 NVMe U.2 drives (optional)
- 1 M.2 NVMe/SATA boot drive
- 2 hot-swap 2.5" SATA drives



Expansion Slots

- 8 PCIe 5.0 x16 low-profile slots connected to GPU via PCIe switch
- 2 PCIe 5.0 x16 full-height full-length slots
- Optional 2 PCIe 5.0 x16 slots via expansion kit



Form Factor

8U air-cooled rackmount
4U liquid-cooled rackmount

Featured Product Lines



AS-8126GS-TNMR2



View Details



AS-4126GS-NMR-LCC



View Details



Back to top



Back to H14 Models



Next Server



5 / 17





H14 FlexTwin System

Deliver Fast Time to Results with this Purpose-Built HPC System



AMD
EPYC

Purpose built for high-performance computing (HPC) applications, the H14 FlexTwin™ system is designed to help overcome challenges including delivering high performance, optimizing costs, working within limited space, power, and cooling constraints, and easing the challenges of cluster management and maintenance.

▶ View System Specs

▶ View Product Lines

Download Datasheet

System Highlights



Designed for High-Performance Computing

his multi-node system is designed for high density, with four 2-socket servers per 2U chassis. Equipped with the latest AMD EPYC™ 9005 Series CPUs with up to 192 cores, each chassis can host up to 1536 CPU cores for up to 36,864 cores per 48U rack. The capability to use the most dense server processors available is made possible through direct liquid cooling for each CPU combined with midplane fans to cool memory and I/O components.



Built for Increased Density and Energy Efficiency

Deployed in large clusters, the H14 FlexTwin system combines AMD's tradition of developing highly energy-efficient CPUs with the precise nature of liquid cooling. These two factors help to lower your data center's Power Usage Effectiveness (PUE) and aid in reaching your sustainability goals. Combining direct liquid cooling with rear-door heat exchangers can make your FlexTwin deployments neutral with respect to data center cooling.



Cost-Optimized Deployment

The system is designed to integrate through an optimized 200-Gbps HDR InfiniBand fabric architecture using in-row switching. This, along with improved serviceability, helps to reduce both capital and operating expenses.



Improved RAS

When you build a cluster of high-density servers, the last thing you need is for a failure to interrupt your workload. Each pair of servers is supported by up to two power supplies for N+N power connected directly to servers without cables that can contribute to failures [True?]. Redundant power combined with liquid cooling contribute to reliability, especially when using Supermicro cooling systems. In the event of a I/O interface, drive, or node failure, all components are hot pluggable in both the front and rear of the chassis. Serviceability is enhanced with L10 through L12 rack-level validation, and easily accessible front- and rear-panel I/O components. Internal M.2 drives can be configured with hardware RAID to minimize the impact of data errors on overall availability.

Key Applications:

- HPC
- Oil and Gas
- Scientific Research
- National Labs



4-Node-Per-Chassis 2U High-Density High-Performance Compute System

Maximize performance through liquid cooling:

- Liquid cooled, multi-node system for CPUs up to 500W
- 2 AMD EPYC™ 9005 Series CPUs per node for up to 8 CPUs and 1536 cores per chassis
- 24 DIMM slots per node for up to 9 TB of DDR5-6000 memory
- Flexible options for I/O and storage
- N or N+N redundant Titanium level power supplies



Open Management

Our approach to management enables you to deliver the scale your organization requires. SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, our accessible RedFish-compliant API provides access to higher-level tools and scripting languages. Regardless of your datacenter's management approach, our open management APIs and tools are ready to support you.



Power Your HPC Workloads

You can configure nodes to meet your HPC needs. For example with an InfiniBand card in the front-panel-accessible PCIe 5.0 slot and 100 Gigabit Ethernet in the rear AIOM/OCPI 3.0 slot. The system can be equipped with up to two front-panel E1.S drives and two internal M.2 drives.



Featured System Specs



Memory Slots & Capacity

24 DIMM slots for DDR5-6000 MHz RDIMM; up to 9 TB registered ECC



Processor Support

Dual SP5 socket for up to two AMD EPYC™ 9005 Series processor. Up to 192 cores, up to 500W TDP per socket



I/O Ports

- 1 RJ45 Dedicated IPMI LAN port
- 2 USB 3.0 ports (front)
- 1 VGA (front)
- 1 TPM 2.0 header
- Hardware root of trust

chassis. Equipped with the latest AMD EPYC™ 9005 Series CPUs with up to 192 cores, each chassis can host up to 1536 CPU cores for up to 36,864 cores per 48U rack. The capability to use the most dense server processors available is made possible through direct liquid cooling for each CPU combined with midplane fans to cool memory and I/O components.



Built for Increased Density and Energy Efficiency

Deployed in large clusters, the H14 FlexTwin system combines AMD's tradition of developing highly energy-efficient CPUs with the precise nature of liquid cooling. These two factors help to lower your data center's Power Usage Effectiveness (PUE) and aid in reaching your sustainability goals. Combining direct liquid cooling with rear-door heat exchangers can make your FlexTwin deployments neutral with respect to data center cooling.



Cost-Optimized Deployment

The system is designed to integrate through an optimized 200-Gbps HDR InfiniBand fabric architecture using in-row switching. This, along with improved serviceability, helps to reduce both capital and operating expenses.



Improved RAS

When you build a cluster of high-density servers, the last thing you need is for a failure to interrupt your workload. Each pair of servers is supported by up to two power supplies for N+N power connected directly to servers without cables that can contribute to failures. Redundant power combined with liquid cooling contribute to reliability, especially when using Supermicro cooling systems. In the event of a I/O interface, drive, or node failure, all components are hot pluggable in both the front and rear of the chassis. Serviceability is enhanced with L10 through L12 rack-level validation, and easily accessible front- and rear-panel I/O components. Internal M.2 drives can be configured with hardware RAID to minimize the impact of data errors on overall availability.

cores per chassis

- 24 DIMM slots per node for up to 9 TB of DDR5-6000 memory
- Flexible options for I/O and storage
- N or N+N redundant Titanium level power supplies



Open Management

Our approach to management enables you to deliver the scale your organization requires. SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, our accessible RedFish-compliant API provides access to higher-level tools and scripting languages. Regardless of your datacenter's management approach, our open management APIs and tools are ready to support you.



Power Your HPC Workloads

You can configure nodes to meet your HPC needs. For example with an InfiniBand card in the front-panel-accessible PCIe 5.0 slot and 100 Gigabit Ethernet in the rear AIOM/OCF 3.0 slot. The system can be equipped with up to two front-panel E1.S drives and two internal M.2 drives.



Featured System Specs



Memory Slots & Capacity

24 DIMM slots for DDR5-6000 MHz RDIMM; up to 9 TB registered ECC



Processor Support

Dual SP5 socket for up to two AMD EPYC™ 9005 Series processor. Up to 192 cores, up to 500W TDP per socket



I/O Ports

- 1 RJ45 Dedicated IPMI LAN port
- 2 USB 3.0 ports (front)
- 1 VGA (front)
- 1 TPM 2.0 header
- Hardware root of trust



Shared Power

2-4 Titanium Level power supplies up to 3200W with N or N+N availability configurations



Storage

Up to 2 E1.S drives per node (optional). Up to 2 M.2 drives with optional hardware RAID per node



Expansion Slots

- 1 full-height, half-length, PCIe Gen 5 x16 slot (front, optional)
- 1 low-profile PCIe Gen 5 x16 (rear)
- 1 PCIe Gen 5 x16 AIOM/OCF 3.0 slot (rear)



Form Factor

2U rackmount

Featured Product Lines



AS-2126FT-HE-LCC



View Details



Back to top



Back to H14 Models



Next Server



6 / 17



H14 GrandTwin® Systems

Leading Multi-node Architecture with Front or Rear I/O



Designed for maximum density, the GrandTwin™ server is built on a multi-node architecture for to exploit the performance of 4th and 5th Gen AMD EPYC processors for high single-CPU performance. The H14 update to the GrandTwin design includes the capability to support up to 160 cores in EPYC 9005 Series processors, higher thermal capability, and an optional PCIe 5.0 x16 AIOM slot. The GrandTwin system delivers high performance in a modular design that can be optimized for a wide range of options, with the capability to add or remove components as needed to match data center needs.

▶ View System Specs

▶ View Product Lines

↓ Download Datasheet

System Highlights



Modular Multi-node System with Front I/O

This Supermicro multi-node system is designed for applications that need a large number of discrete servers with high-speed interconnects for networked or clustered operations. They are ideal for virtualized and nonvirtualized applications including:

- Hyperconverged infrastructure and scale-out storage applications where a balanced set of resources is key
- High-performance computing including EDA simulation, computational fluid dynamics, and weather modeling
- Content-delivery networks where a large number of network streams need to run in parallel
- Back-end infrastructure for mobile devices including gaming, voice recognition, and mapping services
- Cloud computing where a large number of cores are needed to deliver high performance to each virtual machines
- Big data analytics that combine scale-out storage with the need for high compute capacity for data analysis

These 2U servers optimize compute, memory, and I/O resources to deliver maximum density—four single-socket nodes in only two rack units. In this front-I/O system, all storage, networking, and node trays are accessible from the cold aisle, simplifying installation and servicing in space-constrained environments.

Each of the four nodes host a single AMD EPYC 9005 or 9004 Series CPU with up to 192 cores, up to 16 DIMMs for a total of 6 TB of DDR5-6000 memory (with EPYC 9005 Series), up to four U.2 NVMe or SATA drives with PCIe 5.0 connectivity, two M.2 slots for boot drives, and a range of networking options to keep data flowing freely through these powerful servers. Dual redundant 2200W power supplies economize on power and cooling.



GrandTwin Front I/O Node

The A+ Server 2116GT-HNTF has all storage and I/O accessible from the front panel. Each node supports up to four U.2 NVMe or SATA drives and a front I/O card with options including dual 10 or 25 Gigabit Ethernet, or single 100 Gigabit Ethernet interfaces.

For even more demanding network needs, the left pair of drive bays can be interchanged for a Supermicro Advanced I/O Module (AIOM) cage that supports OCP 3.0 interfaces.

Key Applications:

- EDA
- Cloud
- CDN
- HPC



2U, 4-Node-Per-Chassis Flexible Architecture

Maximize resource savings through shared power and cooling

- AMD EPYC™ 9005 or 9004 Series processor with up to 6 TB of DDR5-6000 memory per node
- Up to four 2.5" NVMe or SATA drives per node
- PCIe 5.0 with CXL 2.0 support
- Front I/O configuration enables field service from cold aisle to help reduce downtime
- Flexible networking options with PCIe 5.0 OCP 3.0 interfaces
- Redundant Titanium level shared power supplies




Open Management

Regardless of your data center's management approach, our open management APIs and tools are ready to support you. In addition to a dedicated IPMI port, and a Web IPMI interface per node, Supermicro® SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, industry-standard Redfish® APIs provide access to higher-level tools and scripting languages.



Featured System Specs



Memory Slots & Capacity
12 DIMM slots; speeds up to



Processor Support
Single SP5 socket for AMD EPYC™ 9004



I/O Ports
-1 RJ45 dedicated IPMI management port

- Hyperconverged infrastructure and scale-out storage applications where a balanced set of resources is key
- High-performance computing including EDA simulation, computational fluid dynamics, and weather modeling
- Content-delivery networks where a large number of network streams need to run in parallel
- Back-end infrastructure for mobile devices including gaming, voice recognition, and mapping services
- Cloud computing where a large number of cores are needed to deliver high performance to each virtual machines
- Big data analytics that combine scale-out storage with the need for high compute capacity for data analysis

These 2U servers optimize compute, memory, and I/O resources to deliver maximum density—four single-socket nodes in only two rack units. In this front-I/O system, all storage, networking, and node trays are accessible from the cold aisle, simplifying installation and servicing in space-constrained environments.

Each of the four nodes host a single AMD EPYC 9005 or 9004 Series CPU with up to 192 cores, up to 16 DIMMs for a total of 6 TB of DDR5-6000 memory (with EPYC 9005 Series), up to four U.2 NVMe or SATA drives with PCIe 5.0 connectivity, two M.2 slots for boot drives, and a range of networking options to keep data flowing freely through these powerful servers. Dual redundant 2200W power supplies economize on power and cooling.



GrandTwin Front I/O Node

The A+ Server 2116GT-HNTF has all storage and I/O accessible from the front panel. Each node supports up to four U.2 NVMe or SATA drives and a front I/O card with options including dual 10 or 25 Gigabit Ethernet, or single 100 Gigabit Ethernet interfaces.

For even more demanding network needs, the left pair of drive bays can be interchanged for a Supermicro Advanced I/O Module (AIOM) cage that supports OCP 3.0 interfaces.



Open Management

Regardless of your data center's management approach, our open management APIs and tools are ready to support you. In addition to a dedicated IPMI port, and a Web IPMI interface per node, Supermicro® SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, industry-standard Redfish® APIs provide access to higher-level tools and scripting languages.



Featured System Specs



Memory Slots & Capacity
12 DIMM slots; speeds up to 6000MT/s with up to 9TB



Processor Support

Single SPS socket for AMD EPYC™ 9004 or 9005 Series processors, including those with AMD 3D V-Cache™ technology, up to 192 cores, up to 500W TDP2



I/O Ports

- 1 RJ45 dedicated IPMI management port
- 2 USB 3.0 ports with USB 2.0 speed
- 1 USB 3.0 port with display port support
- ASPEED AST2600 BMC graphics



Shared Power

Redundant up to 2000W Titanium Level M-CRPS



Storage

Up to 12 hot-swap 2.5" NVMe/SAS/SATA drive bays
2 M.2 slots



Expansion Slots

2 PCIe 5.0 x16 FHHL



Form Factor

1U rackmount

Featured Product Lines



AS-2116GT-HNTF



[View Details](#)



[Back to top](#)



[Back to H14 Models](#)



[Next Server](#)



7 / 17



H14 Hyper Systems

Flexible and High Performance for Enterprise Data Centers



You can't successfully run an enterprise data center with one-off servers dedicated to specific purposes, where inconsistencies, oversights, or configuration errors can imperil application availability. Our second-generation H14 Hyper DP servers are dedicated to delivering a hyper level of performance and storage I/O operations per second (IOPS), with even more flexibility. Both systems are based on the same motherboard, firmware, and have the same operating system support. Let your servers be hyper, while you relax with a simpler and more easily managed data center.

► [View System Specs](#)

► [View Product Lines](#)

↓ [Download Datasheet](#)

System Highlights



Introducing H14 Hyper Systems

Our H14 Hyper systems are your new flagship data center systems, certified to run the major enterprise applications while affording you a flexible range of computing, networking, storage, and I/O expansion capabilities. Choose NVMe, SAS, or SAS storage to achieve the number of I/O operations per second (IOPS) your applications need to perform at their best. And use Open Compute Project (OCP) 3.0 add-in modules (AIOMs) for consistent and standard networking capabilities across all of your server deployments.

Every one of our H14 Hyper systems is based on the same motherboard with two AMD EPYC™ 9005 or 9004 Series CPUs. Equip these servers with up to 24 of the fastest DDR5-6000 DIMMs for up to 9 TB of main memory. Consistency means you have only one set of firmware, BIOS settings, and operating system patches to manage. Every system built on this motherboard is designed for reliability, availability and serviceability so that if a problem occurs, your applications can be back up and running quickly.



Designed for Enterprise Applications

You need high performance for your enterprise applications. The flexible selection of density and storage capacity gives you a high-performance server for every purpose, including:

- Virtualization and cloud, including virtual desktop infrastructure with GPU acceleration
- Scale-out, clustered software-defined storage
- Hyperconverged infrastructure
- Enterprise applications including database, customer relationship management, and enterprise resource planning
- High performance computing clusters



Key Applications:

- Enterprise
- Cloud Computing
- HPC
- HCI



Enterprise-focused platform designed for utmost performance and flexibility

Gain high performance, flexibility, scalability and serviceability for demanding IT environments, and power mission-critical enterprise workloads.

- Two AMD EPYC 9005 or 9004 Series processors
- 24 DIMMs for up to 9 TB of DDR5-6000 memory
- Flexible NVMe, SAS, and SATA3 drive options
- Configurable PCIe 5.0 expansion capabilities with CXL 2.0 memory expansion and pooling
- Open Compute Project (OCP) 3.0 AIOM slots
- Titanium-Level efficiency power supplies with AC and DC options



Open Management


Our open management APIs and tools are ready to support you. In addition to a dedicated IPMI port, and a Web IPMI interface, Supermicro® SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, industry-standard Redfish® APIs provide access to higher-level tools and scripting languages.



Consistent Deployment

You get consistent, tool-less deployment and maintenance of both the motherboard and the systems themselves. And our versatile motherboard powers all three of our H14 Hyper systems. Each system has configuration options that enable varying numbers of expansion slots and disk drives, simply by ordering or swapping in the appropriate kits. This means that you can have systems tailored to application needs but with complete architectural consistency. This helps to reduce the chance of errors that can cause downtime, and ease the need for staff to train on multiple server types. With H14 Hyper systems, they are all based on the same infrastructure.

Featured System Specs



Memory Slots & Capacity

24 DIMM slots DDR5; speeds up to 6000MT/s with up to 9TB



Processor Support

Dual AMD EPYC™ 9005 series processors



I/O Ports

- Integrated IPMI 2.0 plus KVM with dedicated LAN
- Up to 3 USB 3.0 ports
- 1 VGA port
- 1 TPM 2.0 header
- ASPEED AST2600 BMC graphics



Shared Power

Up to Redundant up to 2600W Titanium Level or Up to Redundant up to 2000W DC



Storage

Up to 24 hot-swap 2.5" NVMe/SAS/SATA drive bays



Expansion Slots

Up to 4 PCIe 5.0 x16 FHFL or Up to 8 PCIe 5.0 x8 FHFL



Introducing H14 Hyper Systems

Our H14 Hyper systems are your new flagship data center systems, certified to run the major enterprise applications while affording you a flexible range of computing, networking, storage, and I/O expansion capabilities. Choose NVMe, SATA, or SAS storage to achieve the number of I/O operations per second (IOPS) your applications need to perform at their best. And use Open Compute Project (OCP) 3.0 add-in modules (AIOMs) for consistent and standard networking capabilities across all of your server deployments.

Every one of our H14 Hyper systems is based on the same motherboard with two AMD EPYC™ 9005 or 9004 Series CPUs. Equip these servers with up to 24 of the fastest DDR5-6000 DIMMs for up to 9 TB of main memory. Consistency means you have only one set of firmware, BIOS settings, and operating system patches to manage. Every system built on this motherboard is designed for reliability, availability and serviceability so that if a problem occurs, your applications can be back up and running quickly.



Designed for Enterprise Applications

You need high performance for your enterprise applications. The flexible selection of density and storage capacity gives you a high-performance server for every purpose, including:

- Virtualization and cloud, including virtual desktop infrastructure with GPU acceleration
- Scale-out, clustered software-defined storage
- Hyperconverged infrastructure
- Enterprise applications including database, customer relationship management, and enterprise resource planning
- High performance computing clusters

- Flexible NVMe, SAS, and SATA3 drive options
- Configurable PCIe 5.0 expansion capabilities with CXL 2.0 memory expansion and pooling
- Open Compute Project (OCP) 3.0 AIOM slots
- Titanium-Level efficiency power supplies with AC and DC options



Open Management

Our open management APIs and tools are ready to support you. In addition to a dedicated IPMI port, and a Web IPMI interface, Supermicro® SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, industry-standard Redfish® APIs provide access to higher-level tools and scripting languages.



Consistent Deployment

You get consistent, tool-less deployment and maintenance of both the motherboard and the systems themselves. And our versatile motherboard powers all three of our H14 Hyper systems. Each system has configuration options that enable varying numbers of expansion slots and disk drives, simply by ordering or swapping in the appropriate kits. This means that you can have systems tailored to application needs but with complete architectural consistency. This helps to reduce the chance of errors that can cause downtime, and ease the need for staff to train on multiple server types. With H14 Hyper systems, they are all based on the same infrastructure.

Featured System Specs



Memory Slots & Capacity

24 DIMM slots DDR5; speeds up to 6000MT/s with up to 9TB



Processor Support

Dual AMD EPYC™ 9005 series processors



I/O Ports

- Integrated IPMI 2.0 plus KVM with dedicated LAN
- Up to 3 USB 3.0 ports
- 1 VGA port
- 1 TPM 2.0 header
- ASPEED AST2600 BMC graphics



Shared Power

Up to Redundant up to 2600W Titanium Level or Up to Redundant up to 2000W DC



Storage

Up to 24 hot-swap 2.5" NVMe/SAS/SATA drive bays



Expansion Slots

Up to 4 PCIe 5.0 x16 FHFL or Up to 8 PCIe 5.0 x8 FHFL



Form Factor

1U rackmount

Featured Product Lines



AS-1126HS-TN

[View Details](#)



AS-2126HS-TN

[View Details](#)



[Back to top](#)



[Back to H14 Models](#)



[Next Server](#)



8 / 17



H14 CloudDC System

All-In-One Server with Flexible I/O for Cloud-Scale Deployment



A server designed to shift the market from monolithic architectures to a modular design, the H14 CloudDC system is compliant with the OCP Data Center – Modular Hardware System (DC-MHS) standard. This yields a scalable and easily pluggable system that will be increasingly interoperable throughout your data center with standardized interfaces and form factors. This server is ready to take you into the future with cost-optimized services in an increasingly competitive business climate.

▶ View System Specs

▶ View Product Lines

Download Datasheet

System Highlights



Cloud-Optimized Single-Socket Systems

H14 CloudDC systems are single-socket systems optimized for AMD EPYC™ 9005 Series processors with up to 192 cores and 384 threads—ready to power a wide range of cloud workloads. The capacity for up to 4.5 TB of memory accessed through twelve high-speed channels provides the right balance of CPU-to-memory resources to power workloads ranging from financial services to virtualization. Internally, the system utilizes 128 PCIe 5.0 lanes that support high-speed, high-bandwidth networking and storage. The H14 CloudDC system is designed to be multi-generational, with the capability to drop in a prior-generation AMD EPYC 9004 Series processor or one with AMD 3D V-Cache™.



Advanced I/O

The H14 CloudDC line supports an Open Compute Project (OCP) 3.0-compliant Supermicro Advanced I/O Modules (AIOM) with x16 PCIe 5.0 connectivity. This enables you to dial in the type and bandwidth of network connectivity that meets your business needs. Support 100 Gigabit Ethernet to connect with the network you have in place today, as well as 200-Gbps InfiniBand connectivity for extremely high-bandwidth, low-latency cluster interconnections. The system's two full-height, half-length PCIe 5.0 x16 slots support CXL 2.0 for extended and tiered memory.



Designed for AMD EPYC Processors

A single AMD EPYC processor gives you a no-compromise single-socket system, delivering the core density that once required two processors to achieve. With AMD you get more cores per dollar, more virtual instances on a server, and more subscribers in your data center. The CPU's 128 lanes of PCIe 5.0 connectivity eliminates the need to scale up computing power just to accommodate more I/O bandwidth. The system-on-chip nature of the processor eliminates the need for external chip sets that contribute to design complexity and power consumption. Best of all, you only need to purchase and power a single processor for a high-performing, highly configurable system.



Key Applications:

- Data Center
- Cloud Computing
- Virtualization



OCP-Compliant Single-Socket Server

Modular design compatibility and massive deployment

- Single-socket servers with up to 192 cores of 5th Gen AMD EPYC processor performance
- Built for compatibility with Open Compute Project (OCP) Data Center-Modular Hardware System (DC-MHS)
- Tool-less design for rapid deployment and easy maintenance
- Up to 4.5 TB of memory with 12 DDR5-6400 DIMMs (at 6000 MHz)
- Two PCIe 5.0 I/O slots with CXL 2.0 support
- 16-lane AIOM slot for flexible networking
- Up to 12 2.5" SAS, SATA, and NVMe drive options to meet virtually any workload storage requirements



Open Management

Regardless of your data center's management approach, our open management APIs and tools are ready to support you. The system's DC-SCM-compliant management includes an IPMI port, a Web IPMI interface, USB 2.0 and 3.0 connections. Supermicro® SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, industry-standard Redfish® APIs provide access to higher-level tools and scripting languages.




Modular, Tool-Less Design

Cloud data centers are all about scale, with a constant flow of new servers that scale capacity to new heights and also refresh existing infrastructure. The system's DC-MHS compliance gives you the capability to easily interchange components, or repair failures, without the need for tools other than for the motherboard. The front-panel-accessible drives and their brackets are hot swappable and require no tools. Rear-panel components including power supplies, PCIe devices, and AIOM cards are all tool-less. The chassis lid can be opened by hand and the DC-MHS mid-chassis fans pop out for replacement.



Featured System Specs



Memory Slots & Capacity
12 DIMM slots; speeds up to



Processor Support
Single SP5 socket for AMD EPYC™ 9004



I/O Ports
-1 RJ45 dedicated IPMI management port

high-speed channels provides the right balance of CPU-to-memory resources to power workloads ranging from financial services to virtualization. Internally, the system utilizes 128 PCIe 5.0 lanes that support high-speed, high-bandwidth networking and storage. The H14 CloudDC system is designed to be multi-generational, with the capability to drop in a prior-generation AMD EPYC 9004 Series processor or one with AMD 3D V-Cache™.

Advanced I/O

The H14 CloudDC line supports an Open Compute Project (OCP) 3.0-compliant Supermicro Advanced I/O Modules (AIOM) with x16 PCIe 5.0 connectivity. This enables you to dial in the type and bandwidth of network connectivity that meets your business needs. Support 100 Gigabit Ethernet to connect with the network you have in place today, as well as 200-Gbps InfiniBand connectivity for extremely high-bandwidth, low-latency cluster interconnections. The system's two full-height, half-length PCIe 5.0 x16 slots support CXL 2.0 for extended and tiered memory.

Designed for AMD EPYC Processors

A single AMD EPYC processor gives you a no-compromise single-socket system, delivering the core density that once required two processors to achieve. With AMD you get more cores per dollar, more virtual instances on a server, and more subscribers in your data center. The CPU's 128 lanes of PCIe 5.0 connectivity eliminates the need to scale up computing power just to accommodate more I/O bandwidth. The system-on-chip nature of the processor eliminates the need for external chip sets that contribute to design complexity and power consumption. Best of all, you only need to purchase and power a single processor for a high-performing, highly configurable system.

Open Management


Regardless of your data center's management approach, our open management APIs and tools are ready to support you. The system's DC-SCM-compliant management includes an IPMI port, a Web IPMI interface, USB 2.0 and 3.0 connections. Supermicro® SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, industry-standard Redfish® APIs provide access to higher-level tools and scripting languages.

Modular, Tool-Less Design

Cloud data centers are all about scale, with a constant flow of new servers that scale capacity to new heights and also refresh existing infrastructure. The system's DC-MHS compliance gives you the capability to easily interchange components, or repair failures, without the need for tools other than for the motherboard. The front-panel-accessible drives and their brackets are hot swappable and require no tools. Rear-panel components including power supplies, PCIe devices, and AIOM cards are all tool-less. The chassis lid can be opened by hand and the DC-MHS mid-chassis fans pop out for replacement.



Featured System Specs



Memory Slots & Capacity
12 DIMM slots; speeds up to 6000MT/s with up to 9TB



Processor Support
Single SP5 socket for AMD EPYC™ 9004 or 9005 Series processors, including those with AMD 3D V-Cache™ technology, up to 192 cores, up to 500W TDP2



I/O Ports
- 1 RJ45 dedicated IPMI management port
- 2 USB 3.0 ports with USB 2.0 speed
- 1 USB 3.0 port with display port support
- ASPEED AST2600 BMC graphics



Shared Power
Redundant up to 2000W Titanium Level M-CRPS



Storage
Up to 12 hot-swap 2.5" NVMe/SAS/SATA drive bays
2 M.2 slots



Expansion Slots
2 PCIe 5.0 x16 FHHL



Form Factor
1U rackmount

Featured Product Lines



AS-1116CS-TN1

[View Details](#)

[Back to top](#)

[Back to H14 Models](#)

[Next Server](#)



H14 5U PCIe Systems

Flexible, High Density GPU Systems for AI and HPC



Optimized for AI, Deep Learning, HPC, providing maximum acceleration, flexibility, high-performance and balanced solutions. Supermicro GPU-optimized systems support the latest PCI-E 5.0 accelerators and deliver a multitude of performance gains compared to previous generations.

The H14 GPU-optimized servers deliver unprecedented acceleration at every scale to power the worlds highest performing data centers for AI, data analytics, and HPC applications.

[View System Specs](#)

[View Product Lines](#)

[Download Datasheet](#)

System Highlights



Dual-Socket GPU-Optimized Server

To support AI, ML, and HPC workloads, we designed a family of servers with 16 lanes of PCIe 5.0 connectivity to up to ten GPUs, with support for the fastest accelerators from AMD and NVIDIA. To accelerate GPU-to-GPU connectivity, the family of servers support both AMD Infinity Fabric™ Link and NVIDIA® NVLink Bridge™ technologies. We have optimized these systems with a range of options that enable you to choose the right balance of computation, acceleration, I/O, and local storage to best suit your workload needs.



Designed with PCIe 5.0 Connectivity Throughout

The H13 family of 4U GPU servers is designed with PCIe 5.0 connectivity throughout, helping to speed the flow of data within the server and also to provide high network and cluster interconnect connectivity for scale-out applications. PCIe and Open Compute Project (OCP) 3.0 interfaces can support 100Gbps InfiniBand and 100 Gigabit Ethernet connectivity today, with the bandwidth to support 400 Gbps interfaces as they become available.

Each server in the family supports up to 6 TB of main memory. They are powered by redundant 2000W Titanium-Level power supplies and cooled by eight 11.5k RPM heavy-duty fans. This power and cooling infrastructure supports the fastest CPUs and GPU accelerators with either air or active or passive liquid cooling.



Key Applications:

- AI/ML
- 3D Rendering Farm
- HPC
- HCI



GPU-Dense Servers Optimized for ComputeIntensive Workloads

Support up to 10 GPU accelerators of your choice plus bandwidth to spare for networking and disk storage:

- PCIe 5.0 connectivity throughout including direct-connected, single-root, and dual-root options, plus CXL 1.1+ support
- Supports the latest GPUs, including AMD Instinct™ MI350P and NVIDIA® RTX Pro 6000
- 2-socket design supporting 5th Gen AMD EPYC™ Processors
- Flexible PCIe slot options for I/O and networking
- Titanium-Level efficiency power supplies



Open Management


Regardless of your data center's management approach, our open management APIs and tools are ready to support you. In addition to a dedicated IPMI port, and a Web IPMI interface, Supermicro® SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, industry-standard Redfish® APIs provide access to higher-level tools and scripting languages.



Made Possible by 5th Gen AMD EPYC processors

Our H14 servers are made possible by AMD EPYC™ 9005 Series Processors, with up to 192 cores per CPU and 384 per server (dual socket). You can choose the number of cores, cache size, and clock frequency appropriate for your application and the rest of the features are included at no cost.

Featured System Specs



Memory Slots & Capacity

Up to 24 DIMMs 9TB DDR5-6000 in 1DPC



Processor Support

Dual Socket AMD EPYC™ 9005/9004 Series Processors

Support up to 10 double-width PCIe accelerators



I/O Ports

- 2 RJ45 Gigabit Ethernet ports
- 1 RJ45 Dedicated IPMI LAN port
- 2 USB 3.0 Ports (rear)
- 1 VGA Connector
- 1 TPM 2.0 header



Shared Power

Up to 4x 2000W Titanium-Level power supplies with PMBus



Storage

Up to 8 front hot-swap 2.5" NVMe drive bays



Expansion Slots

Up to 13 PCIe 5.0 x16 FHFL slots



10 / 17





Dual-Socket GPU-Optimized Server

To support AI, ML, and HPC workloads, we designed a family of servers with 16 lanes of PCIe 5.0 connectivity to up to ten GPUs, with support for the fastest accelerators from AMD and NVIDIA. To accelerate GPU-to-GPU connectivity, the family of servers support both AMD Infinity Fabric™ Link and NVIDIA® NVLink Bridge™ technologies. We have optimized these systems with a range of options that enable you to choose the right balance of computation, acceleration, I/O, and local storage to best suit your workload needs.



Designed with PCIe 5.0 Connectivity Throughout

The H13 family of 4U GPU servers is designed with PCIe 5.0 connectivity throughout, helping to speed the flow of data within the server and also to provide high network and cluster interconnect connectivity for scale-out applications. PCIe and Open Compute Project (OCP) 3.0 interfaces can support 100Gbps InfiniBand and 100 Gigabit Ethernet connectivity today, with the bandwidth to support 400 Gbps interfaces as they become available.

Each server in the family supports up to 6 TB of main memory. They are powered by redundant 2000W Titanium-Level power supplies and cooled by eight 11.5k RPM heavy-duty fans. This power and cooling infrastructure supports the fastest CPUs and GPU accelerators with either air or active or passive liquid cooling.

- Root, and dual-root options, plus CXL 1.1+ support
- Supports the latest GPUs, including AMD Instinct™ MI350P and NVIDIA® RTX Pro 6000
- 2-socket design supporting 5th Gen AMD EPYC™ Processors
- Flexible PCIe slot options for I/O and networking
- Titanium-Level efficiency power supplies



Open Management

Regardless of your data center's management approach, our open management APIs and tools are ready to support you. In addition to a dedicated IPMI port, and a Web IPMI interface, Supermicro® SuperCloud Composer software helps you configure, maintain, and monitor all of your systems using single-pane-of-glass management. If your DevOps teams prefer to use their own tools, industry-standard Redfish® APIs provide access to higher-level tools and scripting languages.



Made Possible by 5th Gen AMD EPYC processors

Our H14 servers are made possible by AMD EPYC™ 9005 Series Processors, with up to 192 cores per CPU and 384 per server (dual socket). You can choose the number of cores, cache size, and clock frequency appropriate for your application and the rest of the features are included at no cost.

Featured System Specs



Memory Slots & Capacity

Up to 24 DIMMs 9TB DDR5-6000 in 1DPC



Processor Support

Dual Socket AMD EPYC™ 9005/9004 Series Processors

Support up to 10 double-width PCIe accelerators



I/O Ports

- 2 RJ45 Gigabit Ethernet ports
- 1 RJ45 Dedicated IPMI LAN port
- 2 USB 3.0 Ports (rear)
- 1 VGA Connector
- 1 TPM 2.0 header



Shared Power

Up to 4x 2000W Titanium-Level power supplies with PMBus



Storage

Up to 8 front hot-swap 2.5" NVMe drive bays



Expansion Slots

Up to 13 PCIe 5.0 x16 FHFL slots



Form Factor

5U rackmount

Featured Product Lines



AS-5126GS-TNRT

[View Details](#)



AS-5126GS-TNRT2

[View Details](#)



[Back to top](#)



[Back to H14 Models](#)



[Next Server](#)



10 / 17





H13 Generation Servers

World's Most Versatile Portfolio of AMD Processor-Based Systems Supporting AMD EPYC™ & Ryzen™ Series Processors

The most comprehensive portfolio of AMD processor-based systems, now featuring AMD EPYC™ 9005, 9004, 8004, and 4005 series processors. This includes servers, storage, GPU-optimized, blade, and multi-node solutions designed to precisely match your system requirements with your workload.



H13 Rackmount Servers

High Performance, Tool-less Designs for Easy Deployment and Maintenance

[Learn More](#)

H13 Multi-Node Servers

High density, configurable and power efficient systems supporting multiple single socket nodes

[Learn More](#)

H13 GPU Systems

Maximum Acceleration for AI/ Deep Learning and HPC

[Learn More](#)

H13 Storage Systems

Purpose-built All-Flash E3.S Petascale Storage Solution

[Learn More](#)

H13 Cost Optimized Systems

High Density, Energy Efficient, and Cost Optimized Solutions

[Learn More](#)[Next: H13 Rackmount Servers](#)

H13 Rackmount Servers

Offer ultimate flexibility where it counts with Supermicro

Tackle the most demanding workloads with the H13 Hyper series, the ultimate server built for performance and flexibility.

The Supermicro Hyper solutions are enterprise focused servers built with versatility and performance. Uncompromising performance design with dual processors and 12 channel 24 DIMMs optimized to support the highest TDPs and offering a flexible range of computing, networking, storage, and I/O expansion capabilities.



H13 CloudDC Servers deliver best-in-class serviceability features with a tool-less chassis design for streamlined deployment and simplified maintenance.

CloudDC are single socket servers optimized for I/O flexibility with many web and cloud-focused applications. Offering convenient serviceability with tool-less chassis, hot-swap drive trays, and redundant power supplies to ensure rapid deployment and efficient maintenance.



H13 Rackmount Featured Server Models

Hyper Systems

Industry Leading IOPS Rackmount Server with Energy Efficiency and Flexibility

[Learn More](#)



Hyper-U Systems

Flexible and Efficient Single-Socket Server Family

[Learn More](#)



CloudDC Systems

All-in-One Servers with Flexible I/O Options for Cloud Scale Data Centers

[Learn More](#)



H13 WIO Systems

Excellent Density and Energy Efficiency for Intelligent Edge

[Learn More](#)



H13 Short Depth Front I/O

Compact Front I/O design optimized for Telco deployments

[Learn More](#)



[Back to top](#)

[Next: H13 Multi-Node Servers](#)

H13 Hyper DP Systems

Industry Leading IOPS Rackmount Server with Energy Efficiency and Flexibility

H13 Hyper DP Systems



Industry Leading IOPS Rackmount Server with Energy Efficiency and Flexibility

The new H13 Hyper series brings next-generation versatility and performance to Supermicro's range of rackmount servers, built to take on the most demanding workloads along with the storage & I/O flexibility that provide customer fit for a wide range of application needs.

- Uncompromised performance design with 2 CPU sockets and 24 DIMMs optimized for supporting the highest processor TDPs
- Best-in-class server features including all NVMe, hybrid storage and low latency optimizations
- Vast networking and expansion possibilities with AIOM cards

[Download Datasheet](#)

Optimized for:

- ✓ Enterprise Server
- ✓ Big Data Analytics
- ✓ Virtualization
- ✓ Cloud Computing
- ✓ CDN
- ✓ Hyperconverged Storage
- ✓ AI Training/Inferencing
- ✓ In-Memory Database



Product Features



Form Factor

1U and 2U
Rackmount



Memory

24 x DIMM slots,
DDR5-4800 MHz
Memory support up to
6 TB



Power

Up to 2600W
Redundant Power
Supplies



Management

Tool-less design for
easy deployment and
maintenance



Processors

Supports 9005/9004
Series AMD EPYC™
Processors



Drives

Flexible NVMe and
SATA drive options



Input/Output

Up to 3 PCIe 5.0 x16 slots
(1U), or up to 4 PCIe 5.0
x16 slots/ 8 PCIe 5.0 x8
slots (2U)



Services

Worldwide Global
Services

Featured Product Lines



1U AS-1125HS-TNR

H13

[View Details](#)



2U AS-2025HS-TNR

H13

[View Details](#)



2U AS-2125HS-TNR


H13

[View Details](#)



[Back to featured H13 Rackmount Servers](#)

[Up Next: H13 Hyper-U Systems](#)

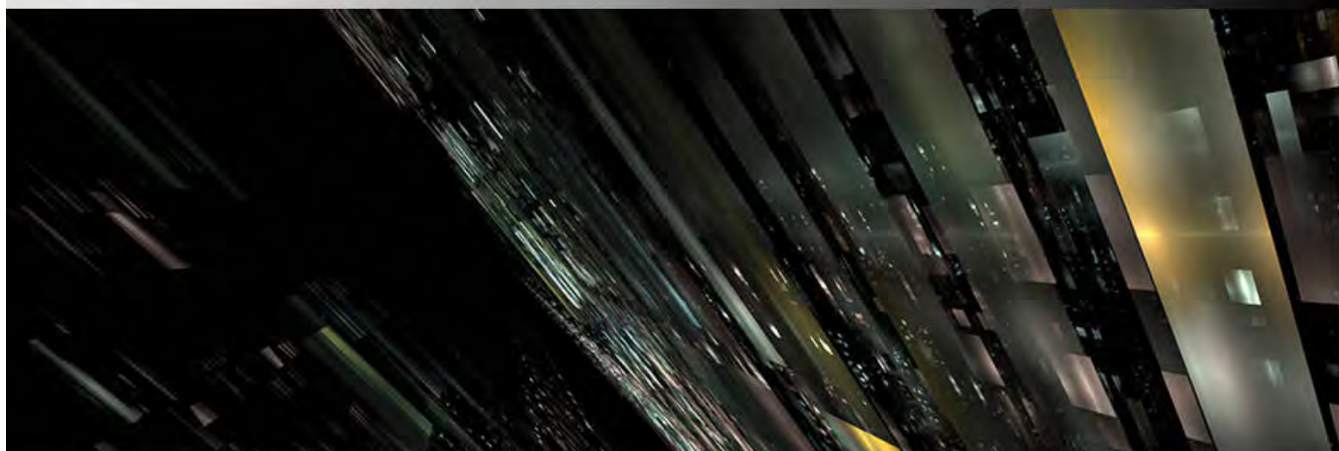

Key Applications:

- ✓ Enterprise Server
- ✓ Cloud Computing
- ✓ Virtualization
- ✓ AI Inference and Machine Learning
- ✓ Software-Defined Storage
- ✓ Blockchain workloads
- ✓ Media streaming applications



Featured Product Lines



Single-Socket AS -1115HS-TNR
H13

[View Details](#)



Single-Socket AS -2015HS-TNR
H13

[View Details](#)



Single-Socket AS -2115HS-TNR
H13

[View Details](#)

[Back to featured H13 Rackmount Servers](#)

[View all H13 CloudDC servers](#)

H13 CloudDC Servers

All-in-One Servers with Flexible I/O Options for Cloud Scale Data Centers



Ultimate flexibility on I/O and storage with 2 to 4 PCI-E 5.0 slots and dual AIOM slots (PCI-E 5.0; OCP 3.0 compliant) for maximum data throughput. Supermicro H13 CloudDC systems offer convenient serviceability with tool-less brackets, hot-swap drive trays and redundant power supplies that ensure a rapid deployment and more efficient maintenance in data centers.

The H13 CloudDC servers are designed for cost-effective service delivery in cloud computing environments, including Internet infrastructure including web hosting, email services, public and private cloud computing, and content-delivery networks (CDNs).

[Download Datasheet](#)

Optimized for:

- ✓ Cloud Computing
- ✓ Web servers
- ✓ CDN
- ✓ Hyper-converged Storage
- ✓ Head-node Computing
- ✓ Telcom Security Server



Product Features



Form Factor



Memory



Power



Management



Processors



Drives



Input/Output



Services

< 12 / 17 >

Product Features



Form Factor

1U and 2U Rackmount



Memory

12 x DIMM slots, DDR5-4800 MHz Memory



Power

Redundant 860W Titanium and 1200W Platinum Level PSUs



Management

Best-in-class serviceability features with tool-less chassis design



Processors

Supports Single 9005/9004 Series AMD EPYC™ Processors



Drives

Up to 12 hot-swap NVMe/SATA drives



Input/Output

Up to 4 PCIe 5.0 x16 & 2 AIOM NIC slots



Services

Worldwide Global Services

Featured Product Lines



AS -1015CS-TNR
H13

[View Details](#)



AS -1115CS-TNR
H13

[View Details](#)



AS -2015CS-TNR
H13

[View Details](#)

[Back to featured H13 Rackmount Servers](#)

[Up Next: H13 WIO Systems](#)

H13 WIO Systems

Excellent Density and Energy Efficiency for Intelligent Edge

AMD
EPYC

The Supermicro WIO systems are energy-efficient single socket (SP6) servers that lower the operating costs for enterprise, telco, and edge applications. The Supermicro WIO with Siena are designed for impressive performance balanced with cost, power, and flexible I/O options



Optimized for:

- ✓ Cloud Services
- ✓ Enterprise Edge
- ✓ Virtualization
- ✓ Database Storage
- ✓ Web Server
- ✓ DNS and Gateway Server

Product Features



Form Factor

1U and 2U Rackmount



Memory

6-channel DDR5 memory support

6 DIMM slots for up to 576 GB ECC DDR5-4800 RDIMM



Power

Redundant Titanium level power supply



Management

Best-in-class serviceability features with tool-less chassis design



Processors

Single SP6 socket for AMD EPYC™ 9005/9004/8004 Series processors, up to 64 cores, up to 225W TDP



Drives

Up to 12 hot-swap NVMe/SATA drives



Input/Output

2 PCIe 5.0 x16 FHFL slots

Up to 2 PCIe 5.0 x8 LP slots



Services

Worldwide Global Services

Featured Product Lines

Featured Product Lines



AS -1015SV-WTNRT
H13

[View Details](#)



AS -1115SV-WTNRT
H13

[View Details](#)



AS -2015SV-WTNRT
H13

[View Details](#)

[Back to featured H13 Rackmount Servers](#)

[Up Next: H13 Short Depth Front I/O](#)

Short Depth Front I/O

Compact Front I/O design optimized for Telco deployments



The short-depth front I/O system is a compact form factor solutions quieter than traditional servers, ideal for Telco and Edge deployments with space and thermal limitations. Powered by AMD EPYC 9005/9004/8004 series processor supporting operating temperatures of up to 40°55°, depending on the processor core count. The new systems use titanium power supplies for increased energy efficiency, resulting in higher performance per watt. The H13 Short depth front I/O system offers AC and DC options and features NEBS compliant design required for telco related operations.



Optimized for:

- ✓ Virtualization
- ✓ Edge Cloud AI Computing
- ✓ Telco 5G
- ✓ CDN/vCDN/Cloud CDN

Product Features



Form Factor

1U Rackmount



Memory

6 DIMM slots; Up to 576GB DDR5-4800



Power

Both AC and DC Power Supply Options Available



Management

Best-in-class serviceability features with tool-less chassis design



Processors

Single SP6 socket for AMD EPYC™ 9005/9004/8004 Series processors, up to 64 cores, up to 225W TDP



Drives

Up to 2 Internal 2.5" U.2 NVMe/SAS/SATA drives



Input/Output

2 PCIe 5.0 x16 FHFL Slots



Services

Worldwide Global Services

Featured Product Lines



AS -1115S-FWTRT (AC)
H13

[View Details](#)



AS -1115S-FDWTRT (DC)
H13

[View Details](#)



AS -1015SV-WTNR

H13

[View Details](#)



AS -1115SV-WTNR

H13

[View Details](#)



AS -2015SV-WTNR

H13

[View Details](#)



[Back to featured H13 Rackmount Servers](#)

[Up Next: H13 Short Depth Front I/O](#)

Short Depth Front I/O

Compact Front I/O design optimized for Telco deployments



The short-depth front I/O system is a compact form factor solutions quieter than traditional servers, ideal for Telco and Edge deployments with space and thermal limitations. Powered by AMD EPYC 9005/9004/8004 series processor supporting operating temperatures of up to 40~55°, depending on the processor core count. The new systems use titanium power supplies for increased energy efficiency, resulting in higher performance per watt. The H13 Short depth front I/O system offers AC and DC options and features NEBS compliant design required for telco related operations.



Optimized for:

- ✓ Virtualization
- ✓ Edge Cloud AI Computing
- ✓ Telco 5G
- ✓ CDN/vCDN/Cloud CDN

Product Features



Form Factor

1U Rackmount



Memory

6 DIMM slots; Up to 576GB DDR5-4800



Power

Both AC and DC Power Supply Options Available



Management

Best-in-class serviceability features with tool-less chassis design



Processors

Single SP6 socket for AMD EPYC™ 9005/9004/8004 Series processors, up to 64 cores, up to 225W TDP



Drives

Up to 2 Internal 2.5" U.2 NVMe/SAS/SATA drives



Input/Output

2 PCIe 5.0 x16 FHFL Slots



Services

Worldwide Global Services

Featured Product Lines



AS -1115S-FWTRT (AC)

H13

[View Details](#)



AS -1115S-FDWTRT (DC)

H13

[View Details](#)



[Back to featured H13 Rackmount Servers](#)

[Next: H13 Multi-Node Servers](#)



12 / 17



H13 A+ Multi Node Systems

Single processor performance, multiple configurations

Offer business customers an optimized solution for maximum density with high customizability to limit costs for greater value.

GrandTwin™ are the newest multi-node architecture with front or rear I/O, designed for maximum density.



High Density Multi-Node System for Cloud and Dedicated Hosting

3U multi-node server powered by AMD EPYC™ 4005/4004 series processors up to 10 single processor nodes delivering excellent density and power efficiency

H13 Multi Node Featured Server Models

GrandTwin Systems

Leading Multi-node Architecture with Front or Rear I/O

[Learn More](#)



MicroCloud Systems

High Density Multi-Node System for the Cloud

[Learn More](#)



[Back to top](#)

[Next: H13 GPU Systems](#)

H13 GrandTwin Systems

Leading Multi-node Architecture with Front or Rear I/O

AMD
EPYC

GrandTwin™ is an all-new multi-node architecture purpose-built for single-processor performance. The design maximizes compute, memory and efficiency to deliver maximum density. Powered by 4th Generation AMD EPYC™ Processors, GrandTwin's flexible modular design can be easily adapted for a wide range of applications, with the ability to add or remove components as required, reducing cost.

For front configurations, all I/O and node trays are fully accessible from the cold aisle, simplifying installation and servicing in space-constrained environments. Flexible storage and networking options are available via front AIOM modules, allowing countless custom configurations.

[Download Datasheet](#)

Optimized for:

- ✓ HCI
- ✓ Cloud Computing
- ✓ HPC
- ✓ Big Data Analytics



Optimized for:

- ✓ HCI
- ✓ HPC
- ✓ CDN
- ✓ Technical Computing (EDA, CFD, FEA)
- ✓ Cloud Computing
- ✓ Big Data Analytics
- ✓ Scale-Out Storage



Product Features



Form Factor

2U Rackmount



Memory

12x DIMM slots,
DDR5-4800Mhz
memory



Power

2x 2200W Redundant
Titanium Level Power
Supply



Management

BMC GbE LAN
Port(IPMI board)



Processors

Supports Single 4004
Series AMD EPYC™
Processors



Drives

Configurable up to six
2.5" drive bays
supporting NVMe or
SATA per node



Input/Output

Flexible networking
options with AIOM / OCP
3.0 support



Services

Worldwide Global
Services

Featured Product Lines



AS-2115GT-HNTR

H13

[View Details](#)



AS-2115GT-HNTF

H13

[View Details](#)



[Back to featured H13 Multi Node Systems](#)

[Up Next: H13 MicroCloud Systems](#)

H13 MicroCloud Systems

3U, 8-Node-Per-Chassis Flexible Architecture



Supermicro H13 MicroCloud is a 3U, multi-node server powered by AMD EPYC™ 4005/4004 series processor with up to 10 single-processor nodes delivering excellent density and power efficiency.

The MicroCloud system is designed for applications that require large numbers of discrete servers, offering up to 10 nodes containing up to two front accessible NVMe U.2 as well as up to 10 lane PCIe 5.0 low profile slots (or up to 5 FHFL option) that can be used for GPU accelerators for web hosting, cloud gaming, content delivery and virtual private servers.



[Download Datasheet](#)

Optimized for:

- ✓ Cloud Computing
- ✓ Web Cache, CDN, Video Streaming
- ✓ Corporate - WINS, DNS, Print, Login
- ✓ Web/Collocation Services
- ✓ Social Networking, Downloads



Product Features



Form Factor

3U Rackmount



Memory

Up to 192 GB DDR5-



Power

Redundant Titanium



Management

BMC GbE Lan Port



Processors

Supports 4005/4004



Drives

Up to 10 nodes or 5



Input/Output

PCIe 5.0 x10 low profile



Services

Worldwide Global



13 / 17





AS -2115GT-HNTR

H13

[View Details](#)



AS -2115GT-HNTF

H13

[View Details](#)



[Back to featured H13 Multi Node Systems](#)

[Up Next: H13 MicroCloud Systems](#)

H13 MicroCloud Systems

3U, 8-Node-Per-Chassis Flexible Architecture



Supermicro H13 MicroCloud is a 3U, multi-node server powered by AMD EPYC™ 4005/4004 series processor with up to 10 single-processor nodes delivering excellent density and power efficiency.

The MicroCloud system is designed for applications that require large numbers of discrete servers, offering up to 10 nodes containing up to two front accessible NVMe U.2 as well as up to 10 lane PCIe 5.0 low profile slots (or up to 5 FHFL option) that can be used for GPU accelerators for web hosting, cloud gaming, content delivery and virtual private servers.



[Download Datasheet](#)

Optimized for:

- ✓ Cloud Computing
- ✓ Web Cache, CDN, Video Streaming
- ✓ Corporate - WINS, DNS, Print, Login
- ✓ Web/Collocation Services
- ✓ Social Networking, Downloads



Product Features



Form Factor

3U Rackmount



Memory

Up to 192 GB DDR5-5200 memory



Power

Redundant Titanium level power supplies per system



Management

BMC Gbe Lan Port (IPMI board)



Processors

Supports 4005/4004 Series AMD EPYC™ Processors



Drives

Up to 10 nodes or 5 GPU/CPU nodes
NVMe U.2 / SAS/ SATA3 drives w/ optional kit



Input/Output

PCIe 5.0 x10 low profile expansion slot



Services

Worldwide Global Services

Featured Product Lines



Single-Socket AS -3015MR-H8TNR

H13

[View Details](#)



Single-Socket AS -3015MR-H10TNR

H13

[View Details](#)



AS -3015MR-H5TNR

H13

[View Details](#)



[Back to featured H13 Multi Node Systems](#)

[Up Next: H13 GPU Systems](#)



13 / 17



H13 GPU Systems

Built for the Future, Available Today

Choose Supermicro H13 GPU Systems for the most complex applications and demanding workloads

The 8U 8-GPU system provides unparalleled I/O and thermal capacity supporting the latest AMD Instinct™ MI300X accelerators and NVIDIA HGX H100 GPUs, with 8x 400G networking to enable 1:1 GPU ratio for AI, deep learning at scale.



Data Center Optimized for HPC Deployment at Scale

The 4U and liquid-cooled 2U Quad APU Systems supporting MI300A APUs, which combine CPUs and GPUs, leverages Supermicro's expertise in multiprocessor system architecture and cooling design finely-tuned to tackle the convergence of AI and HPC



High performance AI/ML and HPC-optimized systems

H13 GPU Systems run on dual socket 4th generation AMD EPYCTM processors and offer double the CPU to GPU throughput with PCI-E 5.0. They can support up to 10 FHFL double-width GPU units including the latest AMD Instinct™ MI200 series and NVIDIA H100 GPUs.

H13 GPU System Featured Models

8U 8-GPU Systems

Unprecedented acceleration at every scale to power the worlds highest performing data centers.

[Learn More](#)



4U Systems

Maximum Acceleration for AI/Deep Learning and HPC

[Learn More](#)



Quad APU Systems

Flexible multi-processor APU system combining AMD's CPU, GPU, and HBM3 memory

[Learn More](#)



[Back to top](#)

[Next: View H13 Storage Systems](#)

H13 4U GPU Systems

Maximum Acceleration for AI/Deep Learning and HPC

Optimized for AI, Deep Learning, HPC, providing maximum acceleration, flexibility, high-performance and balanced solutions. Supermicro GPU-optimized systems support the latest PCI-E 5.0 accelerators and deliver a multitude of performance gains compared to previous generations.

The H13 GPU-optimized servers deliver unprecedented acceleration at every scale to power the worlds highest performing data centers for AI, data analytics, and HPC applications.

[Download Datasheet](#)

Optimized for:

- ✓ AI/ML
- ✓ Deep Learning
- ✓ Molecular Dynamics Simulation
- ✓ Astrophysics Simulation



Optimized for:

- ✓ AI/ML
- ✓ Deep Learning
- ✓ HPC
- ✓ Research Laboratory/National Laboratory
- ✓ Chemistry Simulation
- ✓ Molecular Dynamics Simulation
- ✓ Astrophysics Simulation



Product Features



Form Factor

4U Rackmount



Memory

24 x DIMM slots,
DDR5-4800 MHz
Memory



Power

4x 2200W Titanium
redundant power
supply



Management

Best-in-class
serviceability features
with tool-less chassis
design



Processors

Dual and Single AMD
EPYC™ 9005/9004
Series Processors
including CPUs with
AMD 3D V-Cache™
technology



Drives

Flexible Storage
configuration with 10
hot-swap 2.5" U.2
NVMe drives



Input/Output

Up to 10 PCIe 5.0 x16
slots for GPU
acceleration.



Services

Worldwide Global
Services

Featured Product Lines



AS -4125GS-TNRT

H13

[View Details](#)



AS -4125GS-TNRT1

H13

[View Details](#)



AS -4125GS-TNRT2

H13

[View Details](#)



[Back to featured H13 GPU Servers](#)

[Up Next: H13 8U Universal GPU Systems](#)

H13 8U Universal GPU

Maximum Acceleration for AI/Deep Learning and HPC



Optimized for AI, LLMs, Deep Learning, and HPC, providing maximum acceleration, flexibility, high-performance and balanced solutions. Supermicro 8U 8-GPU systems support the latest OAM and PCIe 5.0 accelerators to streamline deployment at scale for the largest AI models.

The H13 8U 8-GPU servers deliver unprecedented acceleration at every scale to power the worlds highest performing data centers for AI, Data analytics, and HPC applications.



[Download Datasheet](#)

Optimized for:

- ✓ AI
- ✓ Deep Learning
- ✓ Large Language Model (LLM)
- ✓ Autonomous Driving
- ✓ HPC
- ✓ Research Laboratory/ National Lab
- ✓ Astrophysics Simulation



Product Features



Form Factor

8U Rackmount



Memory

24 x DIMM slots,
DDR5-4800 MHz



Power

6x 3000W Titanium
redundant power



Management

Best-in-class
serviceability features



Processors

Dual AMD EPYC™
9005/9004 Series



Drives

Up to 16 NVMe and 2
SATA SSD drives



Input/Output

8 high-speed 400G
networking cards



Services

Worldwide Global
Services



14 / 17



Form Factor	Memory	Power	Management	Processors	Drives	Input/Output	Services
8U Rackmount	24 x DIMM slots, DDR5-4800 MHz Memory	6x 3000W Titanium redundant power supply	Best-in-class serviceability features with tool-less chassis design	Dual AMD EPYC™ 9005/9004 Series Processors including CPUs with AMD 3D V-Cache™ technology	Up to 16 NVMe and 2 SATA SSD drives	8 high-speed 400G networking cards providing direct connectivity to each GPU	Worldwide Global Services

Featured Product Lines



AS -8125GS-TNHR
H13

[View Details](#)



AS -8125GS-TNMR2
H13

[View Details](#)

[Back to featured H13 GPU Servers](#)

[Up Next: H13 Quad APU Systems](#)

H13 A+ 2U and 4U Quad APU systems

With AMD Instinct™ MI300A Accelerators

AMD
EPYC

Targeting accelerated HPC workloads, the 4U air-cooled and 2U liquid-cooled Quad systems integrate 4 AMD Instinct™ MI300A APU accelerators. For flexible customer options, the 2U direct-to-chip liquid-cooled system delivers exceptional TCO with over 51% data center energy cost savings, and 4U air-cooled option providing more storage and IO expansion.

Both systems support dual AIOM and 400G Ethernet to help scale and create a high-density supercomputing cluster with up to 21 2U systems in a 48U rack.



Optimized for:

- ✓ HPC
- ✓ AI/ ML
- ✓ CSP (Cloud Solution Provider)
- ✓ Research Laboratory/ National Lab

Product Features							
Form Factor	Memory	Power	Management	Processors	Drives	Input/Output	Services
2U Liquid-Cooled 4U Air-Cooled	32 HBM3 Stacks (512GB)	4x 1600W Hot-Swappable Titanium Level	Best-in-class serviceability features with tool-less chassis design	Quad AMD® MI300A Processors (96 Zen4 cores and 912 GPU cores)	Flexible storage configuration with 8x 2.5" NVMe drives (24x SAS/SATA options on 4U)	Dual AIOM supporting 400G networking	Worldwide Global Services

Featured Product Lines



< 14 / 17 >



AS -8125GS-TNHR

H13

[View Details](#)



AS -8125GS-TNMR2

H13

[View Details](#)

[Back to featured H13 GPU Servers](#)

[Up Next: H13 Quad APU Systems](#)

H13 A+ 2U and 4U Quad APU systems

With AMD Instinct™ MI300A Accelerators



Targeting accelerated HPC workloads, the 4U air-cooled and 2U liquid-cooled Quad systems integrate 4 AMD Instinct™ MI300A APU accelerators. For flexible customer options, the 2U direct-to-chip liquid-cooled system delivers exceptional TCO with over 51% data center energy cost savings, and 4U air-cooled option providing more storage and IO expansion.

Both systems support dual AIOM and 400G Ethernet to help scale and create a high-density supercomputing cluster with up to 21 2U systems in a 48U rack.



Optimized for:

- ✓ HPC
- ✓ AI/ ML
- ✓ CSP (Cloud Solution Provider)
- ✓ Research Laboratory/ National Lab

Product Features



Form Factor

2U Liquid-Cooled
4U Air-Cooled



Memory

32 HBM3 Stacks
(512GB)



Power

4x 1600W
Hot-Swappable
Titanium Level



Management

Best-in-class
serviceability features
with tool-less chassis
design



Processors

Quad AMD® MI300A
Processors
(96 Zen4 cores and
912 GPU cores)



Drives

Flexible storage
configuration with 8x
2.5" NVMe drives
(24x SAS/SATA
options on 4U)



Input/Output

Dual AIOM supporting
400G networking



Services

Worldwide Global
Services

Featured Product Lines



AS -2145GH-TNMR

H13

[View Details](#)



AS -4145GH-TNMR

H13

[View Details](#)

[Back to featured H13 GPU Servers](#)

[Up Next: H13 Storage Systems](#)

H13 Storage Systems

Highest Performing Storage Solutions for Advanced Computing

Extreme Density, High-Performance All-Flash Servers

Supermicro H13 All-Flash NVMe storage systems powered by AMD EPYC 9005/9004 series processors are designed with the latest EDSFF and CXL technologies allowing unprecedented capacity and performance to enable today's data hungry workloads supporting latest software-defined storage and NVMe over fabrics solutions, as well as in-memory databases.



H13 Storage System Featured Models

Flash Storage

All-Flash EDSFF Petascale for Software-Defined Data Center Workloads

[Learn More](#)



[Back to top](#)

[Next: View H13 Cost Optimized Systems](#)

H13 Flash Storage Systems

Extreme Density, High-Performance All-Flash Servers

Supermicro H13 All-Flash NVMe storage systems powered by AMD EPYC 9005/9004 series processors are designed with the latest EDSFF and CXL technologies allowing unprecedented capacity and performance to enable today's data hungry workloads supporting latest software-defined storage and NVMe over fabrics solutions, as well as in-memory databases.

The new all-flash petascale servers take advantage of 128 PCIe 5.0 lanes, supporting 16 EDSFF E3.S drives, or configured with 8 E3.S (x4) drives and 4 CXL devices in E3.S 2T form factor allowing memory expansion.

[Download Datasheet](#)

Optimized for:

- ✓ Software-Defined Storage
- ✓ Data Intensive HPC
- ✓ Private and Hybrid Cloud
- ✓ NVMe Over Fabrics Solution
- ✓ In-Memory Computing



Flash Storage

All-Flash EDSFF Petascale for Software-Defined Data Center Workloads

[Learn More](#)



[Back to top](#)

[Next: View H13 Cost Optimized Systems](#)

H13 Flash Storage Systems

Extreme Density, High-Performance All-Flash Servers



Supermicro H13 All-Flash NVMe storage systems powered by AMD EPYC 9005/9004 series processors are designed with the latest EDSFF and CXL technologies allowing unprecedented capacity and performance to enable today's data hungry workloads supporting latest software-defined storage and NVMe over fabrics solutions, as well as in-memory databases.

The new all-flash petascale servers take advantage of 128 PCIe 5.0 lanes, supporting 16 EDSFF E3.S drives, or configured with 8 E3.S (x4) drives and 4 CXL devices in E3.S 2T form factor allowing memory expansion.

[Download Datasheet](#)

Optimized for:

- ✓ Software-Defined Storage
- ✓ Data Intensive HPC
- ✓ Private and Hybrid Cloud
- ✓ NVMe Over Fabrics Solution
- ✓ In-Memory Computing



Product Features



Form Factor

1U/ 2U Rackmount



Memory

24 DIMMs slots; up to 6TB DDR5 4800MHz



Power

1600W (Titanium level, 80%) redundant supply



Management

Best-in-class serviceability features with tool-less chassis design



Processors

Single 4th Generation AMD EPYC 9005/9004 Scalable processors



Drives

16x hot-swap EDSFF E3.S (7.5mm) NVMe drive bays



Input/Output

Two PCIe 5.0 x16 FHHL Slots, two PCIe 5.0 x16



Services

Worldwide Global Services

Featured Product Lines



ASG-1115S-NE316R

H13

[View Details](#)



ASG-2115S-NE332R

H13

[View Details](#)

[Back to featured H13 Storage Systems](#)

[Up Next: View H13 Cost Optimized Systems](#)

H13 Cost Optimized Systems

High Density, Energy Efficient, and Cost Optimized Solutions

EPYC™ 4004 powered server for Web Hosting and SMB applications (1U/ 2U Mainstream)

H13 1U/ 2U system offers economical server designed for small and medium businesses, remote offices, and branch offices, delivering unparalleled performance



EPYC™ 4004 Tower Workstation Optimized for Content Creation (Tower Workstation)

Designed with versatility in mind, the latest mini-tower system offers versatile storage options and flexible configuration ensuring it seamlessly adapt to your evolving business requirements.

H13 Cost Optimized Systems Featured Models

1U Mainstream System

1U server efficient and cost optimized for SMB applications

[Learn More](#)



2U Mainstream System

2U high performance and cost optimized server for SMB and office applications

[Learn More](#)



Tower System

Tower Workstation Optimized for Content Creation

[Learn More](#)



[Back to top](#)

[Contact Supermicro](#)

1U Mainstream System

Cost-Optimized, Flexible, and Powerful for SMBs

Supermicro H13 1U systems offers entry level and cost optimized features with flexible configurations, effortlessly adapting to your growing business needs. This economical server is designed for small and medium businesses, remote offices, and branch offices, delivering efficient yet powerful performance



Optimized for:

- ✓ Cloud Computing
- ✓ Web Hosting, CDN, Video Streaming
- ✓ SMB Application
- ✓ Email/ Firewall/ Application Server

Product Features

							
Form Factor	Memory	Power	Management	Processors	Drives	Input/Output	Services
1U Rackmount	4 DIMMs up to 192 GB DDR5-5200 Memory	1x 500W Platinum level power supply	BMC GbE Lan port (IPMI board)	AMD EPYC™ 4004 Series Processor	8 hot-swap 3.5" SAS/ SATA drive bay	2x PCIe 5.0 x16 H/HHL for GPU acceleration	Worldwide Global Services

Featured Product Lines



AS-1015A-MT
H13

[View Details](#)



[Back to featured H13 Cost Optimized Systems](#)


[Up Next: View H13 2U Mainstream System](#)

2U Mainstream System

Versatile, High-Performance Storage for SMBs and Fintech



Supernmicro H13 2U systems offers versatile storage options with 2 PCIe Gen5 M.2 slots support to your growing business needs. The server is ideal for fintech, small and medium businesses, and remote offices delivering unparalleled performance.

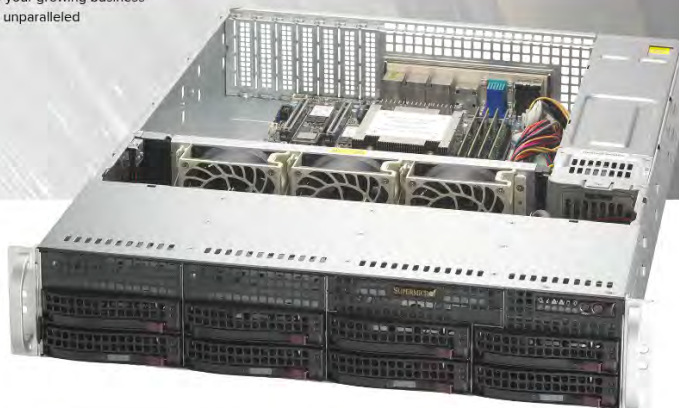

Optimized for:

- ✓ Cloud Computing
- ✓ Web Hosting, CDN, Video Streaming
- ✓ SMB Application
- ✓ Financial/ Trading Workloads
- ✓ AMD Xilinx solarflare X2 X3 adaptors validated

Product Features

							
Form Factor	Memory	Power	Management	Processors	Drives	Input/Output	Services
2U Rackmount	4 DIMMs up to 192 GB DDR5-5200 Memory	1x 800W Platinum level power supply	BMC GbE Lan port (IPMI board)	AMD EPYC™ 4004 Series Processor	8 hot-swap 3.5" SAS/ SATA drive bay	2x PCIe 5.0 x16 H/HHL for GPU acceleration	Worldwide Global Services

Featured Product Lines



AS -2015A-TR

H13

[View Details](#)

[Back to featured H13 Cost Optimized Systems](#)

[Up Next: View H13 Tower System](#)

Tower System

Versatile EPYC™ 4004 System for Entry-Level Servers and Workstations

AMD
EPYC

Designed with versatility in mind, the latest mini-tower system based EPYC™ 4004 series processor offers versatile storage options with 2 PCIe Gen5 M.2 slots and a flexible configuration, ensuring it seamlessly adapts to your evolving business requirements. With remote management features via IPMI, this system can be deployed as an entry level server, workstation or as a desktop.



Optimized for:

- ✓ 2D/ 3D Content Creation
- ✓ SMB Applications
- ✓ Email/ Firewall/ Application Server

Product Features



Form Factor

Tower Workstation



Memory

4 DIMMs up to 192 GB
DDR5-5200 Memory



Power

1x 668W Platinum
level power supply



Management

BMC GbE Lan port
(IPMI board)



Processors

AMD EPYC™ 4004
Series Processor



Drives

4x front hot-swap 3.5"
SAS/ SATA drive bay
(2x M.2 PCIe 5.0 x4
slot)



Input/Output

1x double width PCIe
GPU



Services

Worldwide Global
Services

Featured Product Lines



AS -3015A-I

< 16 / 17 >



AS -2015A-TR

H13

[View Details](#)



[Back to featured H13 Cost Optimized Systems](#)

[Up Next: View H13 Tower System](#)

Tower System

Versatile EPYC™ 4004 System for Entry-Level Servers and Workstations

AMD
EPYC

Designed with versatility in mind, the latest mini-tower system based EPYC™ 4004 series processor offers versatile storage options with 2 PCIe Gen5 M.2 slots and a flexible configuration, ensuring it seamlessly adapts to your evolving business requirements. With remote management features via IPMI, this system can be deployed as an entry level server, workstation or as a desktop.



Optimized for:

- ✓ 2D/ 3D Content Creation
- ✓ SMB Applications
- ✓ Email/ Firewall/ Application Server

Product Features



Form Factor

Tower Workstation



Memory

4 DIMMs up to 192 GB
DDR5-5200 Memory



Power

1x 668W Platinum
level power supply



Management

BMC GbE Lan port
(IPMI board)



Processors

AMD EPYC™ 4004
Series Processor



Drives

4x front hot-swap 3.5"
SAS/ SATA drive bay
(2x M.2 PCIe 5.0 x4
slot)



Input/Output

1x double width PCIe
GPU



Services

Worldwide Global
Services

Featured Product Lines



AS -3015A-I

H13

[View Details](#)



[Back to featured H13 Cost Optimized Systems](#)

[Contact Supermicro](#)



16 / 17






Become a Partner. Connect Today.

Team with Supermicro to deliver innovative server technology driving transformation in the workplace for a more agile, efficient, and deliberate workforce. Become a Supermicro Partner and enjoy exclusive benefits and rewards while growing your organization.



Contact Supermicro?

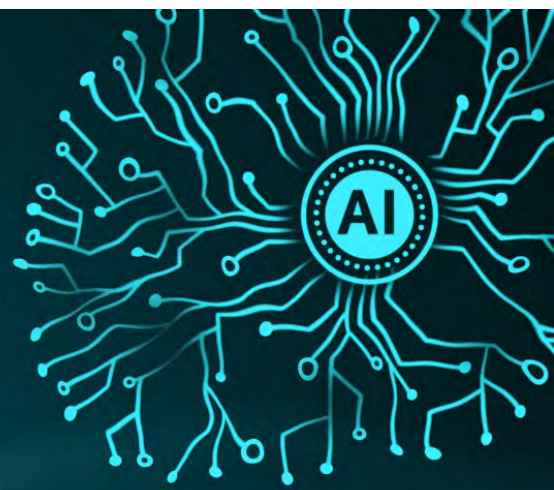

Designed by Pinnacle Creative



17 / 17