

APPENDIX V



UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office
Address: COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, Virginia 22313-1450
www.uspto.gov

APPLICATION NUMBER	FILING or 371(c) DATE	GRP ART UNIT	FIL FEE REC'D	ATTY. DOCKET NO	TOT CLAIMS	IND CLAIMS
62/572,083	10/13/2017		130	65213/84		

1912
AMSTER, ROTHSTEIN & EBENSTEIN LLP
90 PARK AVENUE
NEW YORK, NY 10016

CONFIRMATION NO. 1087
FILING RECEIPT



0000000094949812

Date Mailed: 10/25/2017

Receipt is acknowledged of this provisional patent application. It will not be examined for patentability and will become abandoned not later than twelve months after its filing date. Any correspondence concerning the application must include the following identification information: the U.S. APPLICATION NUMBER, FILING DATE, NAME OF APPLICANT, and TITLE OF INVENTION. Fees transmitted by check or draft are subject to collection. Please verify the accuracy of the data presented on this receipt. **If an error is noted on this Filing Receipt, please submit a written request for a Filing Receipt Correction. Please provide a copy of this Filing Receipt with the changes noted thereon. If you received a "Notice to File Missing Parts" for this application, please submit any corrections to this Filing Receipt with your reply to the Notice. When the USPTO processes the reply to the Notice, the USPTO will generate another Filing Receipt incorporating the requested corrections**

Inventor(s)

David W. Avison, Boxborough, MA;
Steven A. Carlson, Cambridge, MA;
Benjamin Sloan, Exeter, NH;

Applicant(s)

David W. Avison, Boxborough, MA;
Steven A. Carlson, Cambridge, MA;
Benjamin Sloan, Exeter, NH;

Power of Attorney:

Dexter Chang--44071

Permission to Access Application via Priority Document Exchange: No

Permission to Access Search Results: No

Applicant may provide or rescind an authorization for access using Form PTO/SB/39 or Form PTO/SB/69 as appropriate.

If Required, Foreign Filing License Granted: 10/23/2017

The country code and number of your priority application, to be used for filing abroad under the Paris Convention, is **US 62/572,083**

Projected Publication Date: None, application is not eligible for pre-grant publication

Non-Publication Request: No

Early Publication Request: No

**** SMALL ENTITY ****

Title

MULTILAYER NANOPOROUS SEPARATOR

Statement under 37 CFR 1.55 or 1.78 for AIA (First Inventor to File) Transition Applications: No**PROTECTING YOUR INVENTION OUTSIDE THE UNITED STATES**

Since the rights granted by a U.S. patent extend only throughout the territory of the United States and have no effect in a foreign country, an inventor who wishes patent protection in another country must apply for a patent in a specific country or in regional patent offices. Applicants may wish to consider the filing of an international application under the Patent Cooperation Treaty (PCT). An international (PCT) application generally has the same effect as a regular national patent application in each PCT-member country. The PCT process **simplifies** the filing of patent applications on the same invention in member countries, but **does not result** in a grant of "an international patent" and does not eliminate the need of applicants to file additional documents and fees in countries where patent protection is desired.

Almost every country has its own patent law, and a person desiring a patent in a particular country must make an application for patent in that country in accordance with its particular laws. Since the laws of many countries differ in various respects from the patent law of the United States, applicants are advised to seek guidance from specific foreign countries to ensure that patent rights are not lost prematurely.

Applicants also are advised that in the case of inventions made in the United States, the Director of the USPTO must issue a license before applicants can apply for a patent in a foreign country. The filing of a U.S. patent application serves as a request for a foreign filing license. The application's filing receipt contains further information and guidance as to the status of applicant's license for foreign filing.

Applicants may wish to consult the USPTO booklet, "General Information Concerning Patents" (specifically, the section entitled "Treaties and Foreign Patents") for more information on timeframes and deadlines for filing foreign patent applications. The guide is available either by contacting the USPTO Contact Center at 800-786-9199, or it can be viewed on the USPTO website at <http://www.uspto.gov/web/offices/pac/doc/general/index.html>.

For information on preventing theft of your intellectual property (patents, trademarks and copyrights), you may wish to consult the U.S. Government website, <http://www.stopfakes.gov>. Part of a Department of Commerce initiative, this website includes self-help "toolkits" giving innovators guidance on how to protect intellectual property in specific countries such as China, Korea and Mexico. For questions regarding patent enforcement issues, applicants may call the U.S. Government hotline at 1-866-999-HALT (1-866-999-4258).

LICENSE FOR FOREIGN FILING UNDER**Title 35, United States Code, Section 184****Title 37, Code of Federal Regulations, 5.11 & 5.15****GRANTED**

The applicant has been granted a license under 35 U.S.C. 184, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" followed by a date appears on this form. Such licenses are issued in all applications where the conditions for issuance of a license have been met, regardless of whether or not a license may be required as set forth in 37 CFR 5.15. The scope and limitations of this license are set forth in 37 CFR 5.15(a) unless an earlier

license has been issued under 37 CFR 5.15(b). The license is subject to revocation upon written notification. The date indicated is the effective date of the license, unless an earlier license of similar scope has been granted under 37 CFR 5.13 or 5.14.

This license is to be retained by the licensee and may be used at any time on or after the effective date thereof unless it is revoked. This license is automatically transferred to any related applications(s) filed under 37 CFR 1.53(d). This license is not retroactive.

The grant of a license does not in any way lessen the responsibility of a licensee for the security of the subject matter as imposed by any Government contract or the provisions of existing laws relating to espionage and the national security or the export of technical data. Licensees should apprise themselves of current regulations especially with respect to certain countries, of other agencies, particularly the Office of Defense Trade Controls, Department of State (with respect to Arms, Munitions and Implements of War (22 CFR 121-128)); the Bureau of Industry and Security, Department of Commerce (15 CFR parts 730-774); the Office of Foreign Assets Control, Department of Treasury (31 CFR Parts 500+) and the Department of Energy.

NOT GRANTED

No license under 35 U.S.C. 184 has been granted at this time, if the phrase "IF REQUIRED, FOREIGN FILING LICENSE GRANTED" DOES NOT appear on this form. Applicant may still petition for a license under 37 CFR 5.12, if a license is desired before the expiration of 6 months from the filing date of the application. If 6 months has lapsed from the filing date of this application and the licensee has not received any indication of a secrecy order under 35 U.S.C. 181, the licensee may foreign file the application pursuant to 37 CFR 5.15(b).

SelectUSA

The United States represents the largest, most dynamic marketplace in the world and is an unparalleled location for business investment, innovation, and commercialization of new technologies. The U.S. offers tremendous resources and advantages for those who invest and manufacture goods here. Through SelectUSA, our nation works to promote and facilitate business investment. SelectUSA provides information assistance to the international investor community; serves as an ombudsman for existing and potential investors; advocates on behalf of U.S. cities, states, and regions competing for global investment; and counsels U.S. economic development organizations on investment attraction best practices. To learn more about why the United States is the best country in the world to develop technology, manufacture products, deliver services, and grow your business, visit <http://www.SelectUSA.gov> or call +1-202-482-6800.

Provisional Application for Patent Cover Sheet

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c)

Inventor(s)

Inventor 1

Remove

Given Name

Middle Name

Family Name

City

State

Country ;

David

W.

Avison

Boxborough

MA

US

Inventor 2

Remove

Given Name

Middle Name

Family Name

City

State

Country ;

Steven

A.

Carlson

Cambridge

MA

US

Inventor 3

Remove

Given Name

Middle Name

Family Name

City

State

Country ;

Benjamin

Sloan

Exeter

NH

US

All Inventors Must Be Listed – Additional Inventor Information blocks may be generated within this form by selecting the **Add** button.

Add

Title of Invention

MULTILAYER NANOPOROUS SEPARATOR

Attorney Docket Number (if applicable)

65213/84

Correspondence Address

Direct all correspondence to (select one):

☒ The address corresponding to Customer Number

☐ Firm or Individual Name

Customer Number

1912

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

Yes, the invention was made by an agency of the United States Government. The U.S. Government agency name is:

Yes, the invention was under a contract with an agency of the United States Government. The name of the U.S. Government agency and Government contract number are:

Entity Status

Applicant asserts small entity status under 37 CFR 1.27 or applicant certifies micro entity status under 37 CFR 1.29

- ☒ Applicant asserts small entity status under 37 CFR 1.27
- ☐ Applicant certifies micro entity status under 37 CFR 1.29. Applicant must attach form PTO/SB/15A or B or equivalent.
- ☐ No

Warning

Petitioner/applicant is cautioned to avoid submitting personal information in documents filed in a patent application that may contribute to identity theft. Personal information such as social security numbers, bank account numbers, or credit card numbers (other than a check or credit card authorization form PTO-2038 submitted for payment purposes) is never required by the USPTO to support a petition or an application. If this type of personal information is included in documents submitted to the USPTO, petitioners/applicants should consider redacting such personal information from the documents before submitting them to USPTO. Petitioner/applicant is advised that the record of a patent application is available to the public after publication of the application (unless a non-publication request in compliance with 37 CFR 1.213(a) is made in the application) or issuance of a patent. Furthermore, the record from an abandoned application may also be available to the public if the application is referenced in a published application or an issued patent (see 37 CFR 1.14). Checks and credit card authorization forms PTO-2038 submitted for payment purposes are not retained in the application file and therefore are not publicly available.

Signature

Please see 37 CFR 1.4(d) for the form of the signature.

Signature	Dexter T. Chang/			Date (YYYY-MM-DD)	2017-10-13
First Name	Dexter T.	Last Name	Chang	Registration Number (If appropriate)	44071

This collection of information is required by 37 CFR 1.51. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.11 and 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. **This form can only be used when in conjunction with EFS-Web. If this form is mailed to the USPTO, it may cause delays in handling the provisional application.**

Privacy Act Statement

The Privacy Act of 1974 (P.L. 93-579) requires that you be given certain information in connection with your submission of the attached form related to a patent application or patent. Accordingly, pursuant to the requirements of the Act, please be advised that : (1) the general authority for the collection of this information is 35 U.S.C. 2(b)(2); (2) furnishing of the information solicited is voluntary; and (3) the principal purpose for which the information is used by the U.S. Patent and Trademark Office is to process and/or examine your submission related to a patent application or patent. If you do not furnish the requested information, the U.S. Patent and Trademark Office may not be able to process and/or examine your submission, which may result in termination of proceedings or abandonment of the application or expiration of the patent.

The information provided by you in this form will be subject to the following routine uses:

1. The information on this form will be treated confidentially to the extent allowed under the Freedom of Information Act (5 U.S.C. 552) and the Privacy Act (5 U.S.C. 552a). Records from this system of records may be disclosed to the Department of Justice to determine whether disclosure of these records is required by the Freedom of Information Act.
2. A record from this system of records may be disclosed, as a routine use, in the course of presenting evidence to a court, magistrate, or administrative tribunal, including disclosures to opposing counsel in the course of settlement negotiations.
3. A record in this system of records may be disclosed, as a routine use, to a Member of Congress submitting a request involving an individual, to whom the record pertains, when the individual has requested assistance from the Member with respect to the subject matter of the record.
4. A record in this system of records may be disclosed, as a routine use, to a contractor of the Agency having need for the information in order to perform a contract. Recipients of information shall be required to comply with the requirements of the Privacy Act of 1974, as amended, pursuant to 5 U.S.C. 552a(m).
5. A record related to an International Application filed under the Patent Cooperation Treaty in this system of records may be disclosed, as a routine use, to the International Bureau of the World Intellectual Property Organization, pursuant to the Patent Cooperation Treaty.
6. A record in this system of records may be disclosed, as a routine use, to another federal agency for purposes of National Security review (35 U.S.C. 181) and for review pursuant to the Atomic Energy Act (42 U.S.C. 218(c)).
7. A record from this system of records may be disclosed, as a routine use, to the Administrator, General Services, or his/her designee, during an inspection of records conducted by GSA as part of that agency's responsibility to recommend improvements in records management practices and programs, under authority of 44 U.S.C. 2904 and 2906. Such disclosure shall be made in accordance with the GSA regulations governing inspection of records for this purpose, and any other relevant (i.e., GSA or Commerce) directive. Such disclosure shall not be used to make determinations about individuals.
8. A record from this system of records may be disclosed, as a routine use, to the public after either publication of the application pursuant to 35 U.S.C. 122(b) or issuance of a patent pursuant to 35 U.S.C. 151. Further, a record may be disclosed, subject to the limitations of 37 CFR 1.14, as a routine use, to the public if the record was filed in an application which became abandoned or in which the proceedings were terminated and which application is referenced by either a published application, an application open to public inspection or an issued patent.
9. A record from this system of records may be disclosed, as a routine use, to a Federal, State, or local law enforcement agency, if the USPTO becomes aware of a violation or potential violation of law or regulation.

MULTILAYER NANOPOROUS SEPARATOR

FIELD OF THE INVENTION

[0001] The present invention relates generally to porous separators for batteries and other electric current producing cells. In particular, it pertains to multilayer porous separators comprising inorganic oxide/polymer layers on a polymeric layer, and to lithium batteries comprising such separators.

BACKGROUND OF THE INVENTION

[0002] Lithium batteries are widely used in portable electronics, such as smartphones and portable computers. Among the new applications for lithium batteries are high power batteries for hybrid, plug-in hybrid, and electric vehicles. Existing lithium batteries, including rechargeable and non-rechargeable lithium batteries, often utilize multilayer separators. Such separators may include an extruded polyethylene or polypropylene film that is coated with an inorganic oxide/polymer coating layer. As the demand for lithium batteries with increased size and energy density has grown, manufacturers have turned to less safe battery active materials in order to meet these goals. This has resulted in a need for battery separators with increased dimensional stability at temperatures such as 150°C, or higher.

[0003] Thus, it would be advantageous if the inorganic oxide/polymer coating layers could provide even greater dimensional stability at elevated temperatures while, at the same time, requiring lower coating weights and coating thicknesses, and providing lower manufacturing costs.

SUMMARY OF THE INVENTION

[0004] It is an object of the present invention to provide lighter weight, lower cost, and thinner inorganic oxide/polymer coating layers for polymer-based separators for lithium batteries and other electric current producing cells.

[0005] The present invention achieves these goals by providing a separator for a lithium battery comprising: (a) a porous polymeric layer, and (b) nanoporous inorganic oxide/polymer composite layers coated on both sides of the polymeric layer. In one embodiment, the nanoporous layer comprises an inorganic oxide (e.g., boehmite, SiO_2) and one or more polymers, wherein the volume fraction of the one or more polymers in the solid portion of the nanoporous layer may be about 10% to about 50%, and preferably about 12% to about 45%, when the crystallite size of the inorganic oxide particles is 5 nm to 90 nm. This combination of inorganic oxide particles (e.g., boehmite particles) having an extremely small crystallite size, and a high volume of organic polymer, produces a porous heat stable layer that provides increased dimensional stability at high temperature and a high level of porosity for excellent ionic conductivity of the electrolyte in the pores of the separator. This combination was further found to enable a significantly lower coating weight and coating thickness of the heat stable layer.

[0006] In another embodiment the nanoporous layer comprises: (a) a blend of inorganic oxide particles (e.g., boehmite particles) and inorganic nitride particles (e.g., boron nitride or aluminum nitride particles), and (b) one or more polymers, wherein the volume fraction of the one or more polymers in the solid portion of the nanoporous layer may be about 10% to about 50%, and preferably about 12% to about 45%, and the crystallite size of the inorganic particles is 5 nm to 90 nm. This combination of: (1) inorganic oxide and nitride particles (e.g., boehmite and boron nitride or aluminum nitride particles) having extremely small crystallite sizes, and (2)

a high volume of organic polymer, produces a porous heat stable layer that provides increased dimensional stability at high temperature and a high level of porosity for excellent ionic conductivity of the electrolyte in the pores of the separator.

[0007] Preferably, the heat stable inorganic oxide/polymer layer (or inorganic oxide and nitride/polymer layer) is coated on both sides of the porous polymeric layer, such as a porous polyethylene layer or a porous polypropylene layer, as opposed to being on only one side of the polymeric layer. It has been found that this approach provides improved thermal dimensional stability in a thin and low cost separator. However, having the heat stable layer on only one side of the polymeric layer is also useful.

[0008] Another aspect of the separators for a lithium battery of this invention relates to a separator comprising (a) a porous polymeric layer, and (b) a nanoporous inorganic oxide/polymer composite layer on one or both sides of the polymeric layer, wherein the nanoporous layer comprises an inorganic oxide (e.g., boehmite, SiO_2) and a polymer, and wherein the crystallite size of the inorganic oxide is 5 nm to 25 nm. It has been found that this smaller crystallite size results in a denser layer with more cohesive strength and with more adhesion to the polymeric layer at an even lower coating weight than comparable layers where the crystallite size for the inorganic oxide is larger such as, for example, about 80 nm.

[0009] In another embodiment, the present invention includes lithium batteries that comprise the improved separators of this invention.

[0010] A further aspect of the present invention are methods for making separators that comprise coating a solution comprising an inorganic oxide and/or inorganic nitride, and one or more polymers, on one or both surfaces of a porous polymeric layer to form the separators of this invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The features and advantages of the present disclosure will be more fully understood with reference to the following, detailed description when taken in conjunction with the accompanying figures, wherein:

[0012] FIG. 1 is a graph of the thickness as a function of coating weight of a nanoporous separator, according to an embodiment of the present invention made in accordance with Example 1.

[0013] FIG. 2 is a graph of the shrinkage as a function of coating weight of a nanoporous separator, according to an embodiment of the present invention made in accordance with Example 1.

[0014] FIG. 3 is a graph of the thickness as a function of coating weight of a nanoporous separator, according to an embodiment of the present invention made in accordance with Example 2.

[0015] FIG. 4 is a graph of the shrinkage as a function of coating weight of a nanoporous separator, according to an embodiment of the present invention made in accordance with Example 2.

[0016] FIG. 5 is a graph of the thickness as a function of coating weight of a nanoporous separator, according to an embodiment of the present invention made in accordance with Example 2.

[0017] FIG. 6 is a graph of the shrinkage as a function of coating weight of a nanoporous separator, according to an embodiment of the present invention made in accordance with Example 2.

[0018] FIG. 7 is a graph of the thickness as a function of coating weight of a nanoporous separator, according to an embodiment of the present invention made in accordance with Example 3.

[0019] FIG. 8 is a graph of the shrinkage as a function of coating weight of a nanoporous separator, according to an embodiment of the present invention made in accordance with Example 3.

[0020] FIG. 9 is a graph of the thickness as a function of coating weight of a nanoporous separator, according to an embodiment of the present invention made in accordance with Example 3.

[0021] FIG. 10 is a graph of the shrinkage as a function of coating weight of a nanoporous separator, according to an embodiment of the present invention made in accordance with Example 3.

[0022] FIG. 11 is a graph of the moisture content as function of the weight fraction of boron nitride in a nanoporous separator, according to an embodiment of the present invention made in accordance with Example 4.

DETAILED DESCRIPTION

[0023] The separators of the present invention provide superior safety, lower cost, lower thickness, and other key performance properties for use in lithium batteries and in other electric current producing cells.

[0024] One aspect of this invention pertains to a separator for a lithium battery comprising (a) a porous polymeric layer, and (b) a nanoporous inorganic oxide/polymer composite layer on both sides of the polymeric layer, wherein the nanoporous layer comprises boehmite and one or more polymers, wherein the volume fraction of the one or more polymers in

the solid portion of the nanoporous layer may be about 10% to about 50%, and preferably about 12% to 45%, when the crystallite size of the boehmite is 5 nm to 90 nm. Alternatively, the nanoporous layer may comprise other inorganic oxide (e.g., SiO₂) or nitride (e.g., BN or AlN) particles, or combinations thereof.

[0025] The term “lithium battery” may include, for example, batteries in which the electroactive anode material comprises lithium. This includes, but is not limited to, secondary or rechargeable lithium ion batteries, secondary lithium metal batteries, and primary or non-rechargeable lithium metal batteries.

[0026] The term “separator” may include, for example, porous materials in a battery that are interposed between the cathode and the anode of the battery to provide electrical insulation against short circuiting and to provide pores for filling with the electrolyte of the battery.

[0027] The term “porous polymeric layer” may include, for example, a layer of a polymer material that is porous such that it has permeability to the flow of air through the polymeric layer. The battery industry typically measures this air permeability using a porosimeter that provides a value for the time in seconds for 100 cubic centimeters (cc) of air to pass through the porous layer. This value is commonly called the Gurley number. The battery industry prefers that the Gurley number for a separator be as low as possible without sacrificing mechanical integrity. Typical Gurley numbers for the air permeability of porous polyethylene or porous polypropylene separators, as used in the battery industry, are 100 seconds/100 cc to 300 seconds/100 cc. For this invention, porous polymer layer does not include any of the non-woven polymeric layers, such as with polyester fibers, that are used as separators in the battery industry.

[0028] The term “nanoporous” may include layers having pores up to about 100 nm in diameter, preferably, with at least 90% of the pores being less than 100 nm in diameter. The size

and relative number of pores can be measured by mercury porosimetry, or by scanning electron microscope (SEM) or transmission electron microscope (TEM) cross-sections of the layer.

[0029] As discussed herein, the nanoporous layer may be present on both sides of a substrate or other support. For this invention, this means that the layer is present on both sides of the porous polymeric layer, such as a porous polyethylene layer. The general benefits of the nanoporous layers of this invention are also found when the nanoporous layer is present on only one side of the porous polymeric layer, but the overall performance is typically superior when the nanoporous layer is present on both sides of the porous polymeric layer.

[0030] The superior performance features of two-side coating of the polymeric layer, compared to one-side coating at the same total coating weight, includes lower shrinkage at high temperatures and improved battery safety. Improved safety is typically the most important performance feature desired in separators for lithium batteries, especially as the batteries become larger and higher in energy density and use less safe battery active materials in order to achieve higher energy densities and lower costs.

[0031] Another advantage of two-side coating of the porous polymeric layer with the nanoporous coating layer is that it provides the opportunity to make the coatings on each side different in composition. This enables the nanoporous layer to be optimized for the best performance when it is facing the anode and when it is facing the cathode. In general, by tailoring the formulations and coating thicknesses of the ceramic coatings on either side of the separator it is possible to optimize: (a) adhesion between separator and a specific electrode, either anode or cathode; (b) interfacial impedance between separator and a specific electrode, either anode or cathode; (c) complexation of migratory species (e.g., solubilized transition metal ions from cathode).

[0032] For example, when the coating is facing the cathode, it is particularly useful that the coating be resistant to oxidation, especially at higher charge voltages, e.g., above 4.25 volts. This can be done, for example, by selecting the organic polymer of the nanoporous layer to be resistant to oxidation up to the higher voltage desired, e.g., up to 5.0 volts. In addition, the nanoporous layer on one of the sides can be designed with particularly small pore sizes, such as under 10 nm diameter pores, for example, by using boehmite with a primary crystallite size of less than 10 nm in diameter. This separator configuration is useful when placed against a lithium metal anode, where the very small size of the pores assists in preventing the growth of lithium metal dendrites into and through the separator, which reduces cycle life, capacity and safety for the cell.

[0033] In another example, boehmite could be modified by reaction with a fluorinated ethylene carbonate for improved cycle life when such nanoporous layer is positioned against an anode comprising silicon or lithium metal. This nanoporous layer with the boehmite covalently reacted with a fluorinated ethylene carbonate could also be used against the cathode to help achieve excellent stability under high voltage operation of the cell, such as at up to 5.0 volts.

[0034] In a further example, the nanoporous layer with pores that are less than 10 nm in diameter could be positioned against the cathode to inhibit the diffusion of transition metals, such as nickel ions, from the cathode to the anode, which degrades the cycle life and other performance properties of the cell. Optionally, the very small boehmite crystallite size of less than 10 nm could be combined with reaction of this boehmite with fluorinated ethylene carbonate or another organic carbonate to make a nanoporous layer positioned against the cathode to lessen the diffusion of transition metal ions from the cathode.

[0035] The term “Boehmite” is understood in the art. It, for example, may include hydrated aluminum oxide of the empirical chemical formula of $\text{Al}_2\text{O}_3 \cdot x\text{H}_2\text{O}$ where x is 1.0 to 2.0. Another term used interchangeably herein for boehmite is AlOOH . Boehmite may be characterized by its distinctive Fourier-transform infrared spectroscopy (“FTIR”) fingerprint. Boehmite may also be characterized by its distinctive X-ray diffraction pattern and by its distinctive infrared spectrum of double peaks of hydroxyl groups around 3200 cm^{-1} . Boehmite may have values of x for molecules of water that are above 1.5 and even up to about 2. However, the commercial grades of boehmite of all particle sizes typically have a value of x that is in the range of 1.0 to 1.5. The value of x can be measured by first drying the boehmite at about 220°C for 1 hour to remove the surface adsorbed water and then measuring the loss of water that occurs when the boehmite sample is heated to 1000°C for 1 hour and is thereby dehydrated to anhydrous aluminum oxide, Al_2O_3 .

[0036] Examples of polymers that may be utilized in the present invention include, but are not limited to, cellulosic polymers such as hydroxyethyl cellulose, vinyl pyrrolidone polymers and copolymers, polysaccharides such as chitosan, polyethylene oxides, and polyvinyl alcohols. Preferably, the polymers, alone or in combination, provide cohesive and adhesive strength to the nanoporous layer, are insoluble in the electrolyte of the lithium battery, and are electrochemically stable over the voltage range of use of the lithium battery. If needed to achieve these properties, one or more of the polymers may be crosslinked.

[0037] By the term “volume fraction of the one or more polymers in the solid portion of the nanoporous layer” is meant the fraction expressed as a percentage by volume of the polymer content of the solid portion of the inorganic particle/polymer composite layer. As described hereinafter, the nanoporous layer has a % porosity of between about 30% to about 70%. In other

words, much of the volume of the nanoporous layer is air, and not a solid material. The volume fraction of the polymer and inorganic particle content of the nanoporous layer can be calculated based on the relative densities of the materials. For example, assuming that the inorganic particles are only boehmite with a density of 3.03 g/cc, that the organic polymer has a density of 1.3 g/cc, and that the weight ratio of the boehmite to the organic polymer is 12:1, the volume fraction of boehmite is 83.7% and the volume fraction of organic polymer is 16.3%. Changing the weight ratio of the boehmite to the organic polymer to 4:1 results in a volume fraction of boehmite of 63.2% and of organic polymer of 36.8%. If the density of the organic polymer is lower, such as 1.1 g/cc, then its volume fraction at the same weight ratio of inorganic particle/polymer will be higher than at the higher polymer density of 1.3 g/cc.

[0038] The term “crystallite size” of the particles refers to the size of the primary or single crystals of the inorganic particles in their widest dimension. This is typically measured using a transmission electron microscope (TEM) or a very high resolution scanning electron microscope (SEM). Many inorganic oxide particles, such as boehmite particles, are nearly cubic in shape, although they can have other shapes such as platelets and needles. In the dry solid state and in solution, boehmite particles are typically agglomerated into larger particles comprised of many primary boehmite particles, such as, for example, 10 to 20 primary particles. The inorganic particles in the nanoporous layers of this invention result in features, such as pore size diameter, that are related to the crystallite size of the particles.

[0039] In one embodiment of the separators of the present invention, the ratio of the total thickness of the nanoporous layer on both sides of the polymeric layer to the total thickness of the separator is 10% to 80%. The thickness of these layers may be measured by SEM analysis of cross-sections of the separator. Because of the nanoporous pore sizes and the high volume

fraction of organic polymer in the nanoporous layer, it has been found that a lower limit for the proportional thickness of the nanoporous layer of about 10% of the total thickness of the separator, rather than 15% or more typically 25%, is able to provide an excellent improvement in the dimensional stability of the separator at high temperatures, which is needed for improved safety. It has been found that the combination of nanoporous pore sizes and very high volume fractions of organic polymer in the nanoporous layer (e.g., from about 10% to about 50%) provides acceptable % porosity (e.g., from about 30% to about 70%) with good ionic conductivity of the electrolyte. It has also been found that the separator of this invention functions well with the total thickness of the nanoporous layer as high as 80% of the total thickness of the separator.

[0040] In one embodiment, the heat shrinkage of the separator at 150°C for 1 hour is less than 5%. This heat shrinkage may be measured by the change in the area of the separator after heating in an oven for 1 hour. This measurement of the heat shrinkage may be done by hanging a large sheet of the separator in the oven after marking and measuring the dimensions and area of a square or rectangle such as a 10 cm by 10 cm square, on a smaller section of the large sheet. After the heating in the oven, the marked area is measured for the % change or % shrinkage of the dimensions and the area.

[0041] In one embodiment, the heat shrinkage of the separator at 200°C for 1 hour is less than 5%. The nanoporous separators of the present invention have been found to retain their dimensional stability even when heated well above the melting point of the polymeric layer, such as a porous polyethylene layer.

[0042] In one embodiment of the separators of this invention, the total coating weight of the nanoporous layer on both sides is less than 4.5 grams per square meter (gsm), while

providing a heat shrinkage of the separator at 150°C for 1 hour of less than 5%. It should be noted that the use of boehmite with its lower density of about 3.03 g/cc, as compared to the higher density anhydrous aluminum oxide or alumina (which has a density of about 4 g/cc), helps to further lower the coating weight of the heat stabilizing layer. The lower density of the inorganic oxide particle proportionately lowers the weight of coating needed for a specific thickness and % porosity.

[0043] For example, a 4 micron thick alumina/polymer layer with a 45% porosity for polyethylene-based separators typically weighs about 8 grams per square meter (gsm). However, switching to boehmite (or a blend of boehmite and other inorganic particles of a similar or lower density) at the same thickness and % porosity lowers the coating weight to about 6 gsm or less. The high volume fraction of polymer in the nanoporous layers of the separators of this invention, combined with the use of boehmite with a crystallite size of 5 nm to 90 nm, provides increased dimensional stability for a specific thickness of the separator layer. Although it is possible to still make the total thickness of the inorganic particle/polymer layer in the separator 4 microns or higher, it is desirable for lower cost and for lower total thickness of the separator to make the thickness of the inorganic particle/polymer layer as thin as possible, such as about 3 microns total, while still achieving an excellent dimensional stability at high temperature. In one embodiment, the heat shrinkage of the separator at 200°C for 1 hour is less than 5%.

[0044] In one embodiment, other inorganic oxides and/or inorganic nitrides with a density of about 3.0 g/cc or lower, such as silicon dioxide and boron nitride, may be blended with the boehmite pigment. As discussed further below, this provides lower total coating weight of the nanoporous layer and other desirable properties, such as lower water content.

[0045] In another embodiment of the separators of this invention, the total coating weight of the nanoporous layer of both sides is less than 3.5 grams per square meter (gsm), while providing a heat shrinkage of the separator at 150°C for 1 hour of less than 5%. In one embodiment, the heat shrinkage of the separator at 200°C for 1 hour is less than 5%.

[0046] In one embodiment of the separators of the present invention, the crystallite size of the inorganic particles may be about 30 nm to about 50 nm, preferably about 5 nm to about 25 nm, and more preferably about 5 nm to about 10 nm. In one embodiment, the inorganic particles comprise boehmite particles having a crystallite size of about 30 nm to about 50 nm. In one embodiment, the crystallite size of the boehmite may be about 5 nm to about 10 nm, and preferably about 5 nm to about 8 nm.

[0047] In another embodiment of this invention, the % porosity of the nanoporous layer is between 30% and 55%. The % porosity of the nanoporous layer may be calculated from the density in g/cc of the materials in the dry coating assuming it is a 100% solid coating with 0% porosity and comparing it to the actual density of the coating. The actual density of the nanoporous layer may be calculated by dividing its coat weight in gsm by its coating thickness to provide the density in g/cc of the nanoporous layer. Dividing the density of the nanoporous layer by the calculated density of the same materials in a non-porous layer and multiplying by 100% provides the % solid fraction by volume in the nanoporous layer. Subtracting this value of the % solid fraction from 100% gives the % pore volume or % porosity of the nanoporous layer. The % porosity can also be measured by mercury porosimetry analysis.

[0048] In one embodiment, the pore volume of the nanoporous layer is between 0.8 cc/g and 1.0 cc/g. The pore volume can be calculated by measuring the coat weight of the nanoporous layer in gsm and measuring the thickness of the nanoporous layer to determine the total cc in a

square meter. The pore volume in cc/g is then calculated by dividing the the total cc in a square meter by the grams of the gsm measurement. In one embodiment, the % porosity of the nanoporous layer is 55% to 70%. Above this level of % porosity, it is difficult to obtain the cohesive and adhesive strength of the nanoporous layer that are preferred for long term, safer lithium battery separator applications.

[0049] In one embodiment of the separators of the present invention, the volume fraction of the one or more polymers in the solid portion of the nanoporous layer is 15% to 45%. In one embodiment, the volume fraction of the one or more polymers in the solid portion of the nanoporous layer is 20% to 45%. In one embodiment, the volume fraction of the one or more polymers in the solid portion of the nanoporous layer is 25% to 45%.

[0050] In one embodiment of the separators of this invention, the nanoporous layer comprises pores having an average pore diameter of 80 nm or less and at least 70% of the pores have a diameter less than 80 nm. In one embodiment, the nanoporous layer comprises pores having an average pore diameter of 50 nm or less and at least 70% of the pores have a diameter less than 50 nm. In one embodiment, the nanoporous layer comprises pores having an average pore diameter of 25 nm or less and at least 70% of the pores have a diameter less than 25 nm.

[0051] In one embodiment of the separators of this invention, the ratio of the air permeability of the separator to the air permeability of the polymeric layer without any nanoporous layer present is 1.0 to 1.4. As described hereinabove, this air permeability is typically measured on an instrument which provides a Gurley number of the number of seconds for 100 cc of air to pass through the separator. A low level of increase of the air permeability is an important indicator of an expected low decrease in the ionic conductivity of electrolyte in the separator due to adding the inorganic oxide/polymer layer. If the ionic conductivity decreases

too much, this can interfere with the cycling rate capability of the lithium battery particularly its power rate properties, and also interfere with the cycling lifetime of the lithium battery.

[0052] In one embodiment of the separators of the present invention, the polymeric layer comprises a polyolefin. Suitable polyolefins include, but are not limited to, polyethylenes and polypropylenes. Other examples of the polyolefin polymers include, but are not limited to, homopolymers of ethylene, propylene, 1-butene, 1-pentene, 1-hexene, and 1-octene, as well as copolymers and terpolymers thereof, used alone or in combination with one or more types of polymers. In one embodiment, the polymeric layer comprises polyethylene. The polymeric layer may be of the “wet process” type which is produced by extrusion followed by solvent extraction to provide the porosity or of the “dry process” type which is produced by extrusion followed by stretching to provide the porosity. Various molecular weights, densities, and stereochemistries of polyethylene and the other polymers, with various melt flow and mechanical properties, may be utilized in the porous polymeric layers.

[0053] For the purposes of better uniform wetting of the coating fluid of the nanoporous layer and of better adhesion of the nanoporous layer to the substrate, the porous polymeric layer may have a coating layer on the surface to which the nanoporous layer is applied.

[0054] In one embodiment of the separators comprising polyethylene in the polymeric layer, the heat shrinkage of the separator at 120°C for 1 hour is less than 1.0%. Without the nanoporous layer of the separators of this invention, the heat shrinkage of a polyethylene separator of comparable total thickness is typically greater than 1.0% at 105°C. In one embodiment, the ratio of the air permeability of the separator after the heat shrinkage at 120°C for 1 hour to the air permeability of the separator before the heat shrinkage at 120°C is 0.8 to 1.2. This is an important feature for allowing vacuum drying of the polyethylene-based separators of

this invention at a higher temperature of 120°C without any negative effect on the air permeability and ionic conductivity and, in some cases, with a positive effect on ionic conductivity due to the heat treatment. Vacuum drying is beneficial for lowering the moisture content of separators for increased lithium battery cycling lifetimes and capacities and for higher lithium battery cycling rate capabilities. Vacuum drying is typically done for 4 to 24 hours at about 80°C for polyethylene separators and at about 90°C for polyethylene separators with one or more inorganic oxide/polymer layers. The capability of using a higher temperature of 120°C and a shorter drying time of 1 to 3 hours for the polyethylene-based separators of this invention is useful.

[0055] In another embodiment of the separators of the present invention, the nanoporous layer is a laminated layer on the polymeric layer. By the term “laminated layer” is meant that the nanoporous layer is not initially formed on the polymeric layer, such as by direct coating, but is instead laminated to the polymeric layer in a subsequent step. For example, the nanoporous layer is coated on a release substrate, and then this nanoporous layer is transferred by lamination onto the polymeric layer. This lamination may optionally include the use of heat and/or the use of some organic solvent to adhere the nanoporous layer to the polymeric layer and to aid in the subsequent delamination of the release substrate without interfering with the quality of the laminated multilayer separator.

[0056] Another aspect of the separators for a lithium battery of this invention relates to a separator comprising (a) a porous polymeric layer, and (b) a nanoporous inorganic particle/polymer composite layer on one or both sides of the polymeric layer, wherein the nanoporous layer comprises an inorganic oxide (e.g., boehmite), or a blend of an inorganic oxide and an inorganic nitride (e.g., BN or AlN), and a polymer, and wherein the crystallite size of the

inorganic particles is about 5 nm to about 25 nm, and preferably about 5 nm to about 8 nm. In one embodiment, the nanoporous layer comprises pores having an average pore diameter of about 25 nm or less and at least about 70% of the pores have a diameter of about 25 nm or less.

[0057] A further aspect of the separators for a lithium battery of the present invention pertains to a separator comprising (a) a porous polyethylene layer, and (b) a nanoporous inorganic particles/polymer composite layer on both sides of the polyethylene layer, wherein the nanoporous layer comprises boehmite, or a blend of boehmite and boron nitride, and one or more polymers, the volume fraction of the one or more polymers in the solid portion of the nanoporous layer is about 10% to about 50%, the total coating weight of the nanoporous layer on both sides is 5.5 grams per square meter or less, and the heat shrinkage of the separator at 150°C for 1 hour is less than 5%. In one embodiment, the total coating weight of the nanoporous layer on both sides is 3.5 grams per square meter or less and the thickness of the polyethylene layer is between 5 microns and 16 microns.

[0058] In another embodiment, this invention is lithium batteries comprising a separator of the present invention.

[0059] Another aspect of the present invention are methods for making the separator of this invention, which method comprises coating a solution comprising inorganic particles and one or more polymers on one or both surfaces of a porous polymeric layer. In one embodiment, the inorganic particles comprise boehmite particles having a crystallite size of 5 nm to 90 nm. In one embodiment, the boehmite particles have a crystallite size of about 5 nm to about 25 nm, and preferably about 5 nm to about 8 nm. In one embodiment, the volume fraction of the one or more polymers in the solid portion of the coating after drying is about 10% to about 50%, preferably about 12% to about 45 %, and more preferably about 15% to about 45%.

[0060] EXAMPLES

[0061] Several embodiments of the present invention are described in the following examples, which are offered by way of illustration and not by way of limitation.

[0062] Example 1

[0063] A boehmite slurry was prepared by adding 12 parts of boehmite (DISPAL 10F4 supplied by Sasol Inc., Houston, Texas) and 1 part of chitosan (deacetylated chitin, poly(D-glucosamine), medium molecular weight, of a polysaccharide supplied by Sigma-Aldrich, St. Louis, MO) to 73 parts of 9:1 water:isopropyl alcohol and stirring the slurry. The primary particle size of the boehmite was about 40 nm. The boehmite slurry was coated onto both sides of a 12 micron thick porous polyethylene separator (EP12 supplied by ENTEK, Lebanon, Oregon) using wire-wound rods of different wire thicknesses to obtain a range of coating weights for both sides from about 1.2 grams per square meter (gsm) to about 5.2 gsm. The boehmite coating was first applied to one side of the polyethylene separator and dried at 70°C for 2 minutes in a convection oven. The boehmite coating was then applied to the reverse uncoated side of the polyethylene separator and dried under the same oven heating conditions as for the first coating.

[0064] The 12:1 by weight ratio of boehmite pigment to chitosan binder is calculated to have 15.3% by volume of chitosan binder in the solid portion of the porous boehmite coating layer. This calculation is based on a specific gravity of 3.03 g/cc for boehmite and of 1.4 g/cc for chitosan.

[0065] The coating thickness was measured using a Dorsey gauge on the polyethylene separator before and after the coating of the boehmite coating on both sides. The difference in

the thickness values before and after the coating is the coating thickness in microns. An alternative method for measuring the coating thickness is using the Dorsey gauge on the coated separator before and after removing the boehmite coating on both sides, either by pulling off the coating with an adhesive tape or by rubbing off the coating with an alcohol-soaked cloth.

[0066] The coating weight was measured by weighing a 10 cm x 10 cm sample of the polyethylene separator before and after the coating of the boehmite coating on both sides. The difference in the weights before and after the coating multiplied by 1,000 is the coat weight in grams per square meter (gsm). An alternative method for measuring the coating weight was weighing a 10 cm x 10 cm sample of the coated separator before and after removing the boehmite coating on both sides, either by pulling off the coating with an adhesive tape or by rubbing off the coating with an alcohol-soaked cloth.

[0067] Figure 1 shows a plot of the average boehmite coating thickness and coating weight per side of about 0.6 gsm to about 2.6 gsm. For two sided coatings, these numbers are doubled to give a total coating weight range of about 1.2 gsm to about 5.2 gsm. The total boehmite coating thickness for both sides varies from about 1.2 microns to about 4.4 microns. If a more accurate measurement of the coating thickness is desired, scanning electron microscope (SEM) analysis of cross-sections of the boehmite-coated plastic separator can be utilized.

[0068] Using a SEM analysis for the total coating thickness showed a value of about 1.06 gsm per micron of coating thickness. From this, the % porosity for this 12:1 pigment to binder ratio is estimated as 62%.

[0069] One objective for minimizing the cost of the boehmite coating is to apply the total weight of coating that is needed to reduce the heat shrinkage to the target value, such as less than 5% shrinkage at 150°C. Figure 2 shows that this level of heat shrinkage is obtained with an

average coating thickness per side of about 1.9 microns or thicker on the 12 micron polyethylene substrate of this example. For coatings on two sides, this number is doubled to give a total coating thickness of about 3.8 microns or thicker. Based on Figure 1, a total coating thickness of about 3.8 microns on both sides equates to about 4.1 gsm of coating weight.

[0070] For better wetting and coating adhesion of the boehmite slurry, a corona treatment of the polyethylene substrate is preferred. Besides wire wound coating rods, a variety of other coating application methods may be used, such as, but not limited to, gravure coating, screen printer coating, reverse roll coating, blade coating, and slot die coating.

[0071] Example 2

[0072] A boehmite slurry was prepared by adding 12 parts of boehmite (DISPERAL D60 supplied by Sasol Inc., Hamburg, Germany) and 1 part of a vinyl pyrrolidone copolymer (Soteras CCS grade supplied by Ashland Inc., Wilmington, DE) to 73 parts of 9:1 water:isopropyl alcohol and stirring the slurry. The primary particle size of the boehmite was about 75 nm. The boehmite slurry was coated onto both sides of a 12 micron thick porous polyethylene separator (EP12 supplied by ENTEK, Lebanon, Oregon) using wire-wound rods of different wire thicknesses to obtain a range of coating weights for both sides from about 2.4 grams per square meter (gsm) to about 9.2 gsm. The boehmite coating was first applied to one side of the polyethylene separator and dried at 70°C for 2 minutes in a convection oven. Then, the boehmite coating was applied to the reverse uncoated side of the polyethylene separator and dried under the same oven heating conditions as for the first coating.

[0073] The 12:1 by weight ratio of boehmite pigment to vinyl pyrrolidone copolymer binder is calculated to have 18.7% by volume of polymer binder in the solid portion of the

porous boehmite coating layer. This calculation is based on a specific gravity of 3.03 g/cc for boehmite and of 1.1 g/cc for the vinyl pyrrolidone copolymer.

[0074] Figure 3 shows a plot of the average boehmite coating thickness and coating weight per side of about 1.2 gsm to about 4.6 gsm. For two sided coating, these numbers are doubled to give a total coating weight range of about 2.4 gsm to about 9.2 gsm. The total boehmite coating thickness for both sides varies from about 2.8 microns to about 9.0 microns.

[0075] As discussed, one objective for minimizing the cost of the boehmite coating is to apply the total weight of coating that is needed to reduce the heat shrinkage to the target value, such as less than 5% shrinkage at 150°C for 1 hour. Figure 4 shows that this level of heat shrinkage is obtained with an average coating thickness per side of about 2.0 microns or thicker on the 12 micron polyethylene substrate of this example. For the coatings on two sides, this number is doubled to give a total coating thickness of about 4.0 microns or thicker. Based on Figure 3, a total coating thickness of about 4.0 microns on both sides equates to about 3.9 gsm of coating weight.

[0076] A boehmite slurry of an 8 to 1 ratio by weight of the DISPERAL D60 to vinyl pyrrolidone copolymer in 9:1 water:isopropyl alcohol at 15% solids was also coated using wire wound rods on the 12 micron polyethylene substrate and dried, as for the 12:1 boehmite D60:polymer coating in this example. It was calculated to have a volume percent of polymer binder of 25.6%. Figure 5 shows a plot of the average boehmite coating weight and coating thickness per side of about 0.8 gsm to about 4.2 gsm. For the coatings on two sides for this boehmite coating with a 8:1 boehmite pigment:vinyl pyrrolidone polymer binder ratio by weight, these numbers are doubled to give a range of about 1.6 gsm to 8.4 gsm. The corresponding total boehmite coating thicknesses for both sides varies from about 1.6 microns to 8.2 microns. Figure

6 shows that a less than 5% shrinkage at 150°C for 1 hour is obtained with an average coating thickness per side of about 2.2 microns or thicker. For the coatings on two sides, this number is doubled to give a total coating thickness on both sides of about 4.4 microns or thicker. Based on Figure 5, a total coating thickness of about 4.4 microns equates to about 4.8 gsm of coating weight.

[0077] Example 3

[0078] Using the procedure of Example 2, a boehmite slurry of a 12:1 by weight of DISPAL 25F4 boehmite and the vinyl pyrrolidone copolymer in 9:1 water:isopropyl alcohol at 15% solids was prepared. The DISPAL 25F4 is supplied by Sasol, Lake Charles, LA, and has a primary particle size of 8 nm. This boehmite slurry was coated on the EP12 12 micron polyethylene substrate from ENTEK and dried, similarly to the process used in Examples 1 and 2. It was calculated to have a volume percent of polymer binder of 18.7%. Figure 7 shows a plot of the average boehmite coating thickness and the coating weight per side of about 0.8 gsm to about 3.0 gsm. For the coatings on two sides for this boehmite coating with a 12:1 boehmite pigment:vinyl pyrrolidone polymer binder ratio by weight, these numbers are doubled to give a total coating weight range of about 1.6 gsm to about 6.0 gsm. Figure 8 shows that a less than 5% shrinkage at 150°C for 1 hour is obtained with an average coating thickness per side of about 1.8 microns or thicker. For two sided coatings, this number is doubled to give a total coating thickness on both sides of about 3.6 microns or thicker. Based on Figure 7, a total coating thickness of about 3.6 microns equates to about 3.6 gsm.

[0079] A boehmite slurry of an 8 to 1 ratio by weight of the DISPAL 25F4 to vinyl pyrrolidone copolymer in 9:1 water:isopropyl alcohol was also coated on the 12 micron polyethylene substrate and dried, similarly to the process used in Examples 1 and 2. It was

calculated to have a volume percent of polymer binder of 25.6%. Figure 9 shows a plot of the average boehmite coating thickness and coating weight per side of about 0.8 gsm to about 4.7 gsm. For the coatings on two sides for this boehmite coating with a 8:1 boehmite pigment:vinyl pyrrolidone polymer binder ratio by weight, these numbers are doubled to give a total coating weight range of about 1.6 gsm to 9.4 gsm. Figure 10 shows that a less than 5% shrinkage at 150°C for 1 hour is obtained with an average coating thickness per side of about 0.9 microns or thicker. For the coatings on two sides, this number is doubled to give a total coating thickness on both sides of about 1.8 microns or thicker. Based on Figure 9, a total coating thickness of about 1.8 microns equates to about 2.9 gsm of coating weight.

[0080] Example 4

[0081] The procedure of Example 1 was used to make a nanoporous separator comprising a 50:50 blend by weight of boehmite and boron nitride pigments, except that a 12 micron thick porous polyethylene separator from Toray Industries, Tokyo, Japan, was substituted for the Entek polyethylene separator, and the vinyl pyrrolidone polymer, Soteras CCS, was substituted for the chitosan. The boron nitride pigment was NX1, supplied by Momentive Performance Materials. The total coating weight on both sides was 2.5 gsm. Figure 11 shows the reduced water content of this separator compared to the control with only boehmite pigment and no boron nitride. Specifically, as shown in Figure 11, at a 50:50 by weight ratio of boehmite and boron nitride, the water content at 20% RH was reduced by one-third from its value with boehmite pigment only.

[0082] Comparative Example 1

[0083] An alumina mix was prepared in water by adding 20 parts of alumina pigment (HJA-0719 supplied by AnHui Estone Materials Technology Co., Ltd., Anhui Province, China)

and 1 part of a hydroxypropyl cellulose polymer (Klucel H grade supplied by Ashland Inc., Wilmington, DE) to 63 parts of water and stirring the slurry. This 20:1 weight ratio of pigment to binder provided a similar Gurley air permeability and similar ionic conductivity in electrolyte as the 8:1 weight ratio of pigment to binder in Example 2. Reducing the 20:1 weight ratio had a progressively negative effect with higher Gurley air permeability and lower ionic conductivity. The primary particle size of the alumina was greater than 400 nm. The alumina mix was coated onto both sides of a 12 micron thick porous polyethylene separator (EP12 supplied by ENTEK, Lebanon, Oregon) using wire-wound rods of different wire thicknesses to obtain a range of total coating weights for both sides from about 0.8 grams per square meter (gsm) to about 4.4 gsm. The alumina coating was first applied to one side of the polyethylene separator and dried at 70°C for 2 minutes in a convection oven. Then, the alumina coating was applied to the reverse uncoated side of the polyethylene separator and dried under the same oven heating conditions as for the first coating.

[0084] The 20:1 by weight ratio of alumina pigment to hydroxypropyl cellulose polymer binder is calculated to have 13.6% by volume of polymer binder in the solid portion of the porous alumina coating layer. This calculation is based on a specific gravity of 4.0 g/cc for alumina and of 1.27 g/cc for the hydroxypropyl cellulose polymer. At a total coating weight of about 4.4 gsm, this alumina coating had a shrinkage of about 60% at 150°C for 1 hour.

[0085] Comparative Example 2

[0086] An boehmite mix was prepared in water by adding 20 parts of boehmite pigment (BG-613 supplied by AnHui Estone Materials Technology Co., Ltd., Anhui Province, China) and 1 part of a hydroxypropyl cellulose polymer (Klucel H grade supplied by Ashland Inc., Wilmington, DE) to 63 parts of water and stirring the slurry. This 20:1 weight ratio of pigment

to binder provided a similar Gurley air permeability and similar ionic conductivity in electrolyte as the 8:1 weight ratio of pigment to binder in Example 2. Reducing the 20:1 weight ratio had a progressively negative effect with higher Gurley air permeability and lower ionic conductivity. The primary particle size of the boehmite was greater than 400 nm. The boehmite mix was coated onto both sides of a 12 micron thick porous polyethylene separator (EP12 supplied by ENTEK, Lebanon, Oregon) using wire-wound rods of different wire thicknesses to obtain a range of total coating weights for both sides from about 0.8 grams per square meter (gsm) to about 7.0 gsm. The boehmite coating was first applied to one side of the polyethylene separator and dried at 70°C for 2 minutes in a convection oven. Then, the alumina coating was applied to the reverse uncoated side of the polyethylene separator and dried under the same oven heating conditions as for the first coating.

[0087] The 20:1 by weight ratio of boehmite pigment to hydroxypropyl cellulose polymer binder is calculated to have 10.7% by volume of polymer binder in the solid portion of the porous boehmite coating layer. This calculation is based on a specific gravity of 3.03 g/cc for boehmite and of 1.27 g/cc for the hydroxypropyl cellulose polymer. At a total coating weight of about 7.0 gsm, this boehmite coating had a shrinkage of about 60% at 150°C for 1 hour.

[0088] Table 1 shows a summary of the data from Examples 1 to 3.

Table 1

Example	Boehmite Type	Primary Particle Size (nm)	Pigment:Polymer Binder Weight Ratio	Volume % Polymer	Total Coat Weight for <5% Shrinkage at 150°C for 1 hour
1	10F4	40	12:1	15.3%	≥4.1 gsm
2	D60	75	12:1	18.7%	≥3.9 gsm
2	D60	75	8:1	25.6%	≥4.8 gsm
3	25F4	8	12:1	18.7%	≥3.6 gsm

3	25F4	8	8:1	25.6%	≥ 2.9 gsm
---	------	---	-----	-------	----------------

[0089] While the invention has been described in detail and with reference to specific and general embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made therein without departing from the spirit and scope thereof.

CLAIMS

1. A separator for a lithium battery comprising
 - (a) a porous polymeric layer, and
 - (b) a nanoporous composite layer on both sides of said polymeric layer, wherein said nanoporous layer comprises inorganic particles and one or more polymers, and wherein the volume fraction of said one or more polymers in the solid portion of said nanoporous layer is about 10% to about 50%; and wherein the crystallite size of said inorganic particles is about 5 nm to about 90 nm.
2. The separator of claim 1, wherein the inorganic particles comprise boehmite.
3. The separator of claim 1, wherein the inorganic particles comprise inorganic nitrides.
4. The separator of claim 1, wherein the inorganic particles comprise boron nitride.
5. The separator of claim 1, wherein the inorganic particles comprise a blend of boehmite and boron nitride particles.
6. The separator of any of claims 1-5, wherein the ratio of the total thickness of said nanoporous layer on both sides to the total thickness of said separator is 10% to 80%.
7. The separator of any of claims 1-5, wherein the heat shrinkage of said separator at 150°C for 1 hour is less than 5%
8. The separator of any of claims 1-5, wherein the heat shrinkage of said separator at 200°C for 1 hour is less than 5%.
9. The separator of any of claims 1-5, wherein the heat shrinkage of said separator at 120°C for 1 hour is less than 1.0%.
10. The separator of any of claims 1-5, wherein the total coating weight of said nanoporous layer on both sides is less than 4.5 grams per square meter.

11. The separator of any of claims 1-5, wherein the total coating weight of said nanoporous layer on both sides is less than 3.5 grams per square meter.
12. The separator of any of claims 1-5, wherein the crystallite size of said particles is 30 nm to 50 nm.
13. The separator of any of claims 1-5, wherein the crystallite size of said particles is 5 nm to 25 nm.
14. The separator of any of claims 1-5, wherein the crystallite size of said particles is 5 nm to 8 nm.
15. The separator of any of claims 1-5, wherein said nanoporous layer has a % porosity between 30% and 55%.
16. The separator of any of claims 1-5, wherein said nanoporous layer has a pore volume between 0.8 cc/g and 1.0 cc/g.
17. The separator of any of claims 1-5, wherein the volume fraction of said one or more polymers in the solid portion of said nanoporous layer is 15% to 30%.
18. The separator of any of claims 1-5, wherein the volume fraction of said one or polymers in the solid portion of said nanoporous layer is 30% to 45%.
19. The separator of any of claims 1-5, wherein said nanoporous layer has a % porosity of 55% to 70%.
20. The separator of any of claims 1-5, wherein said nanoporous layer comprises pores having an average pore diameter of 80 nm or less and at least 70% of said pores have a diameter less than 80 nm.

21. The separator of any of claims 1-5, wherein said nanoporous layer comprises pores having an average pore diameter of 50 nm or less and at least 70% of said pores have a diameter less than 50 nm.
22. The separator of any of claims 1-5, wherein said nanoporous layer comprise pores having an average pore diameter of 25 nm or less and at least 70% of said pores have a diameter less than 25 nm.
23. The separator of any of claims 1-5, wherein the ratio of the air permeability of said separator to the air permeability of said polymeric layer without any said nanoporous layer present is 1.0 to 1.4.
24. The separator of any of claims 1-5, wherein said polymeric layer comprises a polyolefin.
25. The separator of any of claims 1-5, wherein said polymeric layer comprises polyethylene.
26. The separator of any of claims 1-5, wherein the ratio of the air permeability of said separator after said heat shrinkage at 120°C to the air permeability of said separator before said heat shrinkage at 120°C is 0.8 to 1.2.
27. The separator of any of claims 1-5, wherein said nanoporous layer is coated on said polymer layer.
28. The separator of any of claims 1-5, wherein said nanoporous layer is a laminated layer on said polymer layer.
29. A separator for a lithium battery comprising:
 - (a) a porous polymeric layer, and
 - (b) a nanoporous composite layer on one or both sides of said polymeric layer, wherein said nanoporous layer comprises inorganic particles and a polymer, and wherein the crystallite size of said inorganic particles is 5 to 8 nm.

30. The separator of claim 29, wherein the inorganic particles comprise inorganic oxides.
31. The separator of claim 29, wherein the inorganic particles comprise boehmite.
32. The separator of claim 29, wherein the inorganic particles comprise inorganic nitrides.
33. The separator of claim 29, wherein the inorganic particles comprise boron nitride.
34. The separator of claim 29, wherein the inorganic particles comprise a blend of boehmite and boron nitride particles.
35. The separator of any of claims 29-34, wherein said nanoporous layer comprises pores having an average pore diameter of 25 nm or less and at least 70% of said pores have a diameter of 25 nm or less.
36. A separator for a lithium battery comprising:
 - (a) a porous polyethylene layer, and
 - (b) a nanoporous composite layer on both sides of said polyethylene layer, wherein said nanoporous layer comprises inorganic particles and one or more polymers; the volume fraction of said one or more polymers in the solid portion of said nanoporous layer is 10% to 50%; the total coating weight of said nanoporous layer on both sides is 5.5 grams per square meter or less, and the heat shrinkage of said separator at 150°C for 1 hour is less than 5%.
37. The separator of claim 36, wherein the inorganic particles comprise inorganic oxides.
38. The separator of claim 36, wherein the inorganic particles comprise boehmite.
39. The separator of claim 36, wherein the inorganic particles comprise inorganic nitrides.
40. The separator of claim 36, wherein the inorganic particles comprise boron nitride.
41. The separator of claim 36, wherein the inorganic particles comprise a blend of boehmite and boron nitride particles.

42. The separator of any of claims 36-41, wherein the total coating weight of said nanoporous layer on both sides is 3.5 grams per square meter or less and the thickness of said polyethylene layer is in the range of 5 to 16 microns.
43. A lithium battery comprising a separator according to any one of claims 1 to 42.
44. A method of making the separator according to any of claims 1-42, comprising coating a solution comprising inorganic particles and one or more polymers on both surfaces of the porous polymeric layer.

ABSTRACT

Provided are separators for a lithium battery comprising (a) a porous polymeric layer, such as a polyethylene layer; and (b) a nanoporous inorganic particle/polymer layer on both sides of the polymeric layer, wherein the nanoporous layer comprises an inorganic oxide and one or more polymers; the volume fraction of the polymers in the nanoporous layer is about 10% to about 50%, and the crystallite size of the inorganic oxide is 5 nm to 90 nm. Also provided are lithium batteries comprising such separators and methods of making such separators.

Figure 1

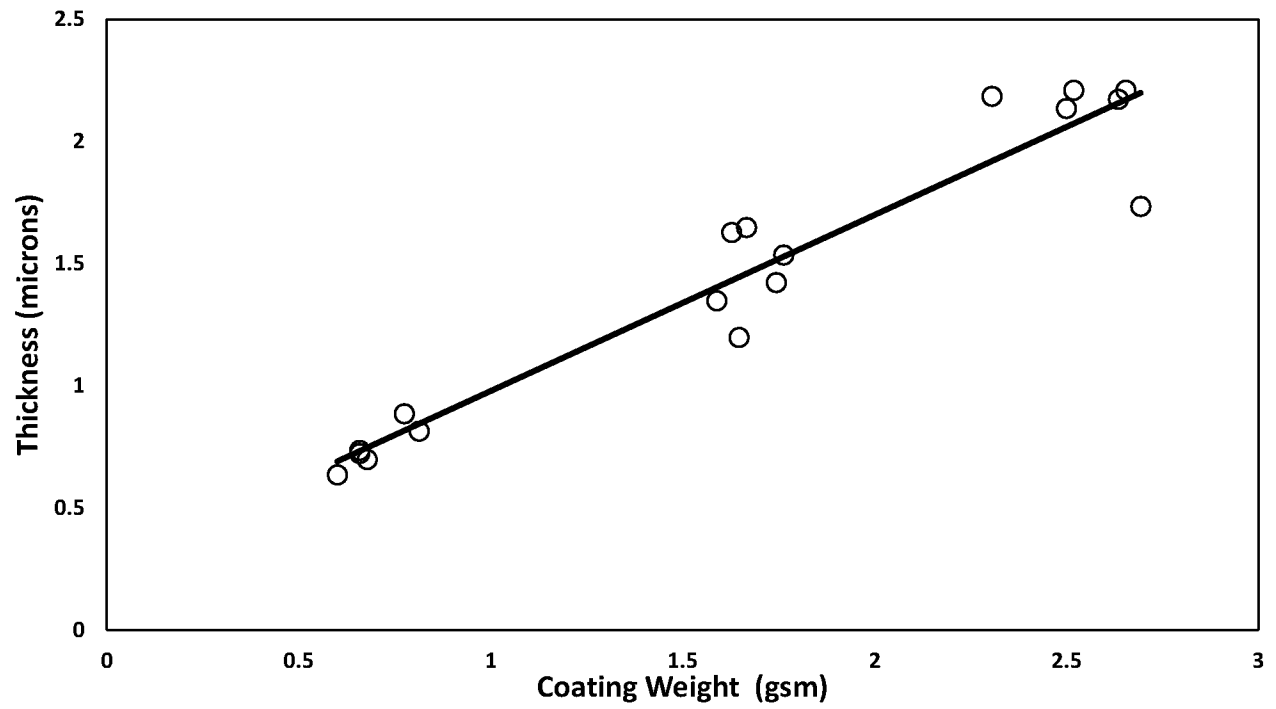


Figure 2

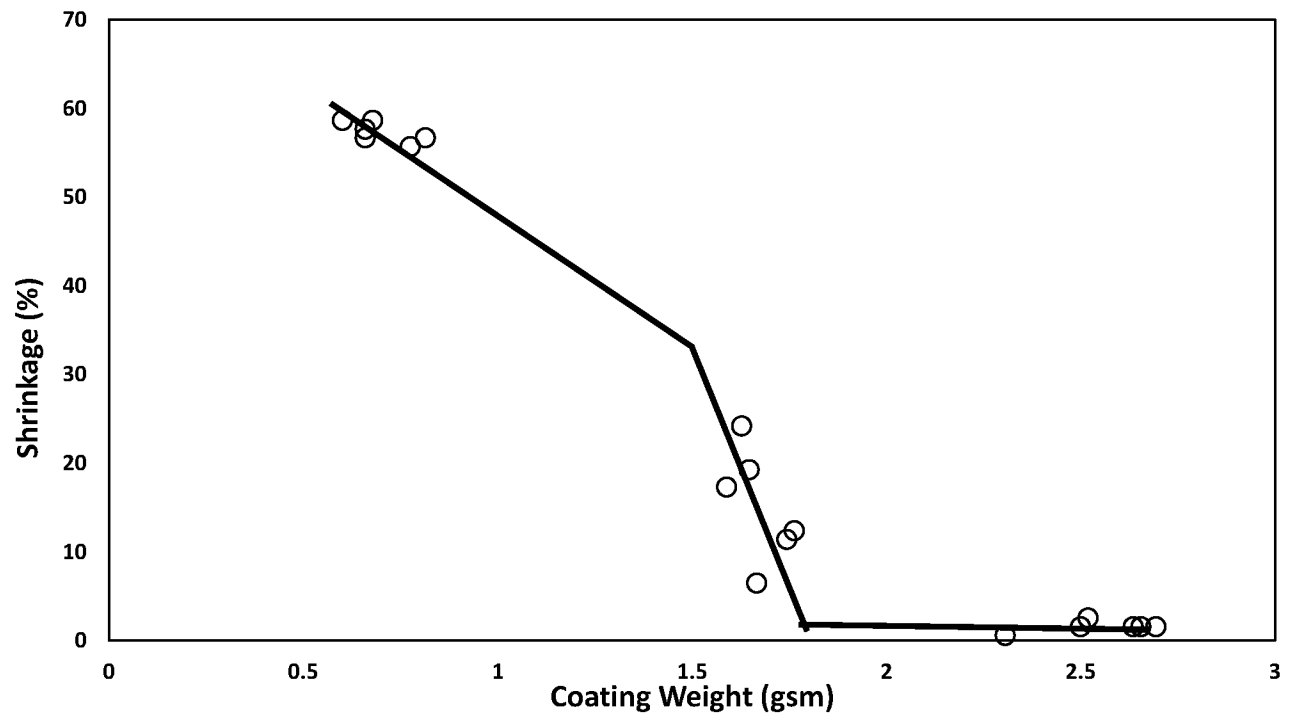


Figure 3

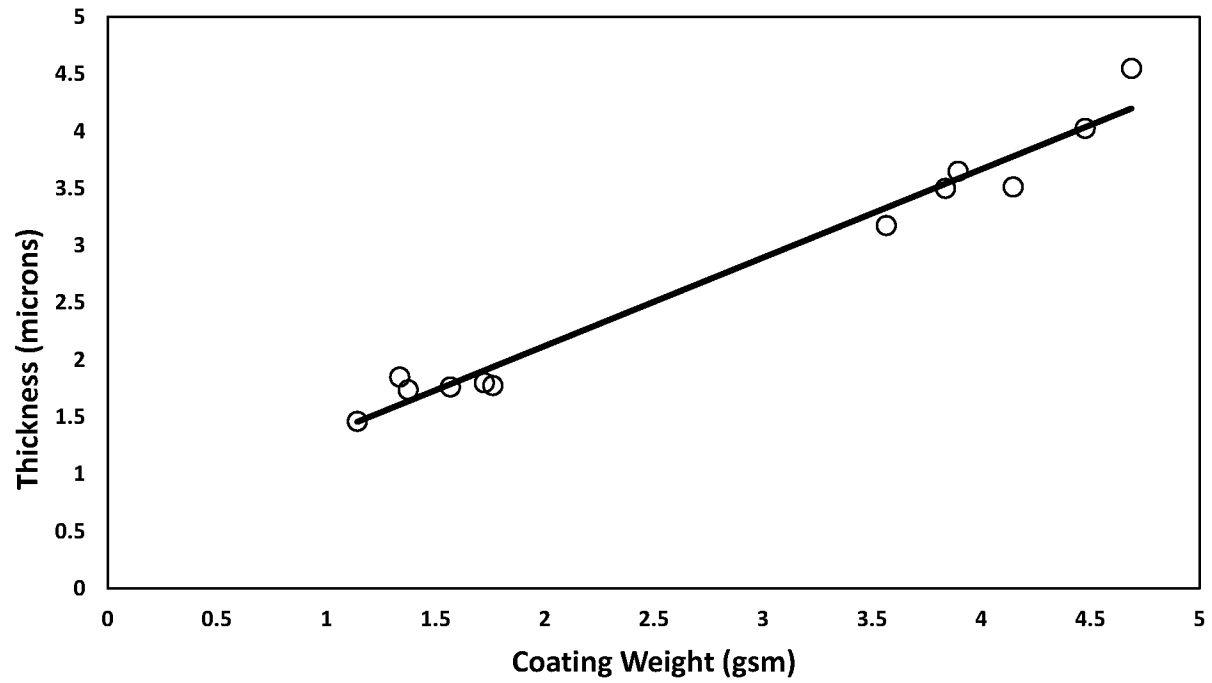


Figure 4

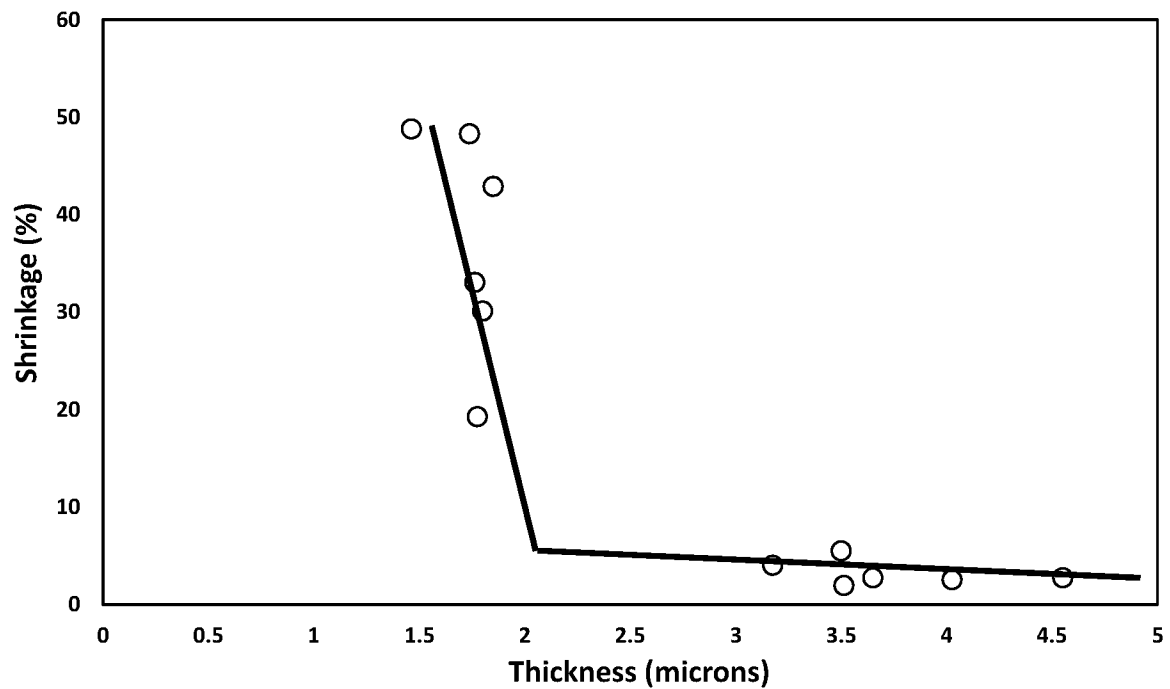


Figure 5

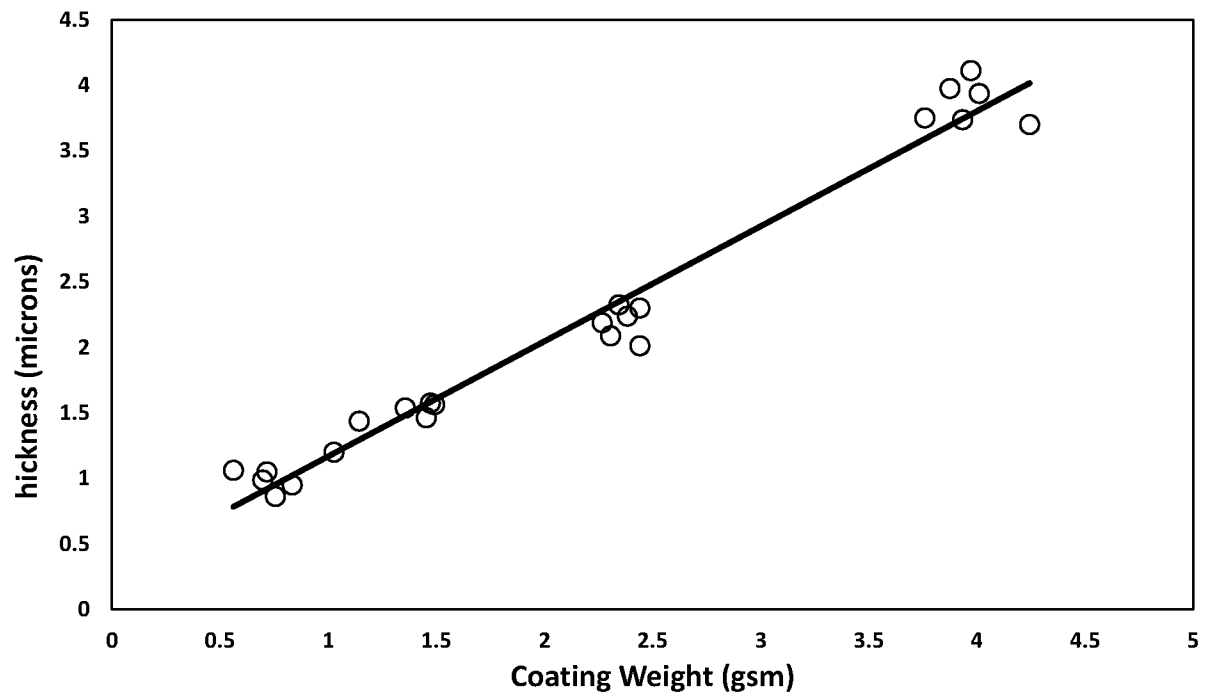


Figure 6

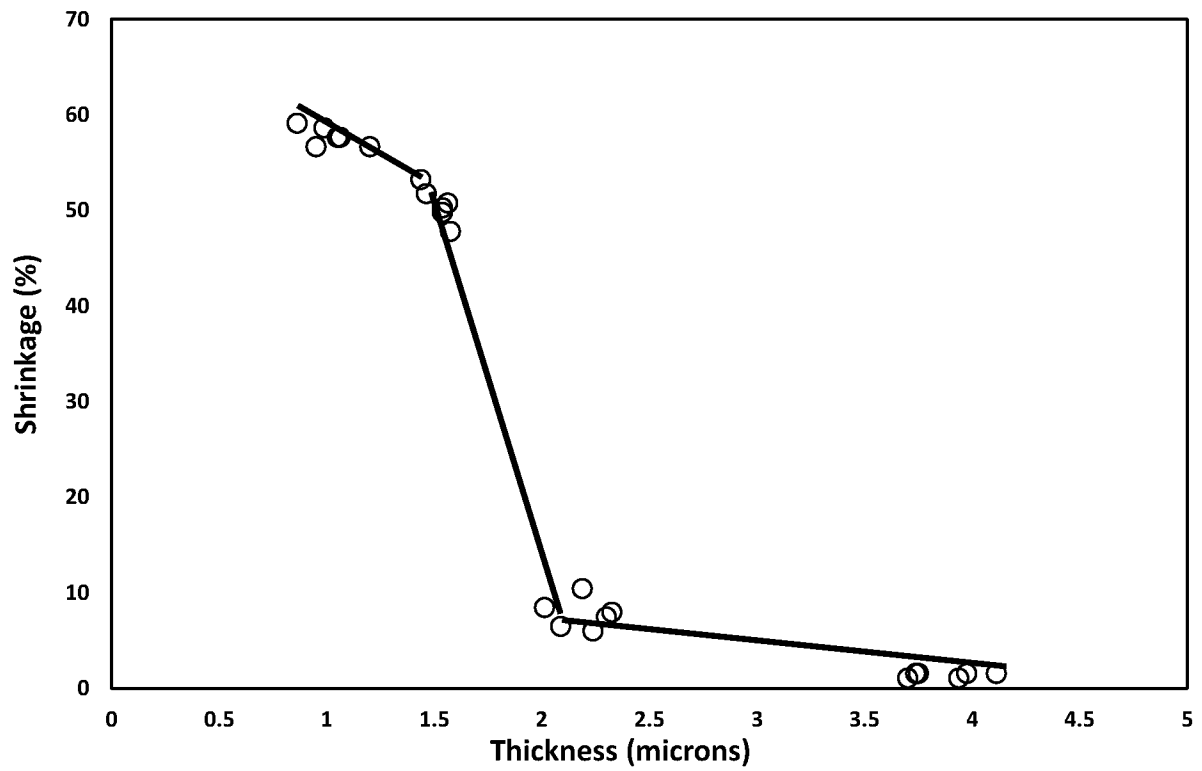


Figure 7

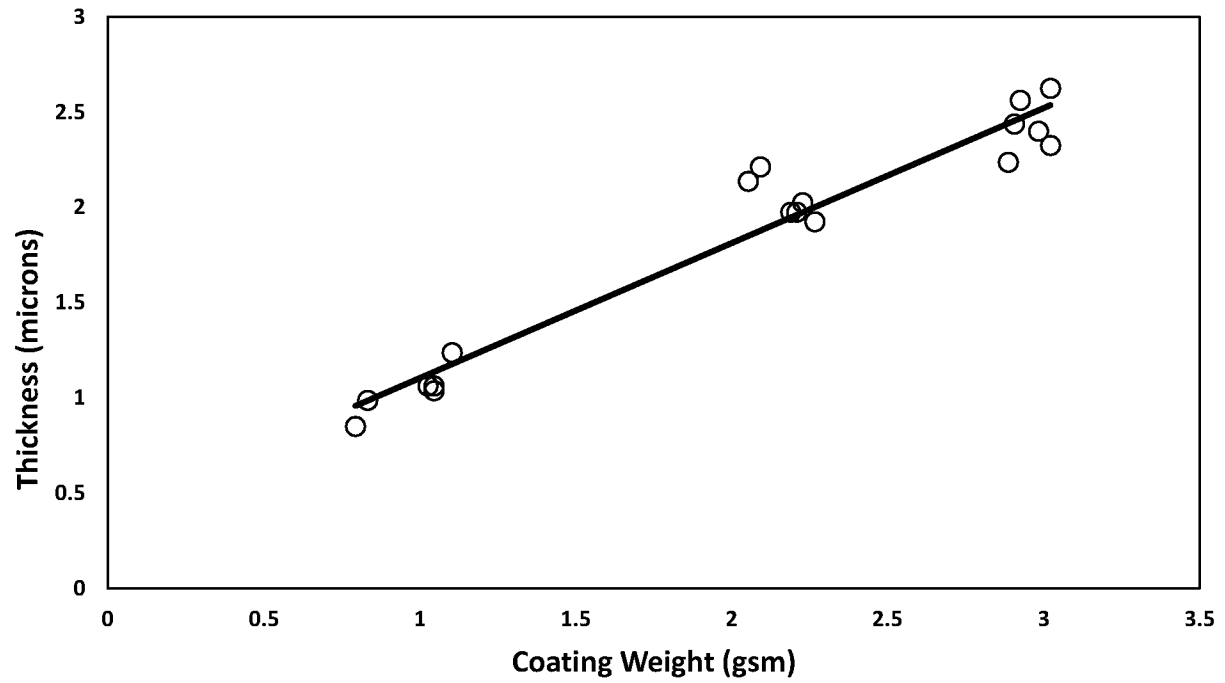


Figure 8

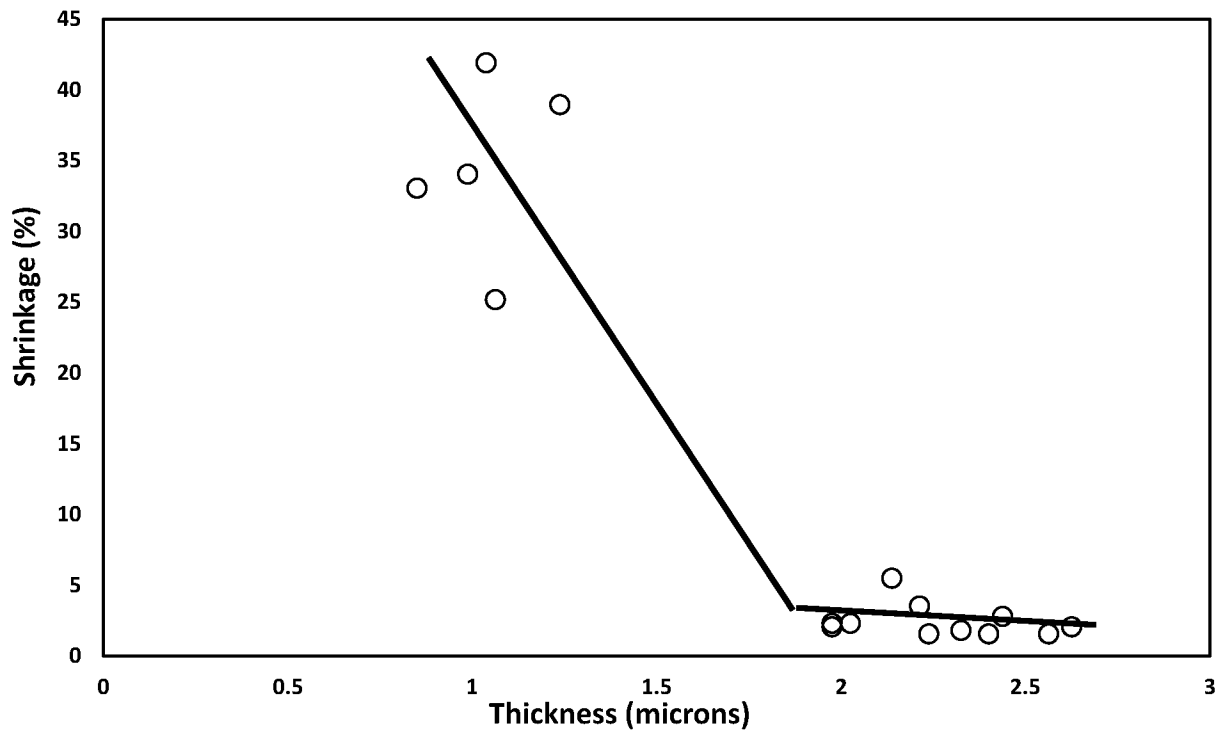


Figure 9


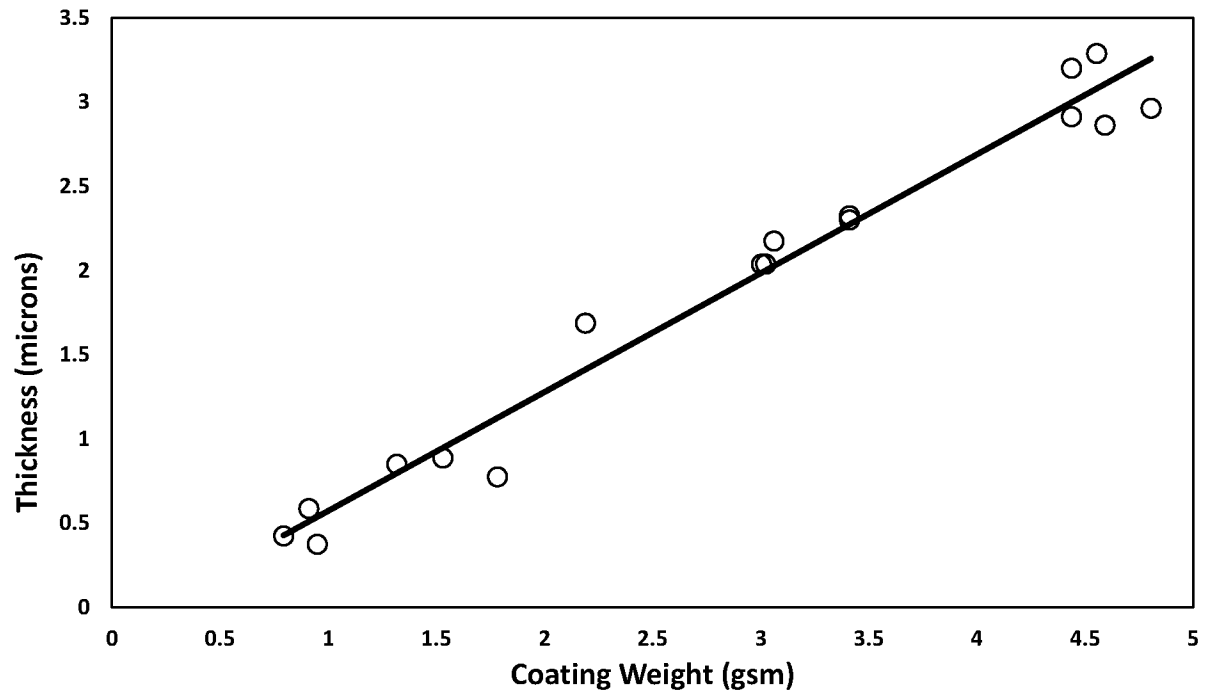


Figure 10

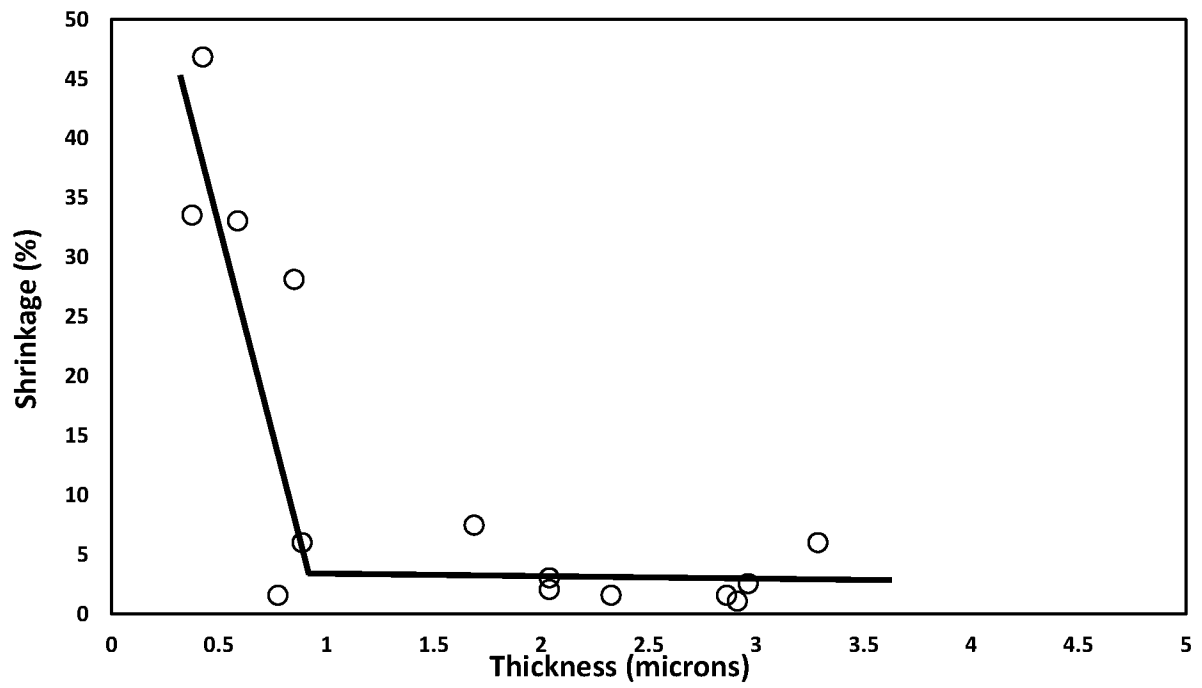

moisture vs weight fraction BN in CCS filler :

CCS C25 on Toray substrate

AS1 binder, P:B = 12:1, ~ 2.5 gsm

samples equilibrated overnight @ 20%-25% RH

error bars represent ± 2 sigma, $n = 4$

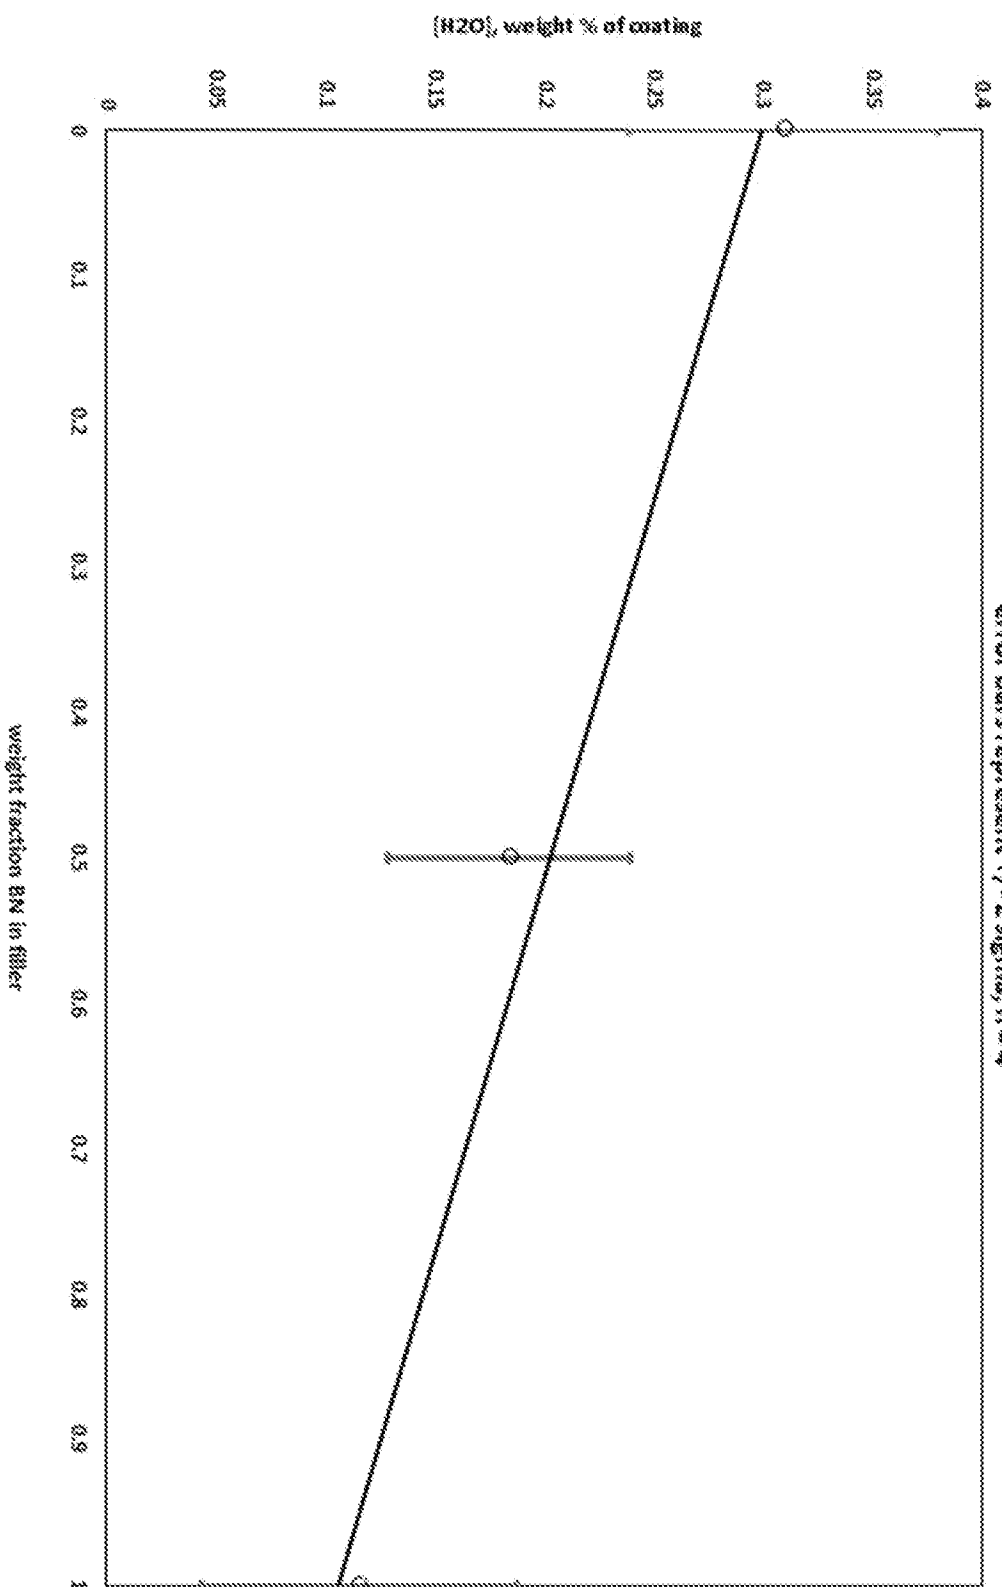


Fig. 11

Electronic Patent Application Fee Transmittal

Application Number:

Filing Date:

Title of Invention:

MULTILAYER NANOPOROUS SEPARATOR

First Named Inventor/Applicant Name:

David W. Avison

Filer:

Dexter T. Chang./Carol Brown

Attorney Docket Number:

65213/84

Filed as Small Entity

Filing Fees for Provisional

Description

Fee Code

Quantity

Amount

**Sub-Total in
USD(\$)**

Basic Filing:

PROVISIONAL APPLICATION FILING FEE

2005

1

130

130

Pages:

Claims:

Miscellaneous-Filing:

Petition:

Patent-Appeals-and-Interference:

Post-Allowance-and-Post-Issuance:

Description	Fee Code	Quantity	Amount	Sub-Total in USD(\$)
Extension-of-Time:				
Miscellaneous:				
Total in USD (\$)				130

Electronic Acknowledgement Receipt

EFS ID:	30653234
Application Number:	62572083
International Application Number:	
Confirmation Number:	1087
Title of Invention:	MULTILAYER NANOPOROUS SEPARATOR
First Named Inventor/Applicant Name:	David W. Avison
Customer Number:	1912
Filer:	Dexter T. Chang./Carol Brown
Filer Authorized By:	Dexter T. Chang.
Attorney Docket Number:	65213/84
Receipt Date:	13-OCT-2017
Filing Date:	
Time Stamp:	15:59:20
Application Type:	Provisional

Payment information:

Submitted with Payment	yes
Payment Type	DA
Payment was successfully received in RAM	\$ 130
RAM confirmation Number	101617INTEFSW00002658011785
Deposit Account	011785
Authorized User	Dexter Chang

The Director of the USPTO is hereby authorized to charge indicated fees and credit any overpayment as follows:

37 CFR 1.17 (Patent application and reexamination processing fees)

37 CFR 1.21 (Miscellaneous fees and charges)

File Listing:					
Document Number	Document Description	File Name	File Size(Bytes)/ Message Digest	Multi Part /.zip	Pages (if appl.)
1	Provisional Cover Sheet (SB16)	1ProvCover.pdf	1477488	no	3
			e44e10fda93be005fc0651ac0fea045eaebb318a		
Warnings:					
Information:					
2	Specification	2Spec.pdf	146582	no	26
			1da5e3289d27eacd48390ad85f25b4541221966b		
Warnings:					
Information:					
3	Claims	3Clms.pdf	73370	no	5
			e50576851830ceebfe9e02c784d5c0afc11d985		
Warnings:					
Information:					
4	Abstract	4Abst.pdf	55319	no	1
			7f0d47b7c2f94cfb9b7815d65722148a7d18e3f1		
Warnings:					
Information:					
5	Drawings-other than black and white line drawings	5Dwgs.pdf	238856	no	6
			11d992c49f42abc7eecbb823207de46458e71d32		
Warnings:					
Information:					
6	Fee Worksheet (SB06)	fee-info.pdf	30125	no	2
			e029a40007e47510f142f93a52b99cb74139ebac		
Warnings:					
Information:					

This Acknowledgement Receipt evidences receipt on the noted date by the USPTO of the indicated documents, characterized by the applicant, and including page counts, where applicable. It serves as evidence of receipt similar to a Post Card, as described in MPEP 503.

New Applications Under 35 U.S.C. 111

If a new application is being filed and the application includes the necessary components for a filing date (see 37 CFR 1.53(b)-(d) and MPEP 506), a Filing Receipt (37 CFR 1.54) will be issued in due course and the date shown on this Acknowledgement Receipt will establish the filing date of the application.

National Stage of an International Application under 35 U.S.C. 371

If a timely submission to enter the national stage of an international application is compliant with the conditions of 35 U.S.C. 371 and other applicable requirements a Form PCT/DO/EO/903 indicating acceptance of the application as a national stage submission under 35 U.S.C. 371 will be issued in addition to the Filing Receipt, in due course.

New International Application Filed with the USPTO as a Receiving Office

If a new international application is being filed and the international application includes the necessary components for an international filing date (see PCT Article 11 and MPEP 1810), a Notification of the International Application Number and of the International Filing Date (Form PCT/RO/105) will be issued in due course, subject to prescriptions concerning national security, and the date shown on this Acknowledgement Receipt will establish the international filing date of the application.

SCORE Placeholder Sheet for IFW Content

Application Number: 62572083

Document Date: 10/13/2017

The presence of this form in the IFW record indicates that the following document type was received in electronic format on the date identified above. This content is stored in the SCORE database.

Since this was an electronic submission, there is no physical artifact folder, no artifact folder is recorded in PALM, and no paper documents or physical media exist. The TIFF images in the IFW record were created from the original documents that are stored in SCORE.

- Drawing

At the time of document entry (noted above):

- USPTO employees may access SCORE content via eDAN using the Supplemental Content tab, or via the SCORE web page.
- External customers may access SCORE content via PAIR using the Supplemental Content tab.