

PUBLIC EXHIBIT 16

Part 1 of 2

EXHIBIT 16

Oura Ring 4 Infringement Claim Chart - U.S. Patent No. 10,978,789

	U.S. Patent No. 10,978,789
Independent Claim 7	Oura Ring 4 (“Oura Accused Product”)
7[pre] 7. A portable communication device comprising:	To the extent that the preamble is limiting, the Oura Accused Product is a portable communication device, comprising a Bluetooth Low Energy transceiver.

A Wearable That's Truly Wearable, Day and Night



Oura Ring 4 is sleeker and more comfortable than its predecessors, allowing it to blend seamlessly into your lifestyle. With a fully titanium coating inside and out, it's gentle to the touch, even on sensitive skin, and slips on and off your finger with ease.

Plus, the powerful health sensors are now recessed, reducing friction and pressure on your fingers when shaking hands or gripping objects. With the lower profile and advancements in comfort of Oura Ring 4, you might even forget you're wearing it—until the compliments start coming.

[\(https://ouraring.com/blog/oura-ring-4/\)](https://ouraring.com/blog/oura-ring-4/)

Connectivity

- Bluetooth Low Energy (Bluetooth Smart®)
- EMF-Safe and allows Airplane Mode
- FCC certified

(<https://support.ouraring.com/hc/en-us/articles/33045011508115-Oura-Ring-4>)

Bluetooth Connectivity


The bluetooth technology in Oura Ring is only active during a small portion (well below 1%) of each day. Data is transmitted more continuously when the ring syncs with the app and during firmware updates. **Airplane mode** disables all radio transmission from Oura Ring.

The limit for SAR (Specific Absorption Rate) for a device such as Oura Ring is 2.0 W/kg for head and body, and Oura's SAR level is 0.0003 W/kg. In other words, the electromagnetic field (EMF) levels of Oura Ring are about *3,000 times* lower than a typical smartphone.

(<https://ouraring.com/blog/technology-in-oura-ring-4/>)


7[a] a first electronic component;

The Oura Accused Product includes a first electronic component. For example, the Oura Accused Product comprises a battery storage component.

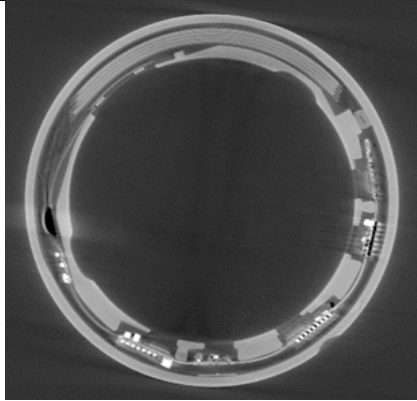

7[b] a second electronic component; and


The Oura Accused Product includes a second electronic component. For example, the Oura Accused Product comprises a wireless charging coil component.

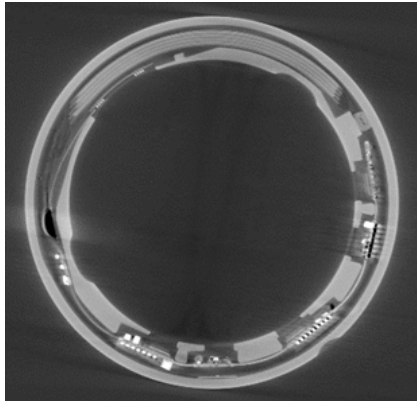

7[c] a printed circuit board (PCB) electrically connected with the first electronic component and the second electronic


The Oura Accused Product includes a printed circuit board (PCB) electrically connected with the first electronic component and the second electronic component. For example, the Oura Accused Product comprises a printed circuit board (PCB) electrically connected with the battery storage component and the wireless charging coil component.


component, the PCB including:

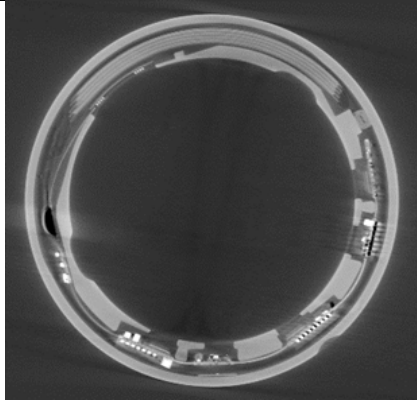


7[c][i] a first rigid PCB portion;

The Oura Accused Product includes a first rigid PCB portion. For example, the Oura Accused Product comprises a first rigid PCB portion, as shown in the overall and zoomed cross-sectional images, which depict multiple rigid and flexible PCB portions arranged in a circular configuration, including the first rigid portion.

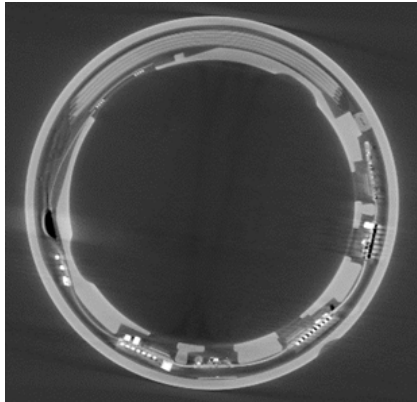


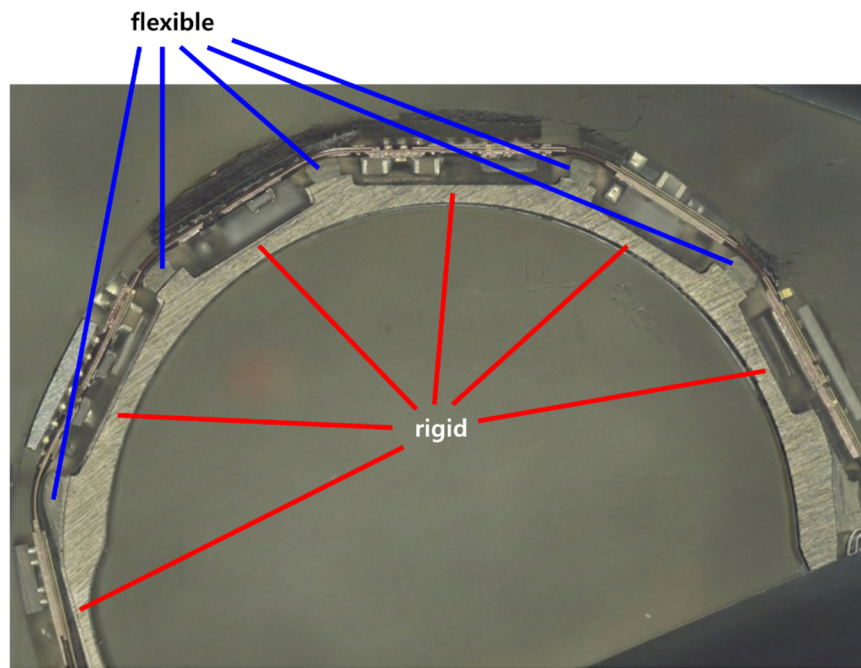


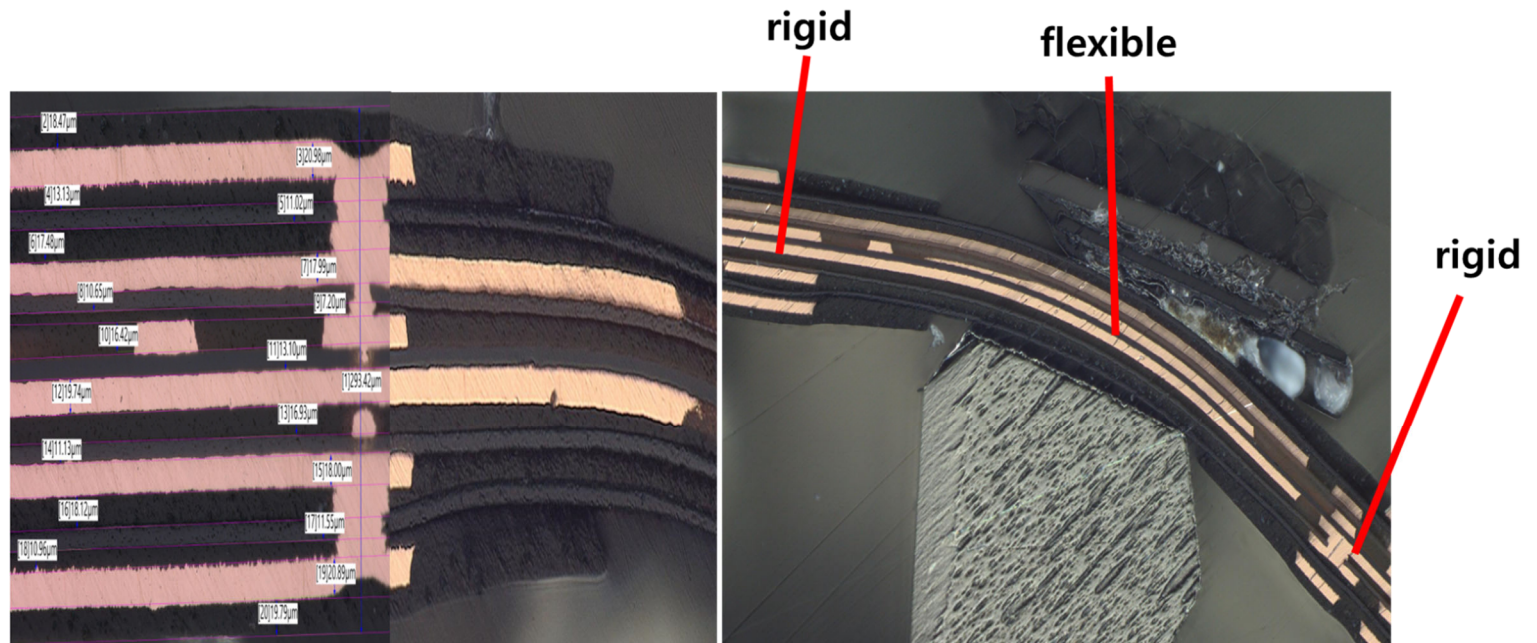


7[c][ii] a first flexible PCB portion in contact with the first rigid PCB portion;

The Oura Accused Product includes a first flexible PCB portion in contact with the first rigid PCB portion. For example, the Oura Accused Product comprises a first flexible PCB portion in contact with the first rigid PCB portion, as shown in the overall and zoomed cross-sectional images, which depict multiple rigid and flexible PCB portions arranged in a circular configuration, including the first flexible PCB portion in contact with the first rigid PCB portion.

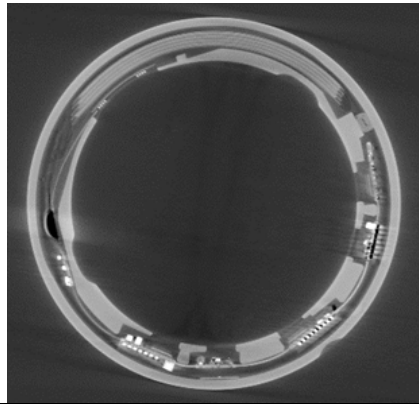


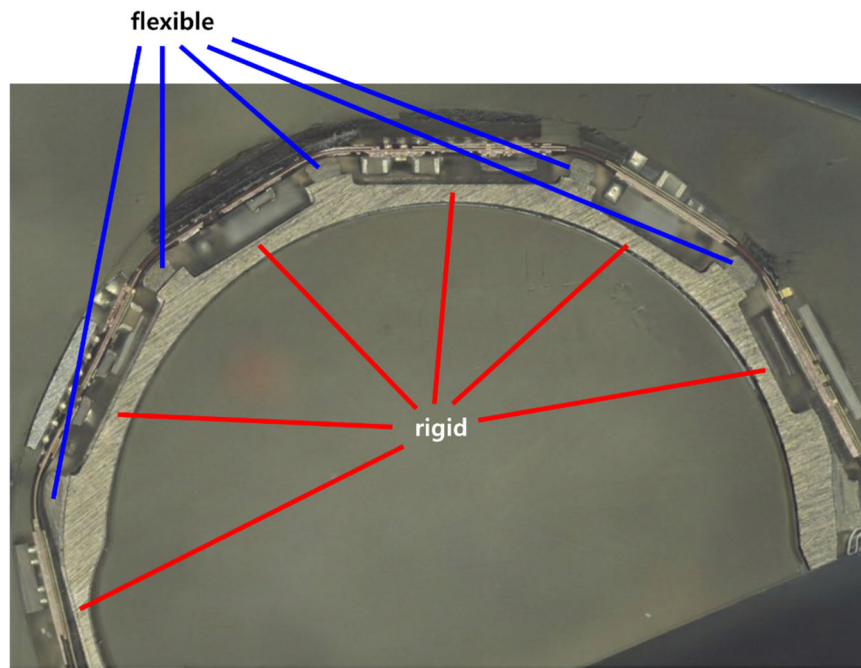


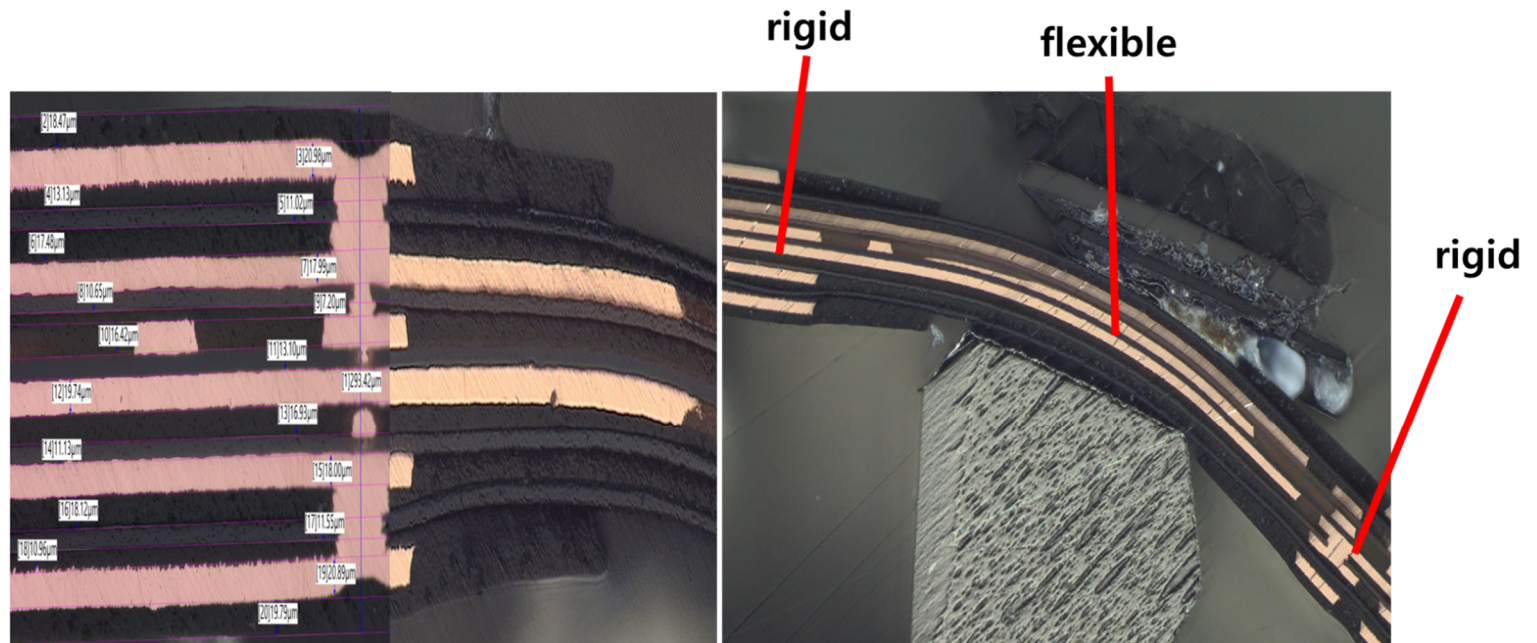




7[c][iii] a second rigid PCB portion in contact with the first flexible PCB portion; and


The Oura Accused Product includes a second rigid PCB portion in contact with the first flexible PCB portion. For example, the Oura Accused Product comprises a second rigid PCB portion in contact with the first flexible PCB portion, as shown in the overall and zoomed cross-sectional images, which depict multiple rigid and flexible PCB portions arranged in a circular configuration, including the second rigid PCB portion in contact with the first flexible PCB portion.

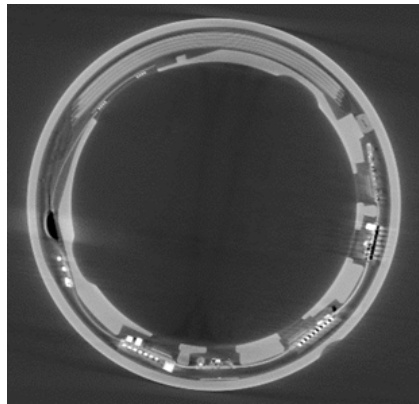

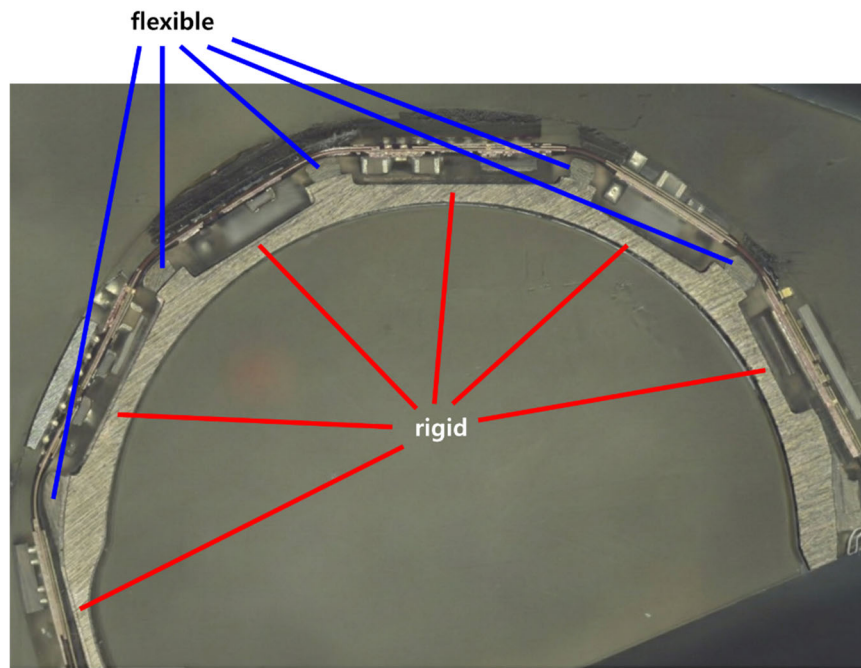

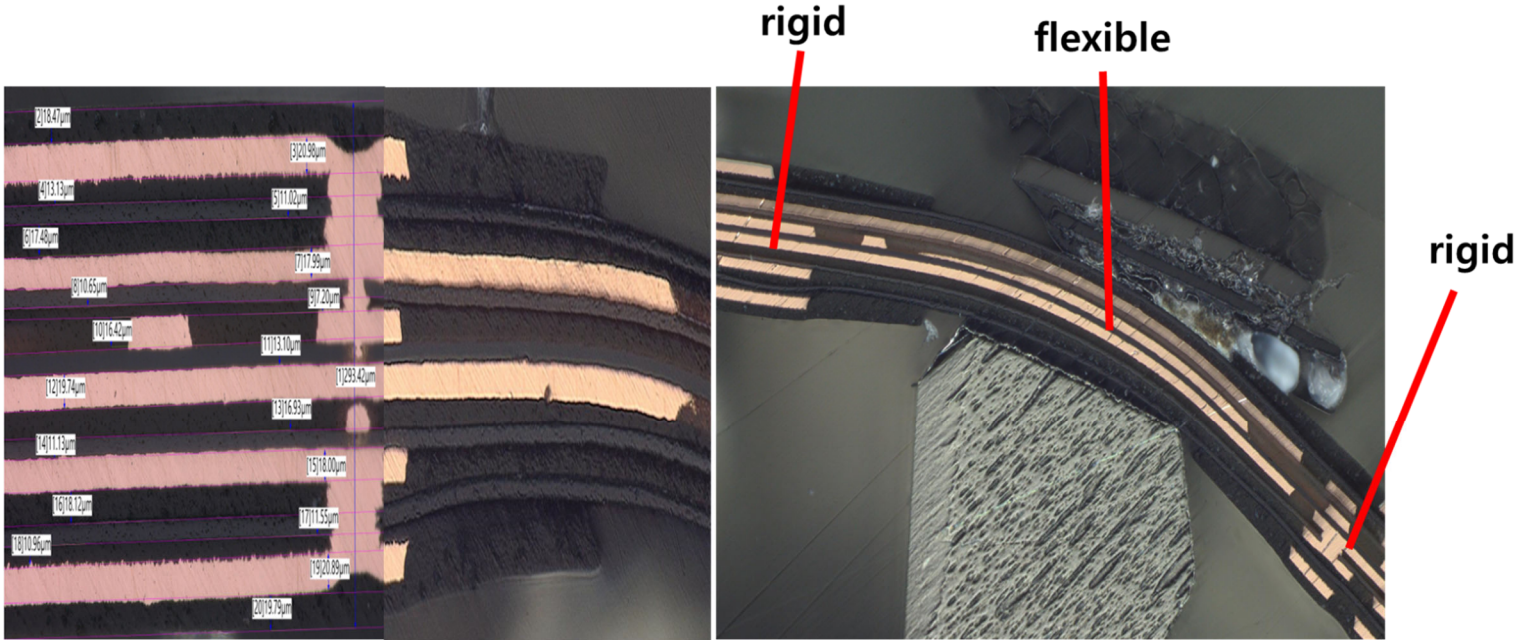
	 The left image is a microscopic cross-section of a PCB assembly showing multiple layers. Thickness measurements are provided for various layers: 2118.47µm, 4113.13µm, 6117.40µm, 8110.65µm, 10116.42µm, 12119.74µm, 14111.13µm, 16118.12µm, 18110.96µm, 20119.79µm, 3120.98µm, 5111.02µm, 7117.99µm, 9117.20µm, 11113.10µm, 13116.93µm, 15118.00µm, 17111.55µm, and 19120.89µm. The right image shows a curved assembly with labels 'rigid' and 'flexible' pointing to different layers.
7[c][iv] a second flexible PCB portion in contact with the second rigid PCB portion,	The Oura Accused Product includes a second flexible PCB portion in contact with the second rigid PCB portion. For example, the Oura Accused Product comprises a second flexible PCB portion in contact with the second rigid PCB portion, as shown in the overall and zoomed cross-sectional images, which depict multiple rigid and flexible PCB portions arranged in a circular configuration, including the second flexible PCB portion in contact with the second rigid PCB portion.

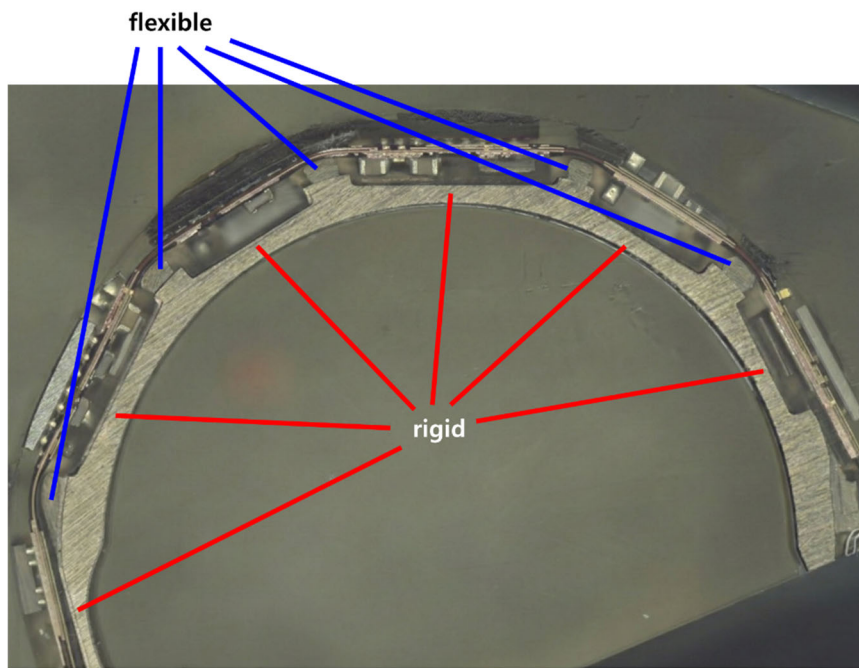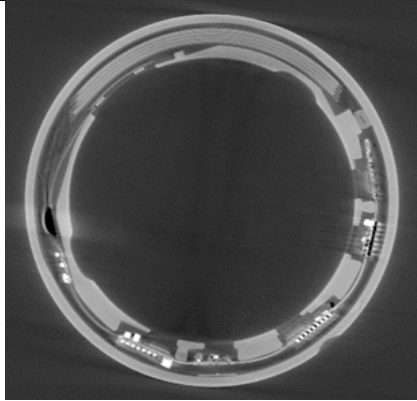


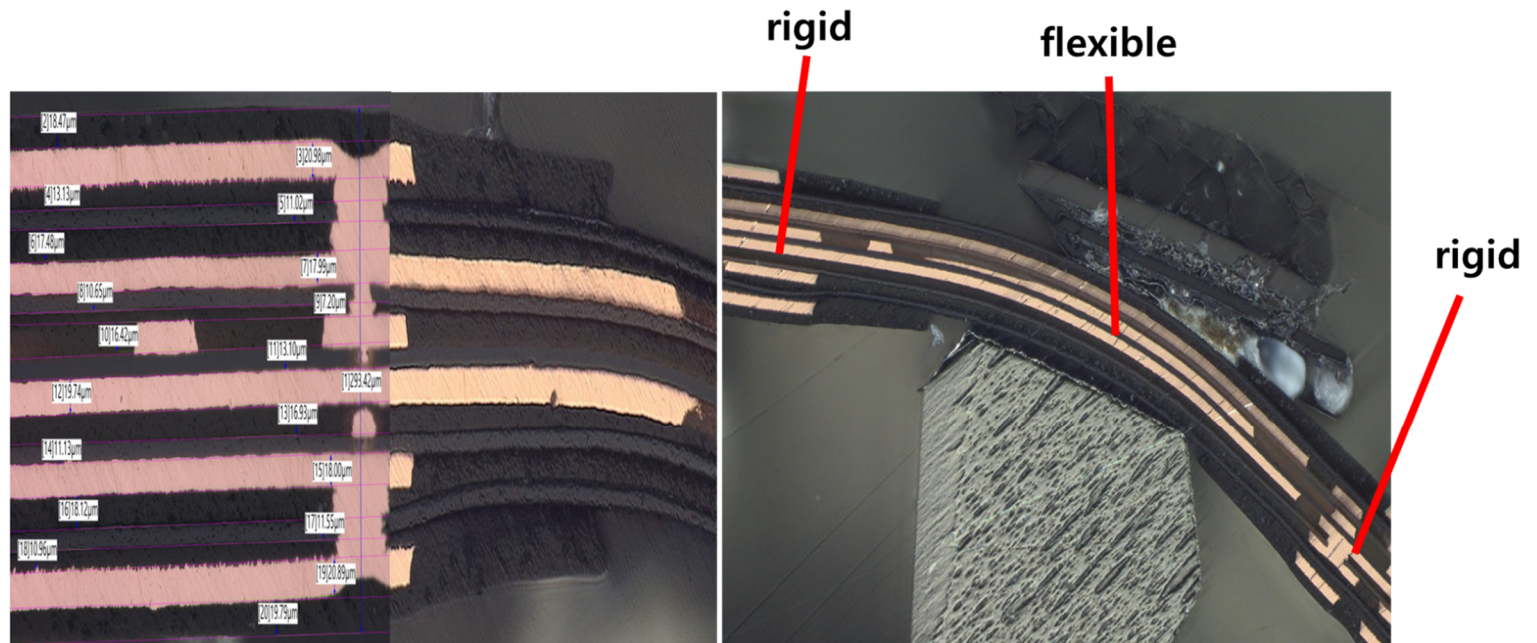


7[c][v] wherein each of the first rigid PCB portion and the second rigid PCB portion includes:


The Oura Accused Product includes a first rigid PCB portion and a second rigid PCB portion. For example, the Oura Accused Product comprises a first rigid PCB portion and a second rigid PCB portion, as shown in the overall and zoomed cross-sectional images, which depict multiple rigid and flexible PCB portions arranged in a circular configuration, including the first rigid PCB portion and the second rigid PCB portion (*see* Element 7[c][i]-[iv]).

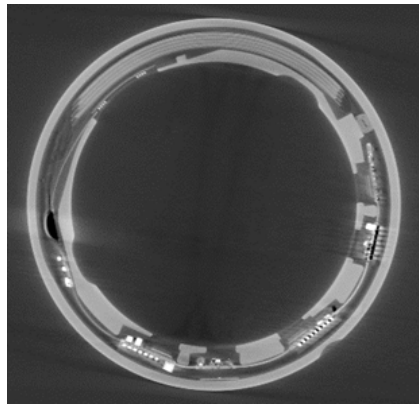

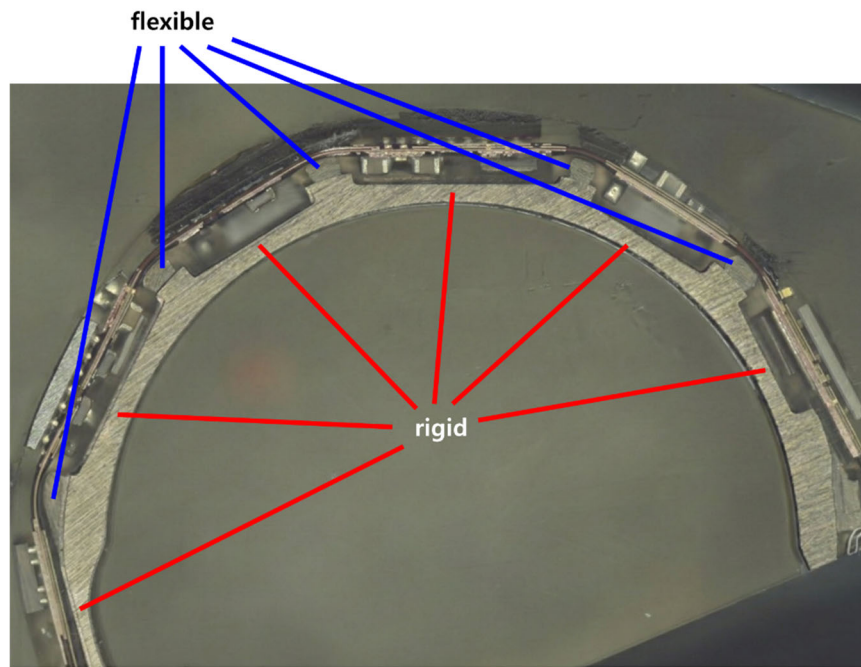

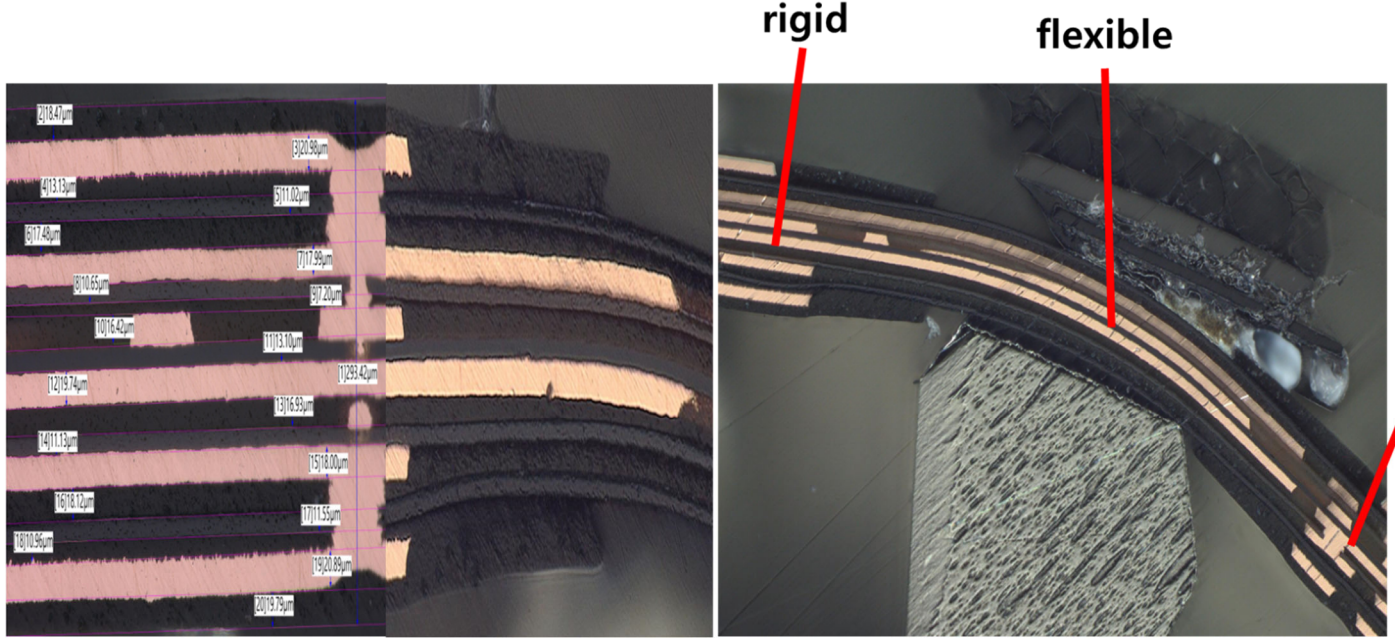
	 The left image is a cross-sectional view of a PCB assembly with multiple layers. Dimensions are labeled for various layers: 2)18.47μm, 4)13.13μm, 6)17.49μm, 8)10.65μm, 10)16.42μm, 12)19.74μm, 14)11.13μm, 16)18.12μm, 18)10.96μm, 20)19.79μm, 3)20.98μm, 5)11.02μm, 7)17.99μm, 9)17.20μm, 11)13.10μm, 13)16.93μm, 15)18.00μm, 17)11.55μm, and 19)20.89μm. The right image shows a curved cross-section of the same assembly. Red arrows point to different regions: 'rigid' points to the top and bottom layers, and 'flexible' points to the central curved region.
7[c][v][(1)] a first insulating layer including a first material and forming a first exterior surface of each of the first rigid PCB portion and the second rigid PCB portion;	The Oura Accused Product includes a first insulating layer including a first material and forming a first exterior surface of each of the first rigid PCB portion and the second rigid PCB portion. For example, the Oura Accused Product comprises a first insulating layer (indicated by the arrow) including a first material and forming a first exterior surface of the first rigid PCB portion and the second rigid PCB portion (<i>see</i> Element 7[c][i]-[iv]).¹

¹ Note that the Oura Ring PCB infringes for substantially the same reasons when starting with either exterior surface as the “first insulating layer,” oriented such that the additional layers are “above” that layer.

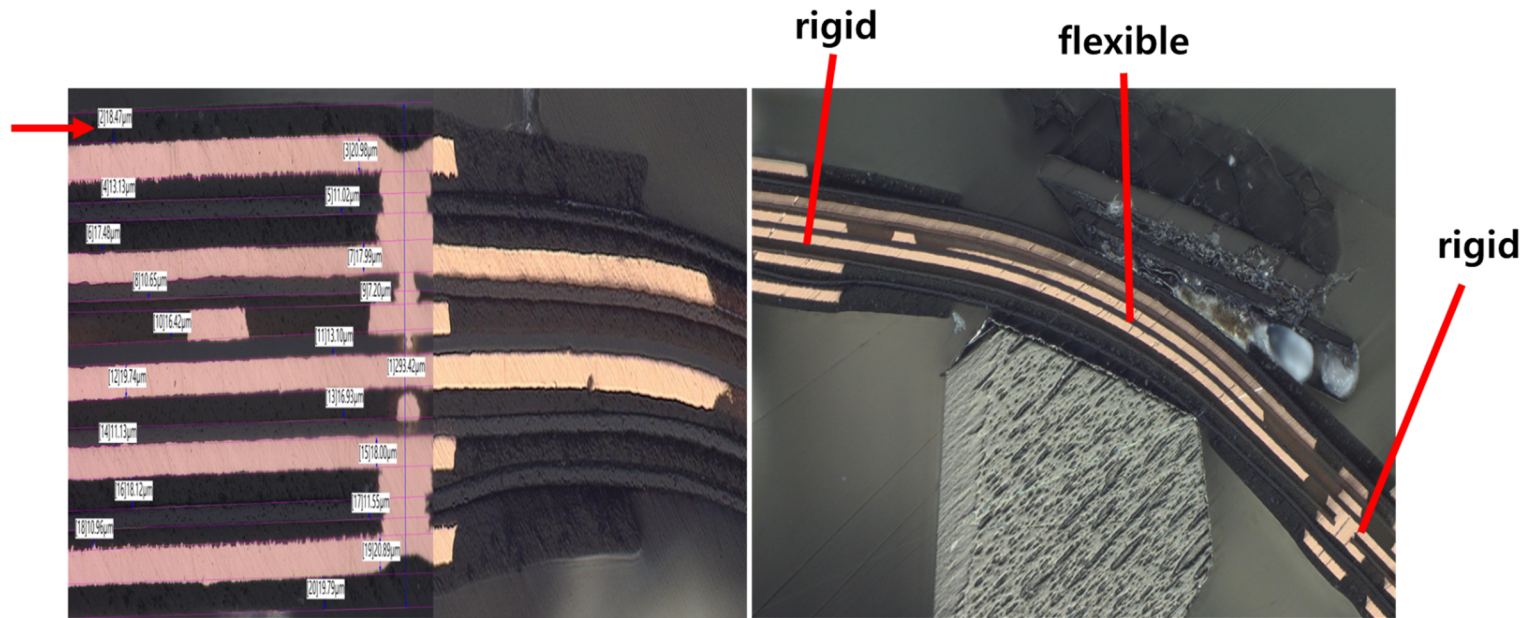


7[c][v][(2)] a first conduction layer located on or above the first insulating layer;

The Oura Accused Product includes a first conduction layer located on or above the first insulating layer. For example, the Oura Accused Product comprises a first conduction layer (indicated by the arrow) located on or above the first insulating layer (*see* Element 7[c][i]-[iv]).

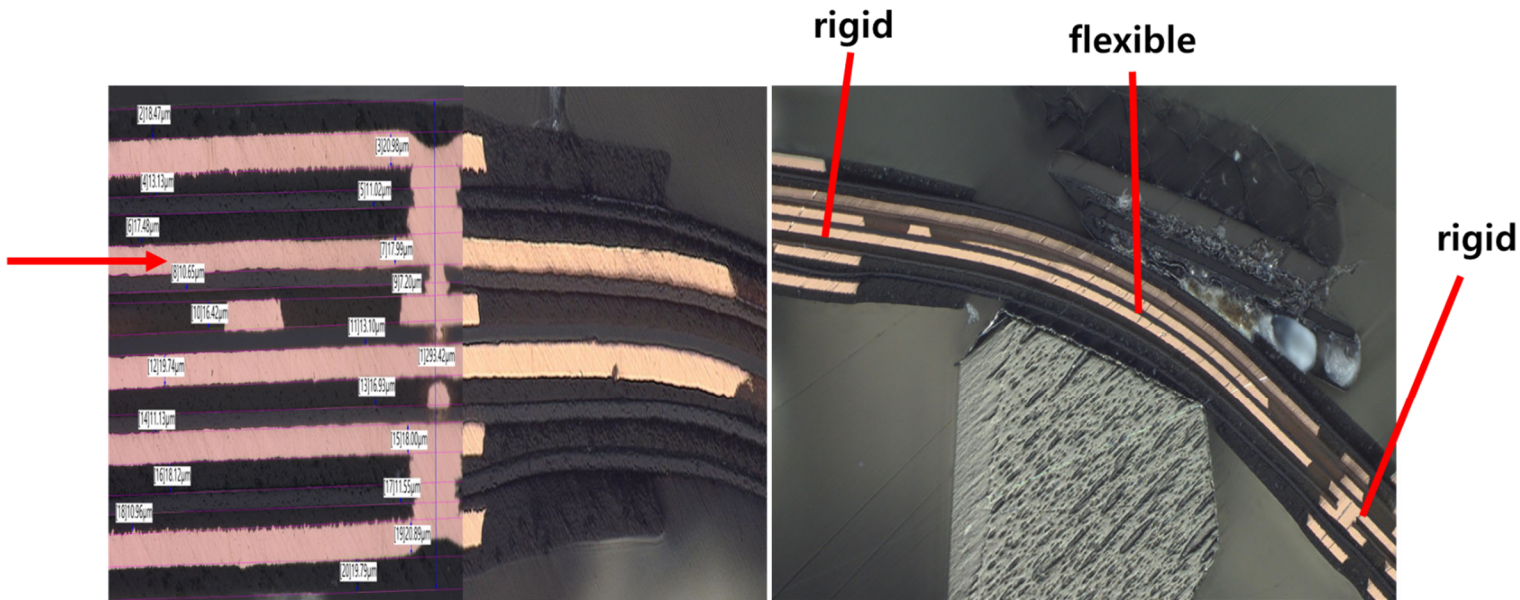

7[c][v][(3)] a second insulating layer located on or above the first conduction layer and having a first thickness;

The Oura Accused Product includes a second insulating layer located on or above the first conduction layer and having a first thickness. For example, the Oura Accused Product comprises a second insulating layer (indicated by the arrow) located on or above the first conduction layer and having a first thickness (e.g., 13.10 μm) (see Element 7[c][i]-[iv]).

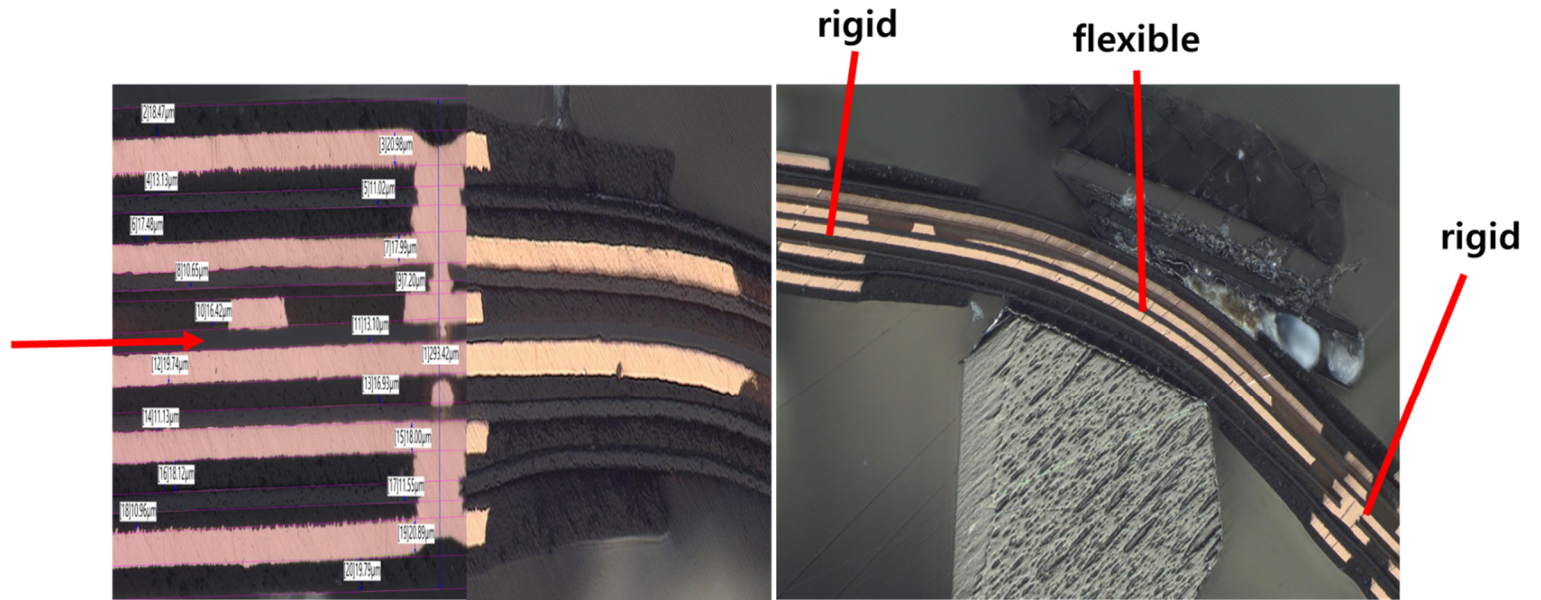

7[c][v][(4)] a second conduction layer located on or above the second insulating layer; and

The Oura Accused Product includes a second conduction layer located on or above the second insulating layer. For example, the Oura Accused Product comprises a second conduction layer (indicated by the arrow) located on or above the second insulating layer (*see* Element 7[c][i]-[iv]).