

Exhibit 7

Exemplary Covered Rocker that Practices Ultra-Mek’s U.S. Patent No. 8,016,348

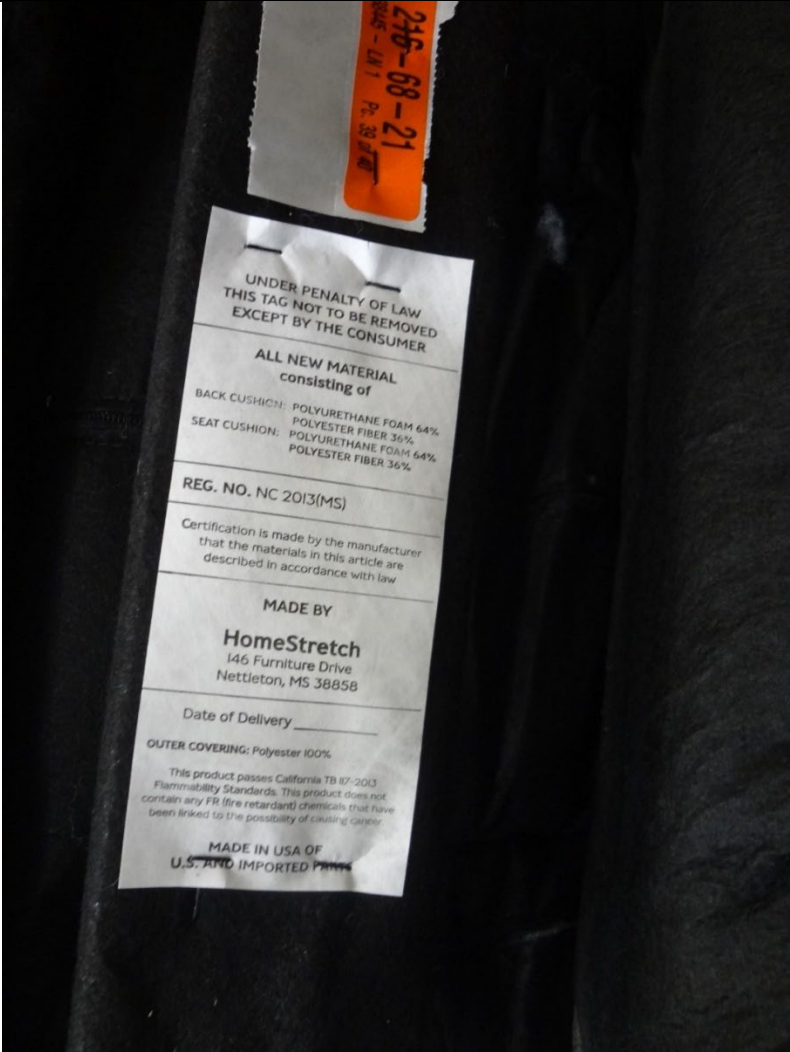
Powered Rocker-Recliner with the Leggett & Platt 5151 Mechanism

The following chart illustrates how an Exemplary Powered Rocker-Recliner (the “Exemplary Covered Rocker”) containing Leggett & Platt’s 5151 Mechanism (the “Exemplary Covered Rocker Mechanism”) falls within the claim scope of U.S. Patent No. 8,016,348. The Exemplary Covered Rocker and/or Exemplary Covered Rocker Mechanism are exemplary products only and illustrate the practice of the above-referenced patent. The following chart contains highlighting, color-coding, and other annotations which are intended to assist the reader in identifying relevant elements, and are not intended to be binding or limiting. Complainants reserve the right to modify the structures associated with identified elements, to identify other functions for identified structures, and/or to adjust the identification of one or more components identified herein.

Complainants reserve the right to offer additional evidence to prove that the Exemplary Covered Rocker(s) practice the claims below in their expert reports, and in motions and at trial. Complainants reserve the right to supplement, amend, or modify the foregoing based on new information that becomes available during discovery, the exchange of proposed claim constructions, and/or issuance of a claim construction order.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
1[p]	1. A seating unit, comprising:	The Exemplary Covered Rocker is a seating unit.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		

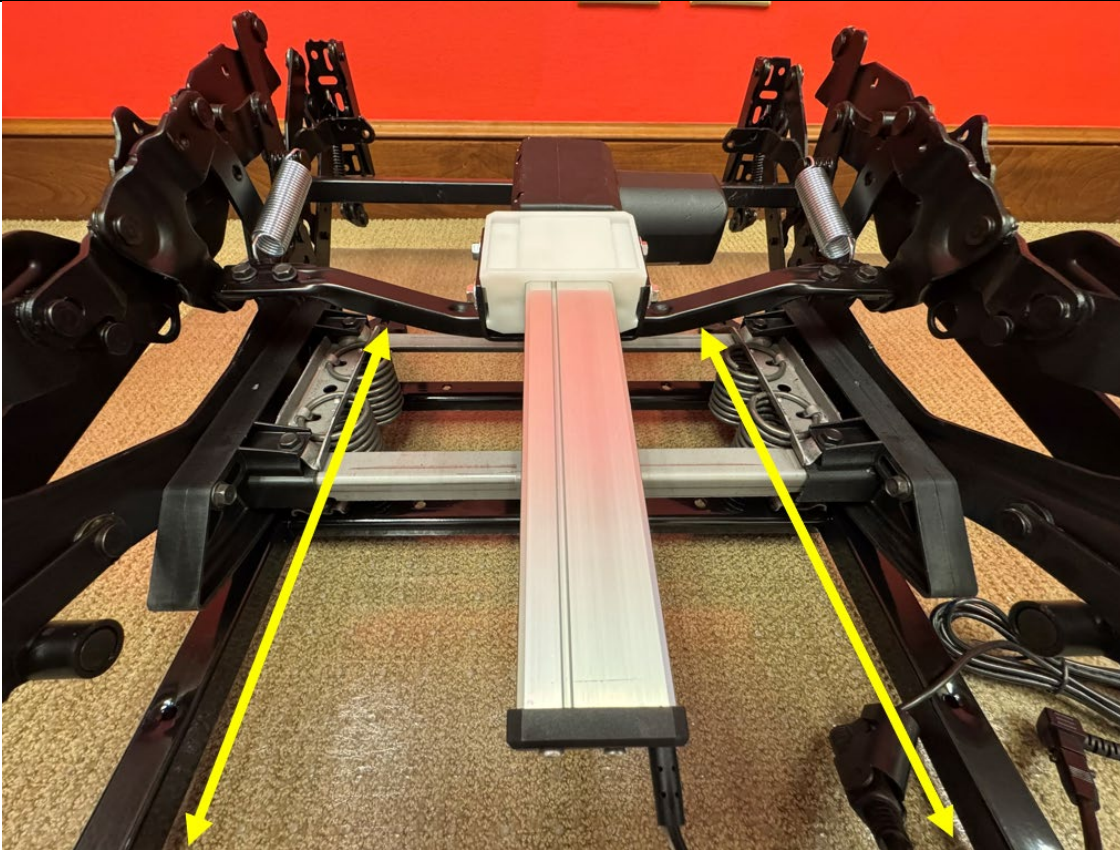
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The Exemplary Covered Rocker comprises a Leggett & Platt 5151 mechanism.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[a]	a base unit with a first bearing surface;	The Exemplary Covered Rocker includes a base unit as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The base unit includes multiple bearing surfaces including a first bearing surface on the upper portion of the base unit.

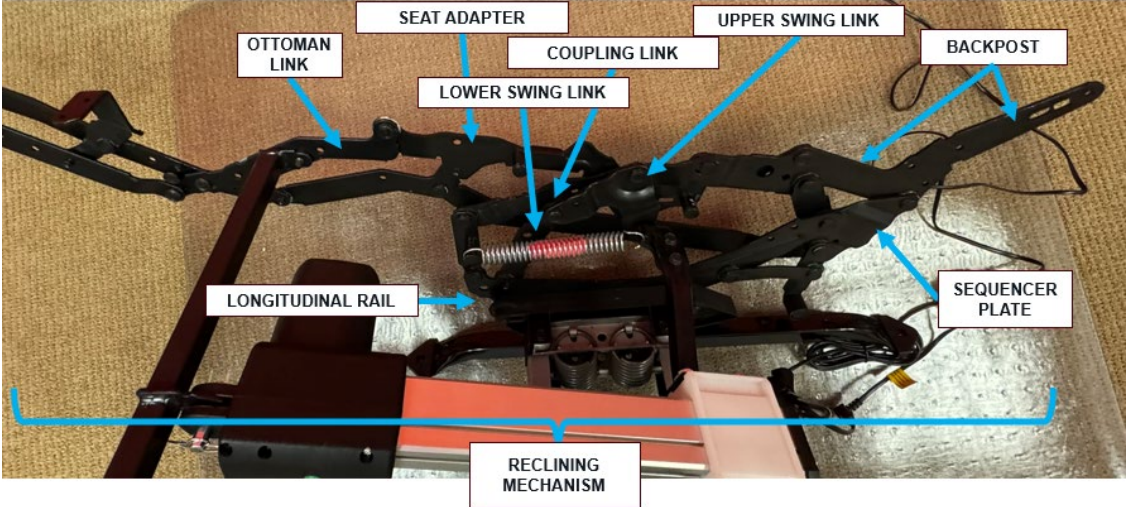
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The photograph shows a close-up of a mechanical assembly, likely a vehicle's rear suspension. A black metal frame is visible, with a white plastic component (possibly a shock absorber or a spring plate) attached. A coiled spring is visible, and a yellow arrow points to a specific part of the mechanism, likely the rocker arm or a related component. The background is a light-colored surface, possibly a concrete floor.

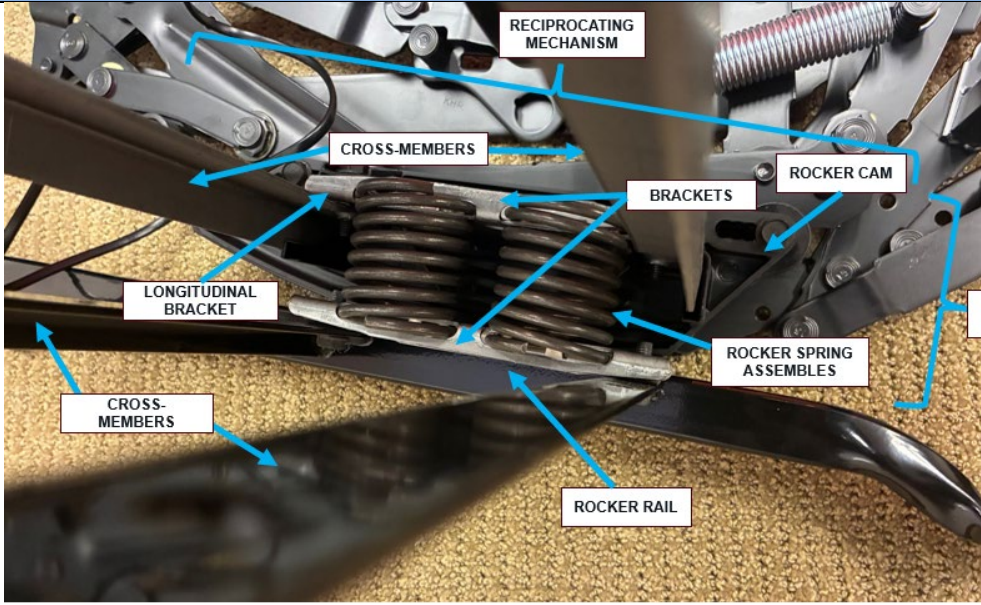
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[b]	a generally horizontally-disposed seat positioned above the base unit;	The Exemplary Covered Rocker includes a generally horizontally-disposed seat positioned above the base unit as shown in the image below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[c]	a generally upright backrest positioned above the base unit and substantially rearward of the seat;	The Exemplary Covered Rocker includes a generally upright backrest positioned above the base unit and substantially rearward of the seat as shown below.

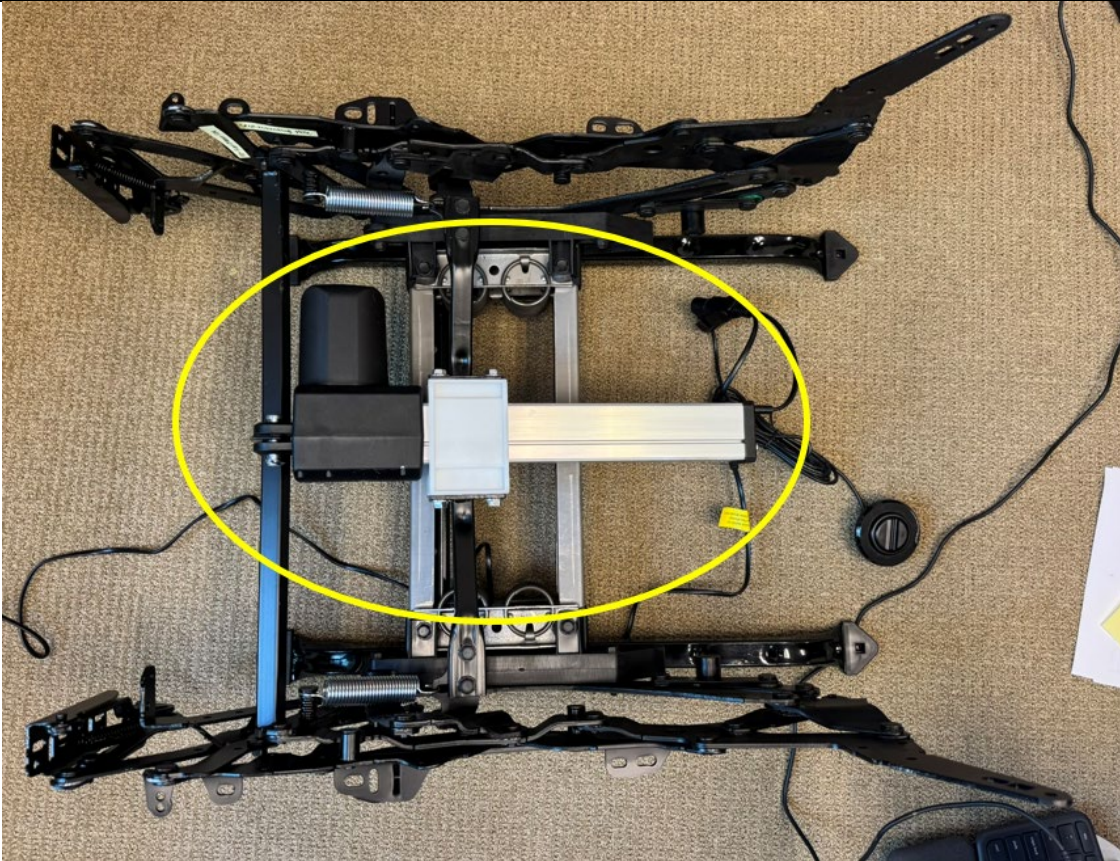
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[d]	an extendable ottoman;	The Exemplary Covered Rocker includes an extendable ottoman as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[e]	a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining	The Exemplary Covered Rocker includes a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit as shown below.

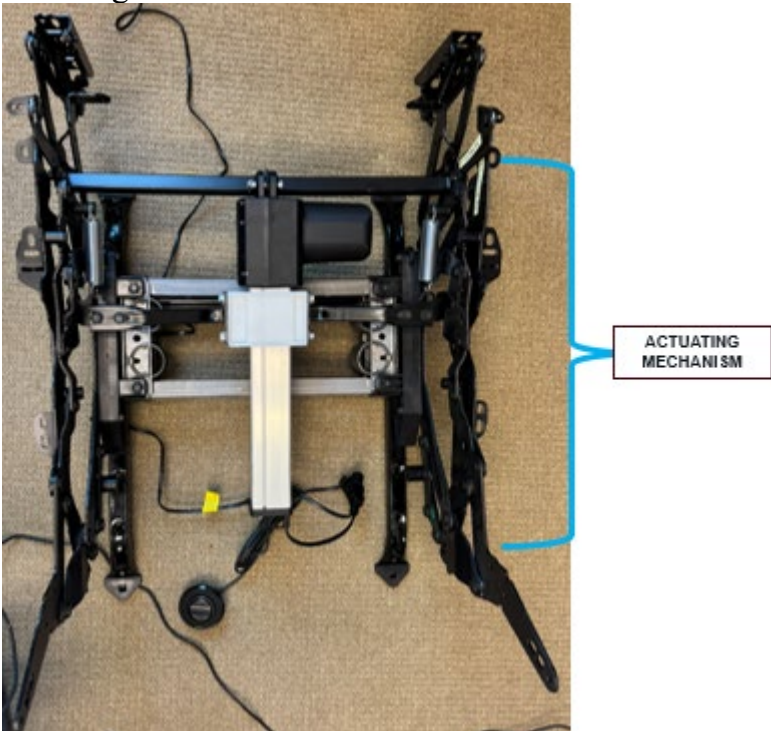
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	mechanism comprising a plurality of pivotally interconnected links;	 The plurality of pivotally interconnected links is shown above.
1[f]	a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and	The Exemplary Covered Rocker includes a reciprocating mechanism attached to the base unit and the reclining mechanism that is configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The reciprocating mechanism comprises at least the rocker cam, rocker spring assembly, and brackets shown above. As shown in the image below, when a longitudinally-directed force is applied, the reciprocating mechanism allows the chair to rock forward and backward.

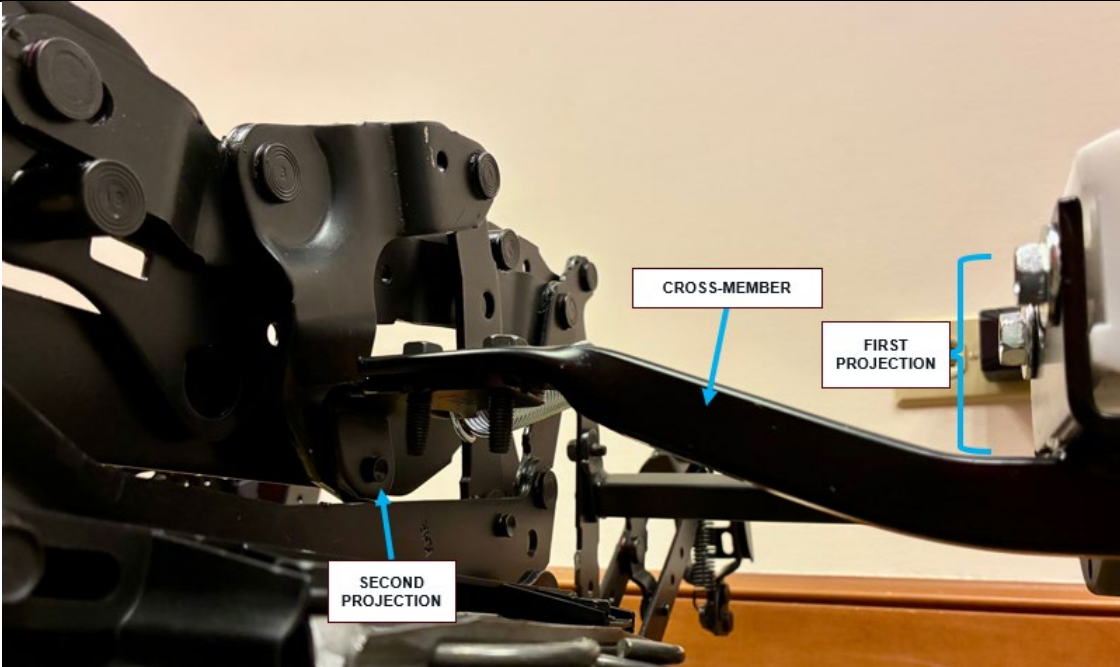
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[g]	a power actuating unit attached to the reclining mechanism, the actuating unit configured to move the seating unit between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman is generally	The Exemplary Covered Rocker includes a power actuating unit attached to the reclining mechanism that is configured to move the seating unit between an upright position, an intermediate TV position, and a fully reclined position. The power actuating unit is shown in the image below.

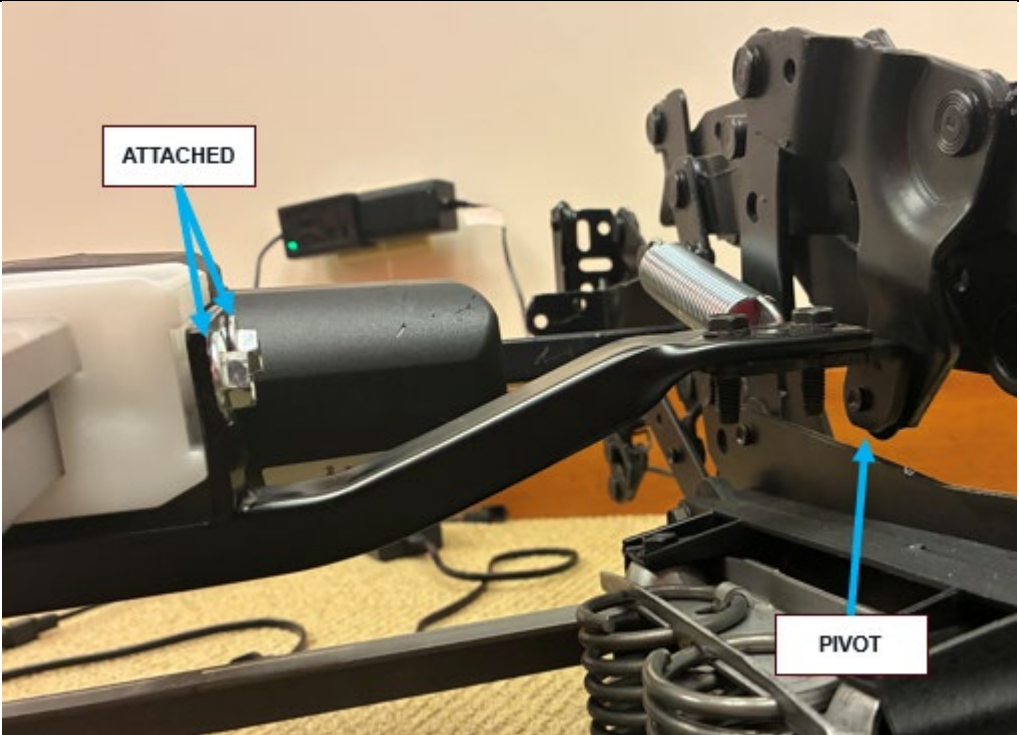
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;	 The photo shows a complex mechanical assembly, likely a seat or ottoman mechanism, laid out on a light-colored carpet. A yellow circle highlights a central component, which appears to be a motor or actuator unit. The assembly includes various metal brackets, rods, and a black plastic housing. Wires are visible extending from the unit. The photos below depict the three positions between which the Exemplary Covered Rocker may be moved by the power actuating unit.

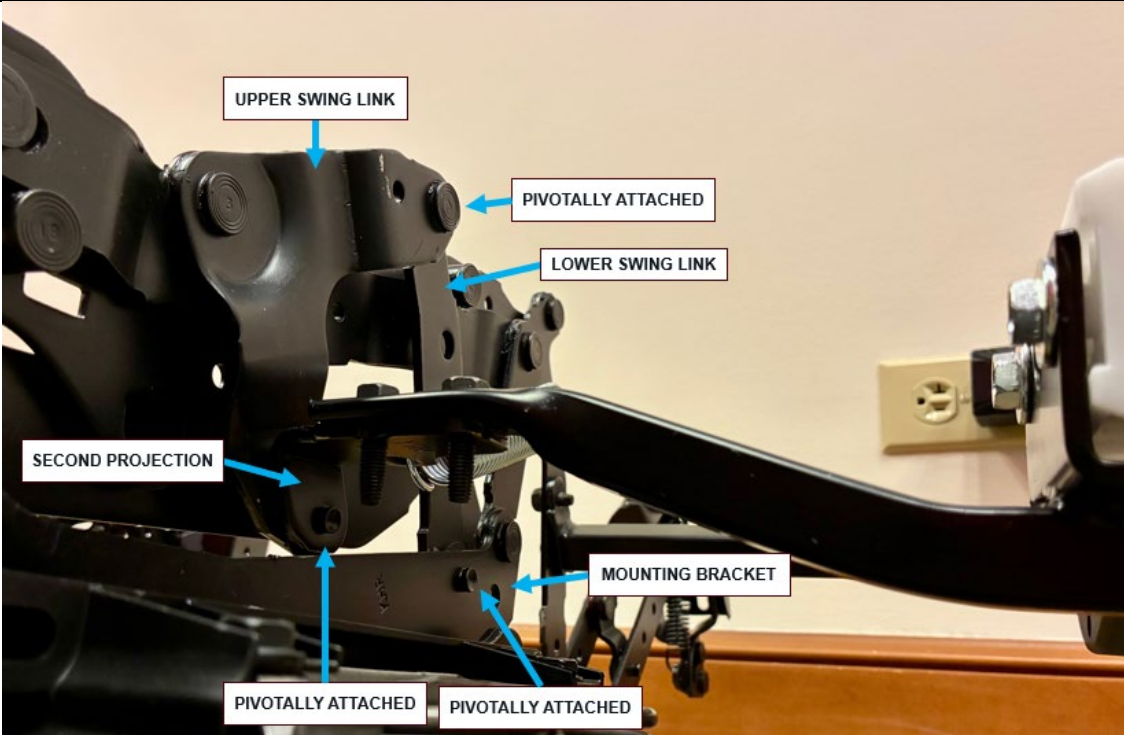
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The image displays three sequential photographs of a mechanical rocker assembly, likely for a chair or vehicle seat, demonstrating its range of motion. The assembly is constructed from black metal frames and components, mounted on a base. A central actuator, possibly a hydraulic cylinder, is visible in the middle of the mechanism. The three states are labeled as follows: UPRIGHT: The top photograph shows the assembly in its upright position, with the seat backrest angled upwards. INTERMEDIATE TV: The middle photograph shows the assembly in an intermediate reclined position, where the backrest is angled downwards. FULLY RECLINED: The bottom photograph shows the assembly in its fully reclined position, with the backrest angled significantly downwards.

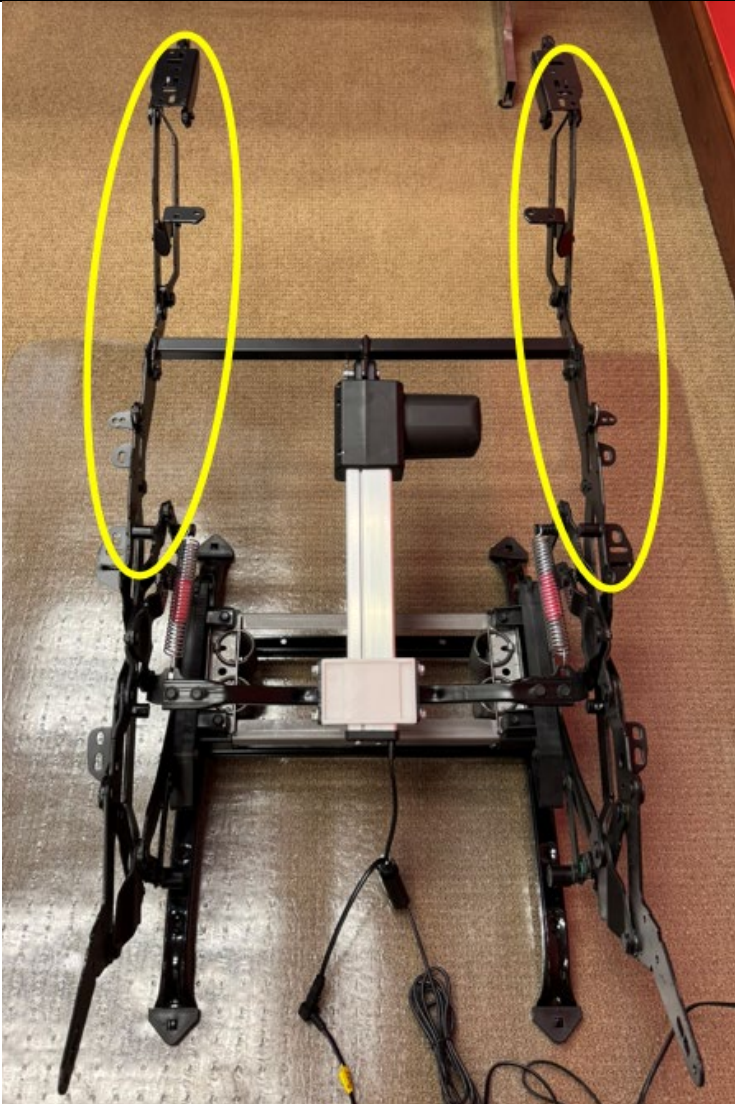
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
1[h]	wherein the actuating unit is attached to an actuating mechanism, the actuating mechanism comprising:	The Exemplary Covered Rocker's actuating unit (not labeled) is attached to an actuating mechanism as shown below. 
1[i]	a cross-member extending transversely across the seating unit;	The Exemplary Covered Rocker's actuating mechanism includes a cross-member (yellow) extending transversely across the seating unit as shown in the image below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[j]	first and second projections fixed to the cross-member;	The Exemplary Covered Rocker's actuating mechanism includes first and second projections fixed to the cross-member as shown in the image below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[k]	wherein the first projection is pivotally attached to the actuating unit; and	The Exemplary Covered Rocker's first projection is pivotally attached to the actuating unit (not labeled) as shown in the image below.

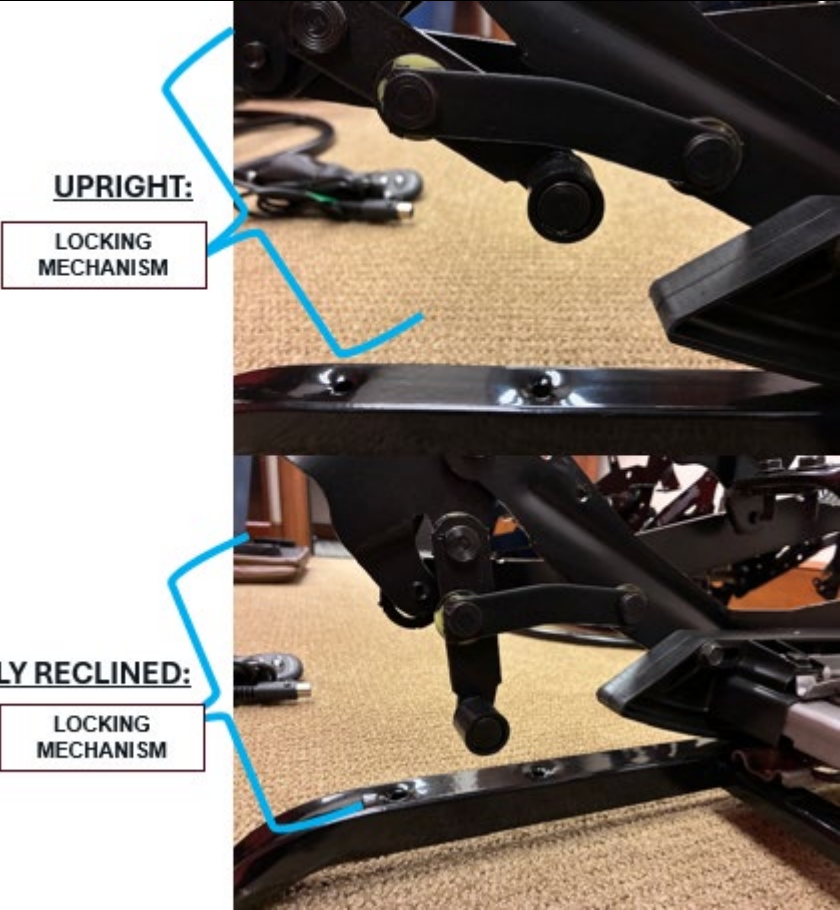
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The first projection is attached to the actuating unit such that the first projection and actuating unit can pivot within the mechanism.
1[1]	wherein the second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the	The Exemplary Covered Rocker's second projection is pivotally attached to a lower swing link via the upper swing link, and the lower swing link is pivotally attached to the upper swing link and a mounting bracket that is attached to the reciprocating mechanism as shown in the image below.

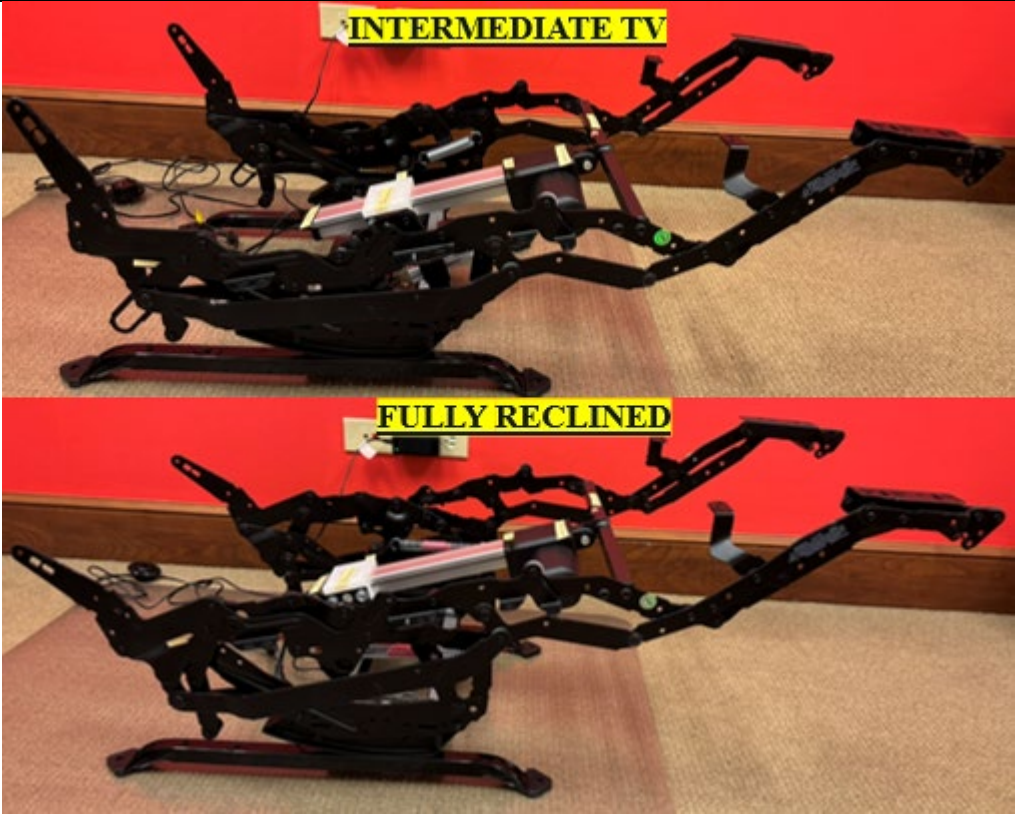
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism.	
2	2. The seating unit defined in claim 1, wherein the reclining mechanism includes a pantographic linkage on which the ottoman is mounted, and wherein in the TV and fully reclined positions, pivots between links of the pantographic	The Exemplary Covered Rocker's reclining mechanism includes a pantographic linkage on which the ottoman is mounted as shown in the image below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	linkage form a near over-center arrangement that locks the ottoman in position.	 The photograph shows a mechanical assembly, likely a rocker mechanism for an ottoman. It features a central motor or actuator connected to a horizontal bar. Two side linkages, each consisting of a vertical rod and a horizontal bar, are connected to the central bar and the motor. These two side linkages are highlighted by yellow ovals. The entire mechanism is mounted on a base and is positioned on a carpeted floor. A power cord is visible at the bottom of the image.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		When the Exemplary Covered Rocker is in the intermediate TV and fully reclined positions, the ottoman is locked into position by the near over-center arrangement of pivots between the ottoman links. 

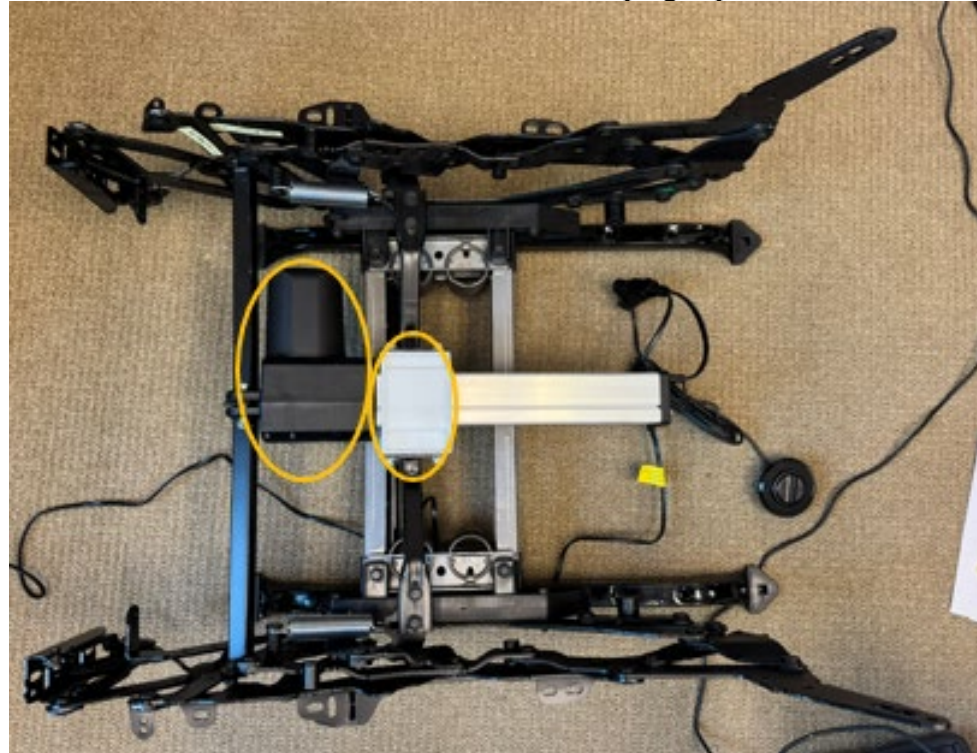
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
3	3. The seating unit defined in claim 1, further comprising a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions.	The Exemplary Covered Rocker includes a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 UPRIGHT: LOCKING MECHANISM FULLY RECLINED: LOCKING MECHANISM
4	4. The seating unit defined in claim 1, wherein the seat rises in moving from the TV	The Exemplary Covered Rocker's seat rises in moving from the TV position to the fully reclined position as shown below.

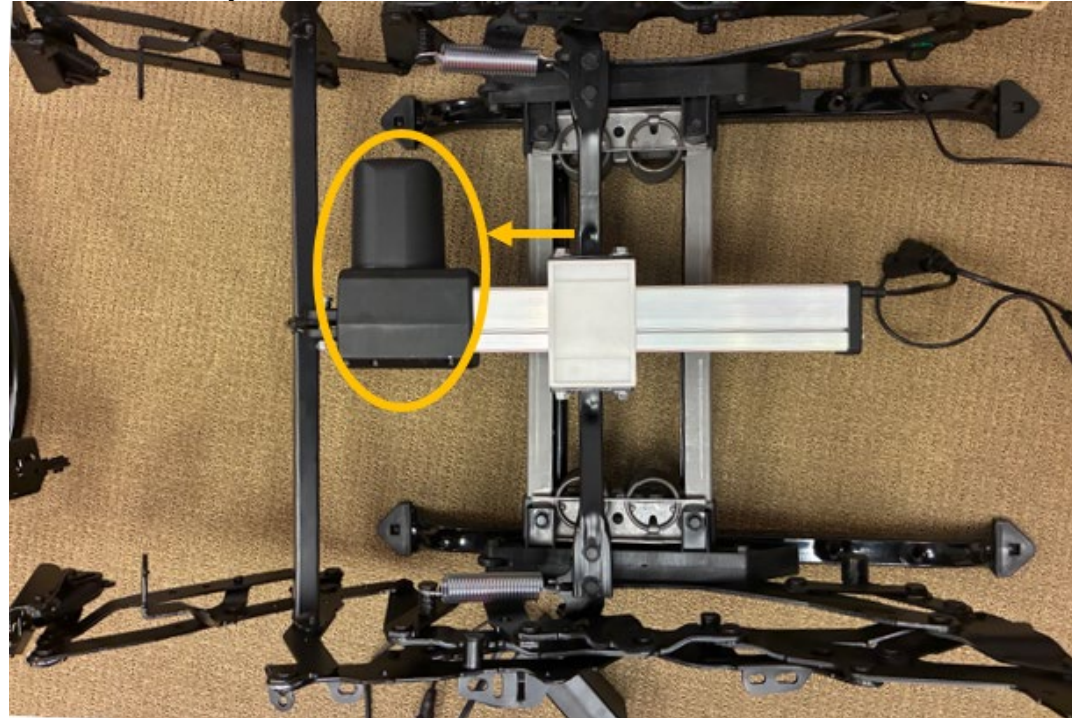
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	position to the fully reclined position.	
7	7. The seating unit defined in claim 1, wherein the power actuating unit includes opposed first and second ends, and wherein the first end of the power actuating unit	The Exemplary Covered Rocker's power actuating unit includes opposed first and second ends where the first end of the power actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the power actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.

moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the power actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.

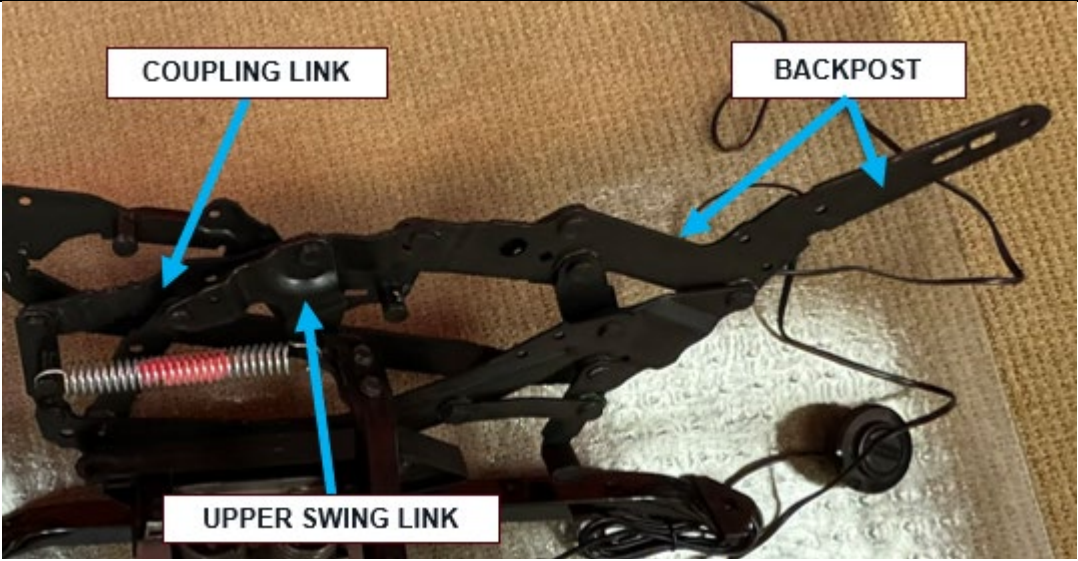
As shown in the image below, the power actuating unit includes opposed first and second ends. The chair below is in the upright position.

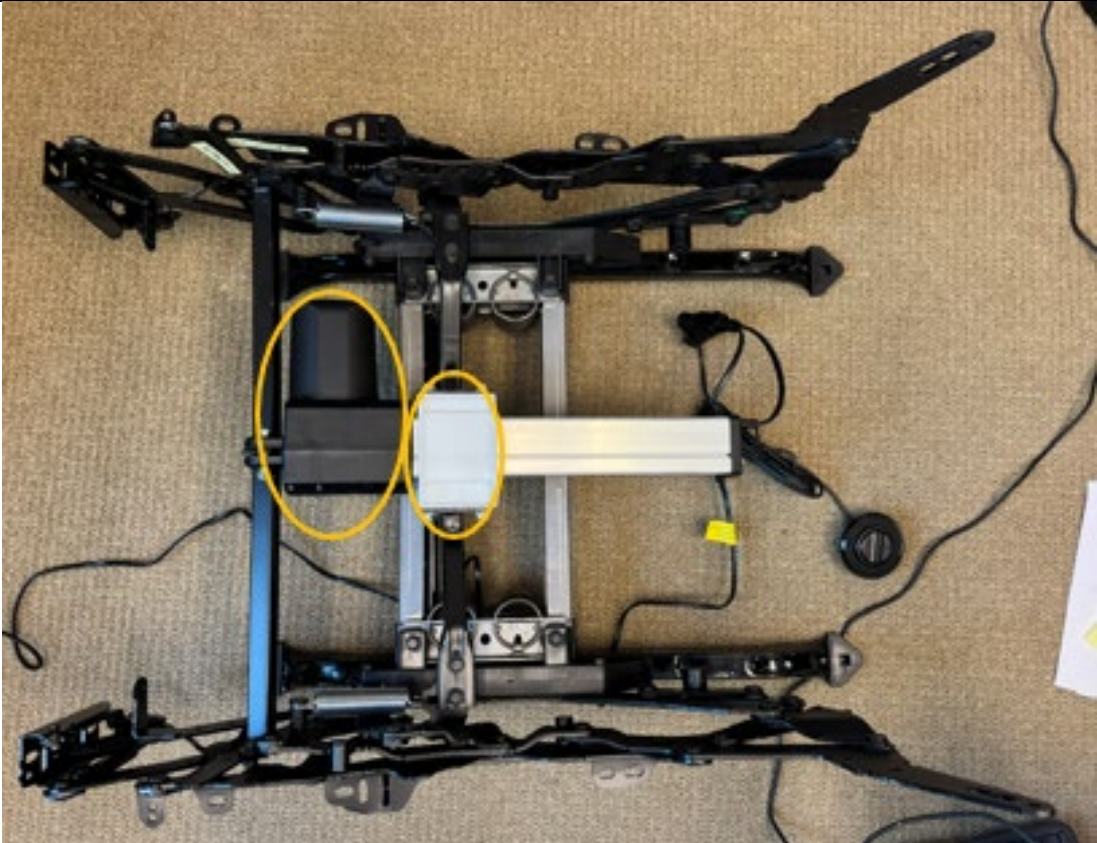


When the chair moves from the upright to intermediate TV position, the first end moves forwardly as shown below.



Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		When the chair moves from the intermediate TV position to the fully reclined position, the second end moves rearwardly as shown in the image below. 
8	8. The seating unit defined in claim 7, wherein the upper swing link is pivotally attached with the backrest.	The Exemplary Covered Rocker's upper swing link is pivotally attached with the backrest as shown in the image below. The upper swing link is pivotally connected to an intervening link that is pivotally connected to the backpost.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
9	9. The seating unit defined in claim 7, wherein the power actuating unit includes a motor and an extendable member at the first and second ends.	The Exemplary Covered Rocker's power actuating unit includes a motor and an extendable member at the first and second ends as shown in the images below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The photograph shows a complex mechanical assembly, likely a covered rocker mechanism, laid out on a light-colored, textured surface. The assembly consists of various metal components, including a central vertical support, a horizontal beam, and several articulated arms and linkages. A yellow circle is drawn around a specific component, which appears to be a motor or actuator, highlighting its role in the mechanism. The overall structure is intricate, with many joints and fasteners visible.