

Exhibit 8

Exemplary Covered Rocker that Practices Ultra-Mek’s U.S. Patent No. 8,297,693

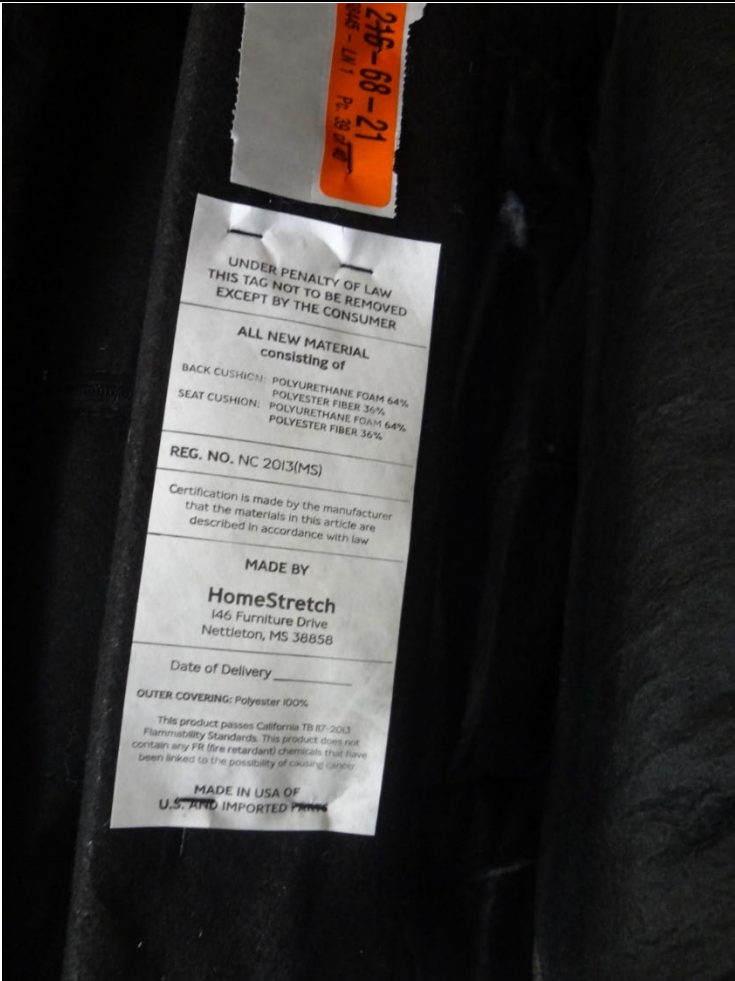
Powered Rocker-Recliner with the Leggett & Platt 5151 Mechanism

The following chart illustrates how an Exemplary Powered Rocker-Recliner (the “Exemplary Covered Rocker”) containing Leggett & Platt’s 5151 Mechanism (the “Exemplary Covered Rocker Mechanism”) falls within the claim scope of U.S. Patent No. 8,297,693. The Exemplary Covered Rocker and/or Exemplary Covered Rocker Mechanism are exemplary products only and illustrate the practice of the above-referenced patent. The following chart contains highlighting, color-coding, and other annotations which are intended to assist the reader in identifying relevant elements, and are not intended to be binding or limiting. Complainants reserve the right to modify the structures associated with identified elements, to identify other functions for identified structures, and/or to adjust the identification of one or more components identified herein.

Complainants reserve the right to offer additional evidence to prove that the Exemplary Covered Rocker(s) practice the claims below in their expert reports, and in motions and at trial. Complainants reserve the right to supplement, amend, or modify the foregoing based on new information that becomes available during discovery, the exchange of proposed claim constructions, and/or issuance of a claim construction order.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
1[p]	A seating unit, comprising:	The Exemplary Covered Rocker is a seating unit.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		

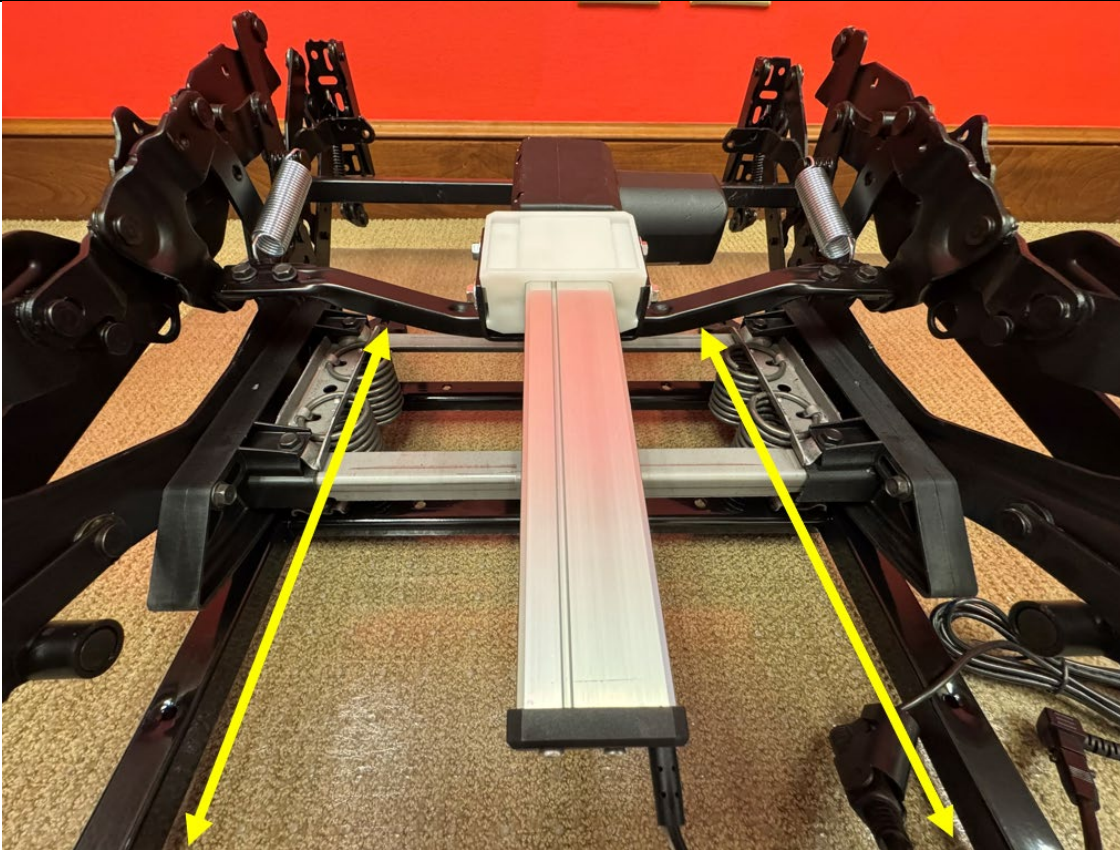
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The Exemplary Covered Rocker comprises a Leggett & Platt 5151 mechanism.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[a]	a base unit with a first bearing surface;	The Exemplary Covered Rocker includes a base unit as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The base unit includes multiple bearing surfaces including a first bearing surface on the upper portion of the base unit.

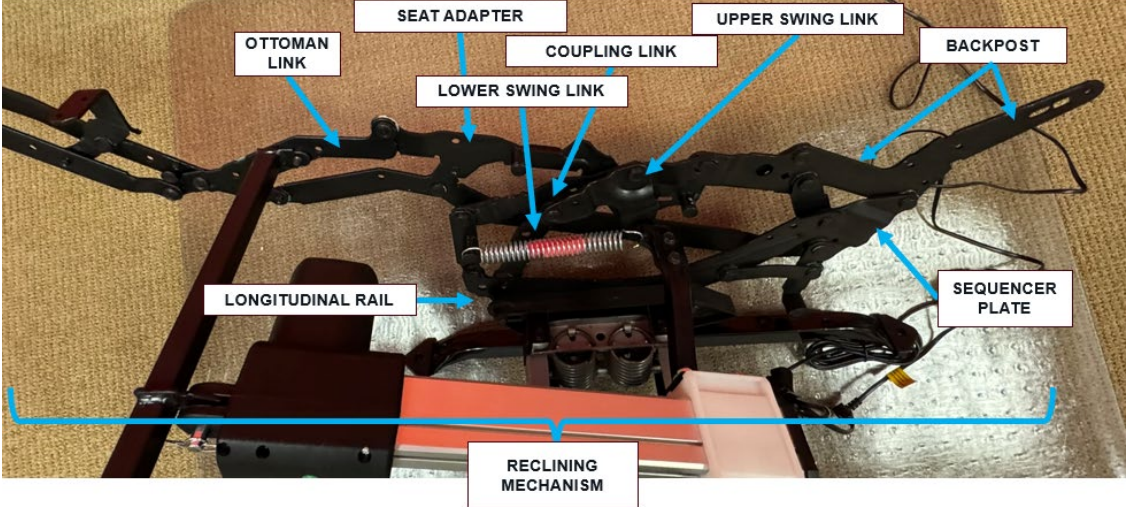
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The photograph shows a close-up of a vehicle's rear suspension system. A black metal frame is visible, with a silver coil spring and a black shock absorber. A yellow arrow points to the lower control arm area, which is connected to the frame and the wheel hub. The background is a light-colored, textured surface, possibly a concrete floor.

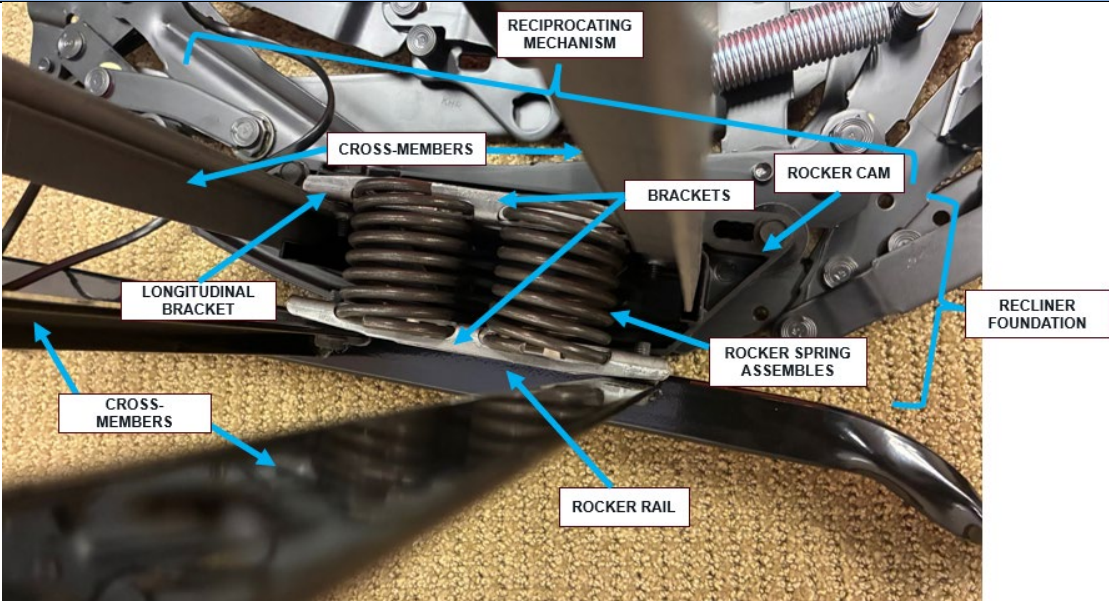
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[b]	a generally horizontally-disposed seat positioned above the base unit;	The Exemplary Covered Rocker includes a generally horizontally-disposed seat positioned above the base unit as shown in the image below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[c]	a generally upright backrest positioned above the base unit and substantially rearward of the seat;	The Exemplary Covered Rocker includes a generally upright backrest positioned above the base unit and substantially rearward of the seat as shown below.

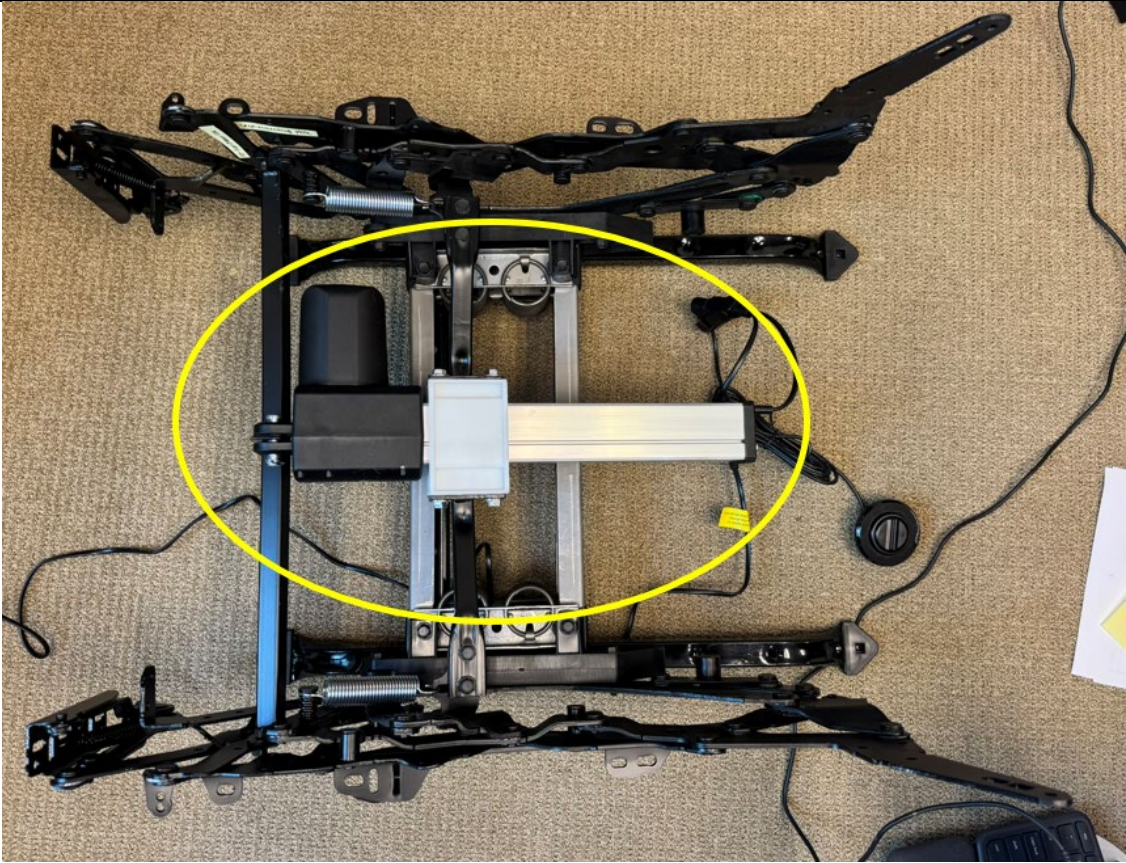
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[d]	an extendable ottoman;	The Exemplary Covered Rocker includes an extendable ottoman as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[e]	a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining	The Exemplary Covered Rocker includes a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	mechanism comprising a plurality of pivotally interconnected links;	 The plurality of pivotally interconnected links is shown above.
1[f]	a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and	The Exemplary Covered Rocker includes a reciprocating mechanism attached to the base unit and the reclining mechanism that is configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force shown in the image below.

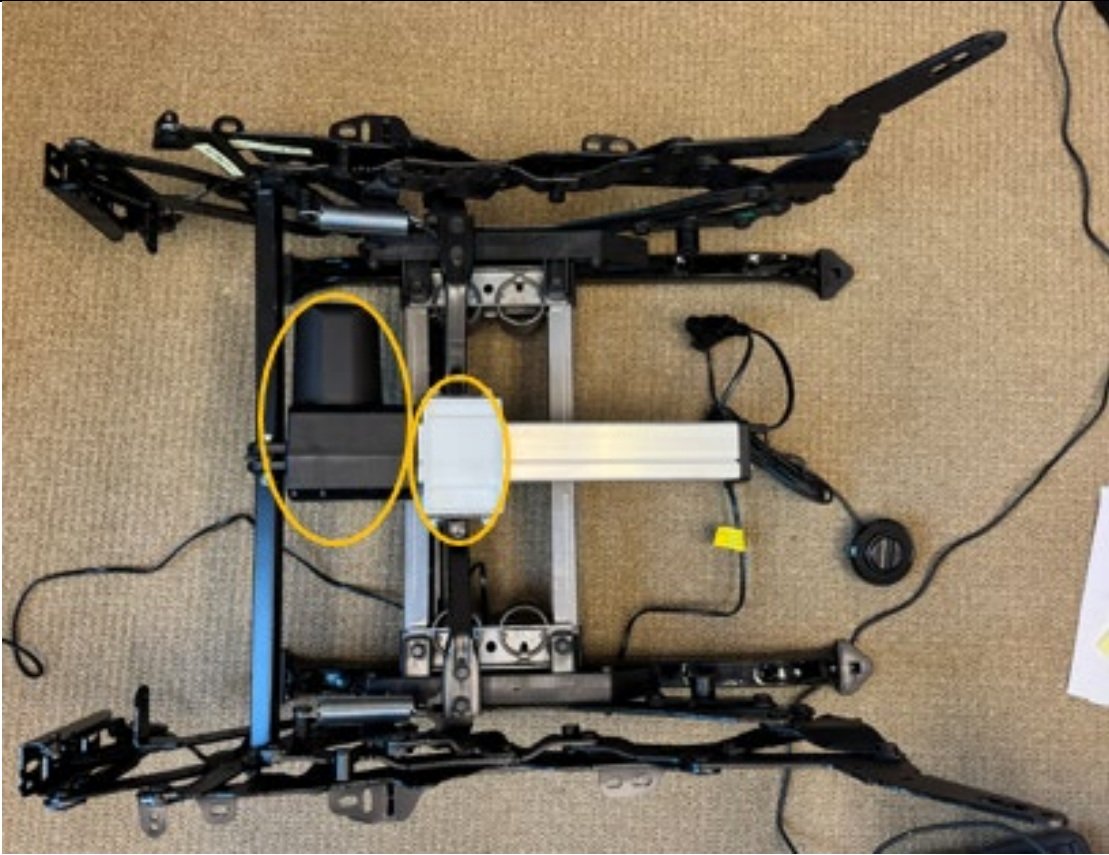
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The photograph shows the internal mechanical components of a chair's recliner. A central longitudinal bracket is connected to a series of cross-members. These cross-members are linked to a reciprocating mechanism, which includes a rocker cam and a rocker spring assembly. The entire assembly is mounted on a recliner foundation. A rocker rail is visible at the bottom, and brackets connect the various parts of the mechanism.
		The reciprocating mechanism comprises at least the rocker cam, rocker spring assembly, and brackets shown above. As shown below, when a longitudinally-directed force is applied, the reciprocating mechanism allows the chair to rock forward and backward.

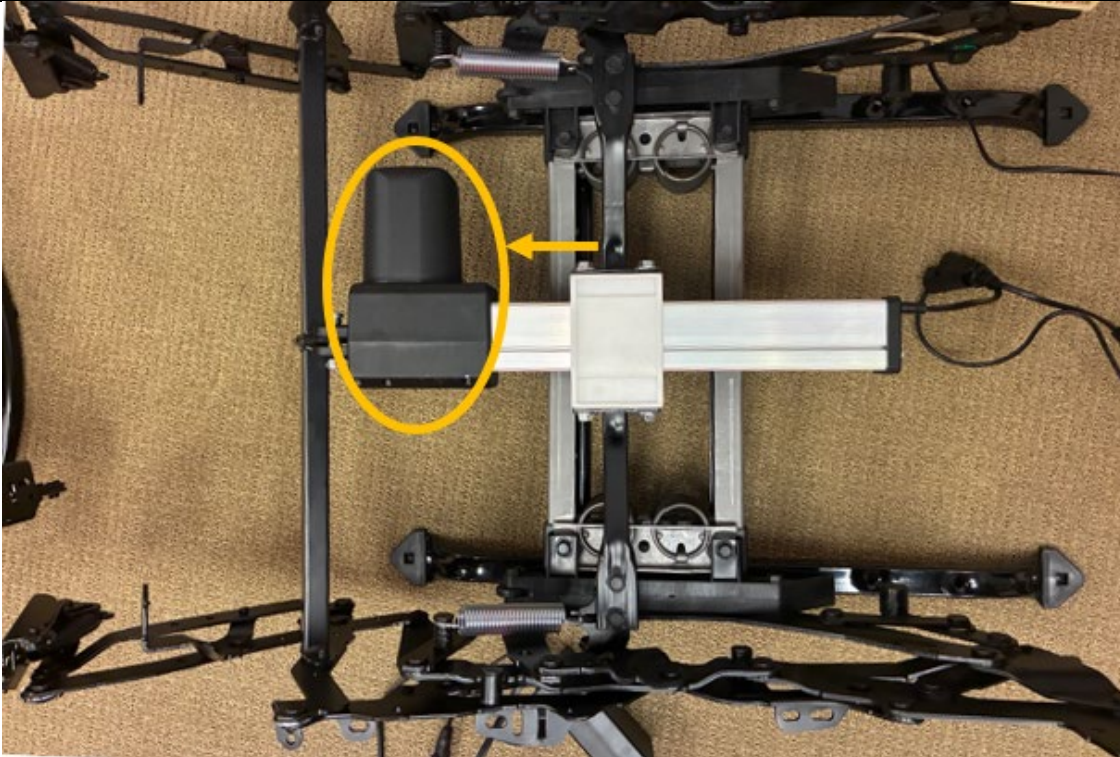
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[g]	a linear actuating unit attached to the reclining mechanism, the linear actuating unit configured to move the seating unit between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed,	The Exemplary Covered Rocker includes a linear actuating unit attached to the reclining mechanism that is configured to move the seating unit between an upright position, an intermediate TV position, and a fully reclined position. The linear actuating unit is shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	and the ottoman is generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;	 The photos below depict the three positions between which the Exemplary Covered Rocker may be moved by the linear actuating unit.

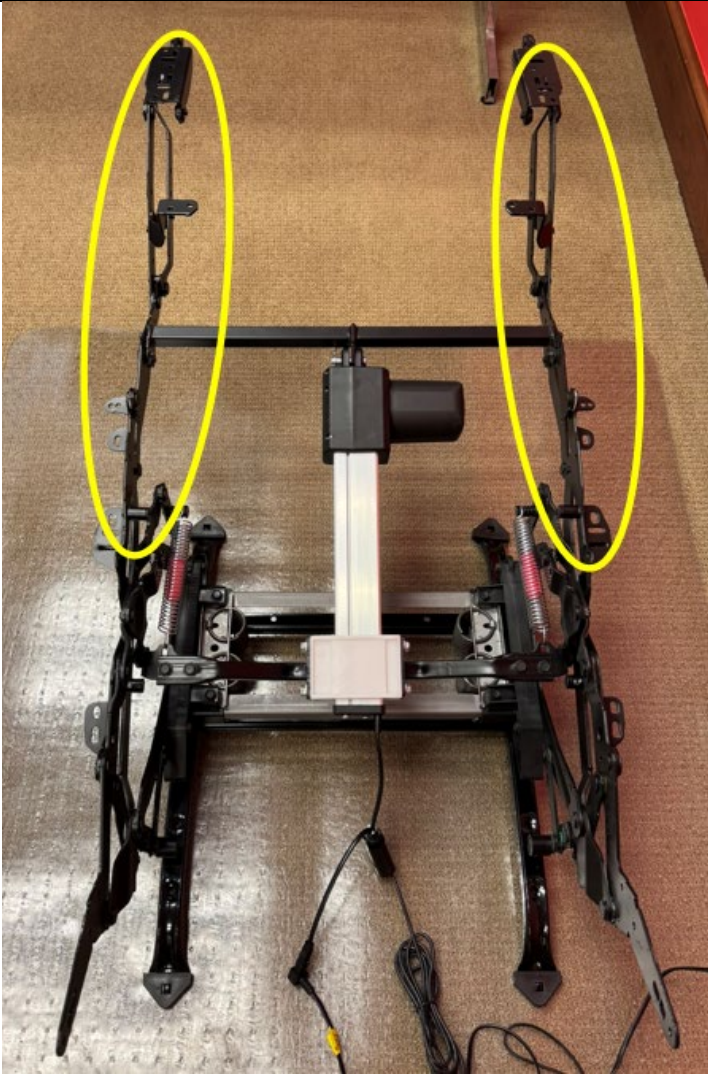
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The image displays three sequential photographs of a mechanical rocker assembly, likely for a chair or vehicle seat, demonstrating its range of motion. The assembly is constructed from black metal frames and components, mounted on a base. The background is a red wall with a wooden baseboard and a light-colored carpet. UPRIGHT: The top photograph shows the rocker in an upright position, with the seat backrest angled slightly backward. A yellow label with the word "UPRIGHT" is positioned above the assembly. INTERMEDIATE TV: The middle photograph shows the rocker in an intermediate reclined position, with the seat backrest angled more significantly backward. A yellow label with the text "INTERMEDIATE TV" is positioned above the assembly. FULLY RECLINED: The bottom photograph shows the rocker in a fully reclined position, with the seat backrest nearly horizontal. A yellow label with the text "FULLY RECLINED" is positioned above the assembly.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
1[h]	wherein the linear actuating unit includes opposed first and second ends, and wherein the first end of the linear actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the linear actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.	The Exemplary Covered Rocker's linear actuating unit includes opposed first and second ends where the first end of the linear actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the linear actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position. As shown below, the linear actuating unit includes opposed first and second ends. The chair below is in the upright position.

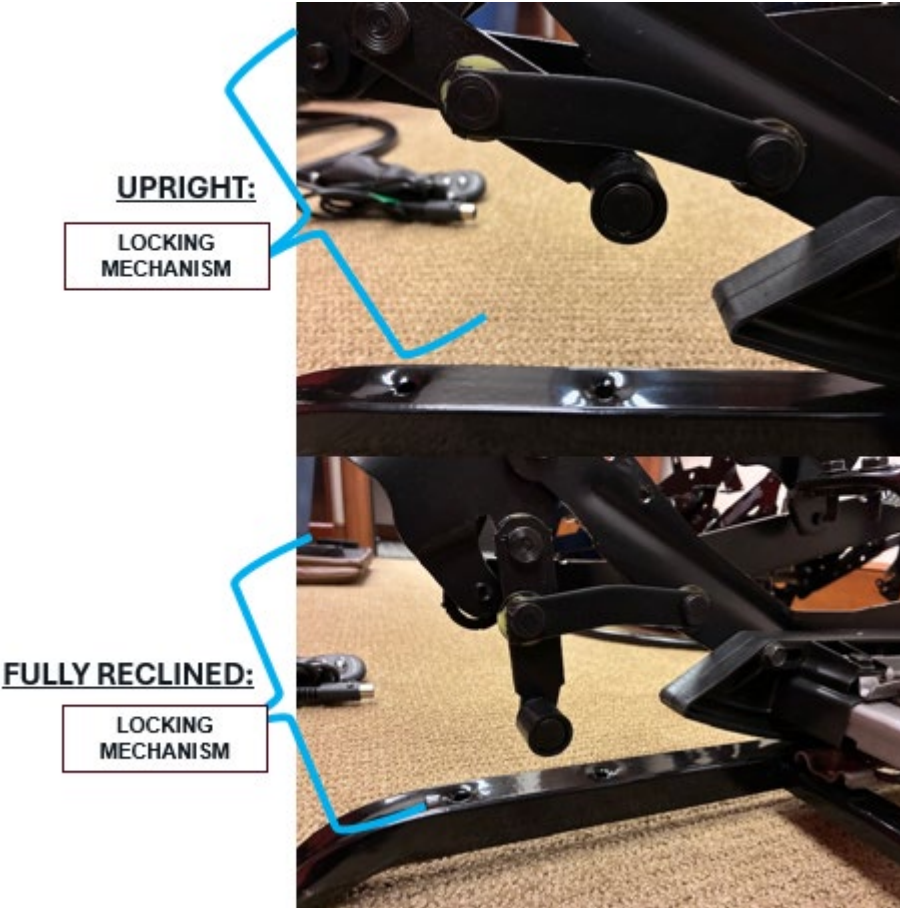
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 When the chair moves from the upright to intermediate TV position, the first end moves forwardly as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 When the chair moves from the intermediate TV position to the fully reclined position, the second end moves rearwardly as shown below.

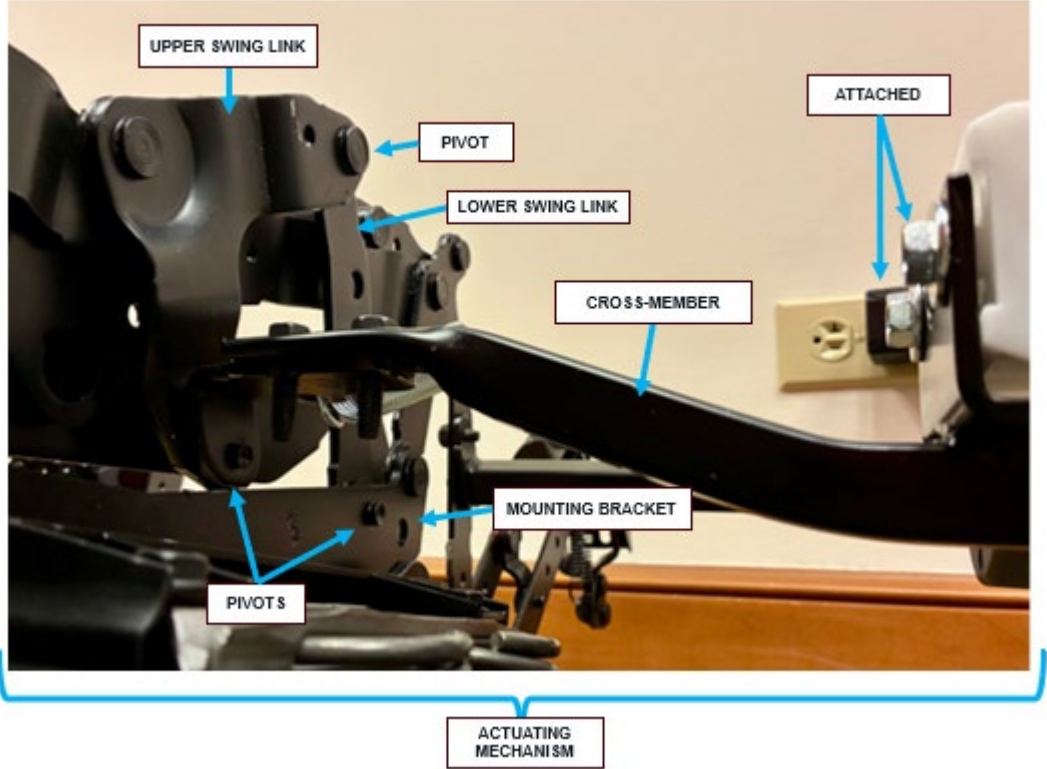
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
2	2. The seating unit defined in claim 1, wherein the reclining mechanism includes a pantographic linkage on which the ottoman is mounted, and wherein in the TV and fully reclined positions, pivots between links of the pantographic linkage form a near over-	The Exemplary Covered Rocker includes a pantographic linkage on which the ottoman is mounted as shown in the image below.

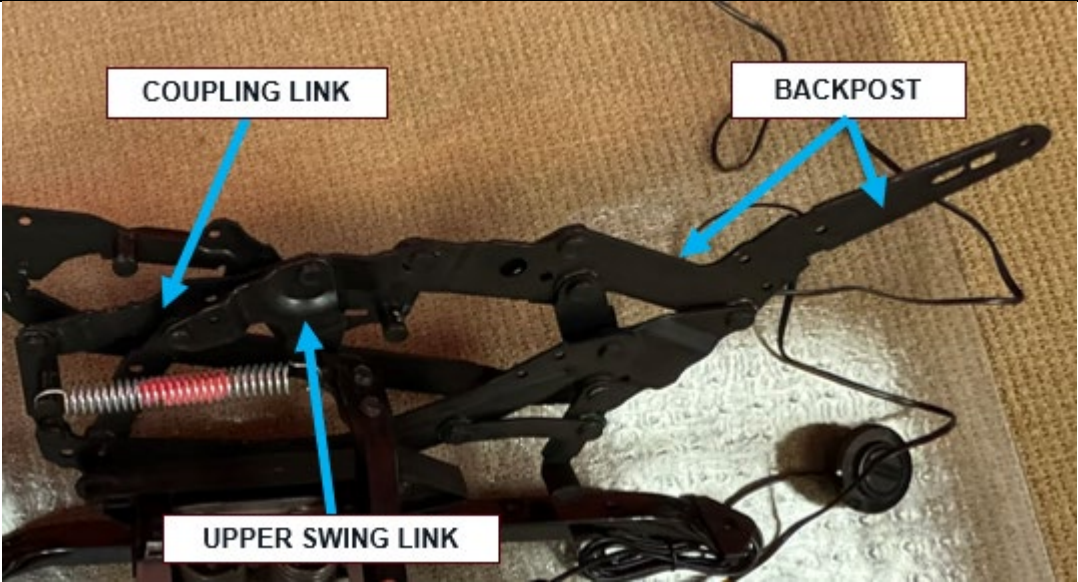
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	center arrangement that locks the ottoman in position.	 The photograph shows a mechanical assembly, likely a rocker mechanism for an ottoman, laid out on a light-colored surface. The assembly consists of various metal components, including a central vertical rod, a horizontal bar, and two side arms. Two yellow ovals are drawn around the side arms, highlighting specific components. The assembly is connected to a central motor or actuator unit. Wires are visible at the bottom of the assembly.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		When the Exemplary Covered Rocker is in the intermediate TV and fully reclined positions, the reclining mechanism on which the ottoman is mounted comprises pivots between links of the pantographic linkage that form a near over-center arrangement that locks the ottoman in position. 

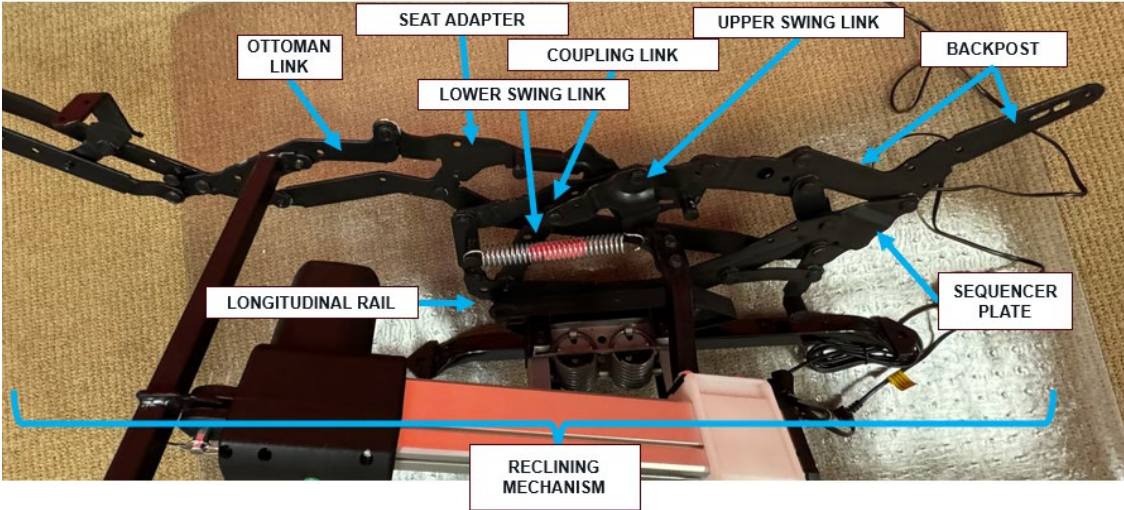
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
3	3. The seating unit defined in claim 1, further comprising a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions.	The Exemplary Covered Rocker includes a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions as shown in the image below.  UPRIGHT: LOCKING MECHANISM FULLY RECLINED: LOCKING MECHANISM

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
4	4. The seating unit defined in claim 1, wherein the linear actuating unit is attached to an actuating mechanism, the actuating mechanism comprising a cross-member extending transversely across the seating unit, wherein the cross-member is pivotally attached to the actuating unit; and wherein the cross-member is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism.	The Exemplary Covered Rocker's linear actuating unit (not labeled) is attached to an actuating mechanism, the actuating mechanism comprising a cross-member extending transversely across the seating unit, wherein the cross-member is pivotally attached to the actuating unit; and wherein the cross-member is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism, as shown below.

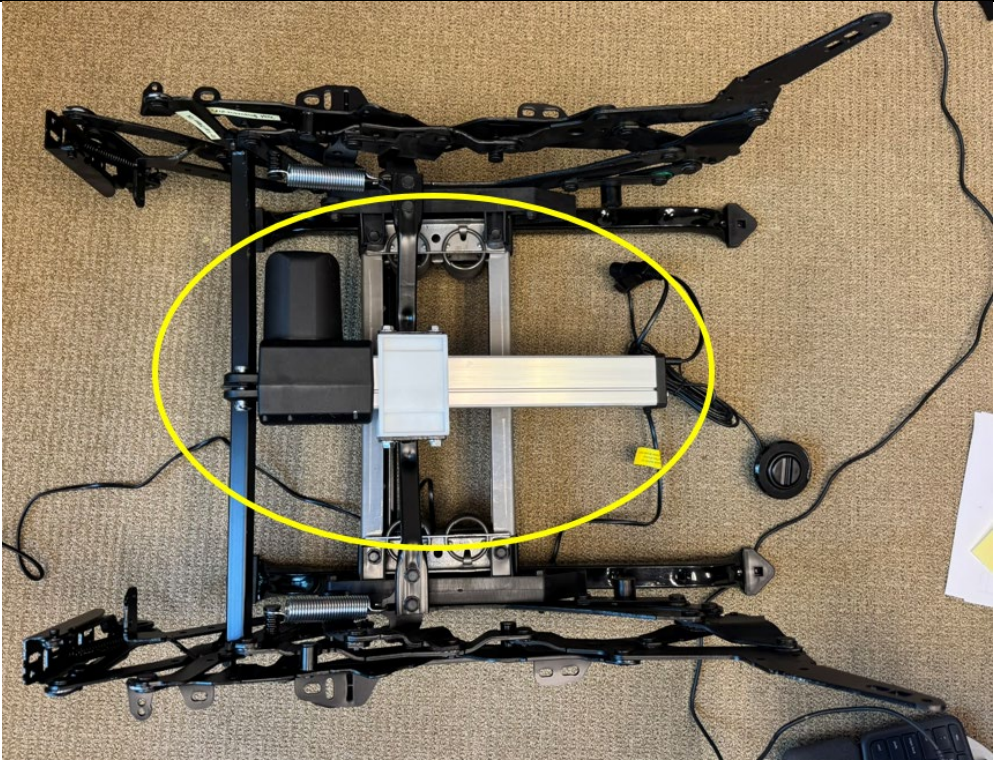
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The cross-member is attached to the linear actuating unit such that the cross-member and the linear actuating unit can pivot within the mechanism.
5	5. The seating unit defined in claim 4, wherein the upper swing link is pivotally attached with the backrest.	The Exemplary Covered Rocker's upper swing link is pivotally attached with the backrest as shown in the image below. The upper swing link is pivotally connected to an intervening link that is pivotally connected to the backpost.

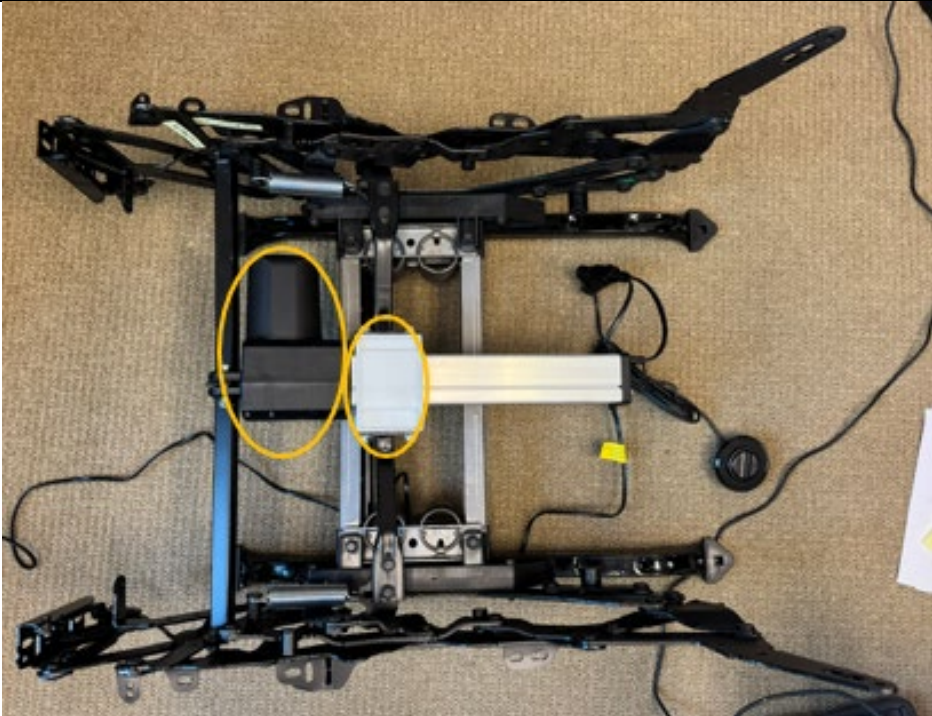
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
6	6. The seating unit defined in claim 1, wherein the seat rises in moving from the TV position to the fully reclined position.	The Exemplary Covered Rocker's seat rises in moving from the TV position to the fully reclined position as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
7	7. The seating unit defined in claim 1, wherein the reclining mechanism includes a backpost that is fixed relative to the backrest, a mounting bracket that is fixed relative to the reciprocating mechanism and pivotally attached to the backpost, and a seat adapter that is fixed relative to the seat and pivotally attached to the backpost as shown in the images below.	The Exemplary Covered Rocker's reclining mechanism includes a backpost that is fixed relative to the backrest, a mounting bracket that is fixed relative to the reciprocating mechanism and pivotally attached to the backpost, and a seat adapter that is fixed relative to the seat and pivotally attached to the backpost as shown in the images below.

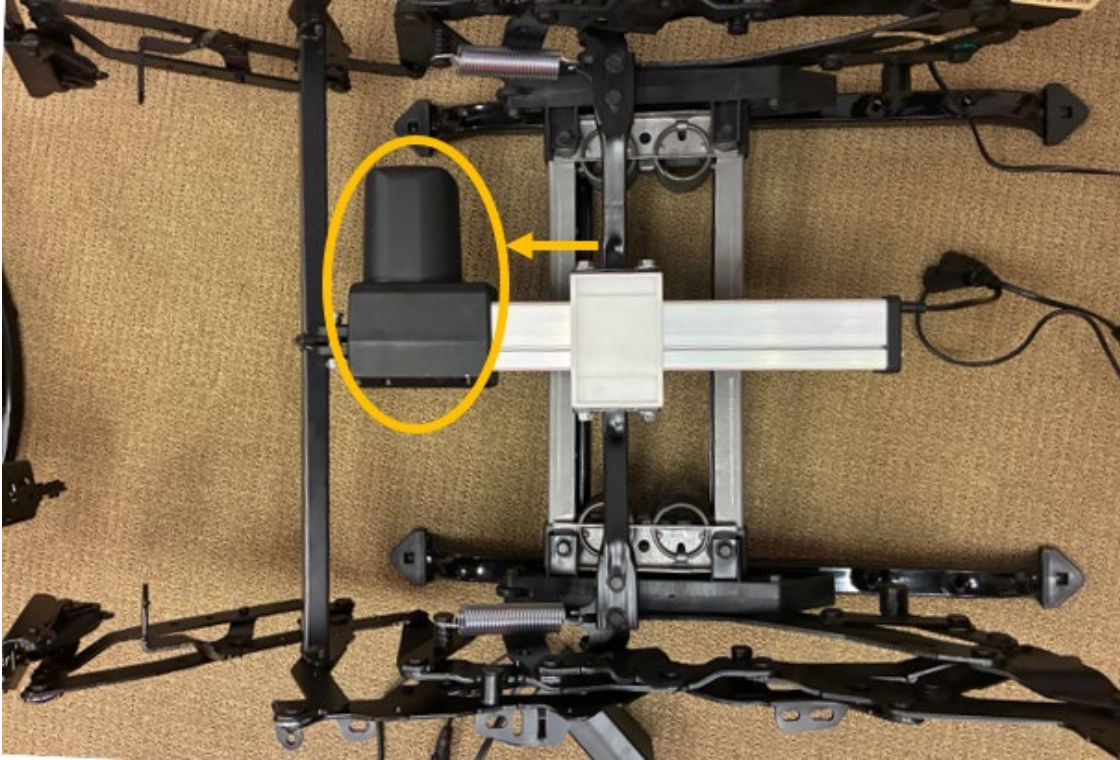
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	seat adapter that is fixed relative to the seat and pivotally attached to the backpost.	
12[p]	A reciprocating seating unit, comprising:	See claim 1[p]
12[a]	a base;	See claim 1[a]
12[b]	a generally horizontally-disposed seat positioned above the base;	See claim 1[b]
12[c]	a generally upright backrest positioned above the base and substantially rearward of the seat;	See claim 1[c]
12[d]	an extendable ottoman;	See claim 1[d]
12[e]	a reclining mechanism attached to the seat, the backrest, the ottoman and the	See claim 1[e]

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	base, the reclining mechanism comprising a plurality of pivotally interconnected links;	
12[f]	a reciprocating mechanism attached with the base unit and the reclining mechanism, the reciprocating mechanism configured to enable the seat, backrest and reclining mechanism to experience a longitudinally-directed reciprocating motion relative to the base unit; and	See claim 1[f]
12[g]	a linear actuator attached to the reclining mechanism, the linear actuator having first and second movable members, wherein the relative movement of the first and second movable members moves the chair between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman is generally vertically disposed and positioned below the seat,	The Exemplary Covered Rocker includes a linear actuator attached to the reclining mechanism that has first and second movable members as shown below.

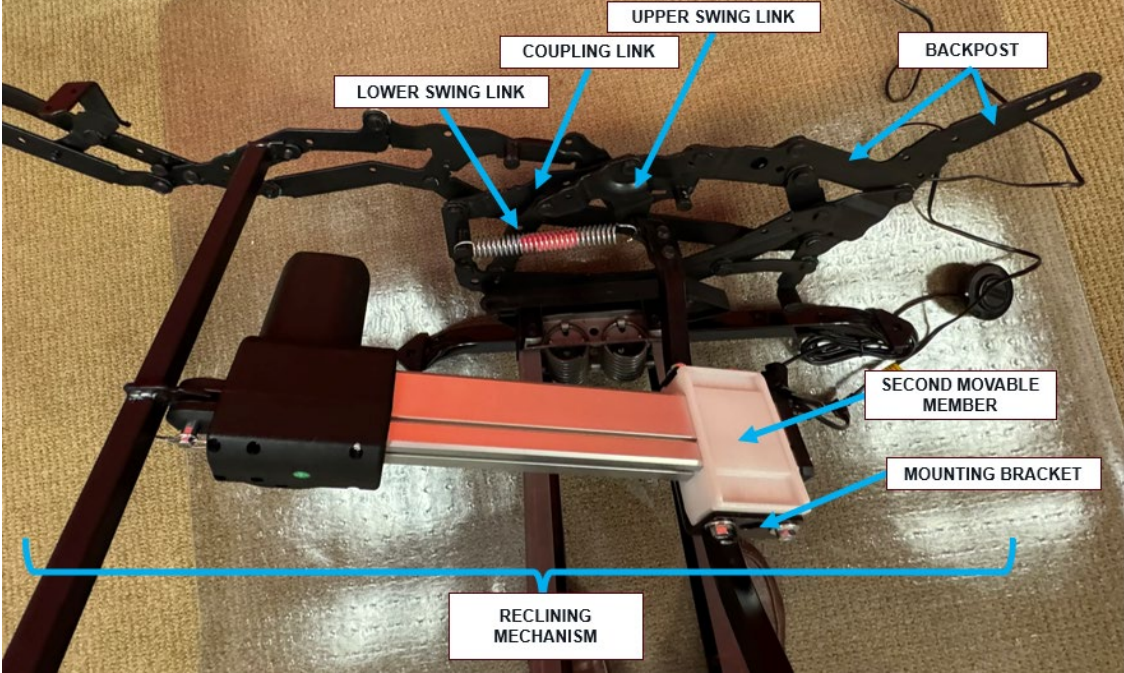
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	(b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;	 The photograph shows a complex mechanical assembly, likely a seat or ottoman mechanism, laid out on a light-colored, textured surface. A yellow circle highlights a central component, which appears to be a motor or actuator connected to a horizontal bar. The assembly includes various metal brackets, springs, and wiring. The background is a plain, light-colored surface.

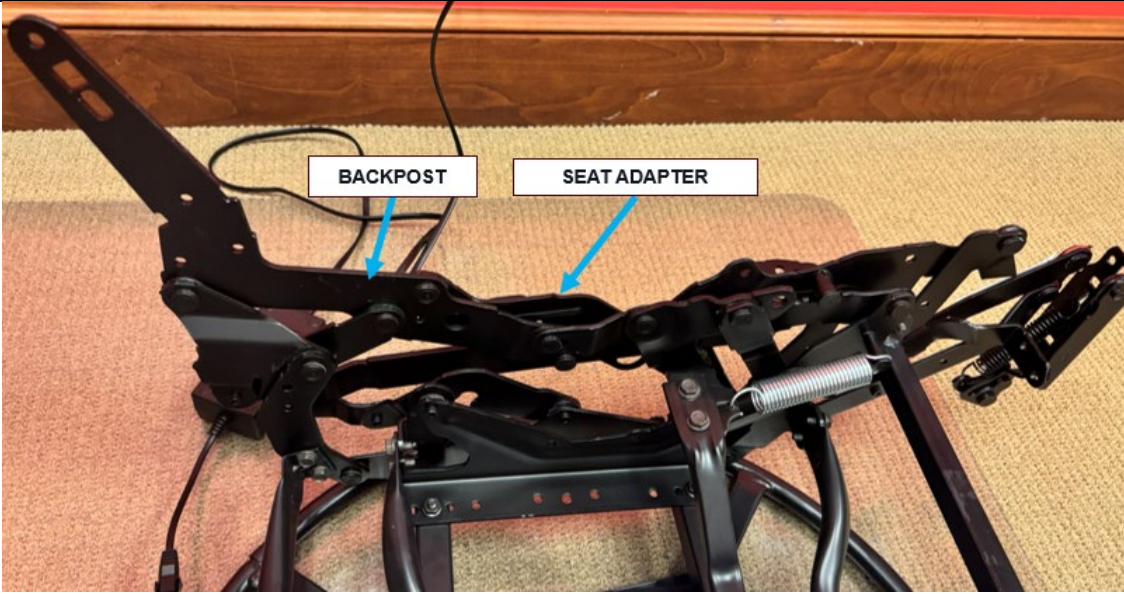
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The relative movement of the first and second movable members moves the seating unit between an upright position, an intermediate TV position, and a fully reclined position. The photos below depict the three positions between which the Exemplary Covered Rocker may be moved by the linear actuator.

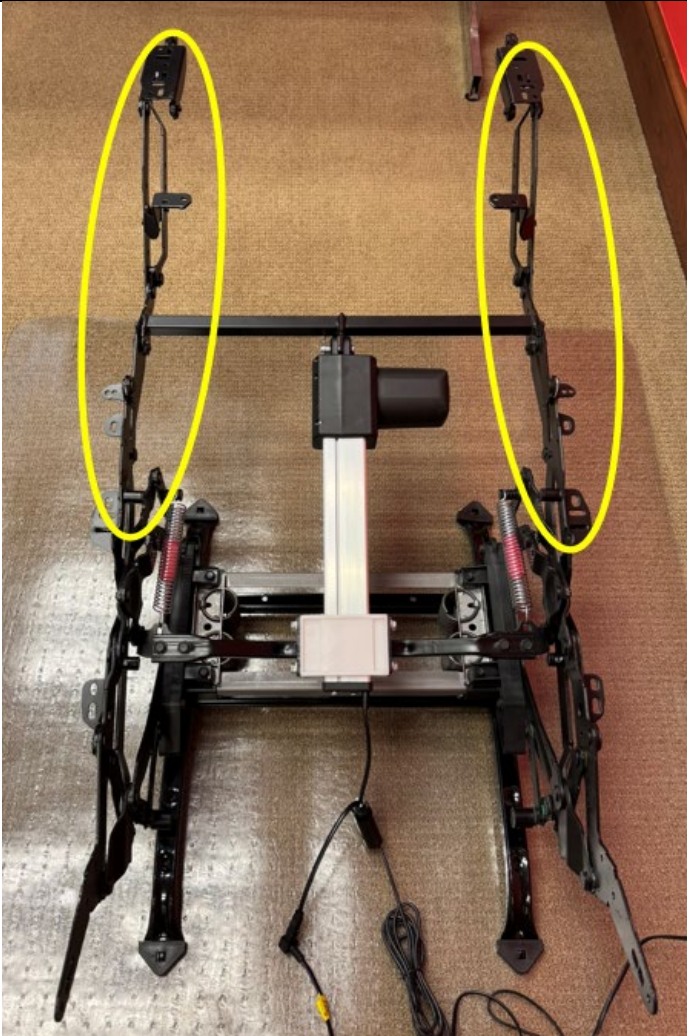
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The image displays three sequential photographs of a mechanical rocker assembly, likely for a chair or vehicle seat, demonstrating its range of motion. The assembly is constructed from black metal frames and components, with a central actuator mechanism visible. The background is a red wall and a light-colored carpet. UPRIGHT: The top photograph shows the assembly in its upright position. A yellow label with the word "UPRIGHT" is placed above the assembly. INTERMEDIATE TV: The middle photograph shows the assembly in an intermediate reclined position. A yellow label with the words "INTERMEDIATE TV" is placed above the assembly. FULLY RECLINED: The bottom photograph shows the assembly in its fully reclined position. A yellow label with the words "FULLY RECLINED" is placed above the assembly.

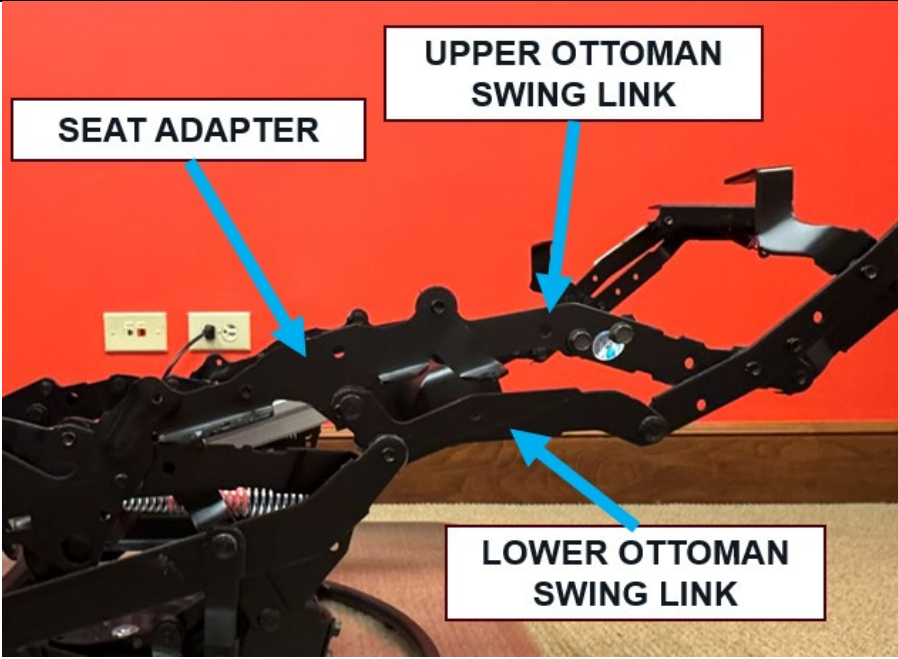
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		When the chair moves from the upright to intermediate TV position, the first movable member moves forwardly as shown below.  When the chair moves from the intermediate TV position to the fully reclined position, the second movable member moves rearwardly as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
12[h]	wherein the reclining mechanism includes: a backpost that is fixed relative to the backrest; a mounting bracket that is attached to the second movable member of the linear actuator; a lower swing link that is attached to the mounting bracket; and an upper swing link that is	The Exemplary Covered Rocker's reclining mechanism includes a backpost that is fixed relative to the backrest; a mounting bracket that is attached to the second movable member of the linear actuator; a lower swing link that is attached to the mounting bracket; and an upper swing link that is pivotally attached to the lower swing link and to the backpost (via a coupling link).

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	pivotally attached to the lower swing link and to the backpost.	
13	13. The seating unit defined in claim 12, further comprising a seat adapter that is fixed relative to the seat and directly pivotally attached to the backpost.	The Exemplary Covered Rocker includes a seat adapter that is fixed relative to the seat and directly pivotally attached to the backpost as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
14	14. The reciprocating seating unit defined in claim 13, wherein the reclining mechanism includes a pantographic linkage that extends the footrest in the TV and fully reclined positions, and wherein the pantographic linkage comprises upper and lower ottoman swing links that are directly pivotally attached to the seat adapter.	The Exemplary Covered Rocker's reclining mechanism includes a pantographic linkage that extends the footrest in the TV and fully reclined positions, and the pantographic linkage includes upper and lower ottoman swing links that are directly pivotally attached to the seat adapter as shown in the images below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The photograph shows a mechanical assembly, likely a covered rocker mechanism, with two yellow ovals highlighting specific components. The assembly is mounted on a wooden surface. The highlighted components are the upper arms or linkages of the mechanism, which are connected to a central pivot point. The mechanism appears to be a part of a larger system, possibly a prosthetic or a robotic arm, given the context of the patent.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The image shows a mechanical assembly, likely a rocker mechanism, with three labels and arrows pointing to specific components. The labels are 'SEAT ADAPTER', 'UPPER OTTOMAN SWING LINK', and 'LOWER OTTOMAN SWING LINK'. The background is red.