

# Exhibit 9

## **Exemplary Covered Rocker that Practices Leggett & Platt's U.S. Patent No. 8,398,165**

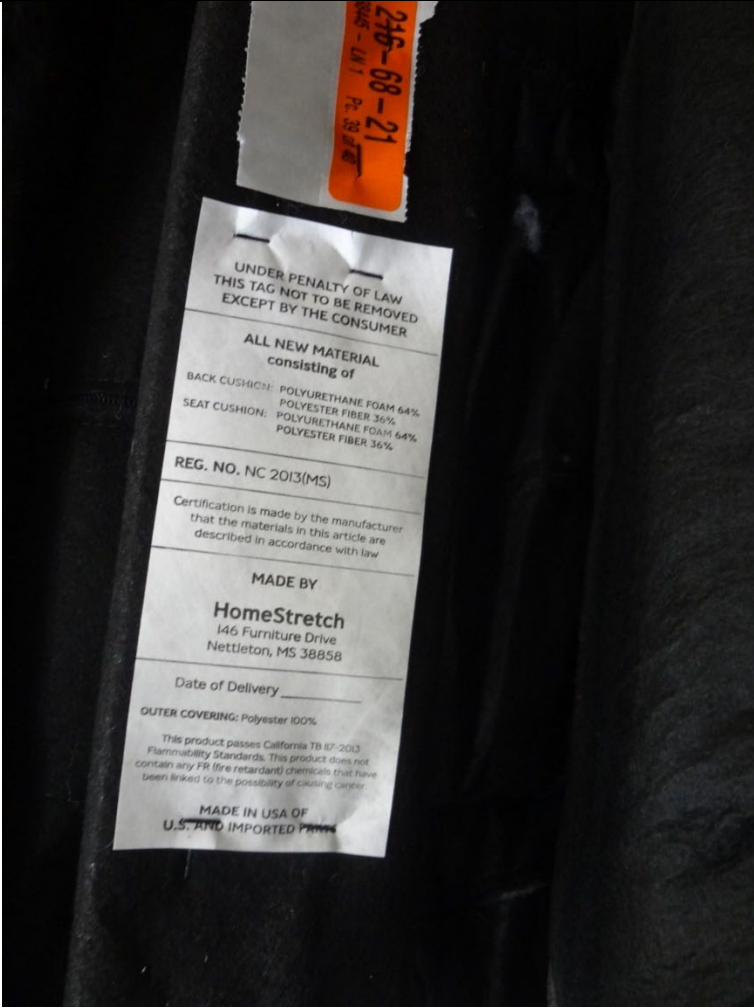
### **Powered Rocker-Recliner with the Leggett & Platt 5151 Mechanism**

The following chart illustrates how an Exemplary Powered Rocker-Recliner (the “Exemplary Covered Rocker”) containing Leggett & Platt’s 5151 Mechanism (the “Exemplary Covered Rocker Mechanism”) falls within the claim scope of U.S. Patent No. 8,398,165. The Exemplary Covered Rocker and/or Exemplary Covered Rocker Mechanism are exemplary products only and illustrate the practice of the above-referenced patent. The following chart contains highlighting, color-coding, and other annotations which are intended to assist the reader in identifying relevant elements, and are not intended to be binding or limiting. Complainants reserve the right to modify the structures associated with identified elements, to identify other functions for identified structures, and/or to adjust the identification of one or more components identified herein.

Complainants reserve the right to offer additional evidence to prove that the Exemplary Covered Rocker(s) practice the claims below in their expert reports, and in motions and at trial. Complainants reserve the right to supplement, amend, or modify the foregoing based on new information that becomes available during discovery, the exchange of proposed claim constructions, and/or issuance of a claim construction order.

| <b>Claim</b> | <b>U.S. Patent No. 8,398,165</b>                                                                                                                                                                                | <b>Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism</b> |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| 1[p]         | 1. A seating unit having, a seat, a backrest, and at least one foot-support ottoman, the seating unit being adapted to move between a closed, an extended and a reclined position, the seating unit comprising: | The Exemplary Covered Rocker is a seating unit.                             |

| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                |
|-------|---------------------------|-------------------------------------------------------------------------------------|
|       |                           |  |

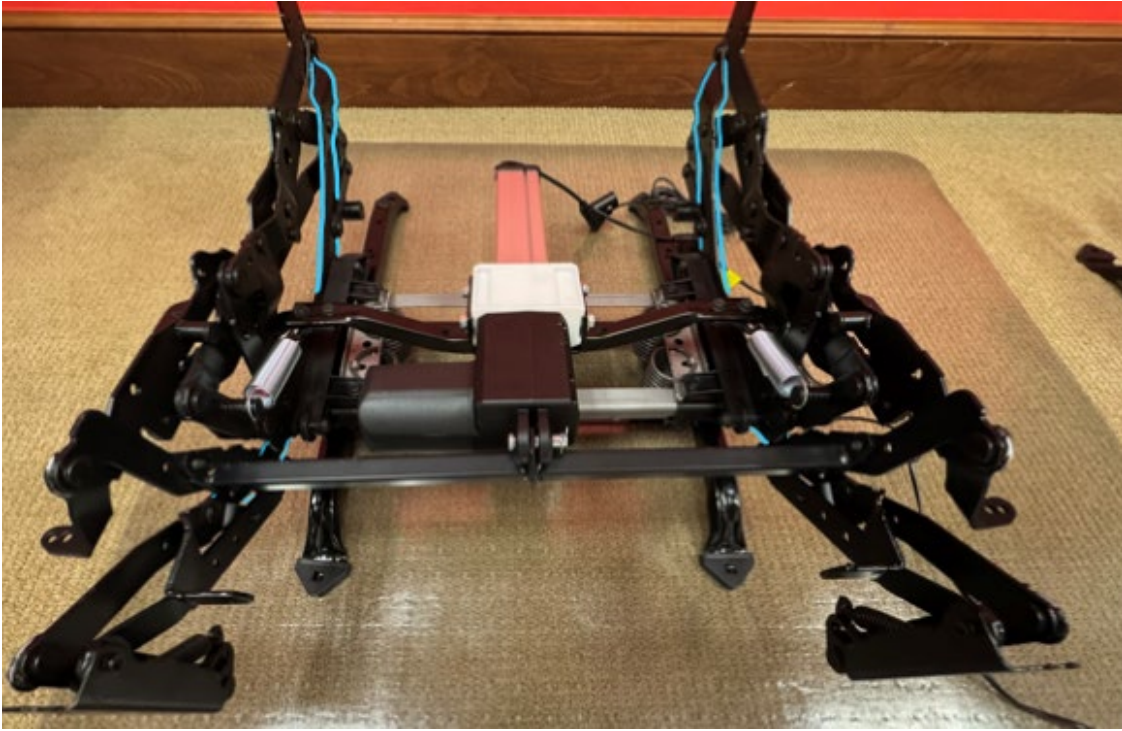
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                    |
|-------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  <p>The Exemplary Covered Rocker comprises a Leggett &amp; Platt 5151 mechanism.</p> |

| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  <p>A close-up photograph of a black metal rocker mechanism, likely part of a chair or stool. A black warning label is affixed to the metal. The label contains the following text: '2024/03/23 CAUTION 5151', 'Do not allow children to play on this mechanized furniture or operate the mechanism. Legrest folds down on closing so that a child could possibly be injured. Always leave in an upright and closed position. Keep hands and feet clear of mechanism. Only the occupant should operate it.', 'JX' (with a small logo), 'LEGGETT&amp;PLATT', and 'MADE IN CHINA'. The background is a plain, light-colored surface.</p> |

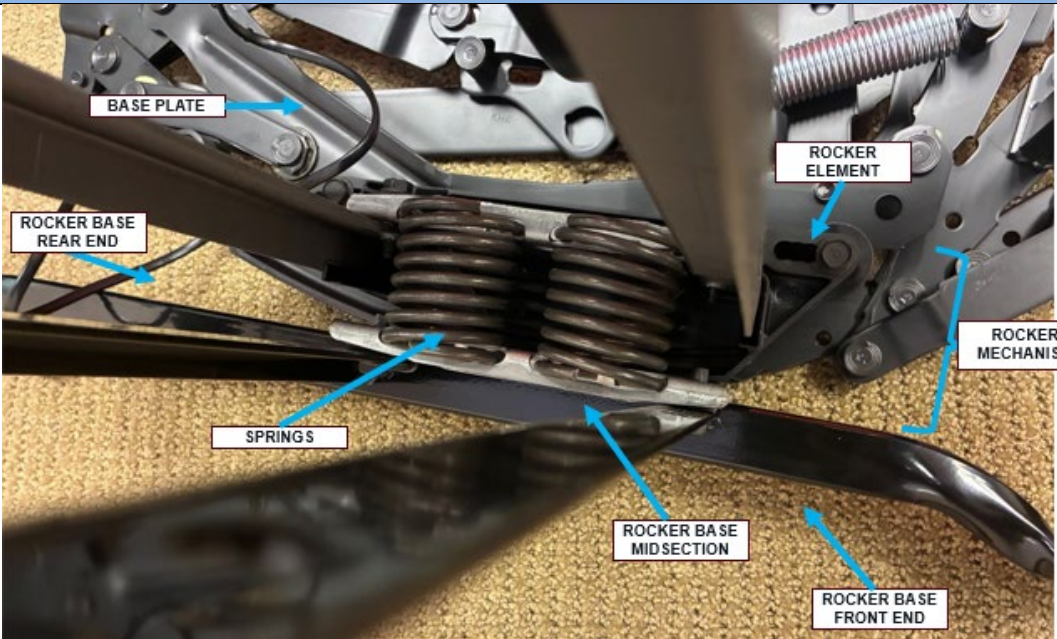
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                       |
|-------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  <p data-bbox="779 1154 1850 1230">The seating unit containing the Exemplary Covered Rocker Mechanism has a seat, a backrest, and at least one foot-support ottoman as shown below.</p> |

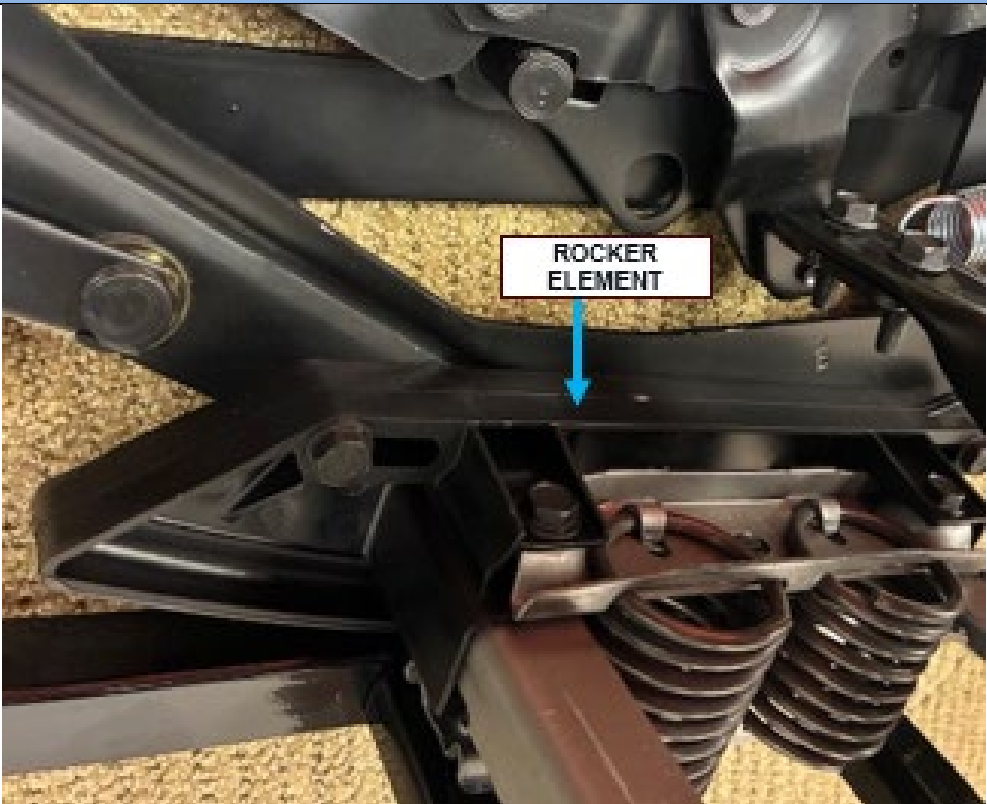
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                               |
|-------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  <p data-bbox="779 776 1797 889">The Exemplary Covered Rocker contains the Exemplary Covered Rocker Mechanism and is adapted to move between a closed, an extended, and a reclined position.</p> |

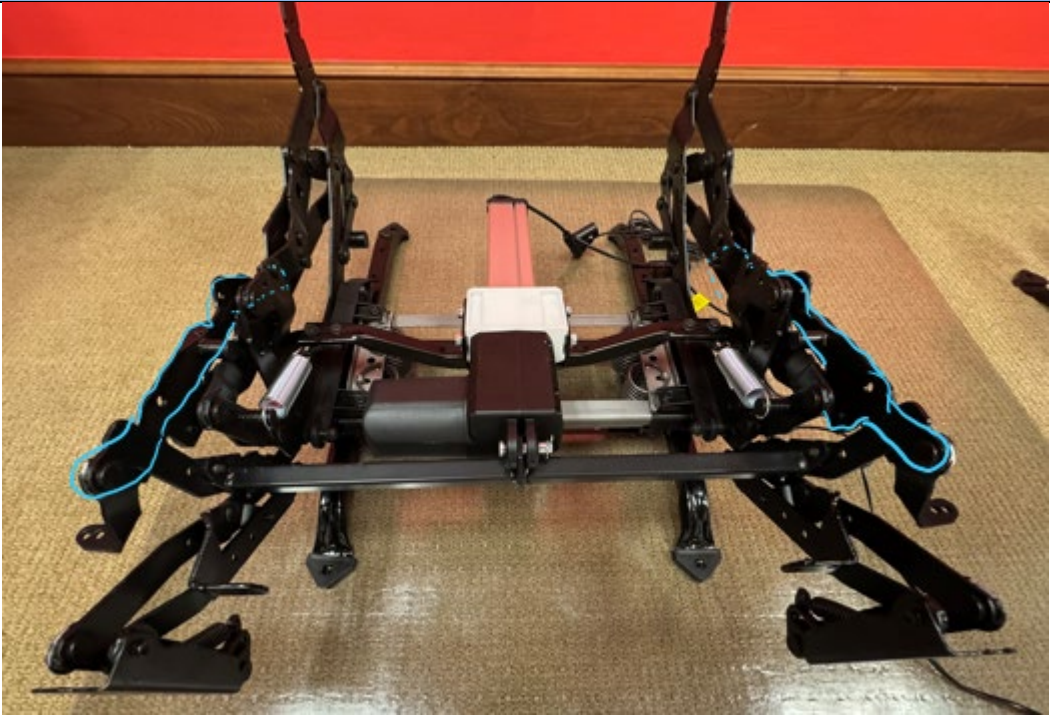


| Claim | U.S. Patent No. 8,398,165                                        | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                             |
|-------|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1[a]  | a pair of base plates in substantially parallel-spaced relation; | <p>The Exemplary Covered Rocker includes a pair of base plates in substantially parallel-spaced relation as shown below.</p>  |

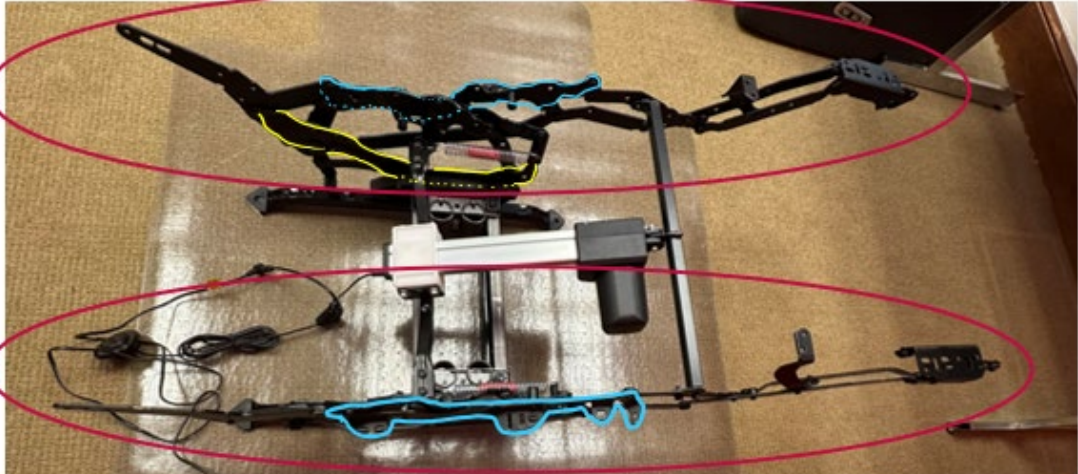
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                              | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                     |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                        |                                                                                                                                                                        |
| 1[b]  | a pair of rocker mechanisms, wherein each of the rocker mechanisms is attached to a respective base plate and moveably supports the respective base plate above an underlying surface; | The Exemplary Covered Rocker includes a pair of rocker mechanisms, wherein each of the rocker mechanisms is attached to a respective base plate and moveably supports the respective base plate above an underlying surface as shown in the image below. |

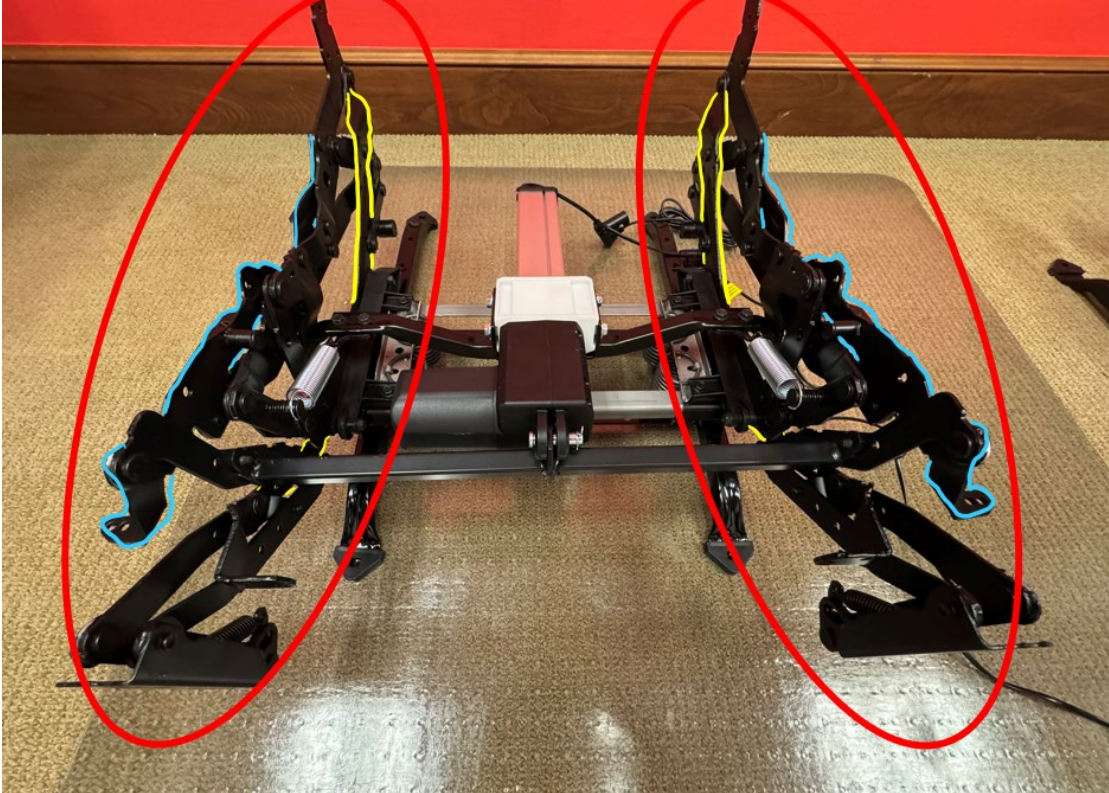
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism               |
|-------|---------------------------|------------------------------------------------------------------------------------|
|       |                           |  |

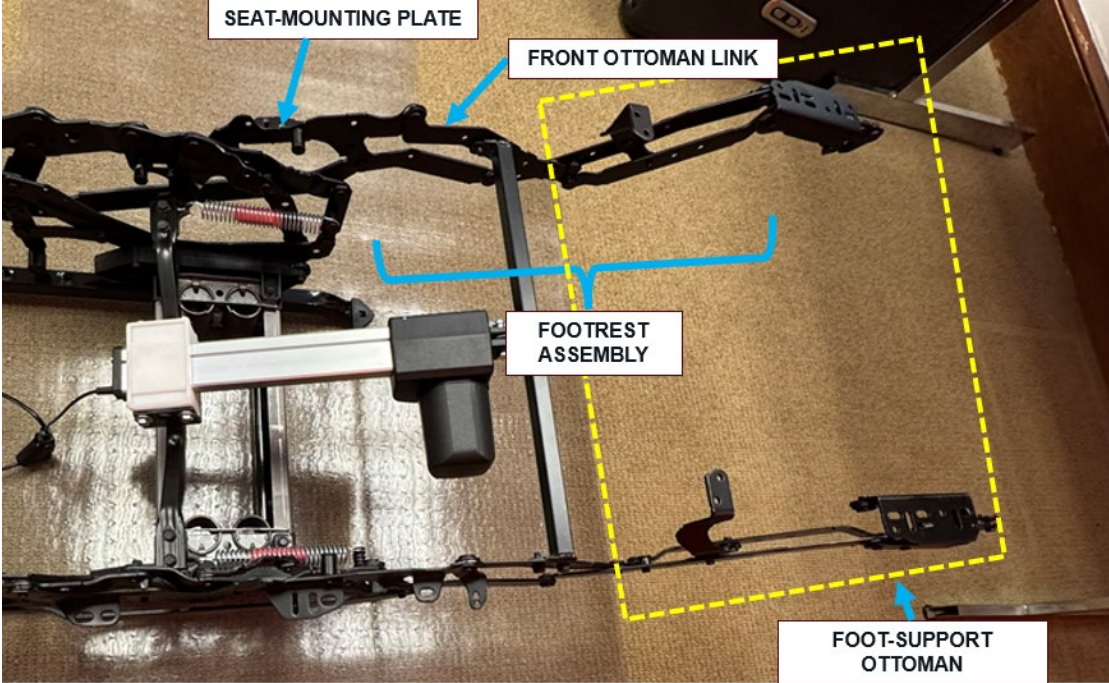
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                     | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                           |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                               |                                                                                                                                                                                                                                                                                             |
| 1[c]  | <p>a pair of seat-mounting plates in substantially parallel-spaced relation, wherein the seat-mounting plates translatably carry the seat over the rocker mechanisms; and</p> | <p>The Exemplary Covered Rocker includes a pair of seat-mounting plates (blue) in substantially parallel-spaced relation, wherein the seat-mounting plates translatably carry the seat over the rocker mechanisms as shown below. The seat-mounting plates translatably carry the seat by attaching to the seat and permitting the seat to rock via the rocker mechanisms.</p> |

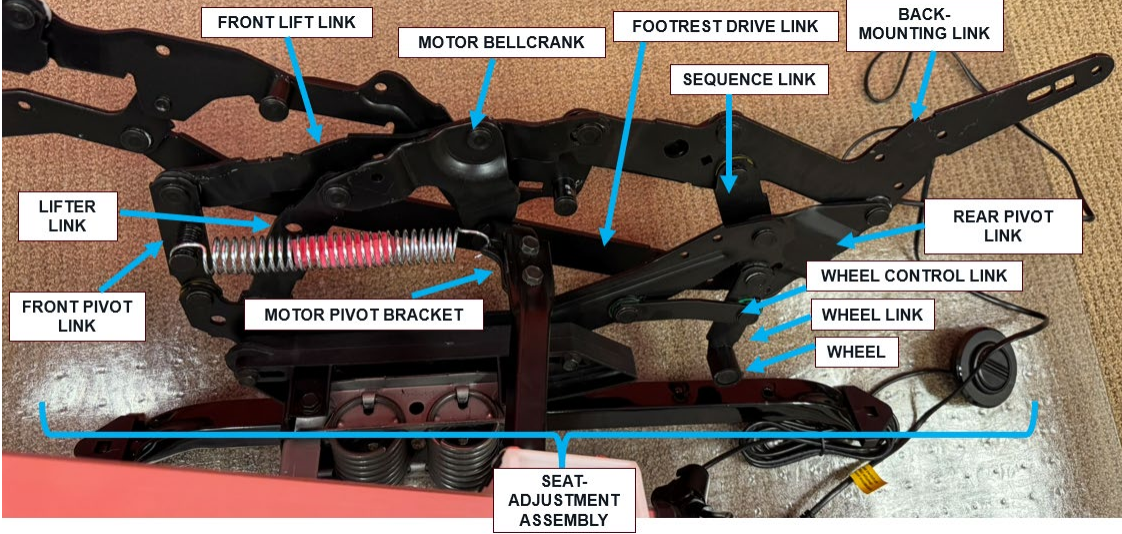
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  <p>The image shows a mechanical assembly, likely a prosthetic foot or a robotic leg component. It features a central actuator (a white and red motor) connected to a series of black metal links and joints. The assembly is mounted on a wooden base. The mechanism appears to be a covered rocker mechanism, as described in the patent. The assembly is shown from a top-down perspective, highlighting the central actuator and the symmetrical arrangement of the links and joints.</p> |

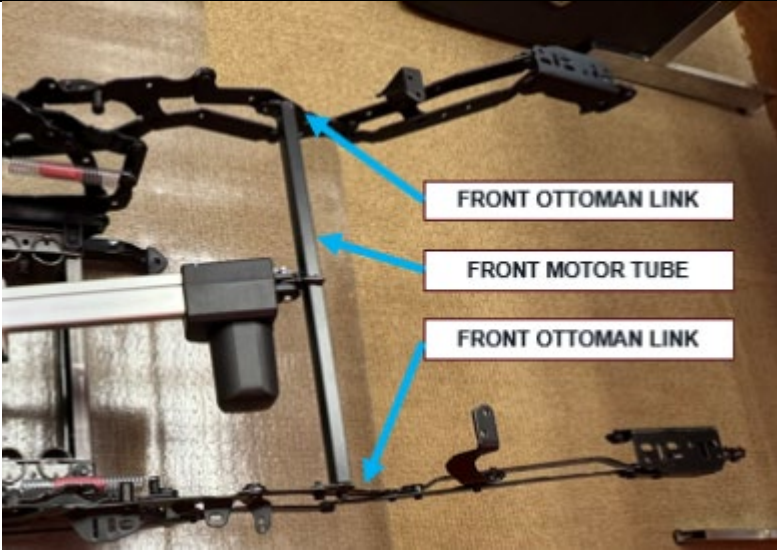
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                  | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                 |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                            |                                                                                                                                                    |
| 1[d]  | <p>a pair of the generally mirror-image linkage mechanisms each moveably interconnecting each of the base plates to a respective seat-mounting plate, wherein each of the linkage mechanisms comprise:</p> | <p>The Exemplary Covered Rocker includes a pair of the generally mirror-image linkage mechanisms (red) each moveably interconnecting each of the base plates (yellow) to a respective seat-mounting plate (blue) as shown below.</p> |

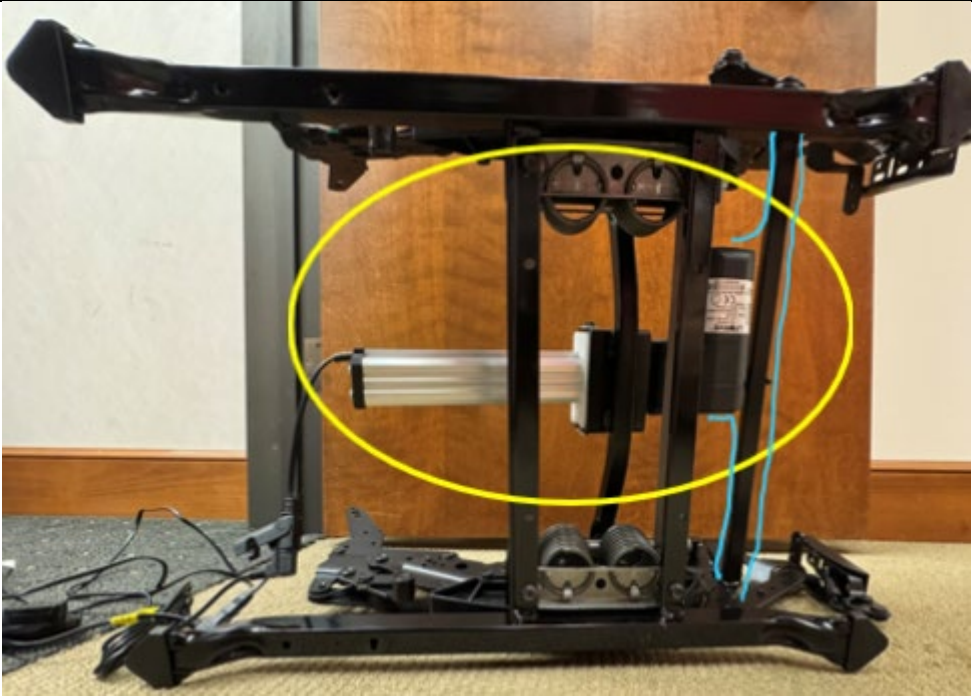
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism               |
|-------|---------------------------|------------------------------------------------------------------------------------|
|       |                           |  |

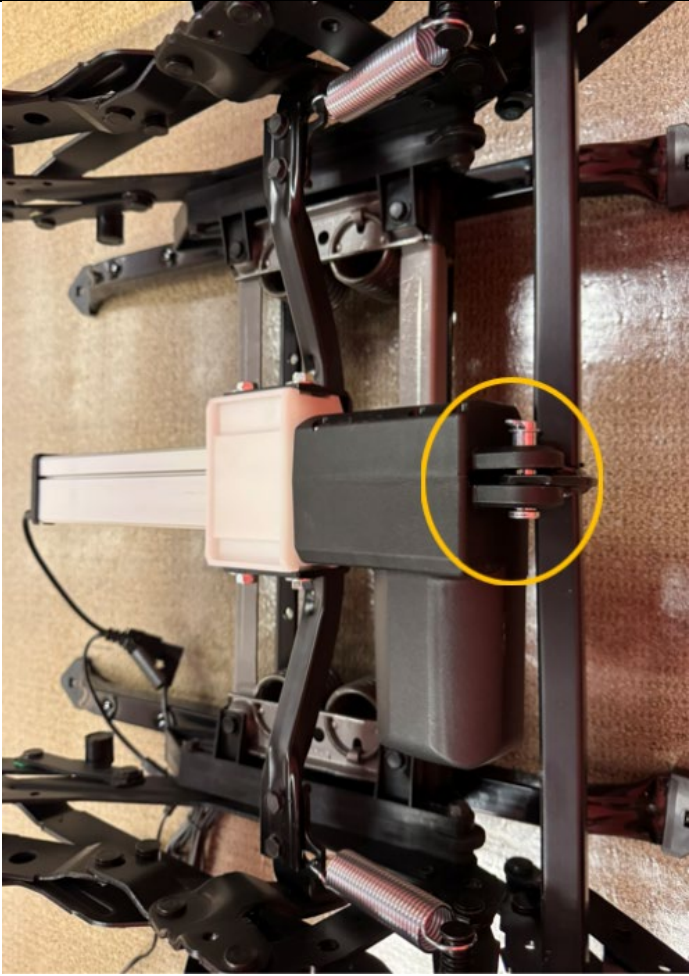
| Claim  | U.S. Patent No. 8,398,165                                                                                                                                                           | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        |                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 1[d-a] | (a) a footrest assembly that extends and retracts the at least one foot-support ottoman, wherein the footrest assembly includes a front ottoman link that is rotatably coupled to a | <p>The Exemplary Covered Rocker linkage mechanisms include a footrest assembly that extends and retracts the at least one foot-support ottoman (<i>see</i> Element 1[p]), wherein the footrest assembly includes a front ottoman link that is rotatably coupled to a forward portion of one of the seat-mounting plates as shown below. In the image below, the dotted yellow lines indicate the general location of where the at least one foot-support ottoman would be attached to the Exemplary Covered Rocker Mechanism.</p> |

| Claim  | U.S. Patent No. 8,398,165                                                   | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                       |
|--------|-----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
|        | forward portion of one of the seat-mounting plates; and                     |                                                          |
| 1[d-b] | (b) a seat-adjustment assembly that reclines and inclines the backrest; and | The Exemplary Covered Rocker linkage mechanisms include a seat-adjustment assembly that reclines and inclines the backrest as shown below. |

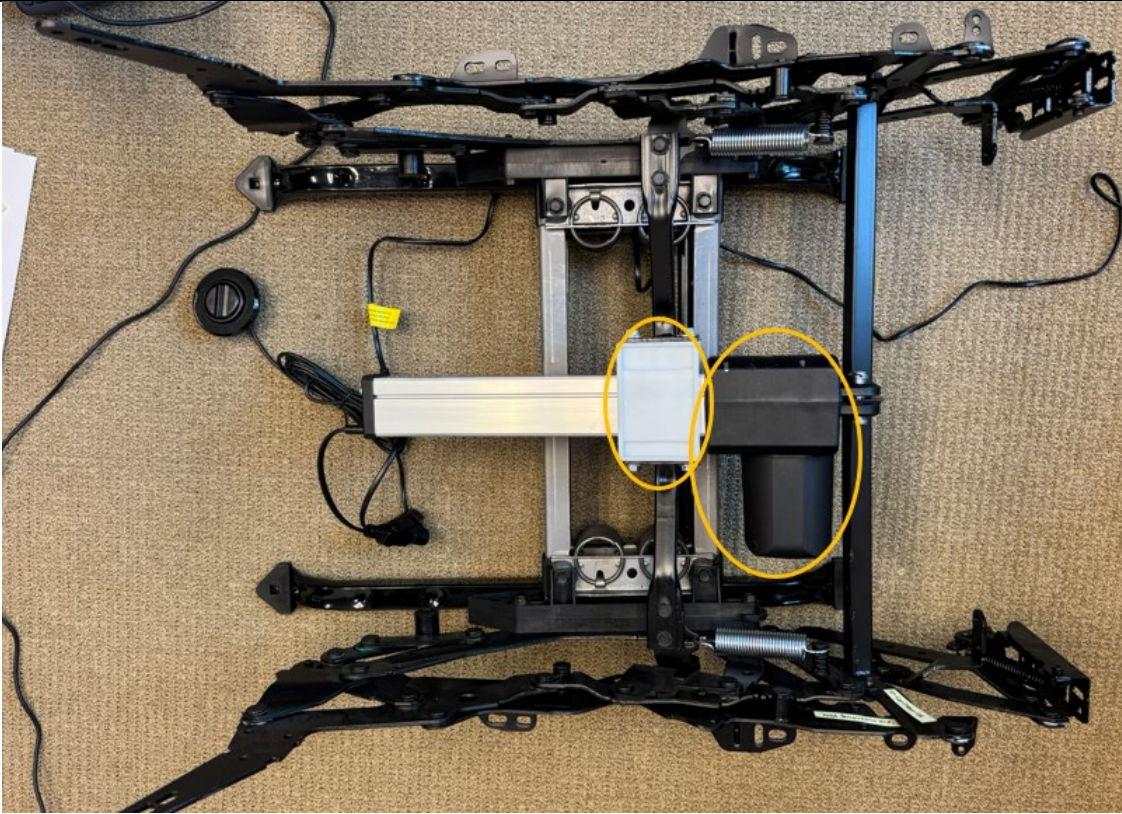
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                      | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                                |                                                                                                                                                                                   |
| 1[e]  | <p>a front motor tube that spans the pair of linkage mechanisms, wherein the front motor tube having a pair of ends, wherein one of the ends of the front motor tube is coupled to the front ottoman link;</p> | <p>The Exemplary Covered Rocker includes a front motor tube that spans the pair of linkage mechanisms, wherein the front motor tube having a pair of ends, wherein one of the ends of the front motor tube is coupled to the front ottoman link as shown below.</p> |

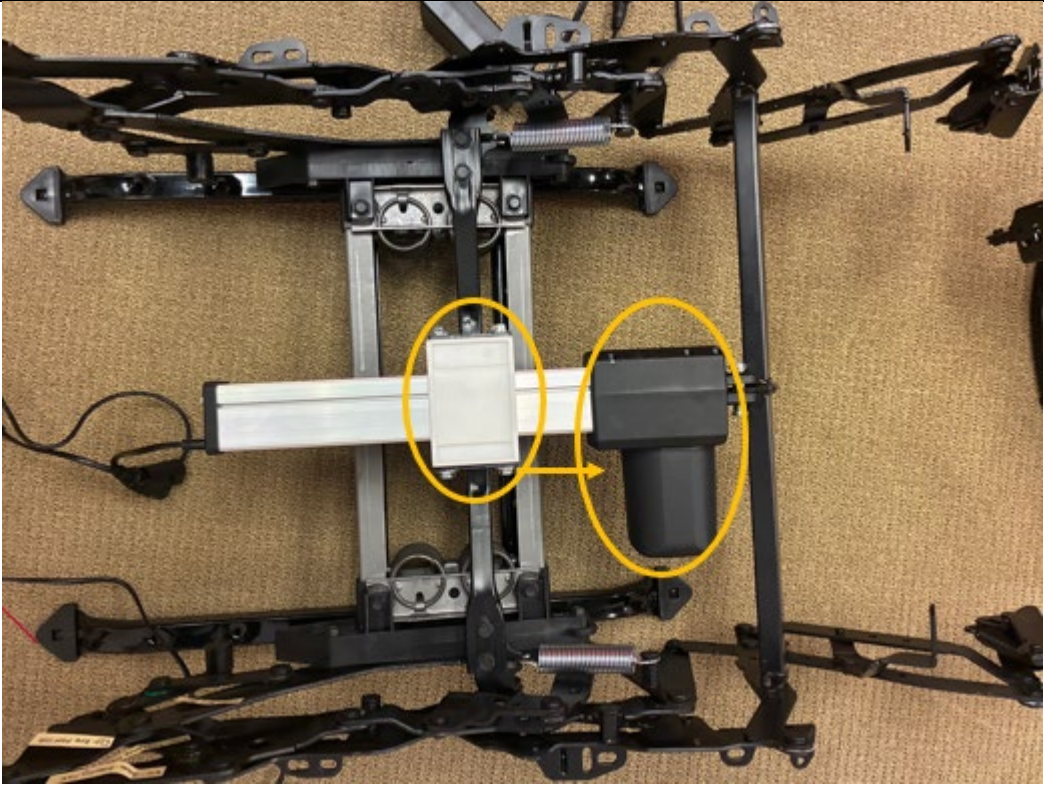
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                          | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                    |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                                    |                                                                                                                                                                                                       |
| 1[f]  | a linear actuator that provides automated adjustment of the seating unit between a closed position, an extended position, and a reclined position, wherein the linear actuator is coupled to the front motor tube, | The Exemplary Covered Rocker includes a linear actuator (yellow) that provides automated adjustment of the seating unit between a closed position, an extended position, and a reclined position, wherein the linear actuator is coupled to the front motor tube (blue) as shown below. |

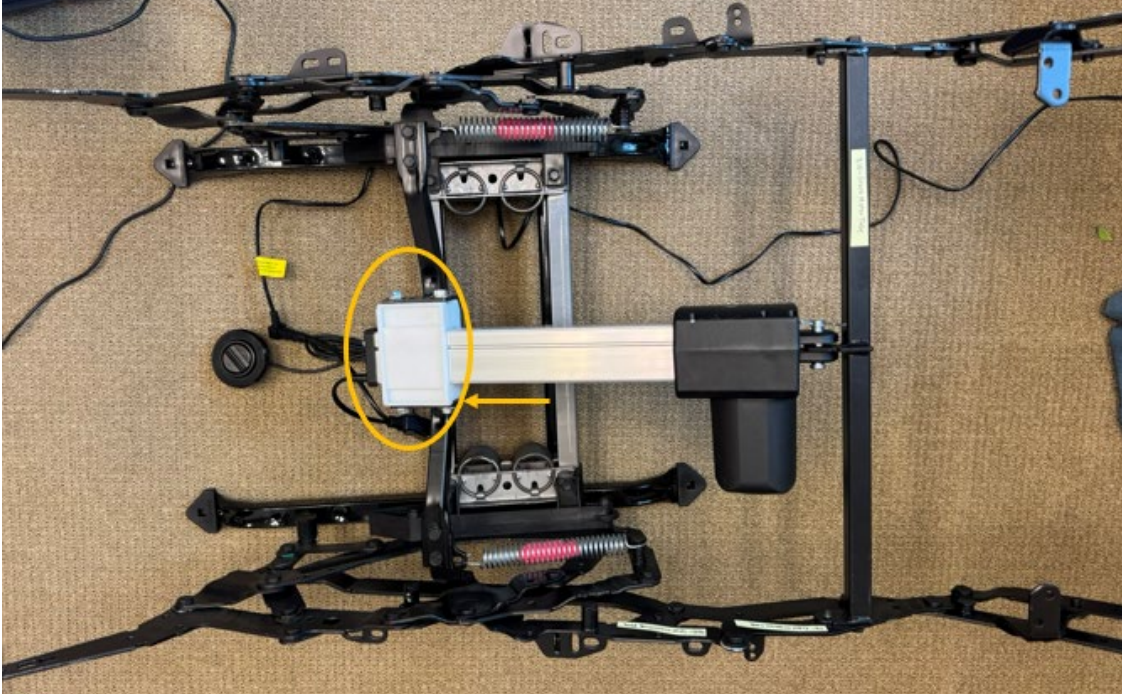
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                  |
|-------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  A photograph of a mechanical assembly, likely a covered rocker mechanism, featuring a black frame, a horizontal actuator, and a yellow circle highlighting a specific component. The assembly is positioned on a carpeted floor against a wooden wall. A blue cable is visible on the right side of the mechanism. |

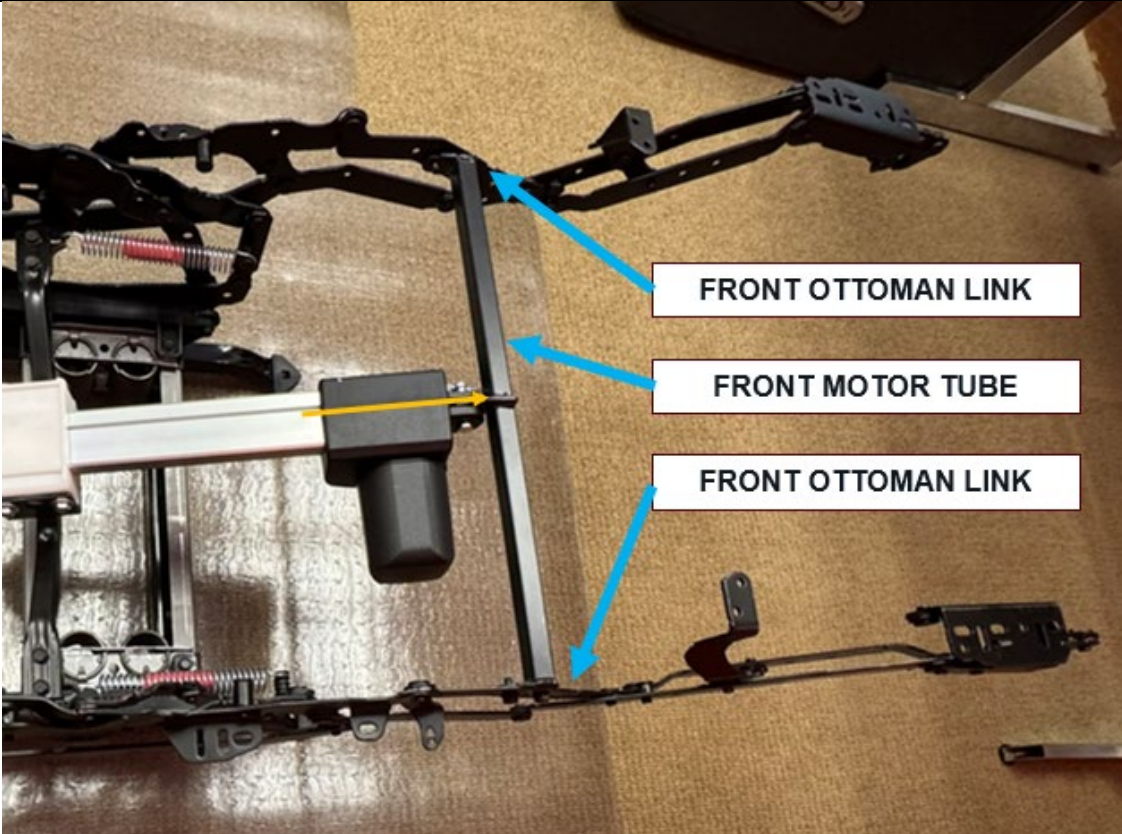
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                  |
|-------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  <p data-bbox="779 1284 1808 1356">The photos below depict the three positions between which the Exemplary Covered Rocker may be moved by the linear actuator.</p> |

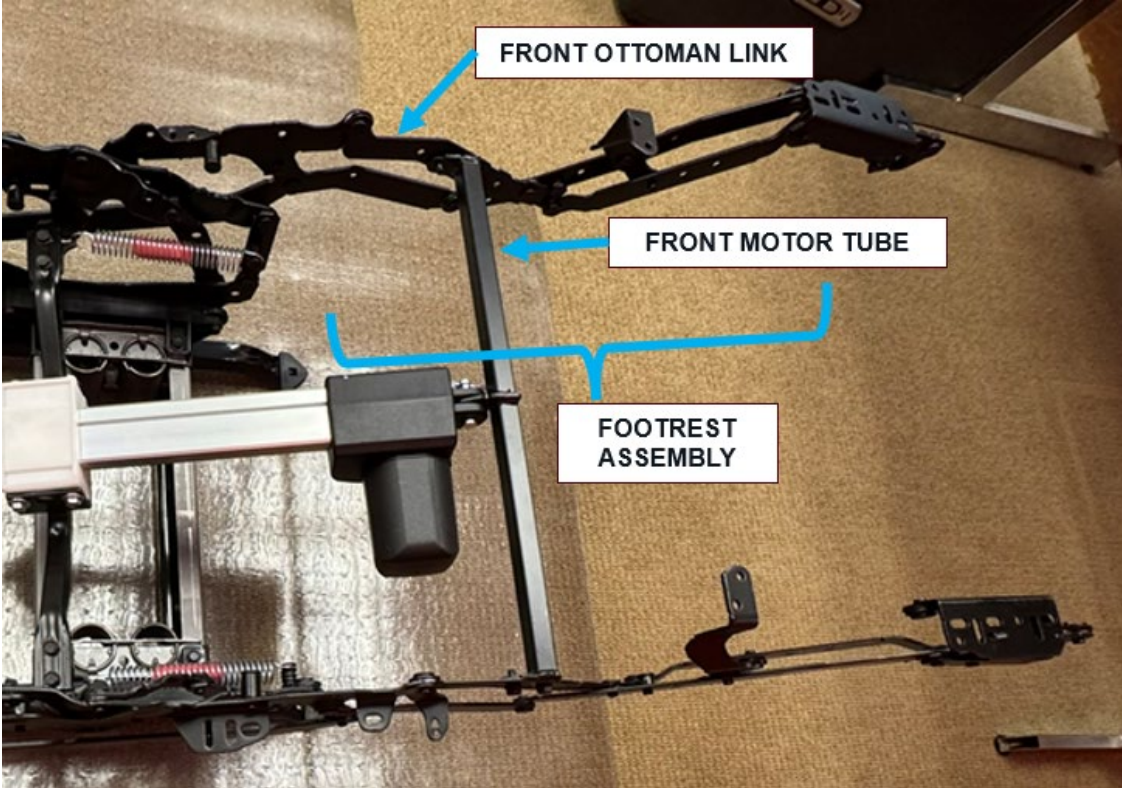
| Claim | U.S. Patent No. 8,398,165                                                           | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                               |
|-------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                     |                                                                                 |
| 1[g]  | wherein the linear-actuator adjustment is sequenced into a first phase and a second | The Exemplary Covered Rocker's linear actuator adjustment is sequenced into a first phase and a second phase that are mutually exclusive in stroke as shown below. |

| Claim | U.S. Patent No. 8,398,165                           | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                         |
|-------|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | <p>phase that are mutually exclusive in stroke,</p> |  <p>The first phase of the linear-actuator adjustment causes the motor to move forward until the footrest assembly is fully extended.</p> |

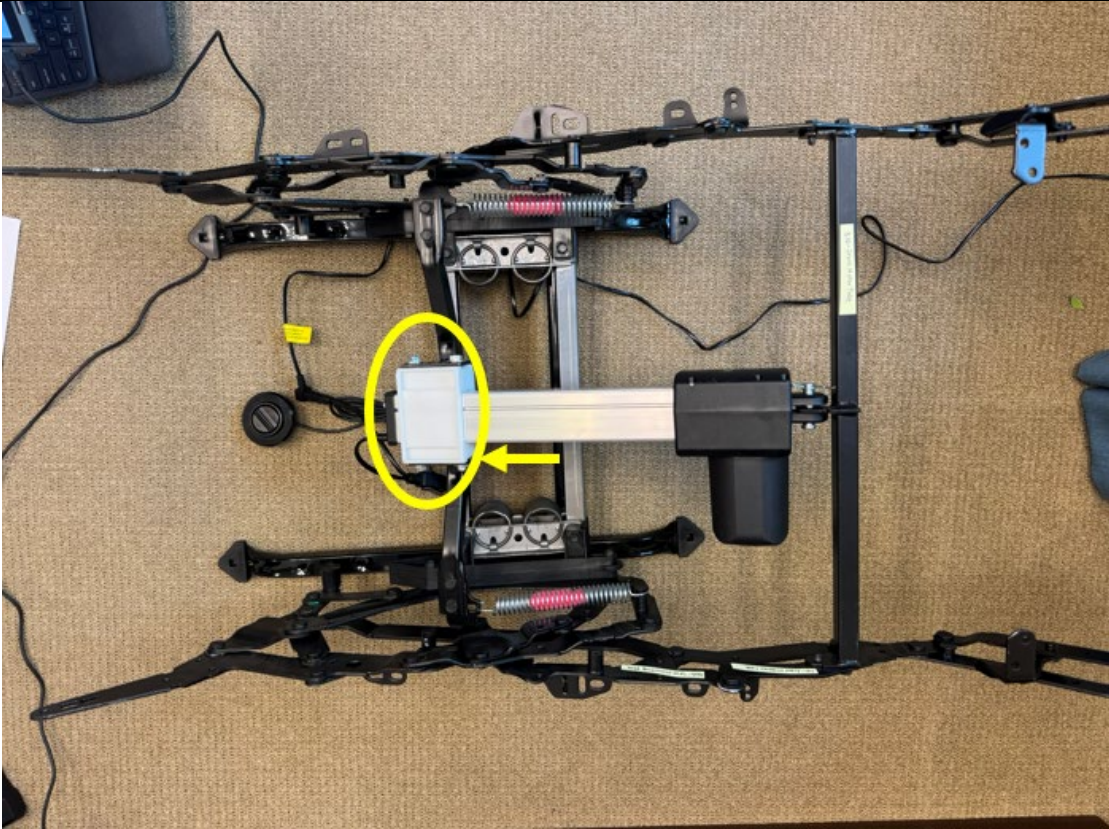
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                    |
|-------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  <p data-bbox="779 1096 1850 1214">When the linear-actuator is activated, the first phase extends the footrest assembly until it is fully extended. The linear-actuator then causes the second phase to actuate to the reclined position, which is exclusive of the first phase.</p> |

| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                                              | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                              |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                 |
| 1[h]  | <p>wherein the first phase moves the footrest assembly between the closed position and the extended position upon the linear actuator exerting lateral thrust onto the front motor tube that, in turn, invokes movement of the front ottoman link,</p> | <p>The Exemplary Covered Rocker's first phase moves the footrest assembly between the closed position and the extended position upon the linear actuator (yellow) exerting lateral thrust onto the front motor tube that, in turn, invokes movement of the front ottoman link as shown below.</p> |

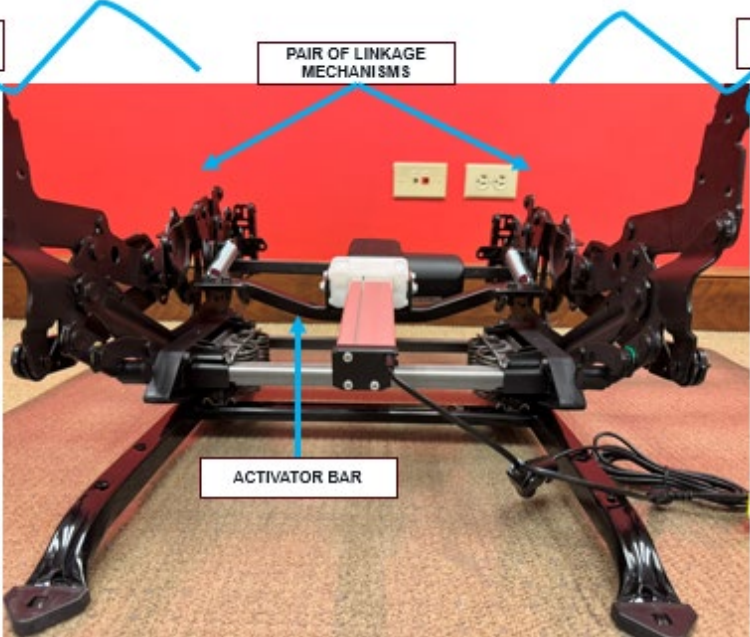
| Claim | U.S. Patent No. 8,398,165                                                                                                                              | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                      |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                        |                                                                                                                                        |
| 1[i]  | wherein the movement of the first ottoman link controls adjustment of the footrest assembly between the closed position and the extended position, and | <p>The movement of the Exemplary Covered Rocker's first ottoman link controls adjustment of the footrest assembly between the closed position and the extended position as shown below.</p> <p><i>See claim 1[p].</i></p> |

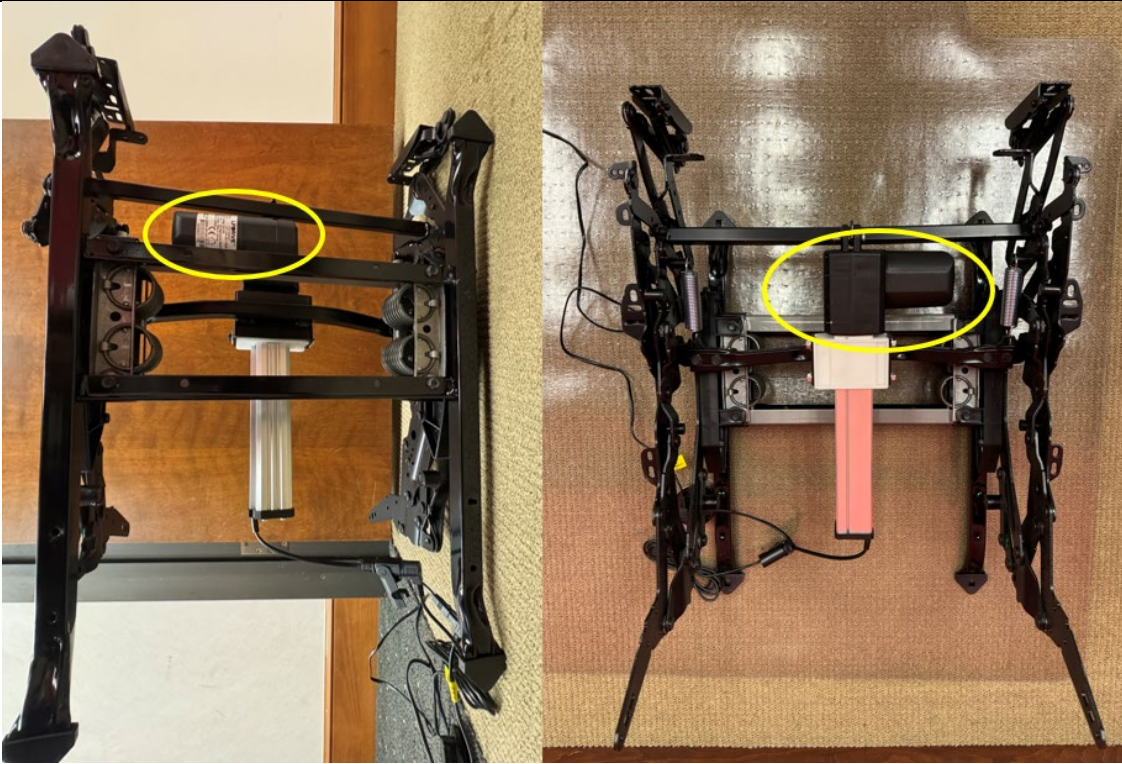
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                |
|-------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  <p>The front motor tube is connected at each end to the first ottoman link of each linkage mechanism. When the linear actuator moves forward during the first stroke, this exerts a force on the first ottoman links which adjusts the footrest assembly from the closed position to the extended position.</p> |

| Claim | U.S. Patent No. 8,398,165                                                                                            | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                        |
|-------|----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                      |                                                                          |
| 1[j]  | wherein the second phase moves the seat-adjustment assembly between the extended position and the reclined position. | The second phase of the Exemplary Covered Rocker moves the seat-adjustment assembly between the extended position and the reclined position as shown below. |

| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                   |
|-------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  <p data-bbox="779 1096 1881 1250">When the linear actuator moves rearward during the second stroke, this exerts a force on the activator bar which moves the seat-adjustment assembly between the extended position and the reclined position.</p> |

| Claim | U.S. Patent No. 8,398,165                                                                                    | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                           |
|-------|--------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
|       |                                                                                                              |                             |
| 2     | 2. The seating unit of claim 1, further comprising an activator bar spanning the pair of linkage mechanisms. | The Exemplary Covered Rocker includes an activator bar spanning the pair of linkage mechanisms as shown below. |

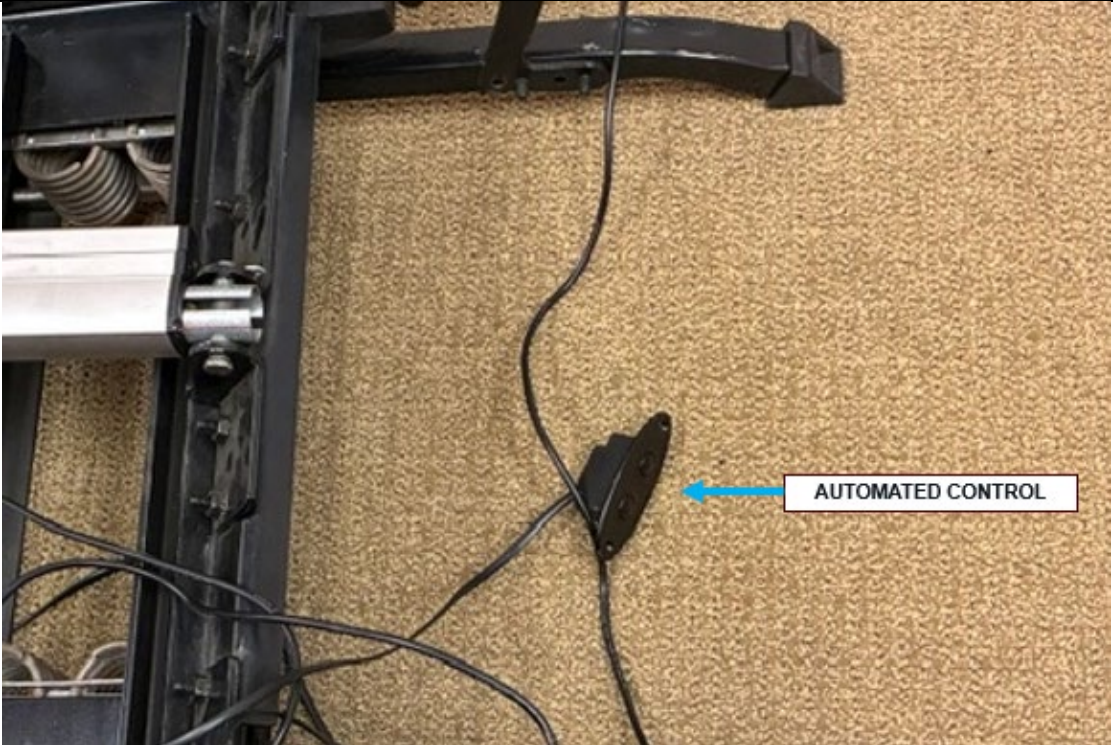
| Claim | U.S. Patent No. 8,398,165                                                                    | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                    |
|-------|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
|       |                                                                                              |       |
| 3[a]  | 3. The seating unit of claim 2, wherein the linear actuator comprises:<br>a motor mechanism; | The Exemplary Covered Rocker linear actuator includes a motor mechanism as shown below. |

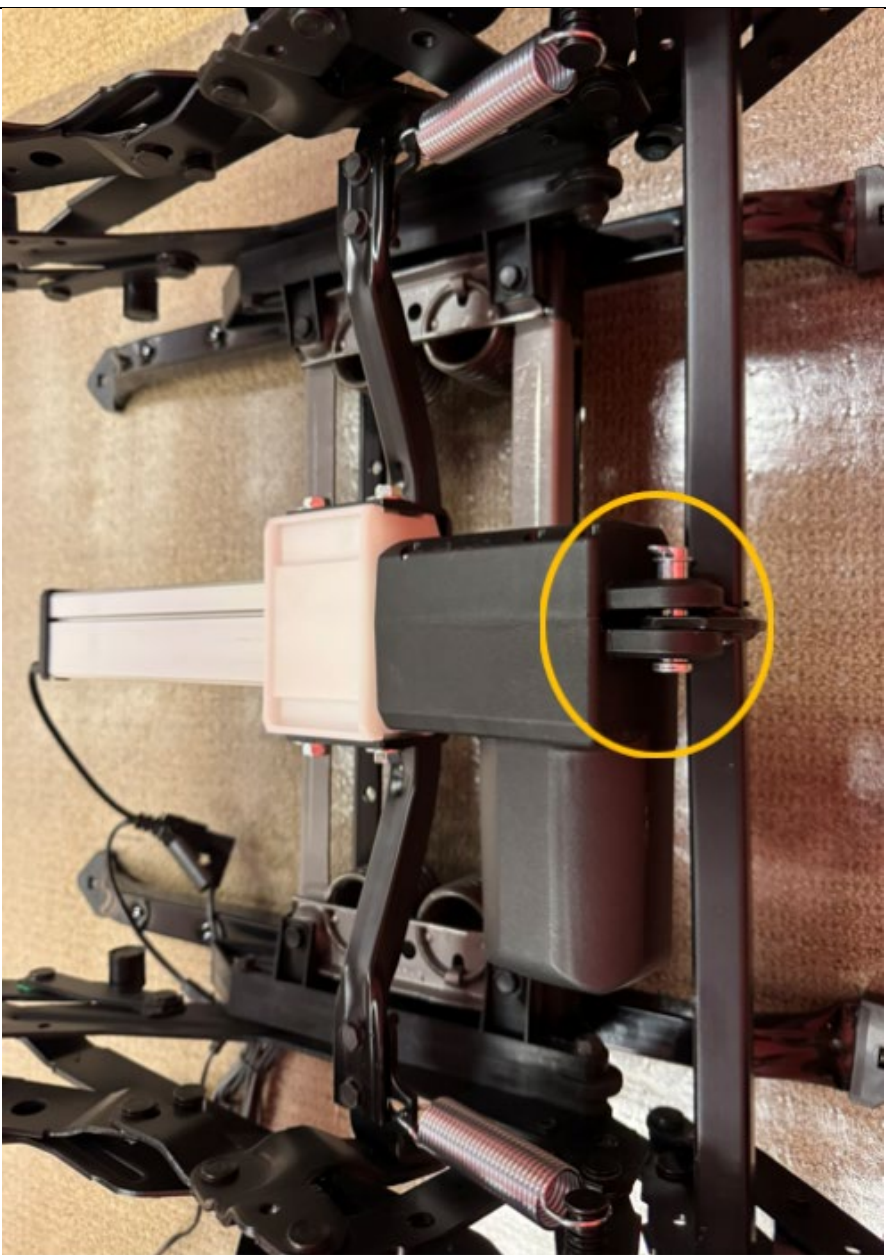
| Claim | U.S. Patent No. 8,398,165                                                                                                       | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                               |
|-------|---------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                 |                                                                                                                                 |
| 3[b]  | a track operably coupled to the motor mechanism, wherein the track includes a first travel section and a second travel section; | The Exemplary Covered Rocker includes a track (yellow/blue) operably coupled to the motor mechanism, wherein the track includes a first travel section (blue) and a second travel section (yellow) as shown below. |

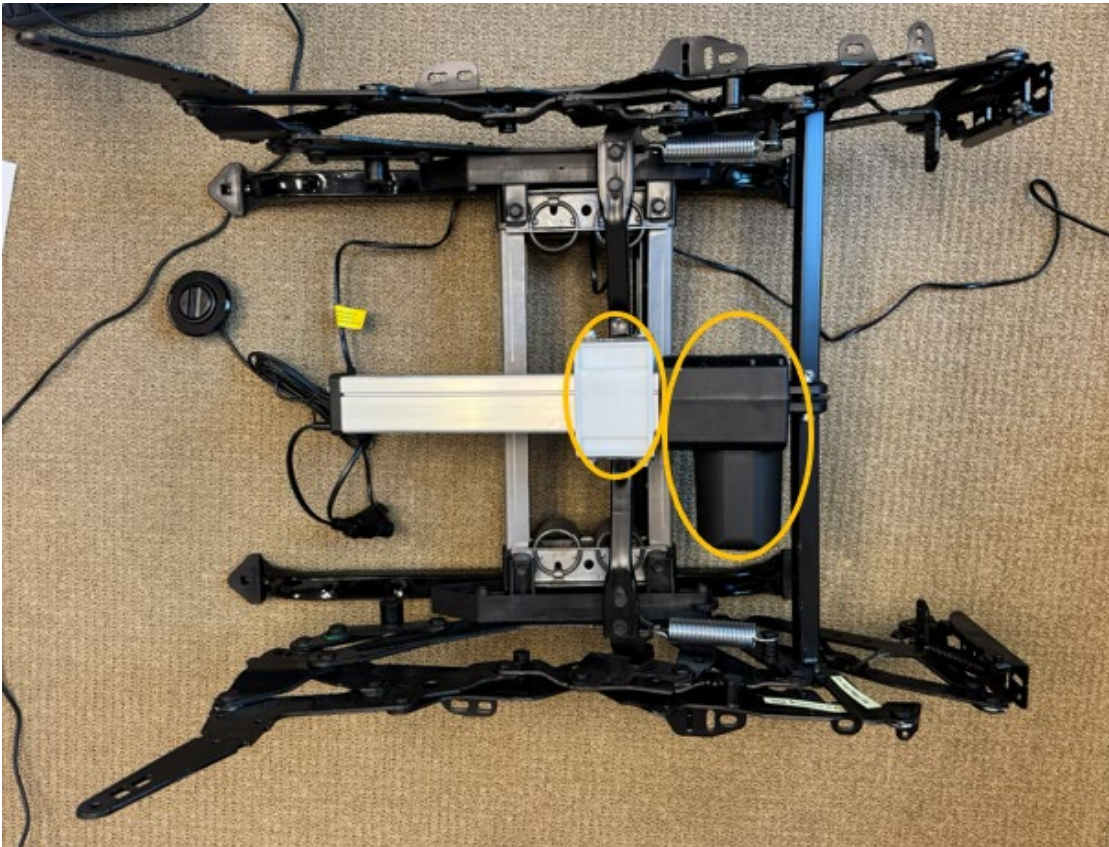
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                |
|-------|---------------------------|-------------------------------------------------------------------------------------|
|       |                           |  |

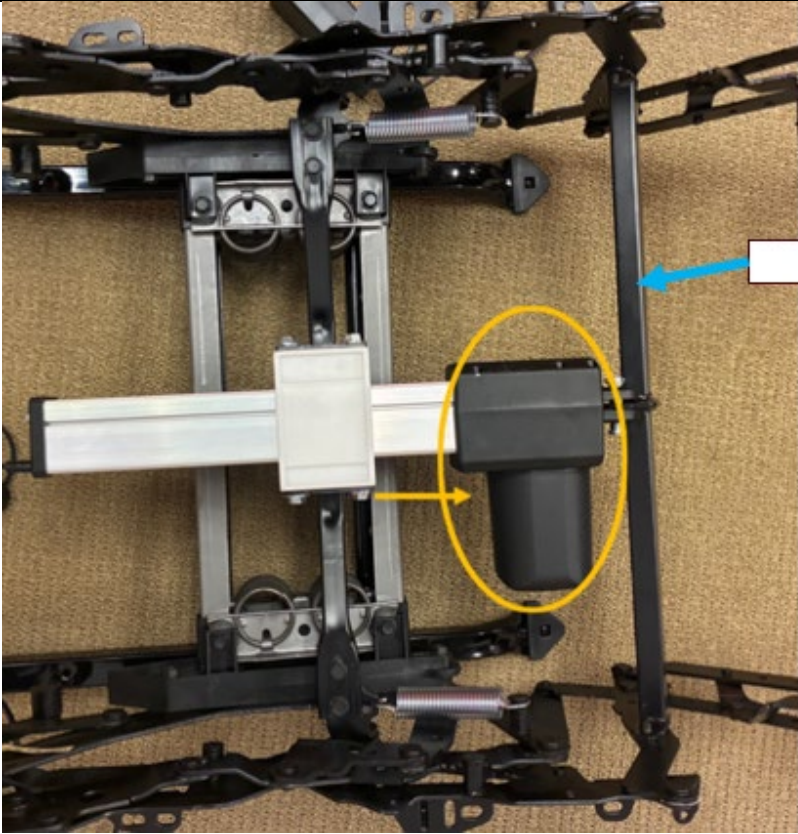
| Claim | U.S. Patent No. 8,398,165                                                                              | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                        |
|-------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3[c]  | and<br>a motor activator block that translates longitudinally along the track under automated control. | The Exemplary Covered Rocker includes a motor activator block (blue) that translates longitudinally along the track under automated control as shown below. |

| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                |
|-------|---------------------------|-------------------------------------------------------------------------------------|
|       |                           |  |

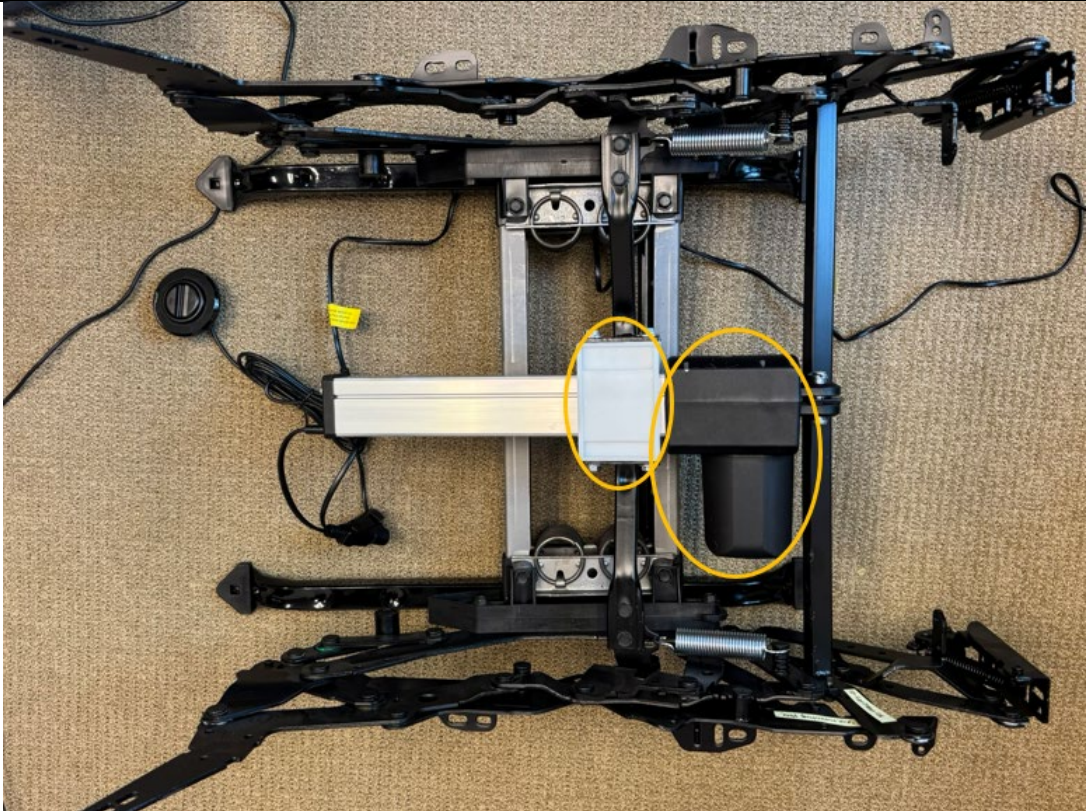
| Claim | U.S. Patent No. 8,398,165                                                                                                                                    | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                           |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                              |                                                                             |
| 4     | 4. The seating unit of claim 3, wherein a housing of the motor mechanism is pivotably coupled to a section between the pair of ends of the front motor tube. | The Exemplary Covered Rocker housing of the motor mechanism is pivotably coupled to a section between the pair of ends of the front motor tube as shown below. |

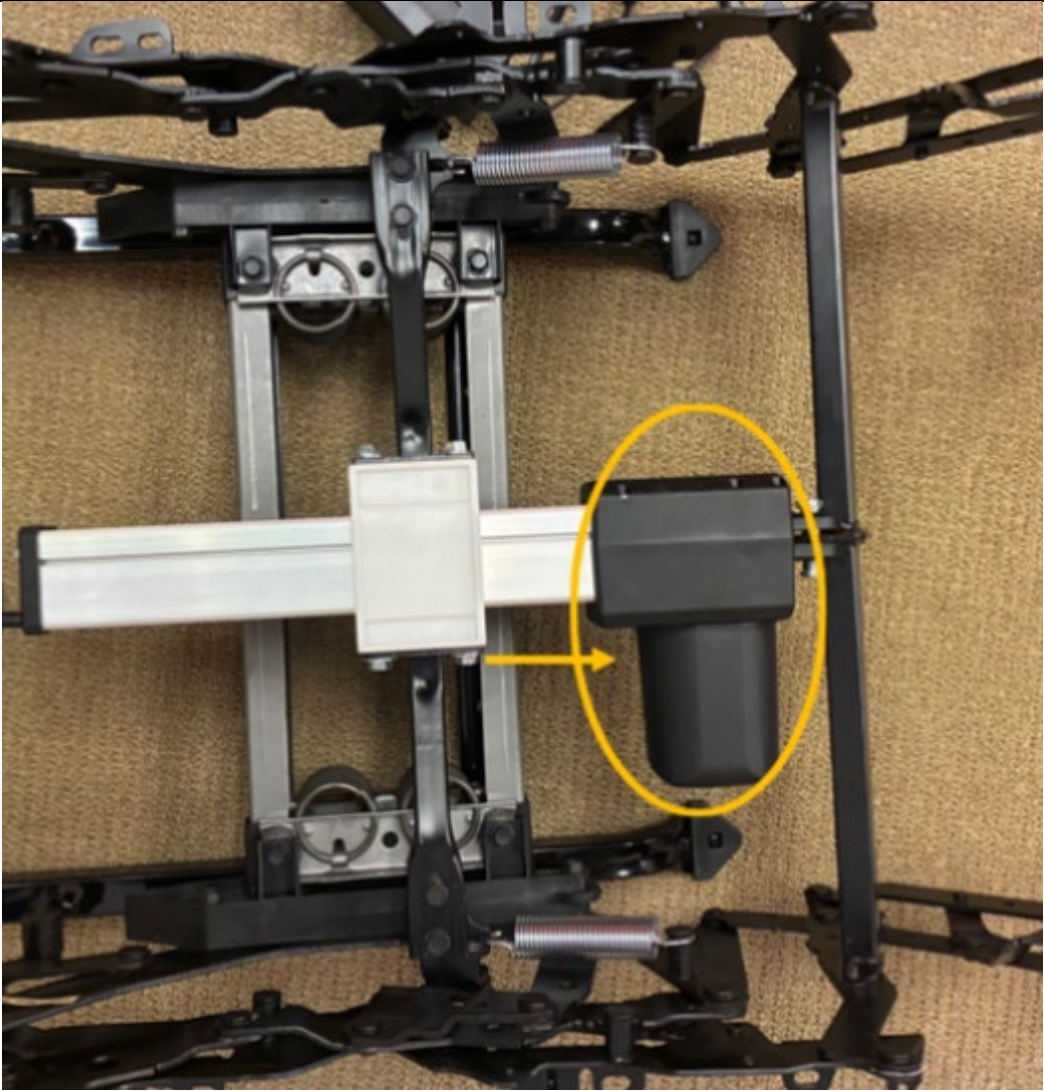


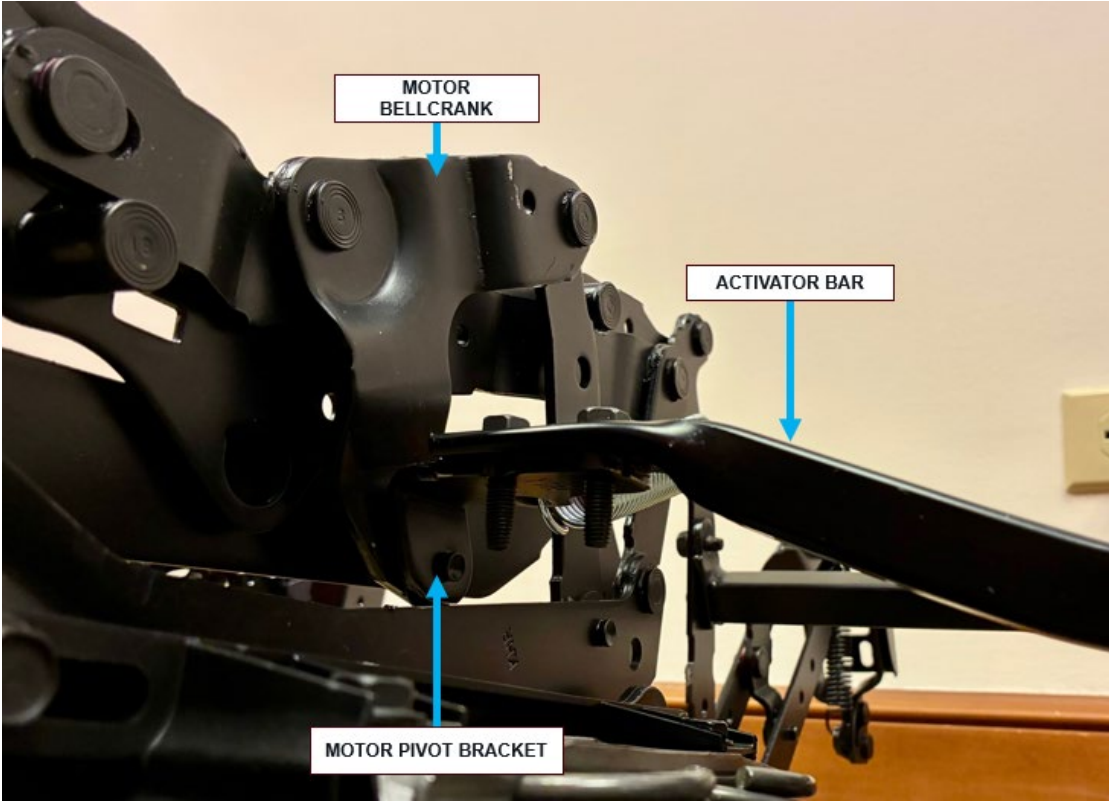
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                           | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5     | <p>5. The seating unit of claim 4, wherein the first phase involves longitudinal translation of the motor activator block along the first travel section that creates a lateral thrust at the front motor tube.</p> | <p>The Exemplary Covered Rocker first phase involves longitudinal translation of the motor activator block along the first travel section that creates a lateral thrust at the front motor tube as shown below. When the Exemplary Covered Rocker is in the closed position and the motor is activated, the motor activator block moves along the first travel section of the motor tube, which creates a lateral force at the front motor tube that extends the ottoman.</p>  |

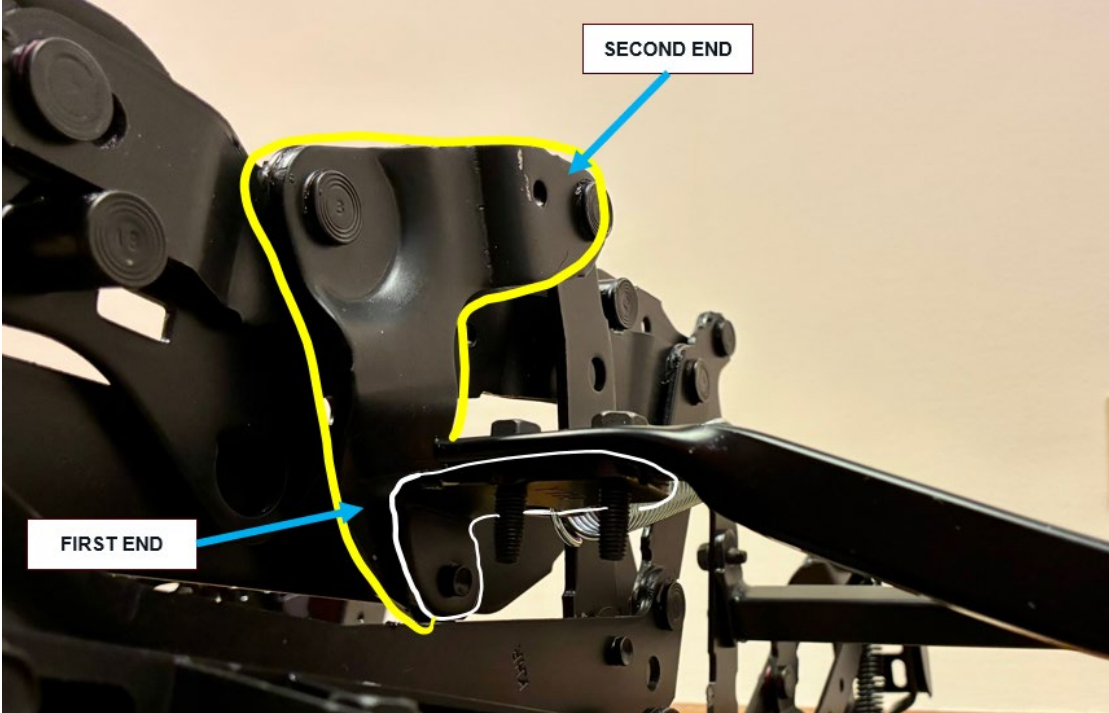
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                     | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                    |
| 6     | <p>6. The seating unit of claim 5, wherein, during the stroke of the linear actuator within the first phase, the motor mechanism moves forward and upward with respect to</p> | <p>The Exemplary Covered Rocker motor mechanism moves forward and upward with respect to the pair of rocker mechanisms while the motor activator block remains generally fixed in space during the stroke of the linear actuator in the first phase as shown below. In the first phase, the motor activator block remains generally fixed while the motor mechanism translates forward and upward within the chair, which extends the ottoman forward and upward.</p> |

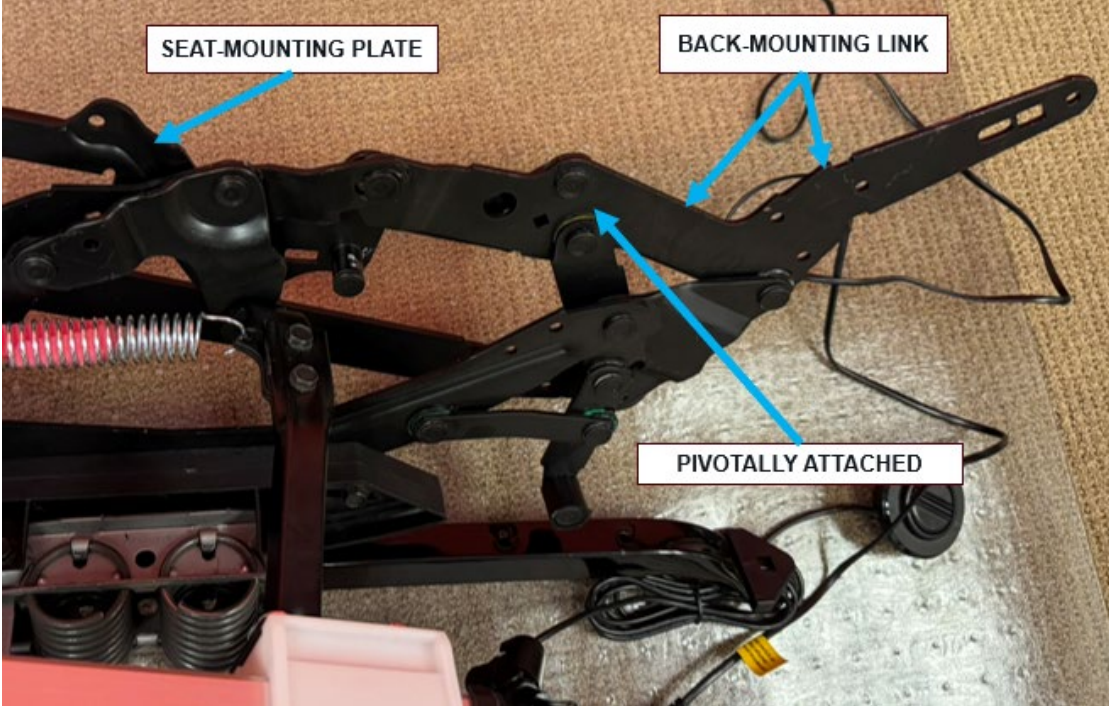
| Claim | U.S. Patent No. 8,398,165                                                                              | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | <p>the pair of rocker mechanisms while the motor activator block remains generally fixed in space.</p> |  <p>The image displays two photographs of a mechanical rocker assembly, likely a prosthetic foot or a robotic gripper, in two different states. The top photograph is labeled 'CLOSED' in a yellow box with black text. The bottom photograph is labeled 'EXTENDED' in a yellow box with black text. The assembly consists of a central motor activator block (a red and white cylinder) connected to a series of black metal linkages and joints. The mechanism is mounted on a base. The background is a red wall and a beige carpet.</p> |

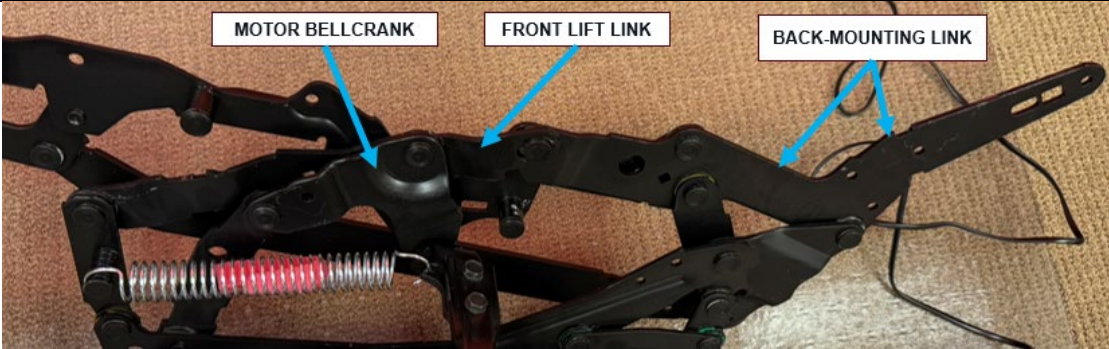
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                |
|-------|---------------------------|-------------------------------------------------------------------------------------|
|       |                           |  |

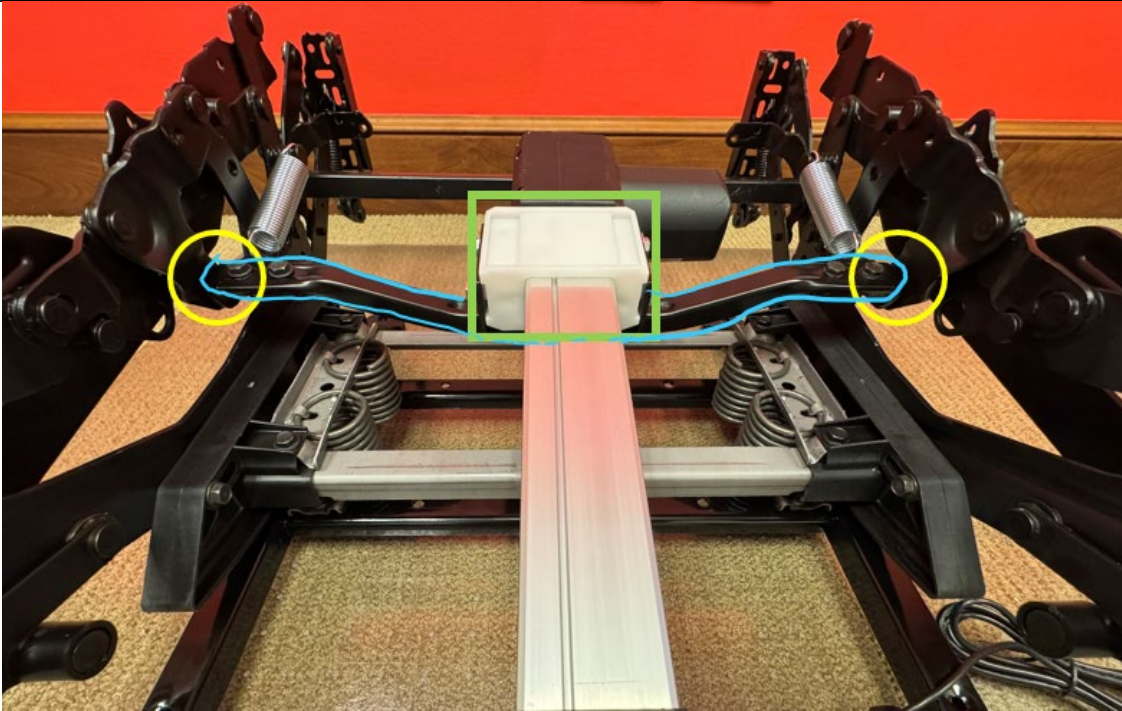
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                |
|-------|---------------------------|-------------------------------------------------------------------------------------|
|       |                           |  |

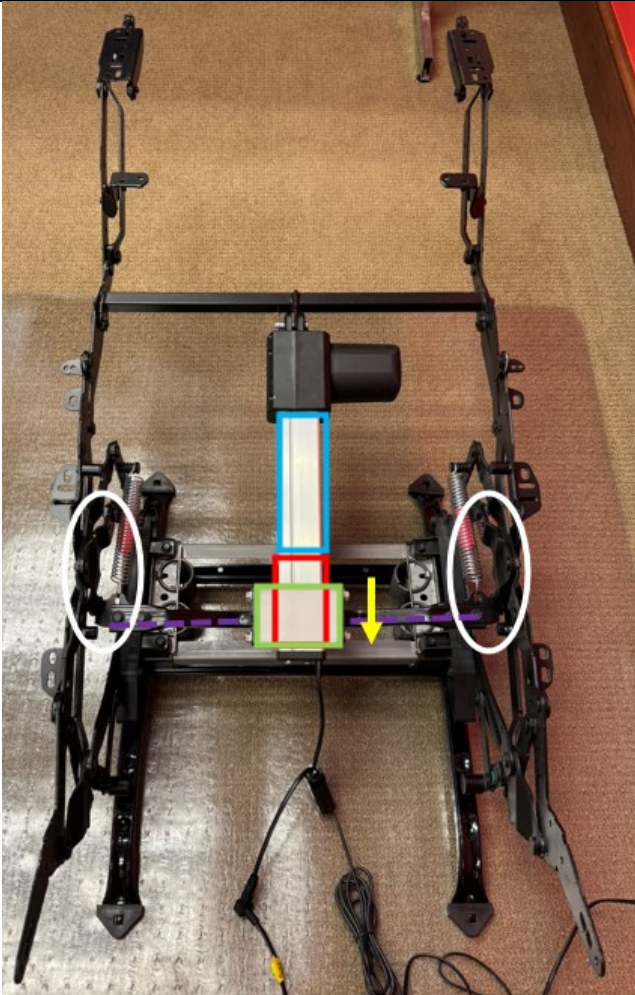
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                                     | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                          |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7     | <p>7. The seating unit of claim 3, wherein the activator bar having a pair of ends, wherein one of the ends of the activator bar is rotatably coupled to a motor bellcrank within the seat-adjustment assembly via a motor pivot bracket.</p> | <p>The Exemplary Covered Rocker activator bar has a pair of ends wherein one of the ends of the activator bar is rotatably coupled to a motor bellcrank within the seat-adjustment assembly via a motor pivot bracket as shown below.</p>  |
| 8[a]  | <p>8. The seating unit of claim 7, wherein the seat-</p>                                                                                                                                                                                      | <p>The Exemplary Covered Rocker seat-adjustment assembly comprises the motor bellcrank (yellow) that includes a mid-portion located between a first end and a</p>                                                                                                                                                             |

| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                         | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                        |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | <p>adjustment assembly comprises: the motor bellcrank that includes a mid-portion located between a first end and a second end, wherein the motor pivot bracket is rotatably coupled to the first end of the motor bellcrank;</p> | <p>second end, wherein the motor pivot bracket (white) is rotatably coupled to the first end of the motor bellcrank as shown below.</p>  |
| 8[b]  | <p>a back-mounting link rotatably coupled to a respective seat-mounting plate, wherein the back-mounting link is configured to support the backrest; and</p>                                                                      | <p>The Exemplary Covered Rocker includes a back-mounting link rotatably coupled to a respective seat-mounting plate, wherein the back-mounting link is configured to support the backrest as shown below.</p>               |

| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                            | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                              |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                 |
| 8[c]  | <p>a front lift link having a front end and a back end, wherein the back end of the front lift link is pivotably coupled to the back-mounting link, and wherein the mid-portion of the motor bellcrank is rotatably coupled to a</p> | <p>The Exemplary Covered Rocker includes a front lift link having a front end and a back end, wherein the back end of the front lift link is pivotably coupled to the back-mounting link, and wherein the mid-portion of the motor bellcrank is rotatably coupled to a section between the front end and the back end of the front lift link.</p> |

| Claim | U.S. Patent No. 8,398,165                                                                                                                        | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                      |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | section between the front end and the back end of the front lift link.                                                                           |                                                                         |
| 9     | 9. The seating unit of claim 8, wherein the motor activator block is fixedly coupled to a section between the pair of ends of the activator bar. | The Exemplary Covered Rocker motor activator block (green) is fixedly coupled to a section between the pair of ends (yellow) of the activator bar (blue). |

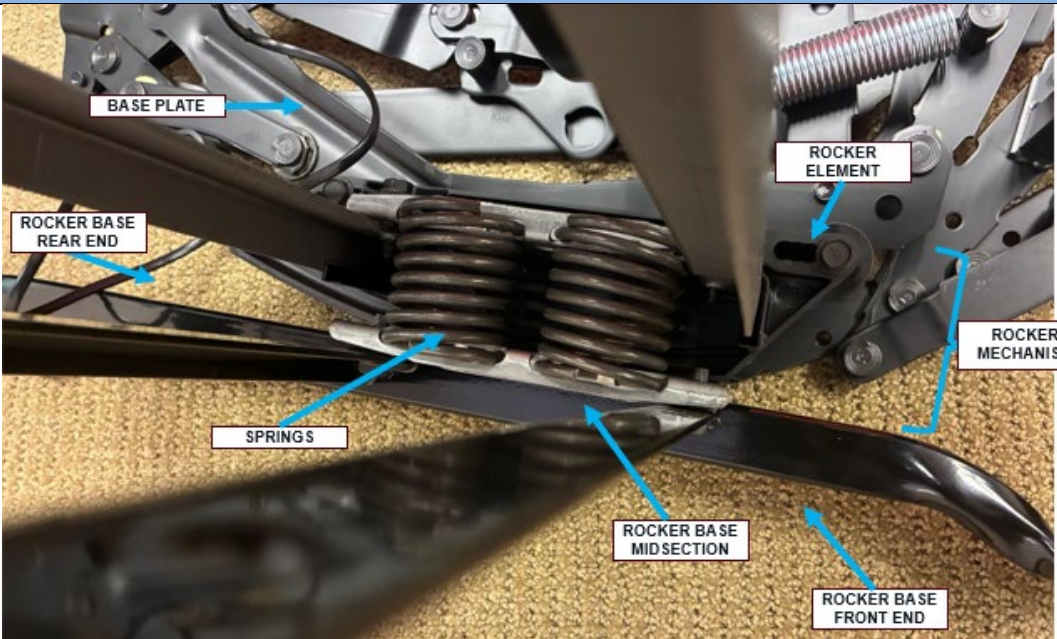
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                                            | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                  |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                     |
| 10    | <p>10. The seating unit of claim 9, wherein the second phase involves longitudinal translation of the motor activator block along the second travel section that creates a lateral thrust at the activator bar, thereby invoking movement of the</p> | <p>The Exemplary Covered Rocker second phase involves longitudinal translation of the motor activator block (green) along the second travel section (red) that creates a lateral thrust at the activator bar (purple), thereby invoking movement of the motor bellcrank (white), the movement of the motor bellcrank controls adjustment of the seat-adjustment assembly between the extended position and the reclined position.</p> |

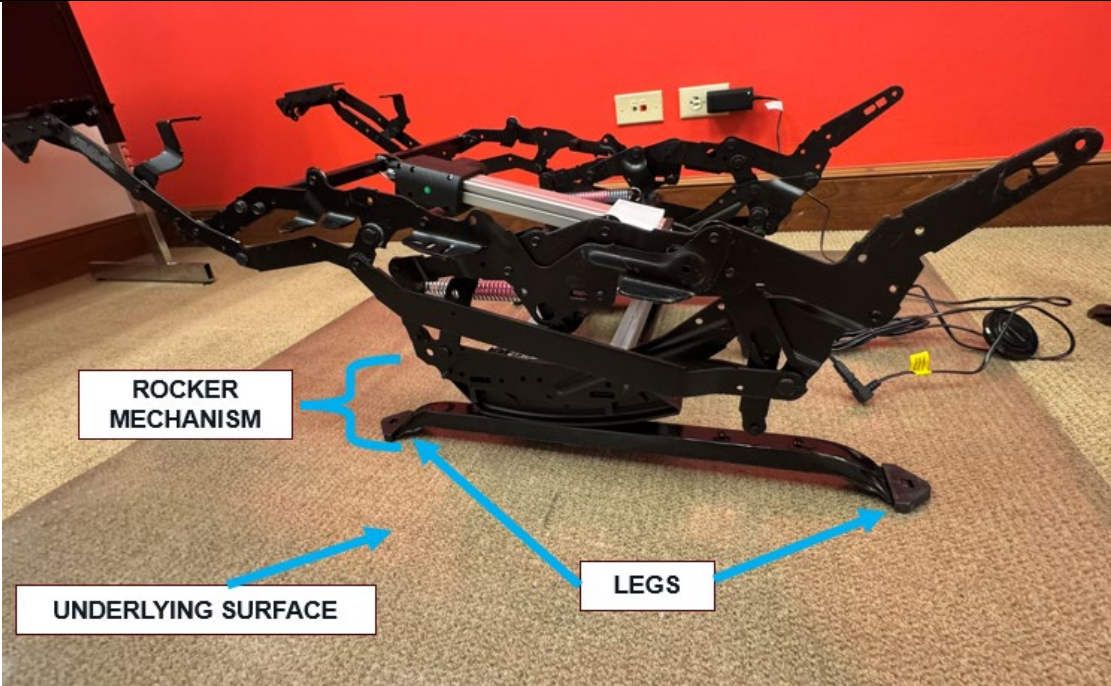
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|       | <p>motor bellcrank, the movement of the motor bellcrank controls adjustment of the seat-adjustment assembly between the extended position and the reclined position.</p> |  |

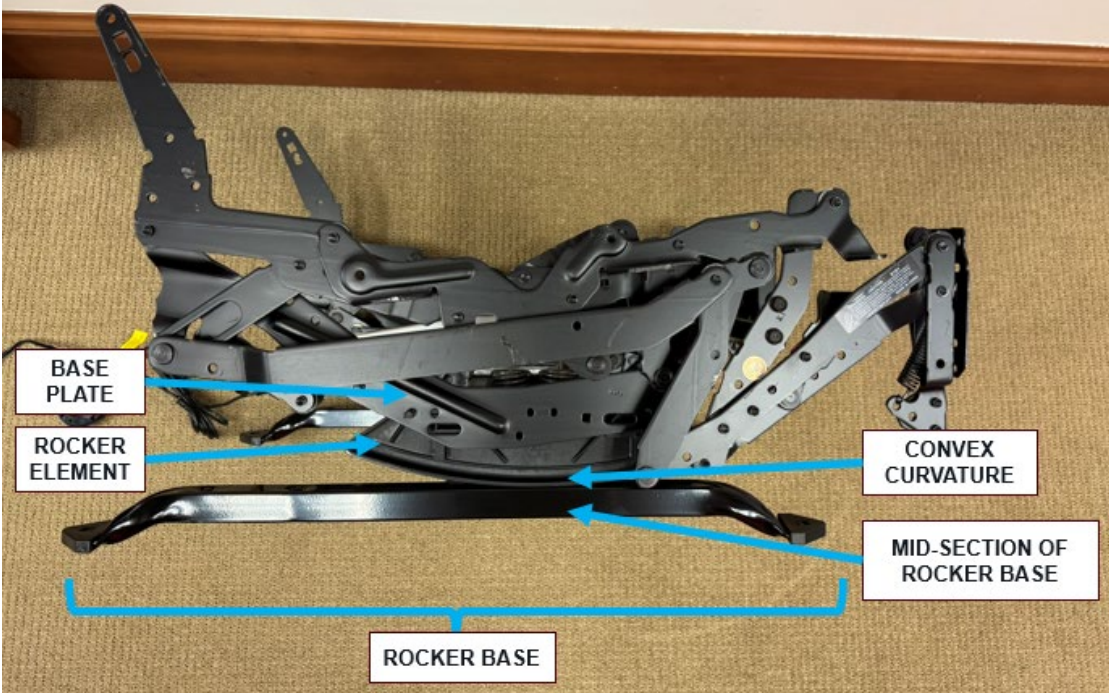
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                  | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                             |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                            |                                                                                                                                                                                               |
| 11    | <p>11. The seating unit of claim 10, wherein, during the stroke of the linear actuator within the second phase, the motor activator block moves rearward with respect to the pair of rocker mechanisms</p> | <p>The Exemplary Covered Rocker second phase includes, during the stroke of the linear actuator within the second phase, the motor activator block moving rearward with respect to the pair of rocker mechanisms while the motor mechanism remains generally fixed in space.</p> |

| Claim | U.S. Patent No. 8,398,165                                          | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------|--------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | <p>while the motor mechanism remains generally fixed in space.</p> |  <p>The image consists of two photographs of a motorized rocker mechanism, likely for a prosthetic limb, shown in two different states. The top photograph is labeled 'EXTENDED' in a yellow box. It shows the mechanism with its foot plate extended forward. The bottom photograph is labeled 'RECLINED' in a yellow box. It shows the same mechanism with the foot plate retracted and the leg assembly tilted backward. Both mechanisms are black with a central silver motor and are connected to a power source via a black cable. The background is a red wall and a beige carpet.</p> |

| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                                                                     | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                              |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                 |
| 12[a] | <p>12. The seating unit of claim 11, wherein each of the rocker mechanisms further comprise:</p> <p>a rocker base that includes a front end, a rear end, and a mid-section, wherein the front end and the rear end attach to respective legs that support the rocker base</p> | <p>The Exemplary Covered Rocker's rocker mechanisms each further comprise a rocker base that includes a front end, a rear end, and a mid-section, wherein the front end and the rear end attach to respective legs that support the rocker base above the underlying surface.</p> |

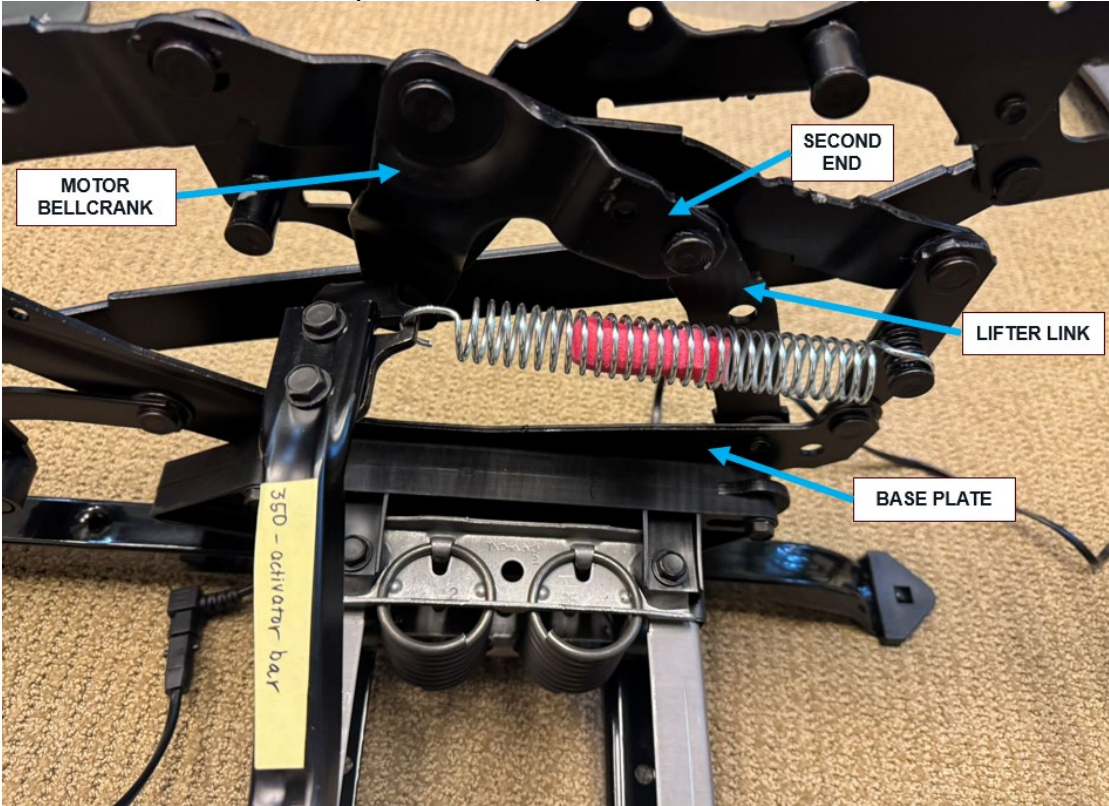
| Claim | U.S. Patent No. 8,398,165     | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism               |
|-------|-------------------------------|------------------------------------------------------------------------------------|
|       | above the underlying surface; |  |

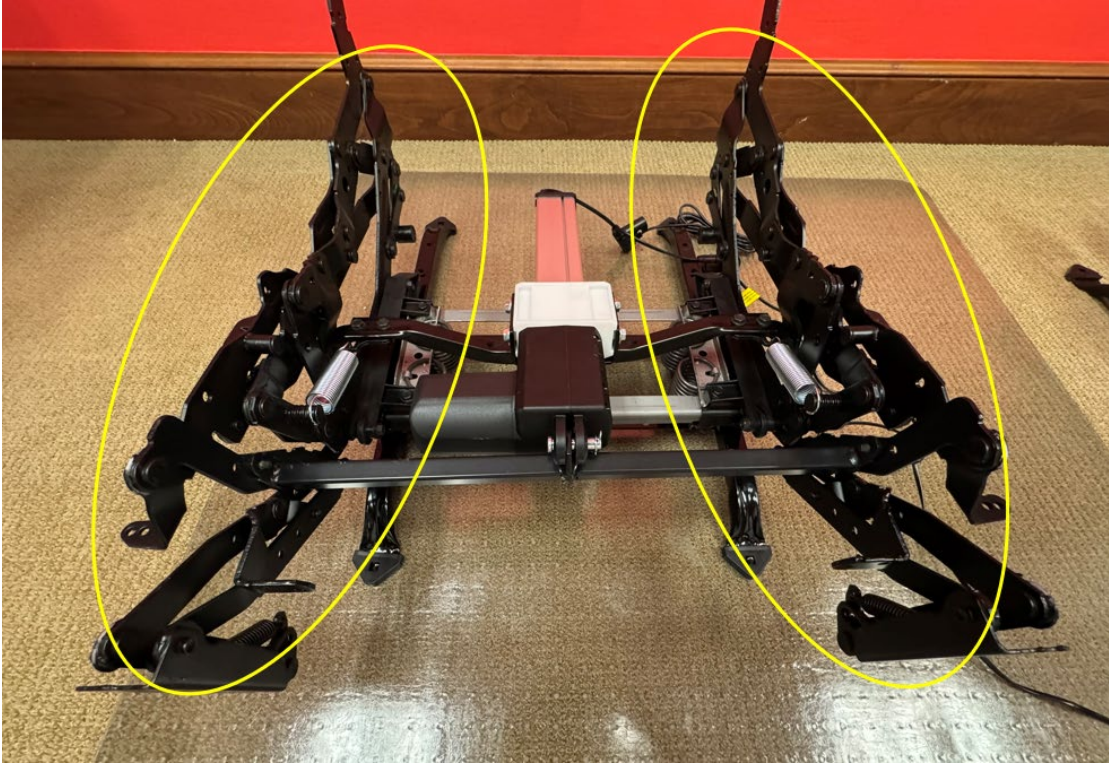
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                          | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                 |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                    |                                                                                                                                                    |
| 12[b] | <p>a rocker element that is formed with a convex curvature that rollably rides upon the mid-section of the rocker base, wherein the rocker element is attached to a respective base plate; and</p> | <p>The Exemplary Covered Rocker includes a rocker element that is formed with a convex curvature that rollably rides upon the mid-section of the rocker base, wherein the rocker element is attached to a respective base plate.</p> |

| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                         | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                    |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                                                   |                                                                                                                                                                                       |
| 12[c] | <p>at least one spring that interconnects the rocker base and the rocker element, wherein the interconnection of the at least one spring facilitates a controlled sway of the rocker element with respect to the rocker base.</p> | <p>The Exemplary Covered Rocker includes at least one spring that interconnects the rocker base and the rocker element, wherein the interconnection of the at least one spring facilitates a controlled sway of the rocker element with respect to the rocker base.</p> |

| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                                                                                                                                                 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                          |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                             |
| 13    | <p>13. The seating unit of claim 12, wherein the pair of linkage mechanisms are configured to translate the seat-mounting plates at a substantially consistent inclination angle, with respect to the rocker mechanisms, throughout the adjustment of the seating unit between the closed position, the extended position, and the reclined position.</p> | <p>The Exemplary Covered Rocker includes a pair of linkage mechanisms that are configured to translate the seat-mounting plates at a substantially consistent inclination angle (see blue arrows), with respect to the rocker mechanisms (see green arrows), throughout the adjustment of the seating unit between the closed position, the extended position, and the reclined position.</p> |

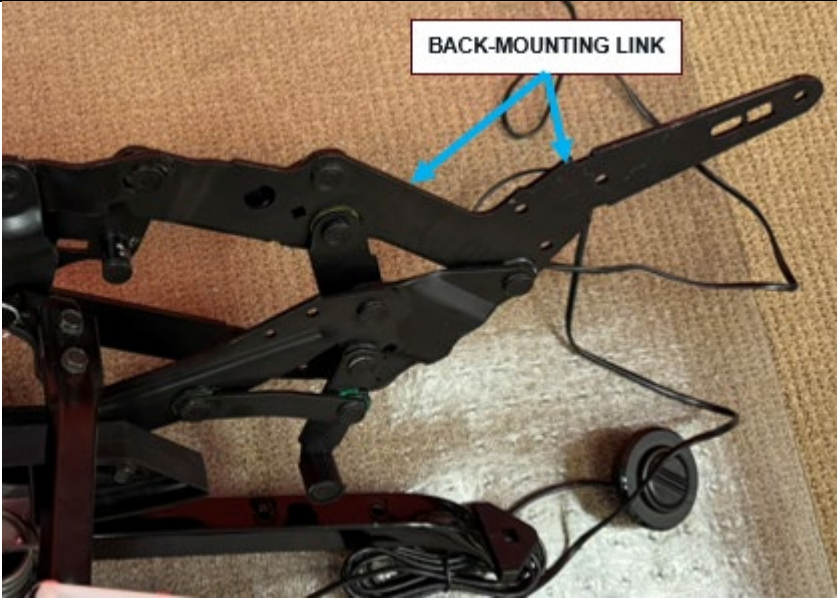
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  <p>The image displays three sequential photographs of a mechanical rocker assembly, likely for a prosthetic limb, in different operational states. Each photograph is labeled at the top with a yellow box containing black text: "CLOSED", "EXTENDED", and "RECLINED".</p> <ul style="list-style-type: none"> <li><b>CLOSED:</b> The top photograph shows the mechanism in a compact, folded position. A blue arrow points upwards from the central joint, and a green arrow points downwards from the lower joint.</li> <li><b>EXTENDED:</b> The middle photograph shows the mechanism with its arms extended forward and slightly upward. A blue arrow points upwards from the central joint, and a green arrow points downwards from the lower joint.</li> <li><b>RECLINED:</b> The bottom photograph shows the mechanism in a reclined position, with the arms extended further forward and downward. A blue arrow points upwards from the central joint, and a green arrow points downwards from the lower joint.</li> </ul> <p>The mechanism consists of black metal frames, joints, and a central actuator unit. It is set against a red wall and a light-colored carpeted floor.</p> |

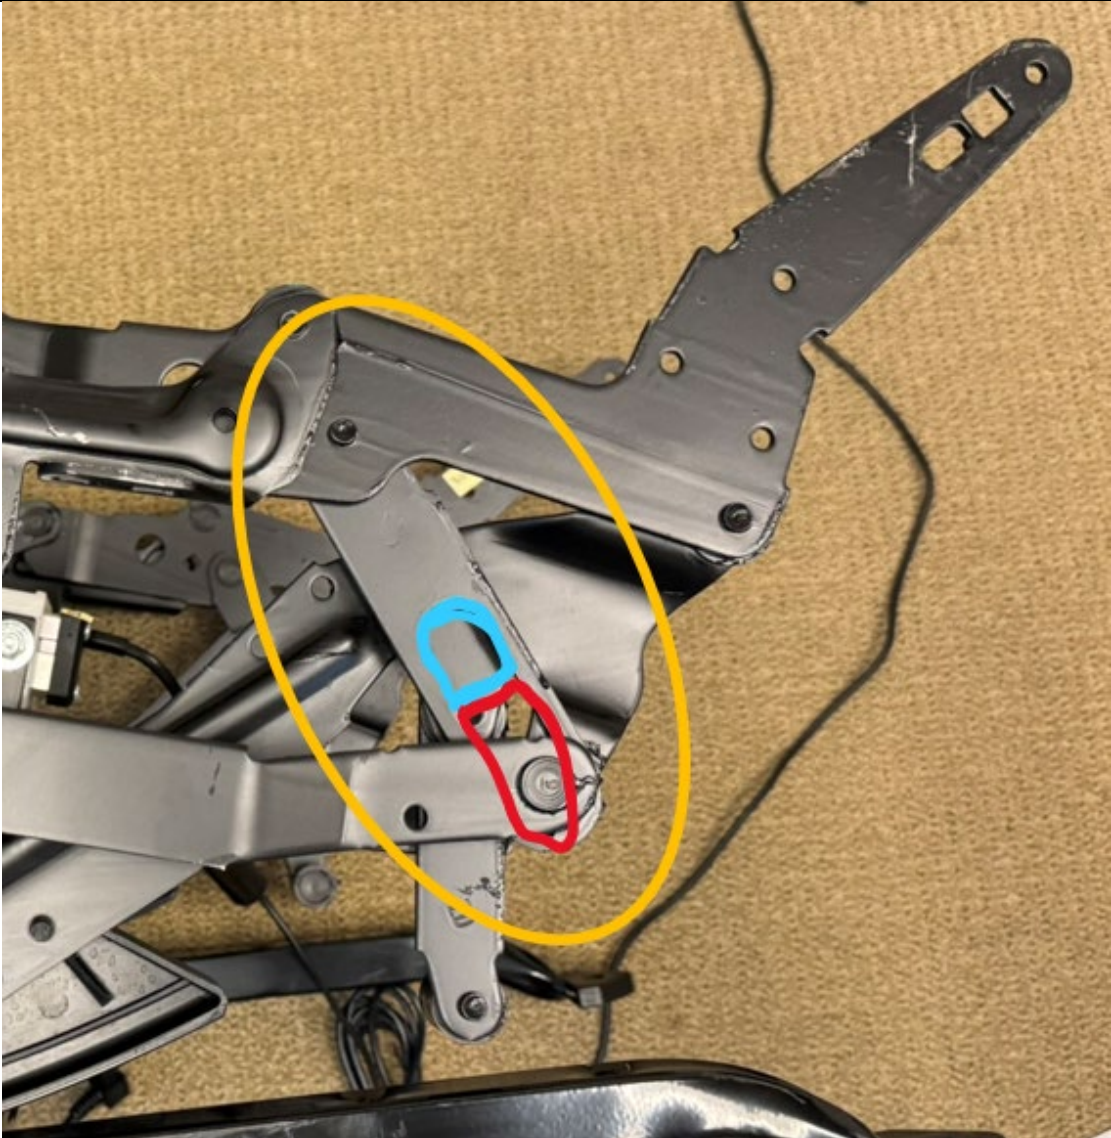
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                              | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                             |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 14    | 14. The seating unit of claim 13, wherein the seat-adjustment assembly further comprises a lifter link that pivotably interconnects the second end of the motor bellcrank and a respective base plate. | <p>The Exemplary Covered Rocker includes a seat-adjustment assembly that further comprises a lifter link that pivotably interconnects the second end of the motor bellcrank and a respective base plate.</p>                  |
| 15[p] | 15. A pair of the generally mirror-image linkage mechanisms adapted to move a rocker recliner between a closed, an                                                                                     | The Exemplary Covered Rocker Mechanism includes a pair of the generally mirror-image linkage mechanisms adapted to move a rocker recliner between a closed, an extended, and a reclined position, the rocker recliner having a pair of rocker mechanisms, a seat that is translatable with respect to the rocker |

| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                                                                             | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                            |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | <p>extended, and a reclined position, the rocker recliner having a pair of rocker mechanisms, a seat that is translatable with respect to the rocker mechanisms, and a backrest that is angularly adjustable with respect to the seat, each of the linkage mechanisms comprising:</p> | <p>mechanisms, and a backrest that is angularly adjustable with respect to the seat as shown below.</p>  <p>The Exemplary Covered Rocker Mechanism has a pair of the generally mirror-image linkage mechanisms adapted to move a rocker recliner between a closed, an extended, and a reclined position.</p> |

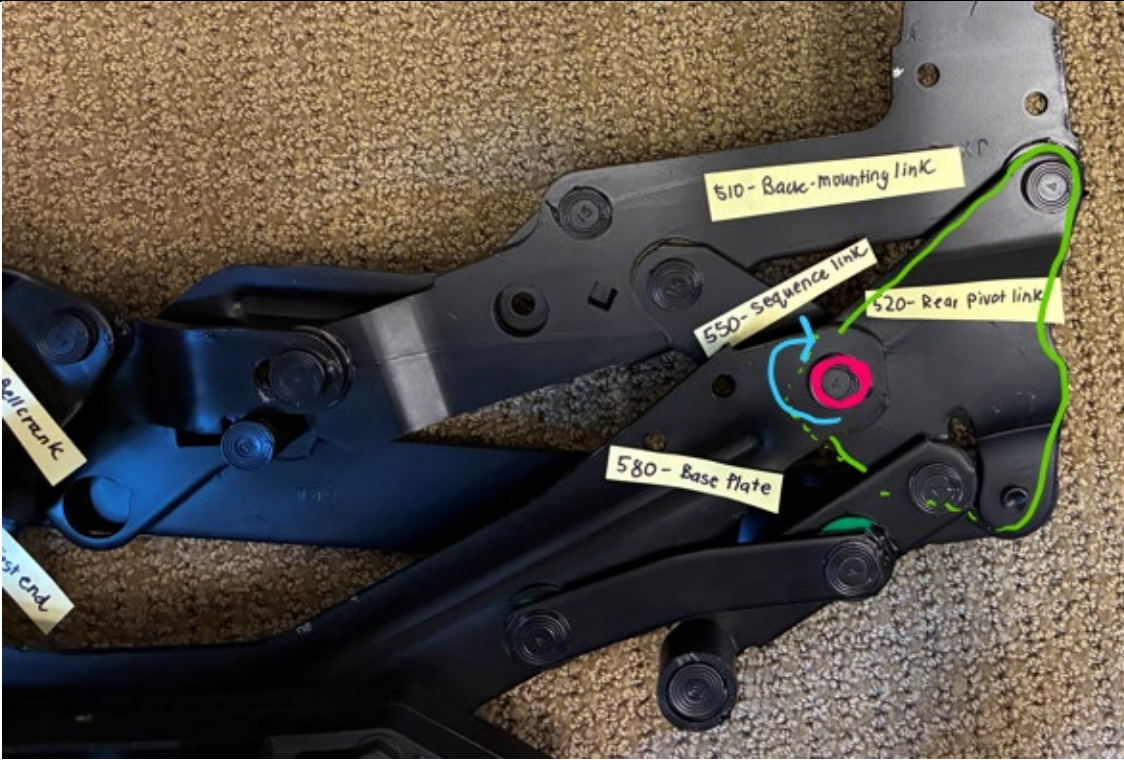


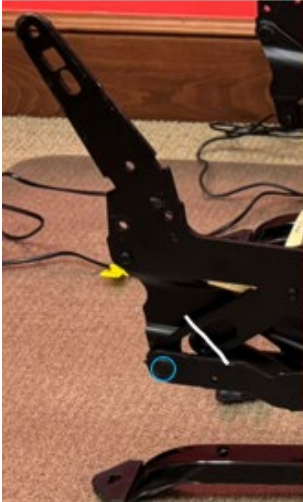
| Claim | U.S. Patent No. 8,398,165                                        | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                 |
|-------|------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                  | <p>The Exemplary Covered Rocker Mechanism includes rocker mechanisms, a seat mounting plate configured to support a seat, and a back-mounting link that is configured to support a backrest.</p>  |
| 15[a] | a back-mounting link that is configured to support the backrest; | The Exemplary Covered Rocker Mechanism includes a back-mounting link that is configured to support the backrest as shown below.                                                                                                                                                      |

| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                     | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                   |
|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                               |                                                                                                                                                                                                                                                                      |
| 15[b] | <p>a sequence link having a guide slot, wherein the guide slot includes a first region and a second region, and wherein the sequence link is rotatably coupled to the back-mounting link;</p> | <p>The Exemplary Covered Rocker Mechanism includes a sequence link having a guide slot, wherein the guide slot includes a first region (blue) and a second region (red), and wherein the sequence link is rotatably coupled to the back-mounting link as shown below. The top of the sequence link is rotatably coupled to the back-mounting link.</p> |

| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                |
|-------|---------------------------|-------------------------------------------------------------------------------------|
|       |                           |  |

| Claim | U.S. Patent No. 8,398,165                                                                           | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                       |
|-------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 15[c] | a sequence element that, at least partially, extends into the guide slot; and                       | <p>The Exemplary Covered Rocker Mechanism includes a sequence element (pink) that, at least partially, extends into the guide slot as shown below.</p>  |
| 15[d] | a rear pivot link rotatably coupled to the back-mounting link and attached to the sequence element, | <p>The Exemplary Covered Rocker Mechanism includes a rear pivot link (green) rotatably coupled to the back-mounting link and attached to the sequence element as shown below.</p>                                                          |

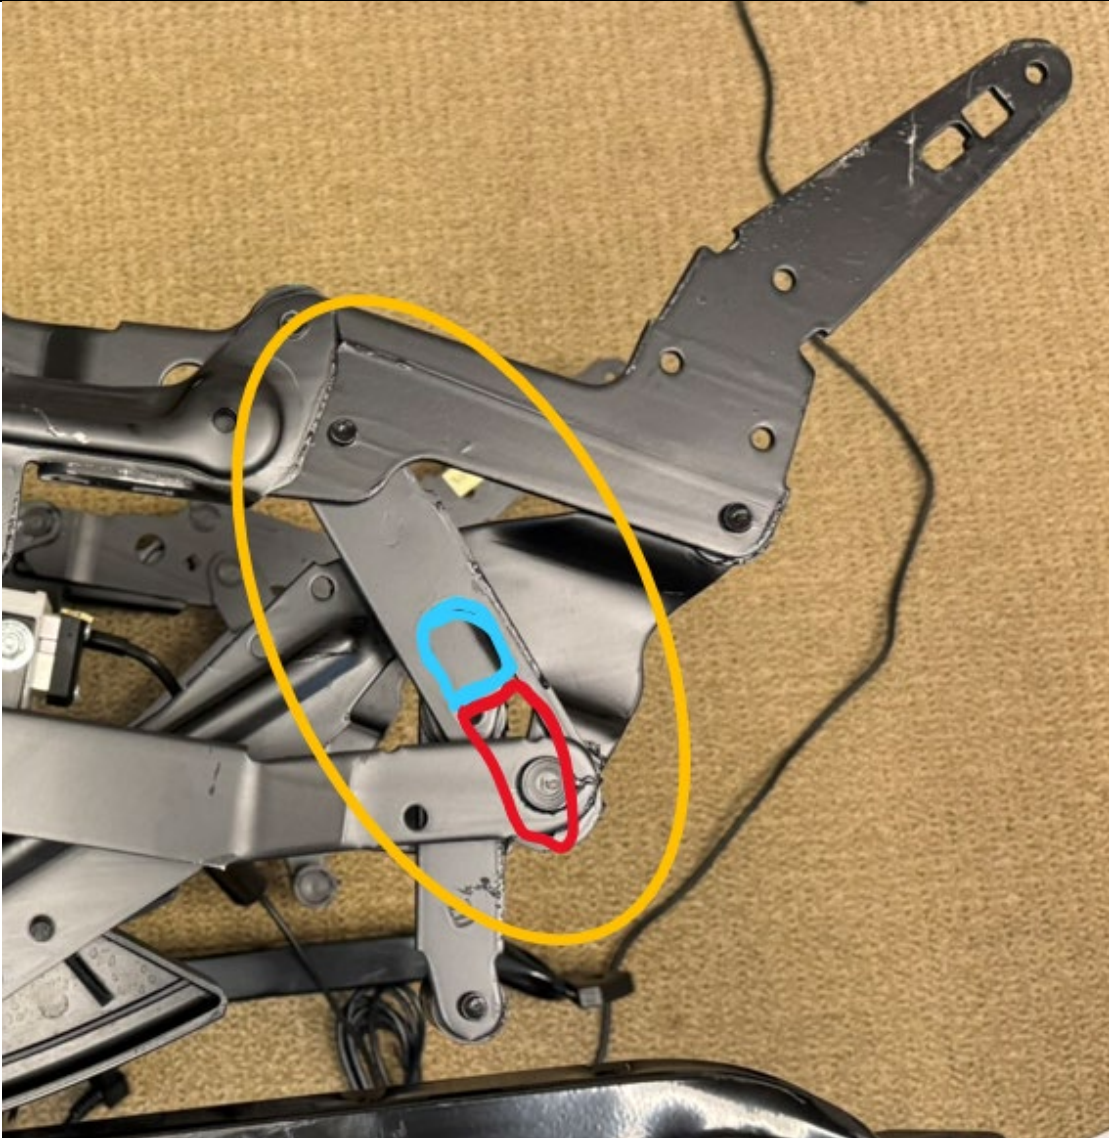
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 15[e] | <p>wherein the sequence element resides within the second region when the rocker recliner is adjusted to the reclined position, and when the rocker recliner is adjusted to the reclined position, the interaction of</p> | <p>The Exemplary Covered Rocker Mechanism sequence element (blue) resides within the second region when the rocker recliner is adjusted to the reclined position, and when the rocker recliner is adjusted to the reclined position, the interaction of the sequence element and the sequence link resists adjustment of the rocker recliner to the closed position as shown below. The sequence element resists adjustment of the sequence link when the recliner is placed in the reclined position, resisting movement of the recliner into the closed position.</p> |

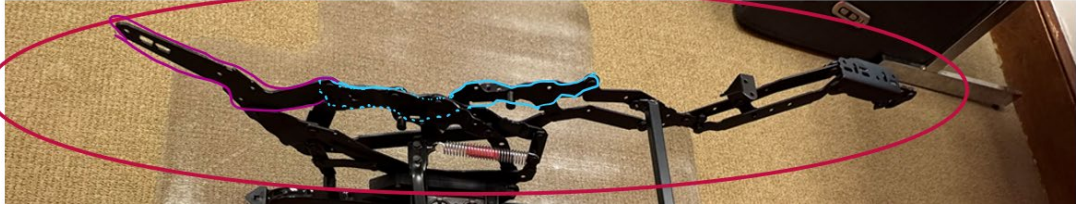
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                                                                  | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | <p>the sequence element and the sequence link resists adjustment of the rocker recliner to the closed position,</p>                                                                                                                                                        | <p>The first (upper) and second (lower) regions are shown separated by a white line below.</p> <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p><b>CLOSED</b></p>  </div> <div style="text-align: center;"> <p><b>EXTENDED</b></p>  </div> <div style="text-align: center;"> <p><b>RECLINED</b></p>  </div> </div> |
| 15[f] | <p>wherein the sequence element resides within the first region when the rocker recliner is adjusted to the extended position, and when the rocker recliner is adjusted to the reclined position, the interaction of the sequence element and the sequence link allows</p> | <p>The Exemplary Covered Rocker Mechanism's sequence element (blue) resides within the first region when the rocker recliner is adjusted to the extended position, and when the rocker recliner is adjusted to the reclined position, the interaction of the sequence element and the sequence link allows adjustment of the rocker recliner to either the reclined position or to the closed position as shown below. When the sequence element is in the first region when the rocker recliner is in the extended position, the sequence element moves to the second region in transitioning to either the closed or reclined positions.</p>      |

| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                                                                                  | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | adjustment of the rocker recliner to either the reclined position or to the closed position, and                                                                                                                                                                                           | <p>The first (upper) and second (lower) regions are shown separated by a white line below.</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p><b><u>CLOSED</u></b></p>  </div> <div style="text-align: center;"> <p><b><u>EXTENDED</u></b></p>  </div> <div style="text-align: center;"> <p><b><u>RECLINED</u></b></p>  </div> </div> |
| 15[g] | wherein the sequence element resides within the second region when the rocker recliner is adjusted to the closed position, and when the rocker recliner is adjusted to the closed position, the interaction of the sequence element and the sequence link resists adjustment of the rocker | <p>The Exemplary Covered Rocker Mechanism's sequence element resides within the second region when the rocker recliner is adjusted to the closed position, and when the rocker recliner is adjusted to the closed position, the interaction of the sequence element and the sequence link resists adjustment of the rocker recliner to the reclined position as shown below. The sequence element resists adjustment of the sequence link when the recliner is placed in the closed position to resist recliner adjustment into the reclined position.</p> <p>The first (upper) and second (lower) regions are shown separated by a white line below.</p>            |

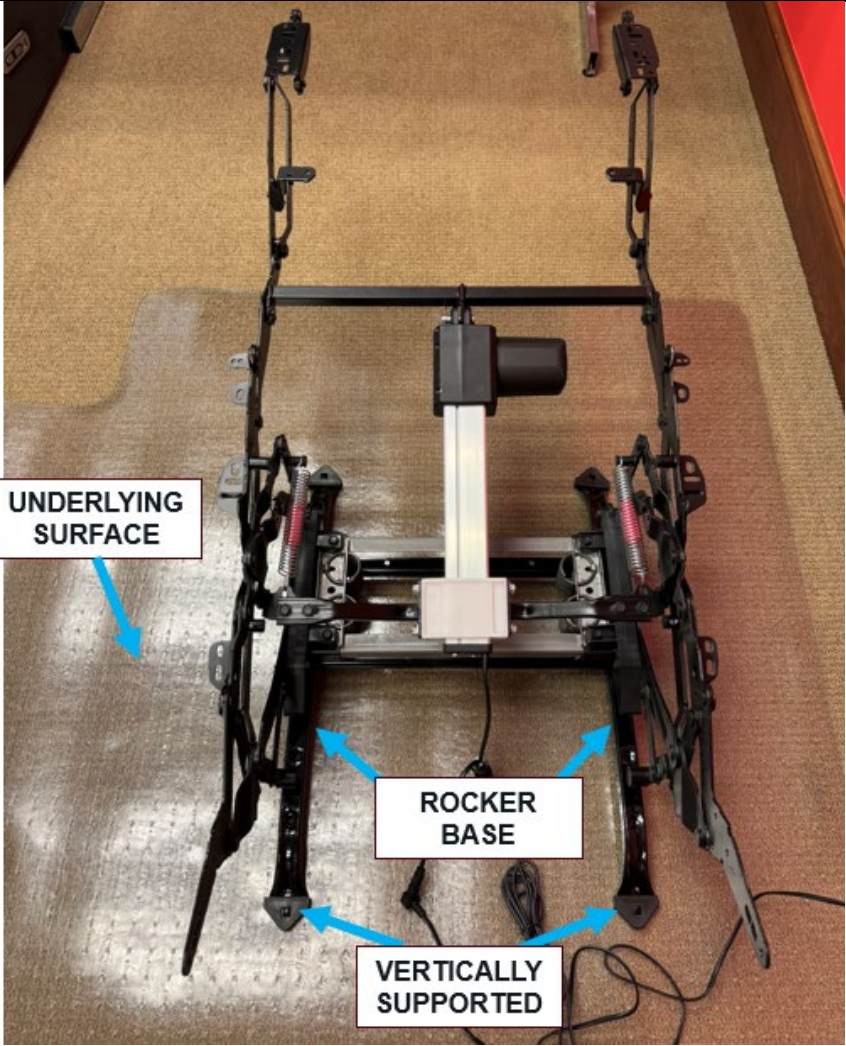
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                                                                                                              | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                        |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       | recliner to the reclined position.                                                                                                                                                                                                                                                                                     | <div style="display: flex; justify-content: space-around; text-align: center;"> <div><b>CLOSED</b></div> <div><b>EXTENDED</b></div> <div><b>RECLINED</b></div> </div>                                                                                                     |
| 16    | 16. The linkage mechanism of claim 15, wherein the sequence link includes an upper portion and a lower portion, wherein the upper portion of the sequence link is rotatably coupled to the back-mounting link, and wherein the guide slot represents an aperture formed within the lower portion of the sequence link. | The Exemplary Covered Rocker Mechanism's sequence link includes an upper portion and a lower portion (shown divided by a white line), wherein the upper portion of the sequence link is rotatably coupled to the back-mounting link, and wherein the guide slot represents an aperture formed within the lower portion of the sequence link as shown below. |

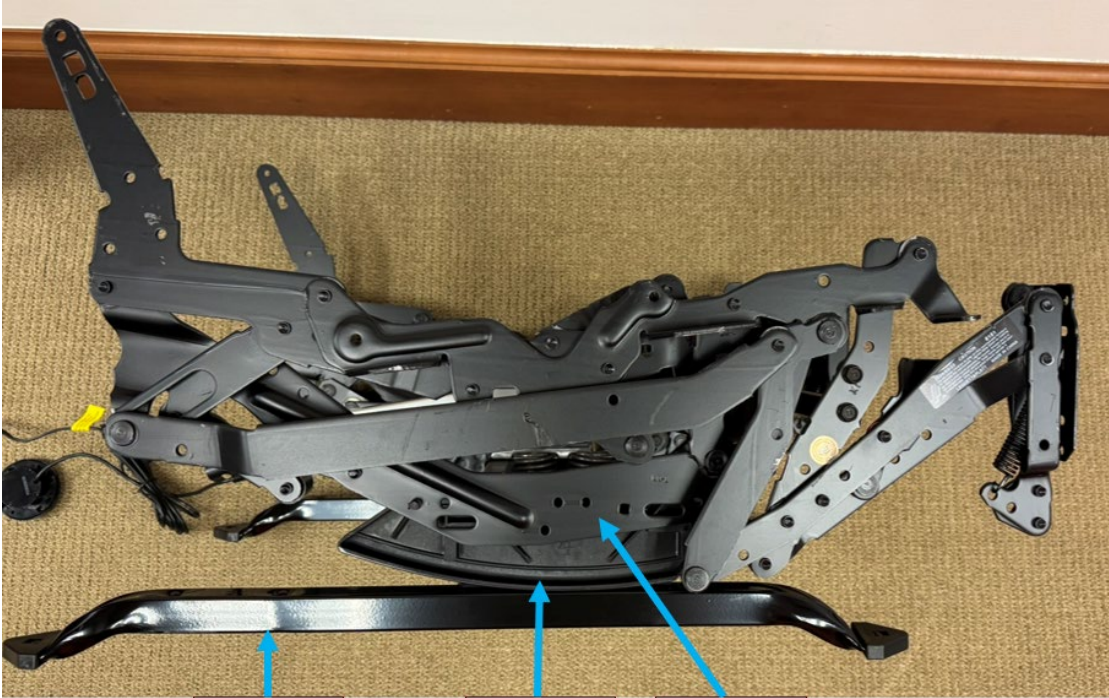
| Claim | U.S. Patent No. 8,398,165                                                                                                              | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                       |
|-------|----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                                                                                        |                                                                                                                         |
| 17    | <p>17. The linkage mechanism of claim 16, wherein the sequence element fully extends through the guide slot, and wherein the first</p> | <p>The Exemplary Covered Rocker Mechanism's sequence element fully extends through the guide slot, and the first region of the guide slot is above the second region of the guide slot as shown below.</p> |

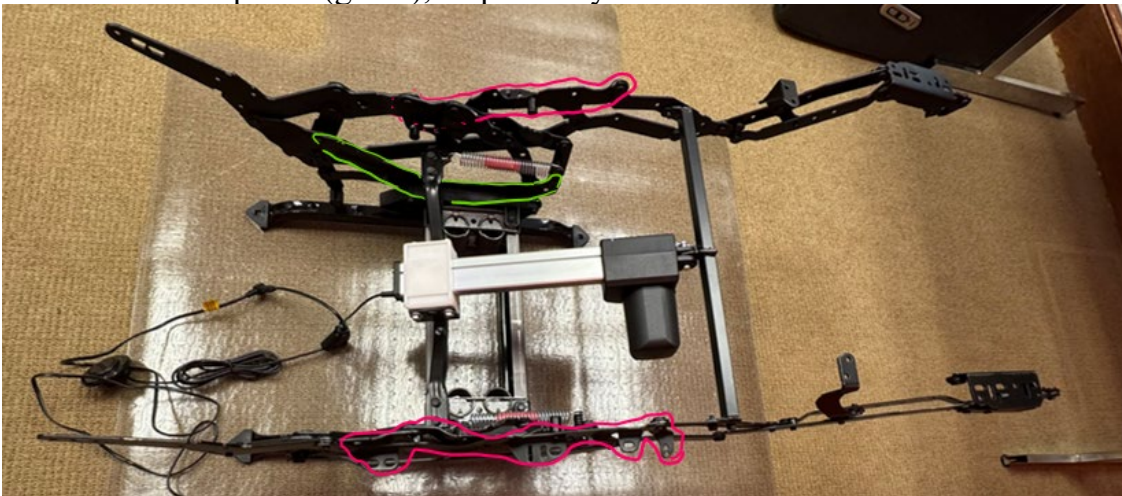
| Claim | U.S. Patent No. 8,398,165                                       | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                |
|-------|-----------------------------------------------------------------|-------------------------------------------------------------------------------------|
|       | <p>region is above the second region within the guide slot.</p> |  |

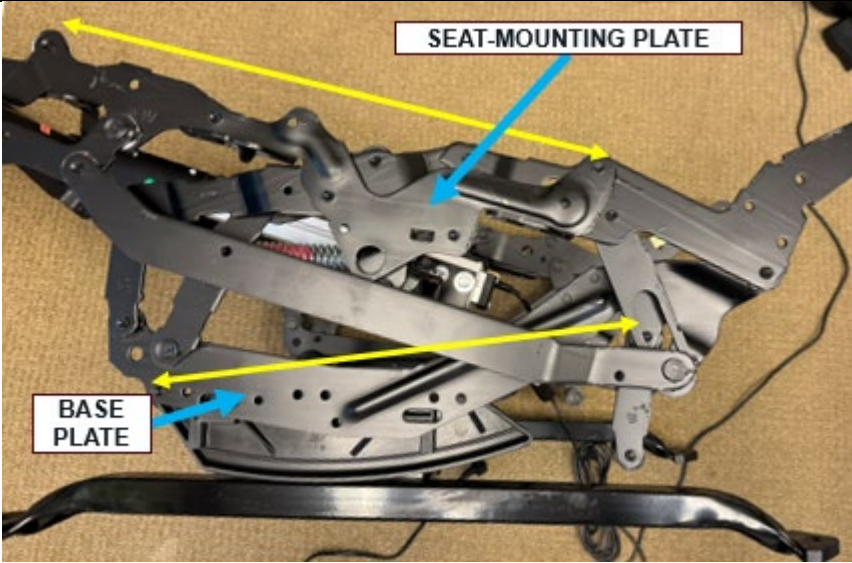
| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                    | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                              |
|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 18[a] | <p>18. The linkage mechanism of claim 17, further comprising:<br/> a seat-mounting plate that supports the seat, the seat-mounting plate is rotatably coupled to the back-mounting link;</p> | <p>The Exemplary Covered Rocker Mechanism includes a seat-mounting plate (blue) that supports the seat, the seat-mounting plate is rotatably coupled to the back-mounting link (purple) within the linkage mechanism (red) as shown below.</p>  |
| 18[b] | <p>a base plate that is interconnected to the seat-mounting plate via a system of links;</p>                                                                                                 | <p>The Exemplary Covered Rocker Mechanism includes a base plate that is interconnected to the seat-mounting plate via a system of links as shown below.</p>                                                                                                                                                                       |

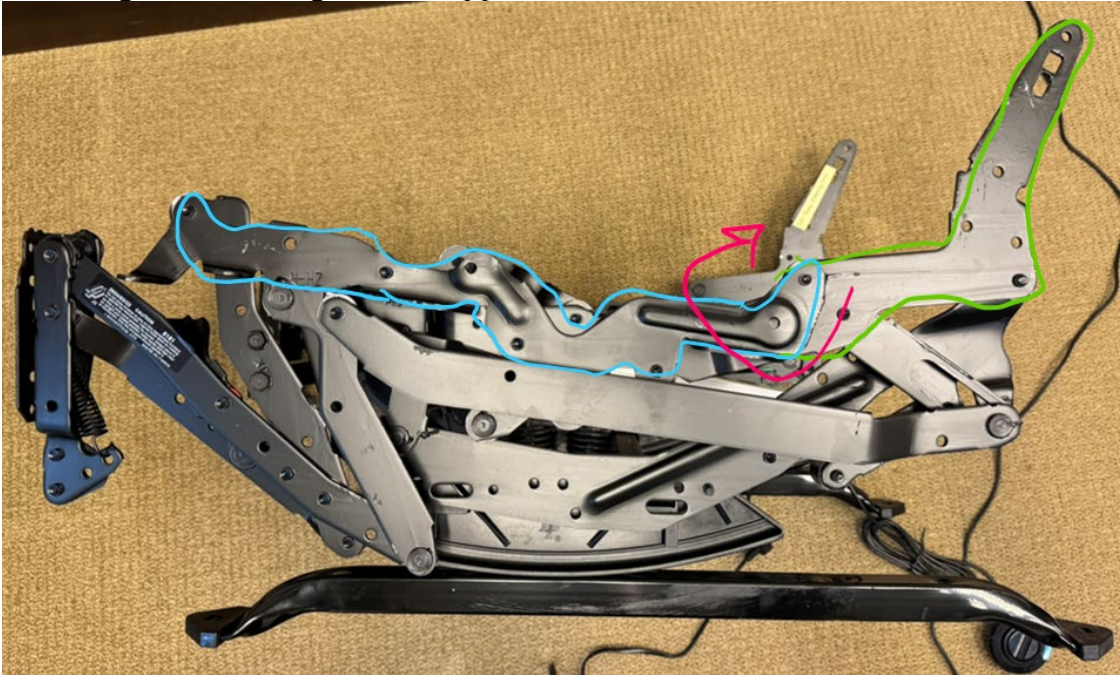
| Claim | U.S. Patent No. 8,398,165                                           | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                   |
|-------|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                                                                     |  <p>SEAT-MOUNTING PLATE</p> <p>SYSTEM OF LINKS</p> <p>BASE PLATE</p> |
| 18[c] | a rocker base vertically supported above an underlying surface; and | The Exemplary Covered Rocker Mechanism includes a rocker base vertically supported above an underlying surface as shown below.                         |

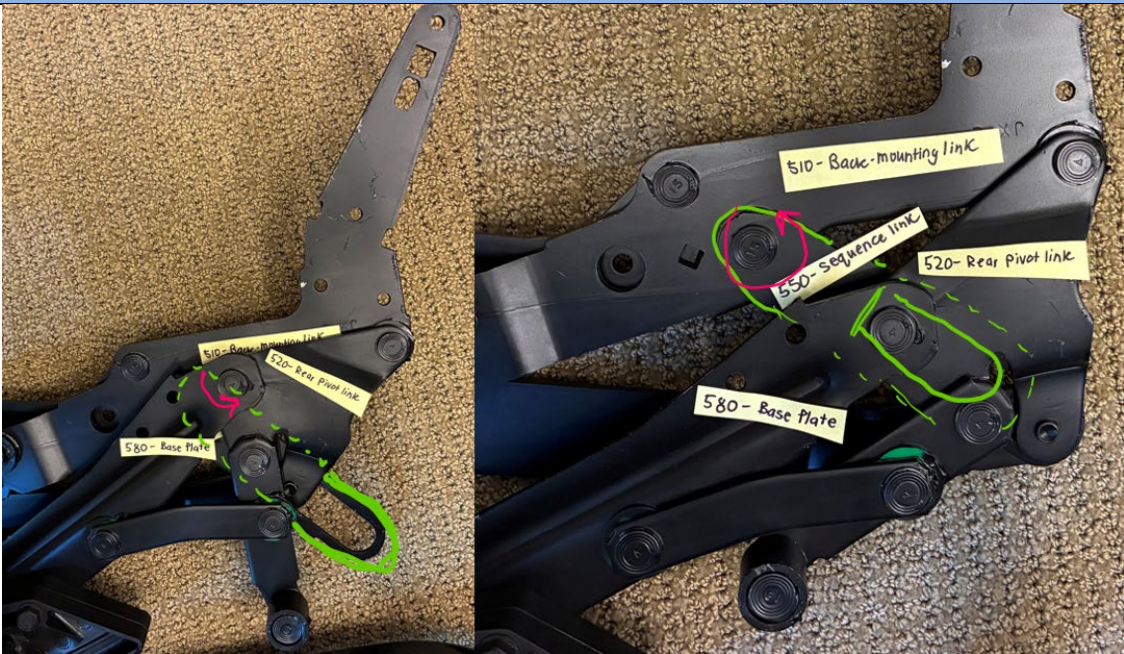
| Claim | U.S. Patent No. 8,398,165 | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|       |                           |  <p>The photograph shows a mechanical rocker assembly positioned on a light-colored, textured floor. The assembly consists of a central horizontal bar with a black motor or actuator mounted on top. Below the bar, there are two vertical supports, each with a red spring. The entire assembly is mounted on a base that is in contact with the floor. Three blue arrows point to specific parts of the assembly: one points to the floor, another points to the base of the vertical supports, and a third points to the vertical supports themselves.</p> <p>UNDERLYING SURFACE</p> <p>ROCKER BASE</p> <p>VERTICALLY SUPPORTED</p> |

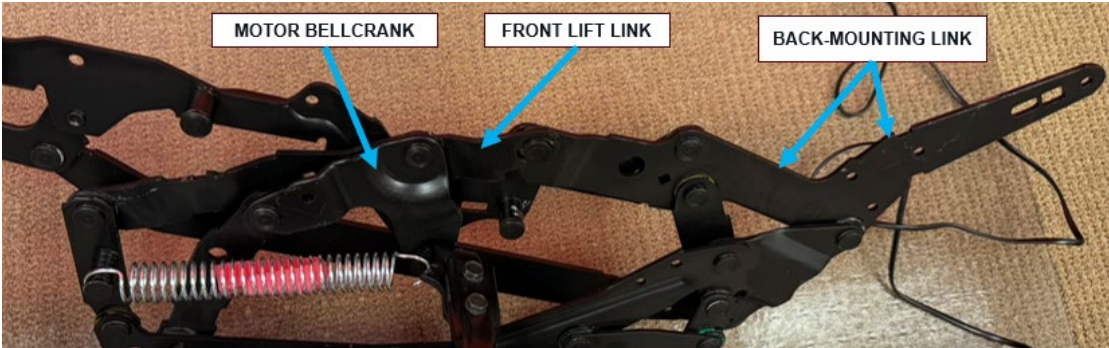
| Claim | U.S. Patent No. 8,398,165                                                                                              | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                     |
|-------|------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 18[d] | a rocker element that rollably engages with the rocker base, wherein the rocker element is attached to the base plate. | <p>The Exemplary Covered Rocker Mechanism includes a rocker element that rollably engages with the rocker base, wherein the rocker element is attached to the base plate.</p>  <p>ROCKER BASE      ROCKER ELEMENT      BASE PLATE</p> |
| 19[p] | 19. A seating unit, comprising:                                                                                        | See claim 1[p].                                                                                                                                                                                                                                                                                                          |

| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                           | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                               |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 19[a] | a pair of base plates in substantially parallel-spaced relation;                                                                                                                                                    | <i>See claim 1[a].</i>                                                                                                                                                                                                                                                                                                                                                                             |
| 19[b] | a pair of seat-mounting plates in substantially parallel-spaced relation, wherein each of the seat-mounting plates is disposed in an inclined orientation in relation to each of the base plates, respectively; and | <p>The Exemplary Covered Rocker includes a pair of seat-mounting plates (pink) in substantially parallel-spaced relation, wherein each of the seat-mounting plates is disposed in an inclined orientation (see yellow arrows) in relation to each of the base plates (green), respectively as shown below.</p>  |

| Claim | U.S. Patent No. 8,398,165                                                                                                                                                                                                                                                                | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism               |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|       |                                                                                                                                                                                                                                                                                          |  |
| 19[c] | <p>a pair of generally mirror-image linkage mechanisms each moveably interconnecting each of the seat-mounting plates to a respective base plate, and adapted to move the seating unit between a closed position, an extended position, and a reclined position, wherein each of the</p> | <p>See claim 1[p], 1[d].</p>                                                       |

| Claim   | U.S. Patent No. 8,398,165                                                                                                                | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                             |
|---------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         | linkage mechanisms comprise:                                                                                                             |                                                                                                                                                                                                                                                                                                                  |
| 19[c-a] | (a) a back-mounting link rotatably coupled to a respective seat-mounting plate and configured to support a backrest of the seating unit; | <p>The Exemplary Covered Rocker includes a back-mounting link (green) rotatably coupled to a respective seat-mounting plate (blue), wherein the back-mounting link is configured to support the backrest as shown below.</p>  |
| 19[c-b] | (b) a sequence link rotatably coupled to the back-mounting link, wherein the                                                             | See claim 15[b].                                                                                                                                                                                                                                                                                                 |

| Claim   | U.S. Patent No. 8,398,165                                                                                                                                                                                                                                                                                        | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism               |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|         | sequence link includes a guide slot;                                                                                                                                                                                                                                                                             |  |
| 19[c-c] | (c) a rear pivot link rotatably coupled to the back-mounting link and to a respective base plate, and attached to a sequence element, wherein the sequence element extends into the guide slot, and wherein interaction between the sequence element and the sequence link resists direct adjustment between the | See claims 15[c], 15[d], 15[e], 15[g].                                             |

| Claim   | U.S. Patent No. 8,398,165                                                                                                                                                                                                                                                                                | Exemplary Covered Rocker with the Exemplary Covered Rocker Mechanism                                                                                                                                                                                                                                                                                                                                                                  |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         | closed position and the reclined position;                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 19[c-d] | (d) a motor bellcrank having a mid-portion located between a first end and a second end, wherein an activator bar is rotatably coupled to the first end of the motor bellcrank; and                                                                                                                      | <i>See</i> claims 7, 8[a].                                                                                                                                                                                                                                                                                                                                                                                                            |
| 19[c-e] | (e) a front lift link having a front end and a back end, wherein the back end of the front lift link is pivotably coupled to the back-mounting link, and wherein the mid-portion of the motor bellcrank is rotatably coupled to a section between the front end and the back end of the front lift link. | <p>The Exemplary Covered Rocker includes a front lift link having a front end and a back end, wherein the back end of the front lift link is pivotably coupled to the back-mounting link, and wherein the mid-portion of the motor bellcrank is rotatably coupled to a section between the front end and the back end of the front lift link.</p>  |