

Exhibit 12

Exemplary Covered Glider that Practices Leggett & Platt's U.S. Patent No. 8,398,168 Powered Glider-Recliner with the Leggett & Platt 5181 Mechanism

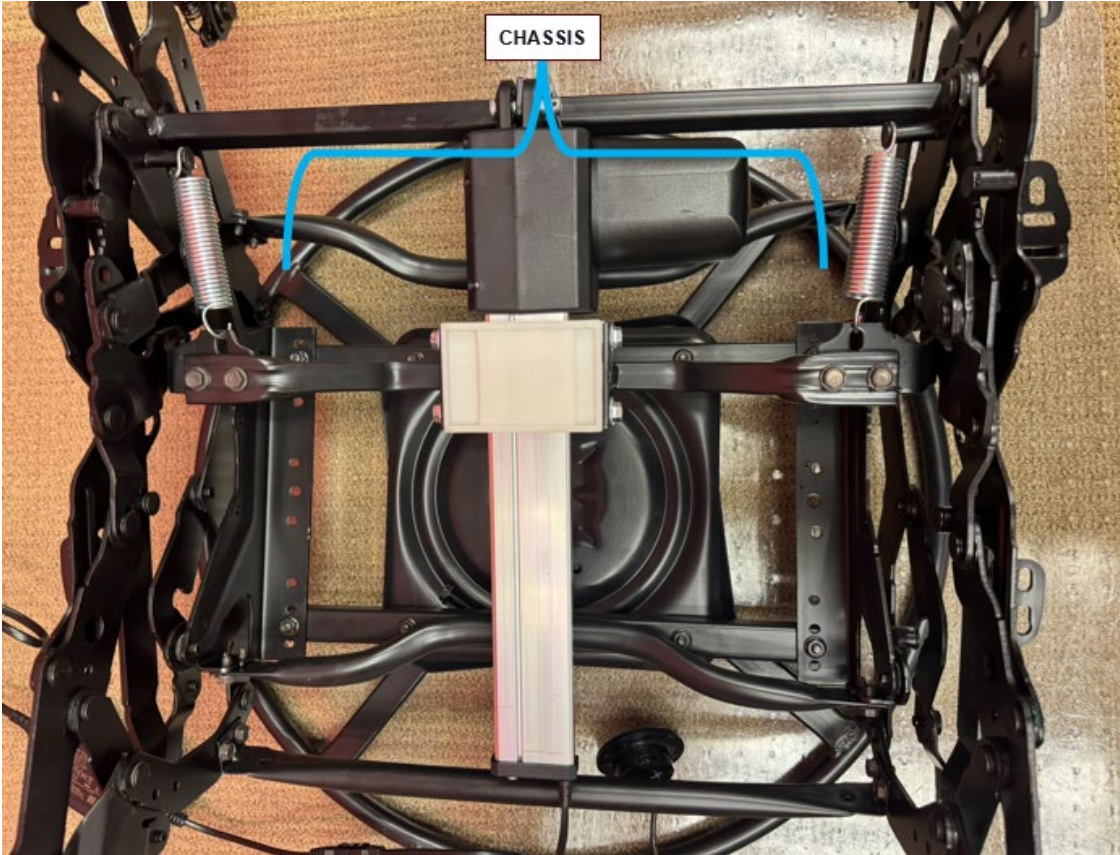
The following chart illustrates how an Exemplary Powered Glider-Recliner (the “Exemplary Covered Glider”) containing Leggett & Platt’s 5181 Mechanism (the “Exemplary Covered Glider Mechanism”) falls within the claim scope of U.S. Patent No. 8,398,168. The Exemplary Covered Glider and/or Exemplary Covered Glider Mechanism are Exemplary products only and illustrate the practice of the above-referenced patent. The following chart contains highlighting, color-coding, and other annotations which are intended to assist the reader in identifying relevant elements, and are not intended to be binding or limiting. Complainants reserve the right to modify the structures associated with identified elements, to identify other functions for identified structures, and/or to adjust the identification of one or more components identified herein.

Complainants reserve the right to offer additional evidence to prove that the Exemplary Covered Glider(s) practice the claims below in their expert reports, and in motions and at trial. Complainants reserve the right to supplement, amend, or modify the foregoing based on new information that becomes available during discovery, the exchange of proposed claim constructions, and/or issuance of a claim construction order.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
1[p]	1. A seating unit having a chassis, a seat, a backrest, and at least one foot-support ottoman, the seating unit being adapted to move between a closed, an extended and a reclined position, the seating unit comprising:	The Exemplary Covered Glider is a seating unit.  The Exemplary Covered Glider comprises a Leggett & Platt 5181 mechanism.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The Exemplary Covered Glider has a chassis.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The Exemplary Covered Glider has a seat.

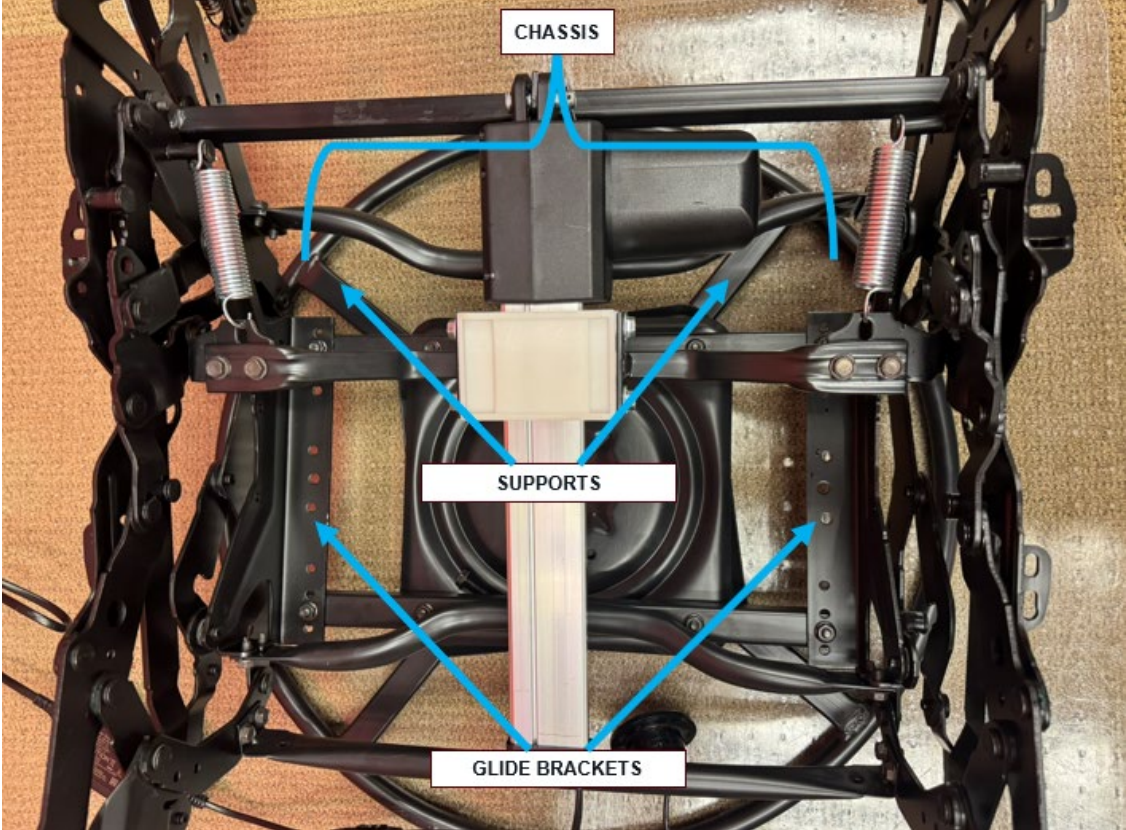
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The Exemplary Covered Glider has a backrest.

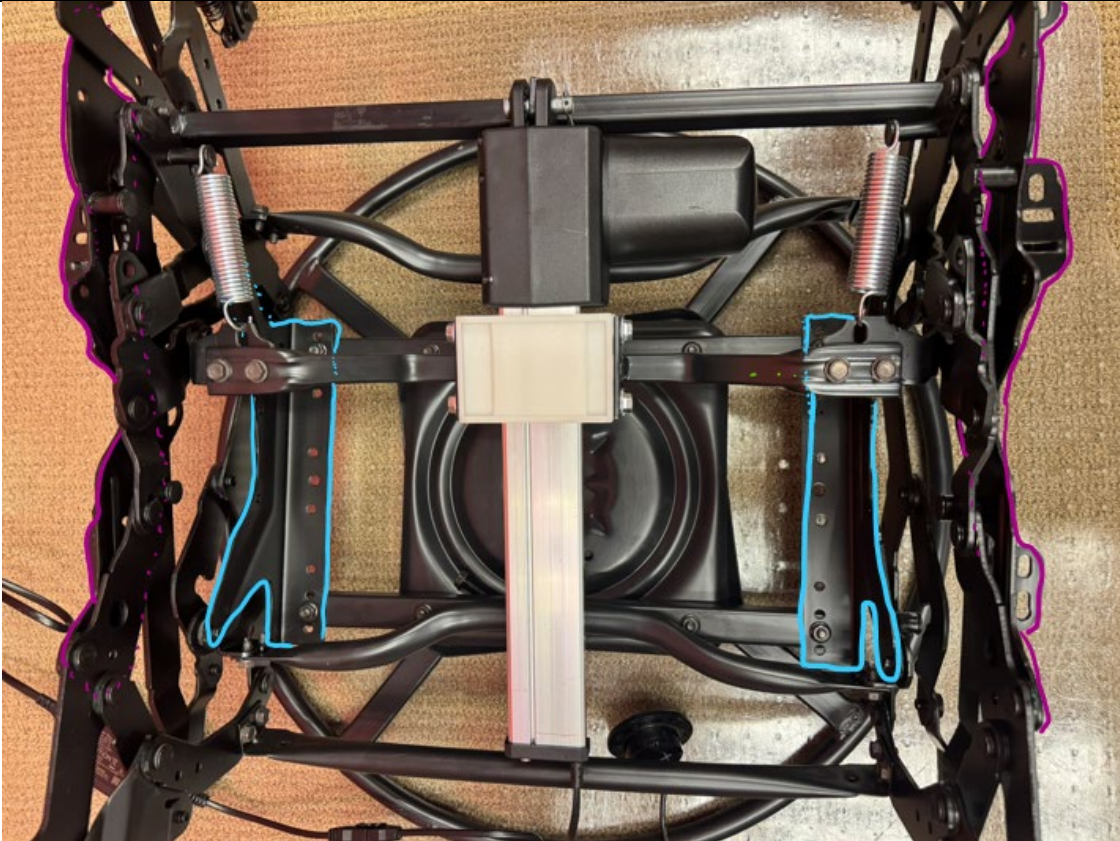
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The Exemplary Covered Glider has at least one foot-support ottoman as shown below.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The Exemplary Covered Glider is adapted to move between a closed, an extended, and a reclined position as shown in the images below.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		<u>Closed</u> <u>Reclined</u> 

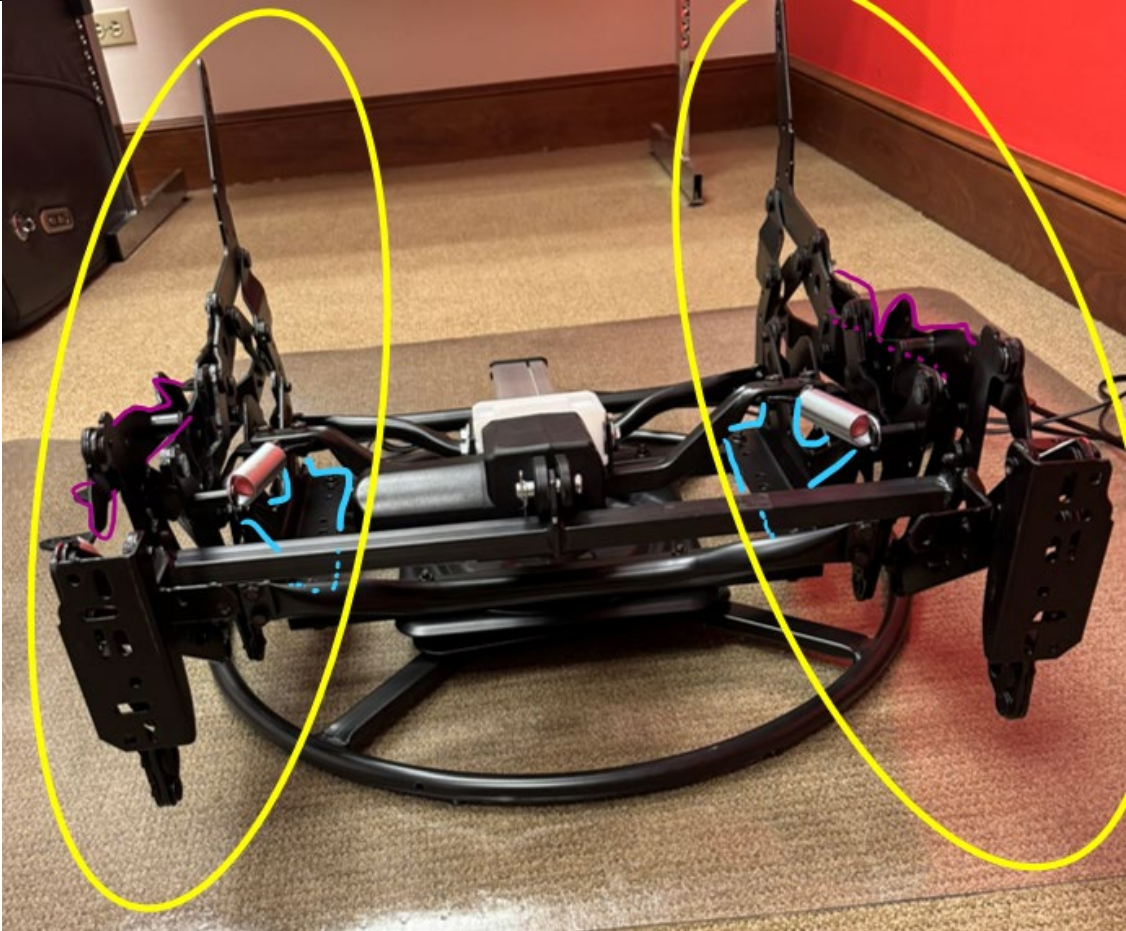
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		<u>Closed</u> <u>Extended</u> <u>Reclined</u>  The image shows three top-down views of a glider mechanism. In the 'Closed' state, the glider is compact. In the 'Extended' state, the glider's frame is expanded. In the 'Reclined' state, the glider is tilted back. Each view shows a central white rectangular component and various mechanical linkages and cables.
1[a]	a pair of glide brackets in substantially parallel-spaced relation, wherein the glide brackets are mounted to the chassis and are vertically raised above an underlying surface by a plurality of supports;	The Exemplary Covered Glider includes a pair of glide brackets in substantially parallel-spaced relation, wherein the glide brackets are mounted to the chassis and are vertically raised above an underlying surface by a plurality of supports as shown in the image below.

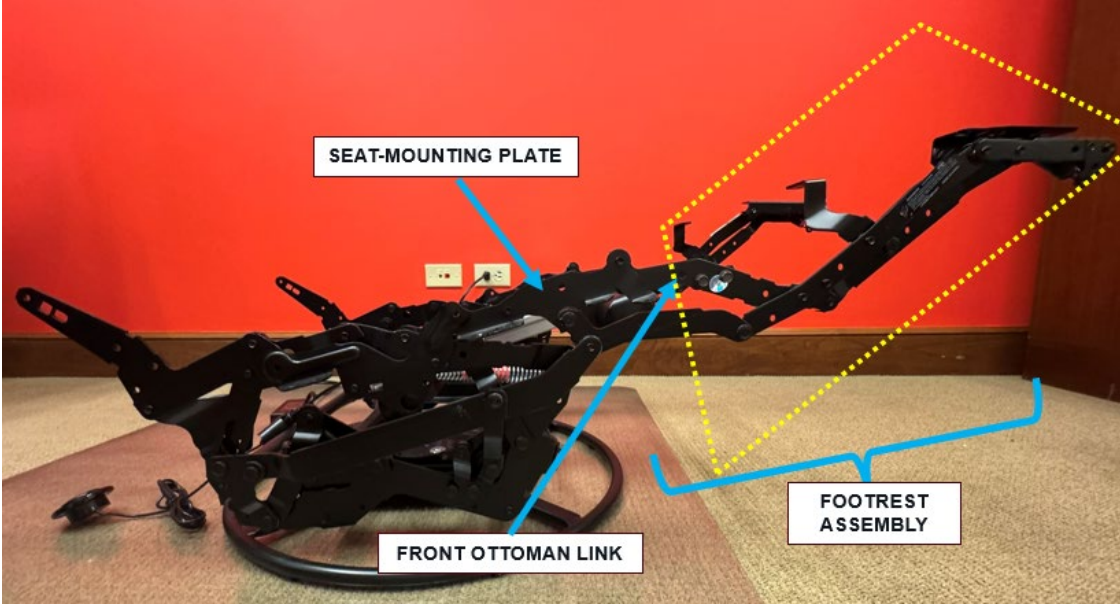
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[b]	a pair of seat-mounting plates in substantially parallel-spaced relation, wherein the seat-mounting plates translatably carry the seat over the glide brackets; and	The Exemplary Covered Glider includes a pair of seat-mounting plates (purple) in substantially parallel-spaced relation, wherein the seat-mounting plates translatably carry the seat over the glide brackets (blue) as shown in the image below.

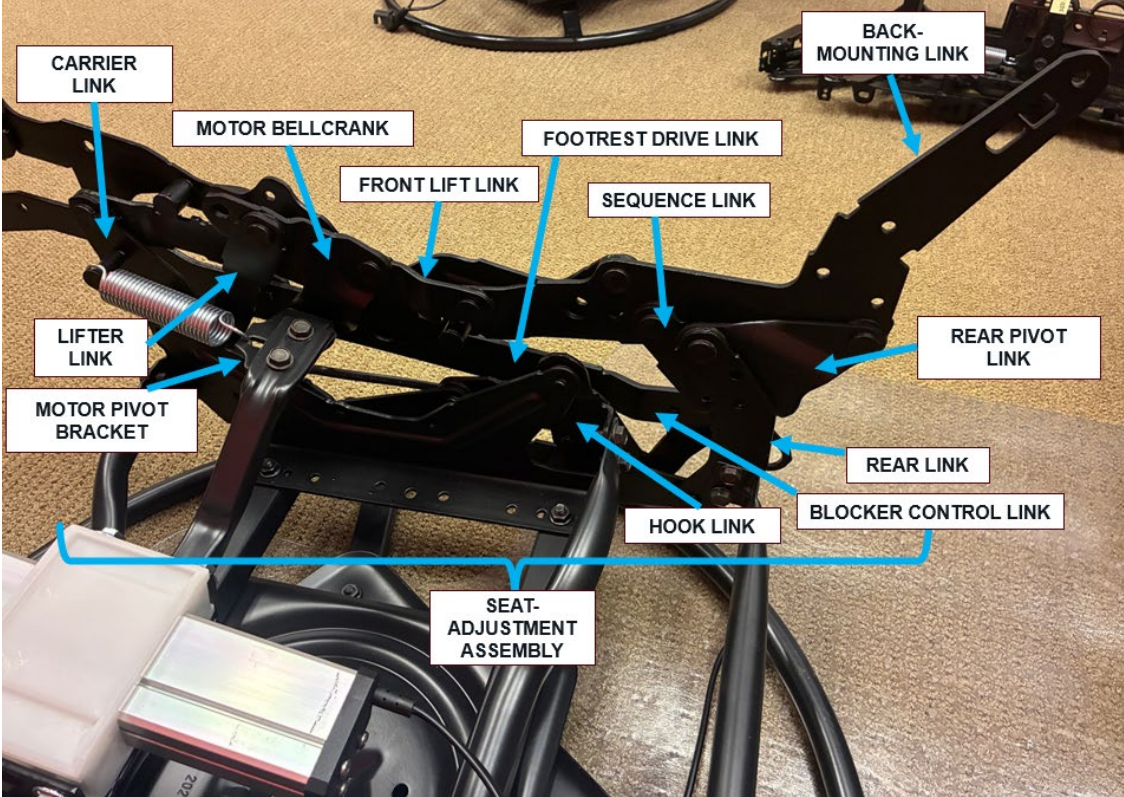
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		

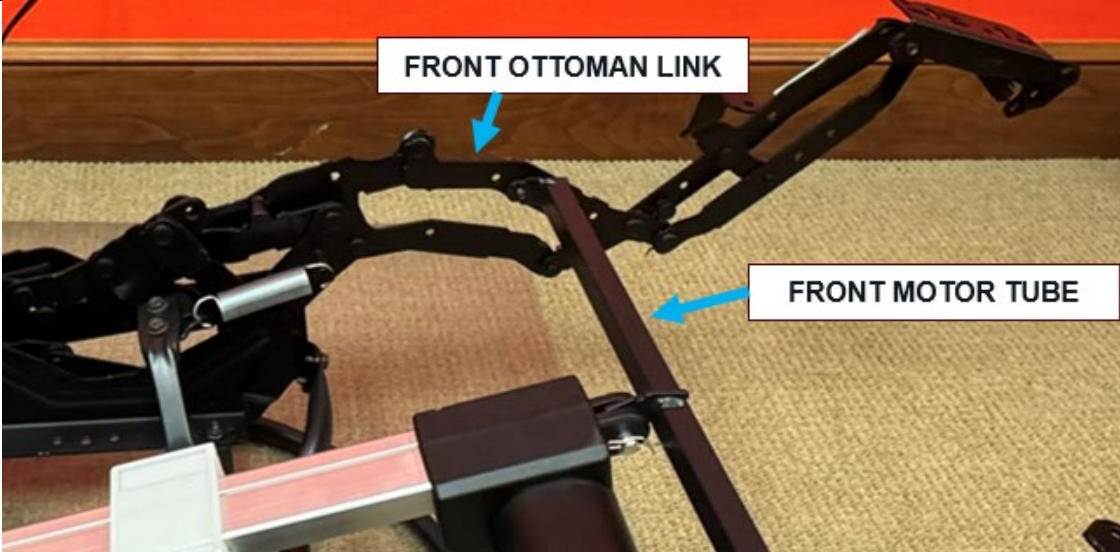
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The photograph shows a complex mechanical assembly, likely a glider mechanism, constructed from black metal components. A blue line is drawn on a horizontal beam, and a pink line is drawn on a curved arm, highlighting specific parts of the mechanism. The assembly is resting on a light-colored, textured surface, possibly a carpet or mat, with a wooden baseboard visible in the background.

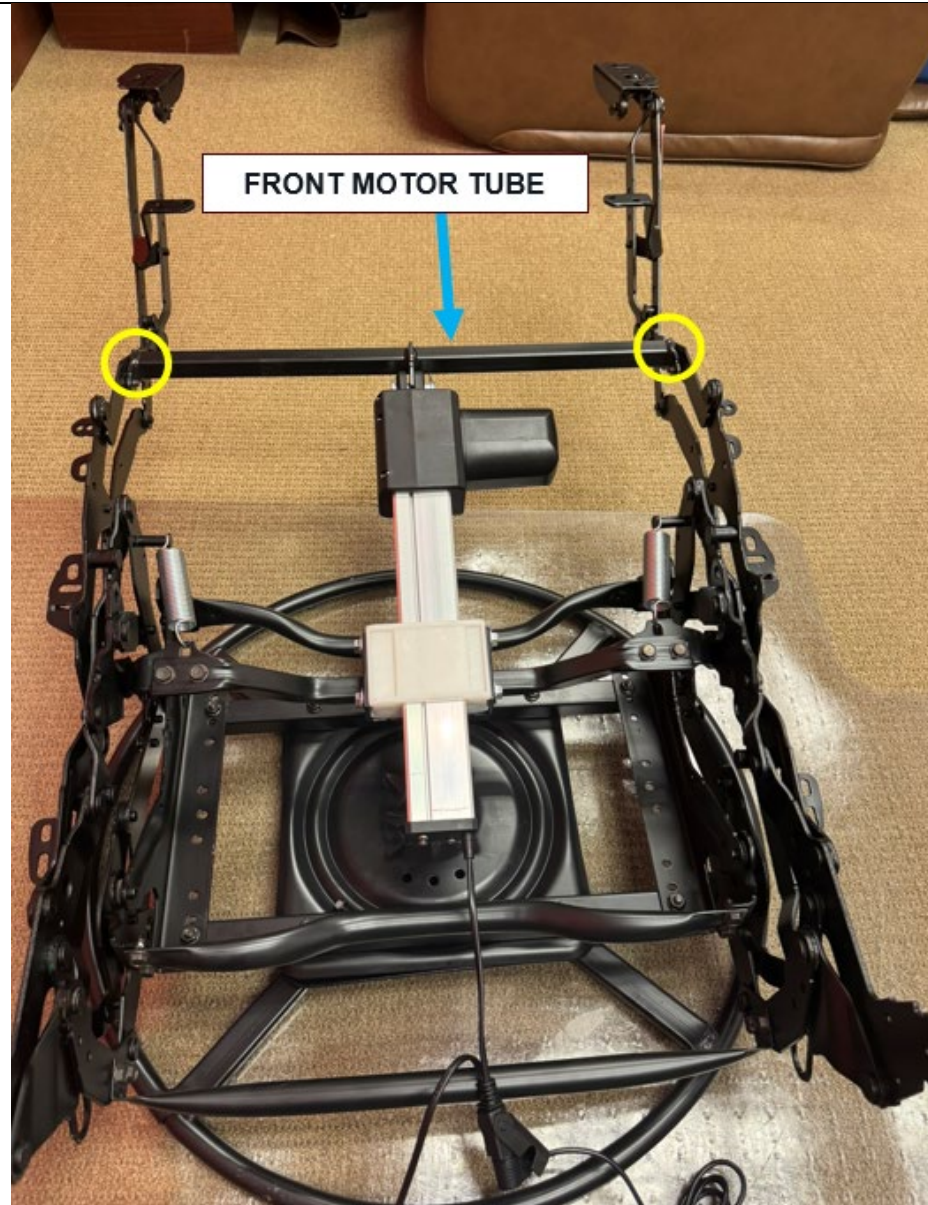
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[c]	a pair of the generally mirror-image linkage mechanisms each moveably interconnecting each of the glide brackets to a respective seat-mounting plate, wherein	The Exemplary Covered Glider includes a pair of the generally mirror-image linkage mechanisms (yellow) each moveably interconnecting each of the glide brackets (blue) to a respective seat-mounting plate (purple) as shown in the image below.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	each of the linkage mechanisms comprise:	
1[c-a]	(a) a footrest assembly that extends and retracts the at least one foot-support ottoman, wherein the footrest assembly includes a	The Exemplary Covered Glider includes a footrest assembly that extends and retracts the at least one foot-support ottoman, wherein the footrest assembly includes a front ottoman link that is rotatably coupled to a forward portion of one of the seat-mounting plates as shown below. In the image below, the dotted

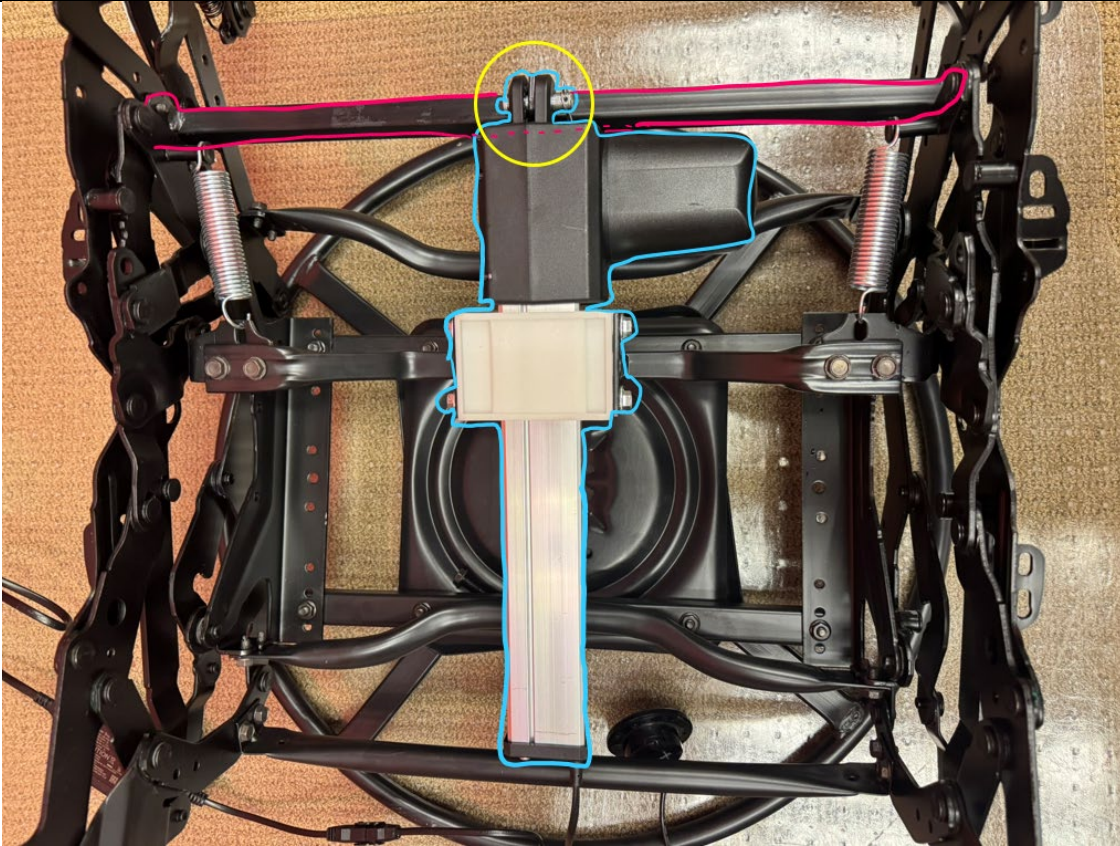
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	front ottoman link that is rotatably coupled to a forward portion of one of the seat-mounting plates; and	yellow lines indicate the general location of where the at least one foot-support ottoman would be attached to the Exemplary Covered Glider Mechanism. 
1[c-b]	(b) a seat-adjustment assembly that reclines and inclines the backrest; and	The Exemplary Covered Glider includes a seat-adjustment assembly that reclines and inclines the backrest as shown below.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[d]	a front motor tube that spans and couples to the pair of linkage mechanisms, wherein the front motor tube having a pair of ends, wherein one of the ends of the front motor tube is	The Exemplary Covered Glider includes a front motor tube that spans and couples to the pair of linkage mechanisms, wherein the front motor tube has a pair of ends, wherein one of the ends of the front motor tube is fixedly coupled to the front ottoman link as shown below.

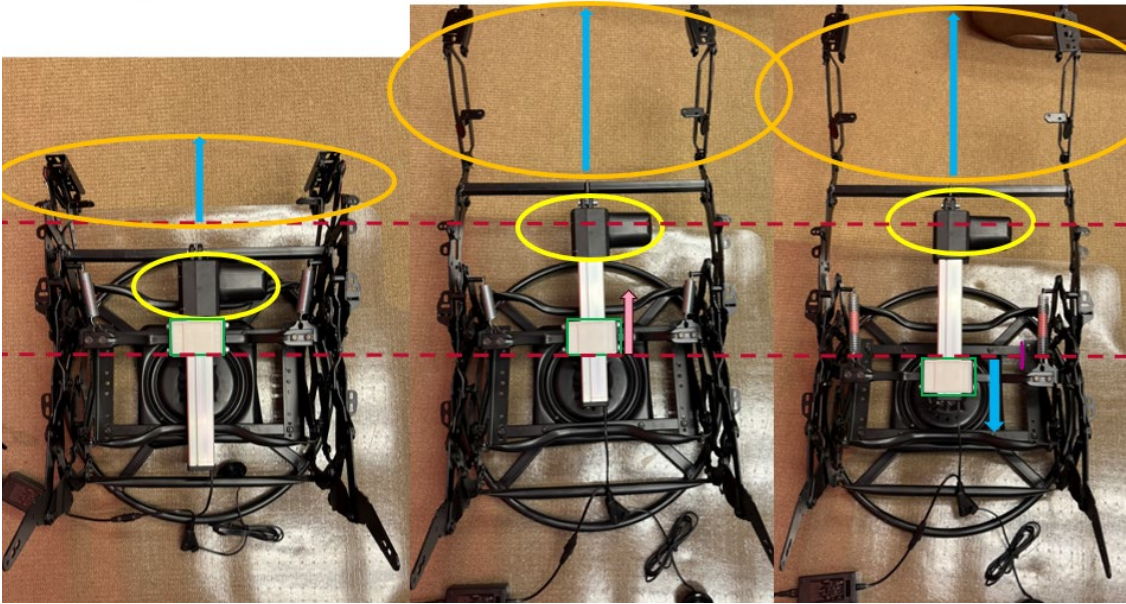
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	fixedly coupled to the front ottoman link;	

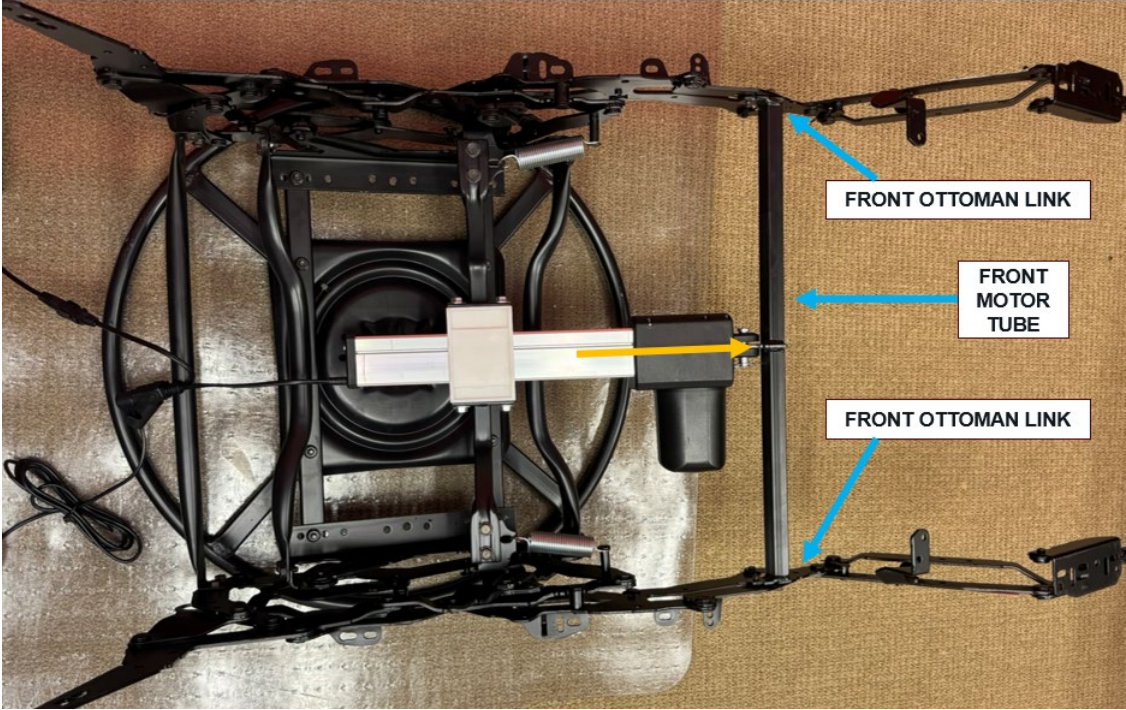


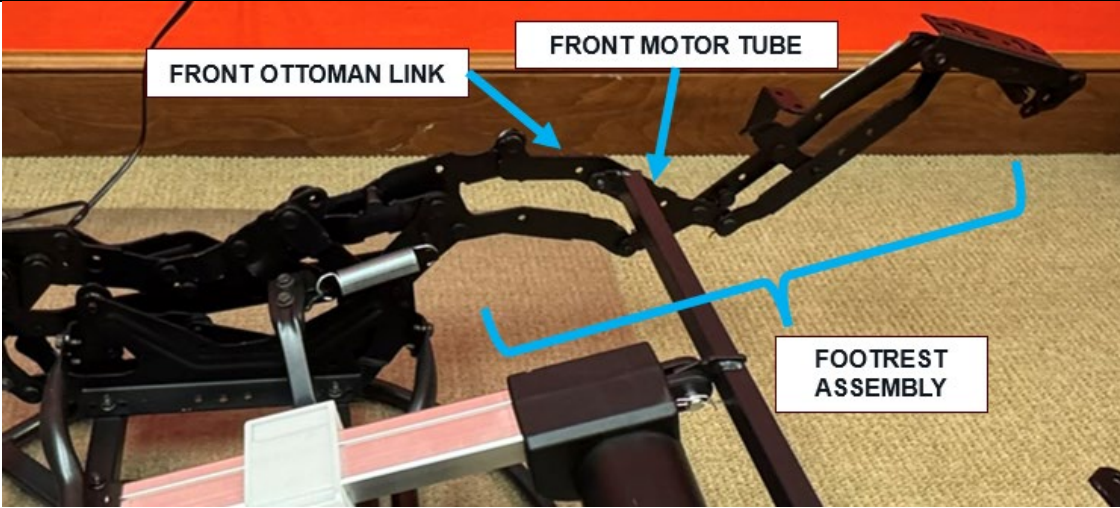
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
1[e]	a linear actuator that provides automated adjustment of the seating unit between a closed position, an extended position, and a reclined position, wherein the linear actuator is pivotably coupled to the front motor tube,	The Exemplary Covered Glider includes a linear actuator that provides automated adjustment of the seating unit between a closed position, an extended position, and a reclined position, wherein the linear actuator (blue) is pivotably coupled (yellow) to the front motor tube (pink) as shown below. 

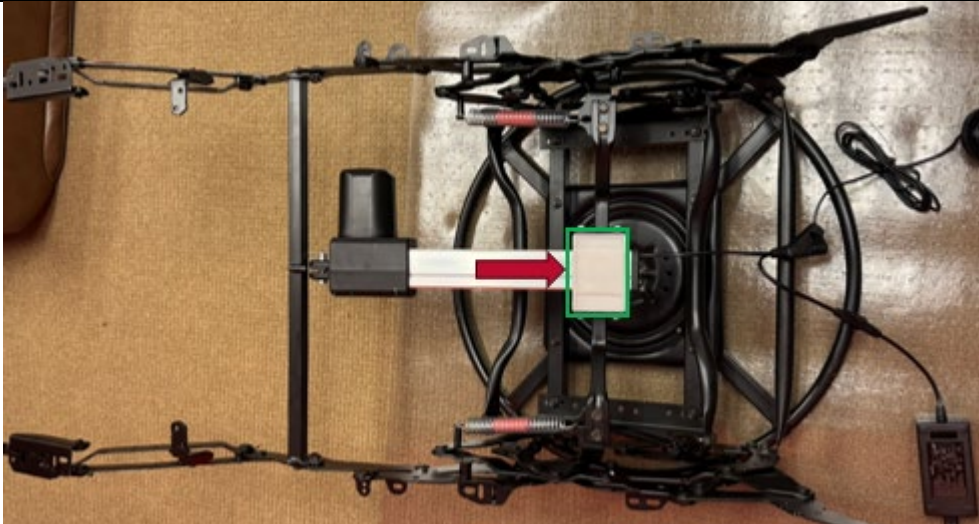
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The linear actuator provides automated adjustment of the seating unit between a closed position, an extended position, and a reclined position as shown below.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		<u>Closed</u> <u>Extended</u> <u>Reclined</u>  The image shows three top-down views of a glider mechanism. In the 'Closed' state, the glider is compact with its legs folded. In the 'Extended' state, the legs are fully extended forward. In the 'Reclined' state, the glider's frame is tilted backward, and the legs are extended. Each view shows a central white rectangular actuator connected to a black frame and various cables.
1[f]	wherein the linear-actuator adjustment is sequenced into a first phase and a second phase that are mutually exclusive in stroke,	The Exemplary Covered Glider's linear-actuator adjustment is sequenced into a first phase and a second phase that are mutually exclusive in stroke as shown below.

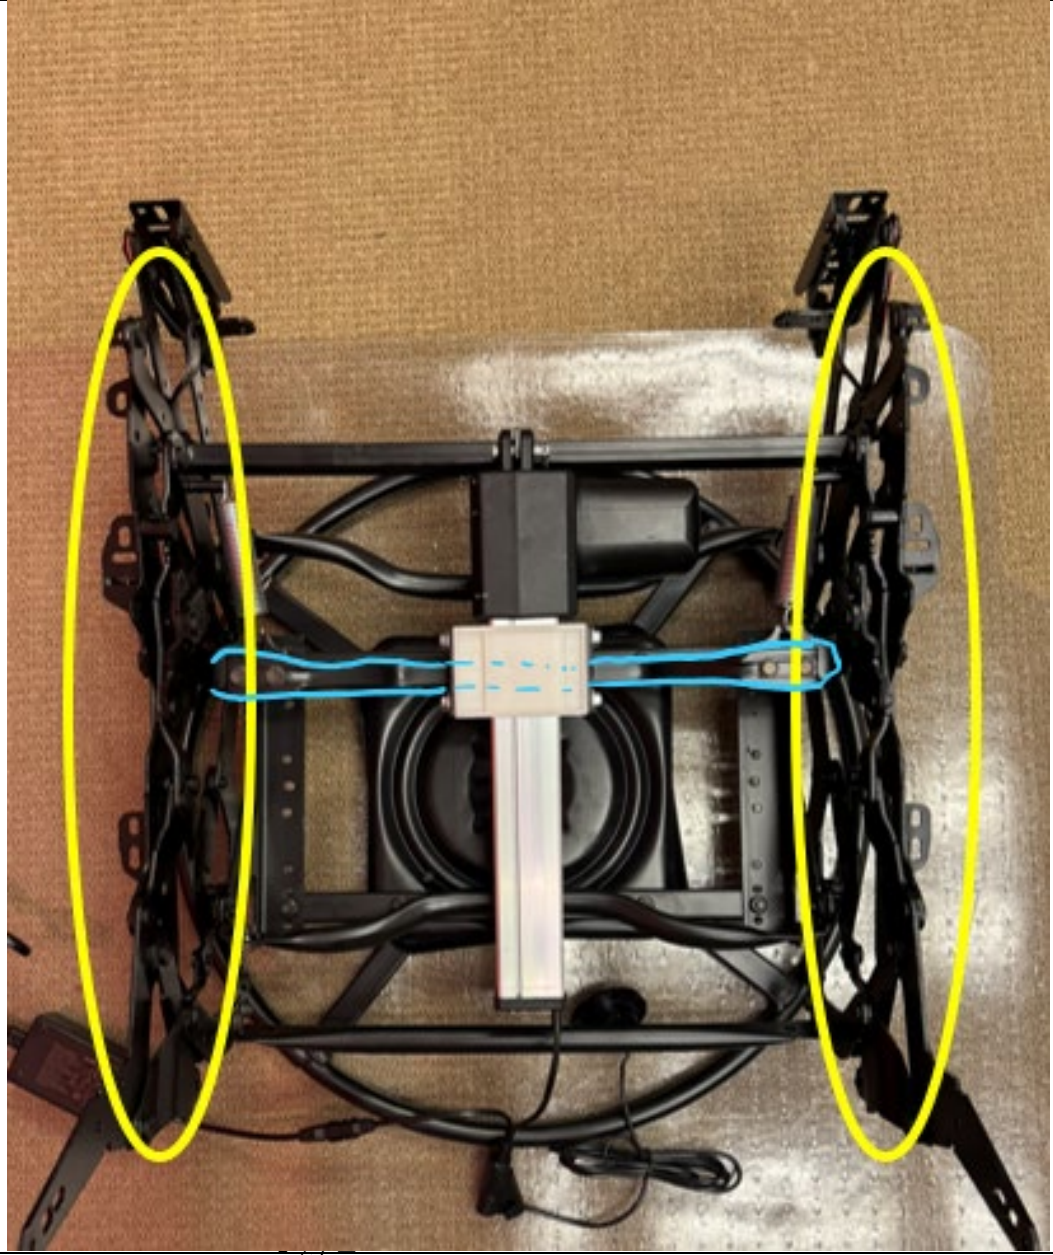
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		<u>Closed</u> <u>Extended</u> <u>Reclined</u> 
1[g]	wherein the first phase moves the footrest assembly between the closed position and the extended position upon the linear actuator exerting lateral thrust onto the front motor tube that, in turn, invokes movement of the front ottoman link,	The Exemplary Covered Glider's first phase moves the footrest assembly between the closed position and the extended position upon the linear actuator exerting lateral thrust onto the front motor tube that, in turn, invokes movement of the front ottoman link as shown below.

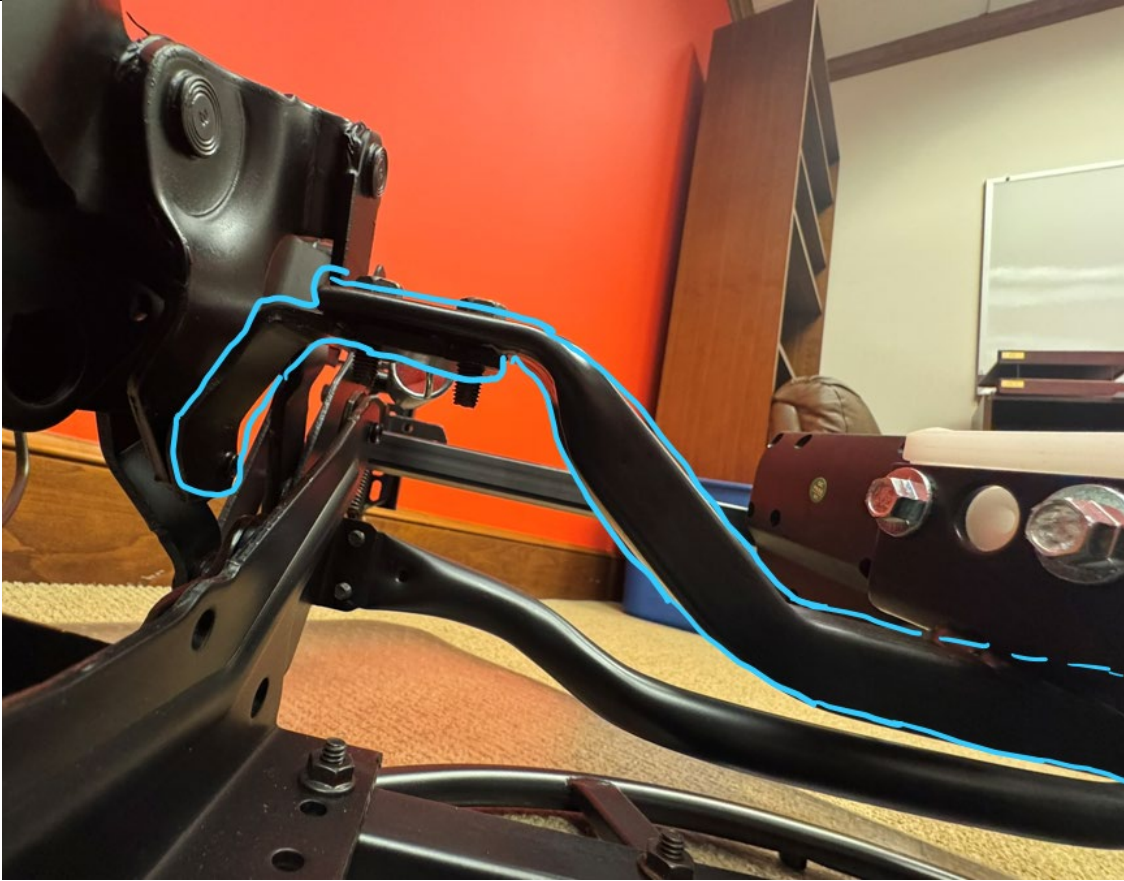
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The photograph shows a mechanical glider assembly. A central motor tube is connected to two front ottoman links. The links are part of a larger frame that supports a footrest assembly. The motor tube is labeled 'FRONT MOTOR TUBE' and the links are labeled 'FRONT OTTOMAN LINK'. A yellow arrow points from the motor tube to the links, indicating the direction of movement.
1[h]	wherein the movement of the first ottoman link controls adjustment of the footrest assembly between the closed position and the extended position, and	The movement of the Exemplary Covered Glider's first ottoman link controls adjustment of the footrest assembly between the closed position and the extended position as shown below.

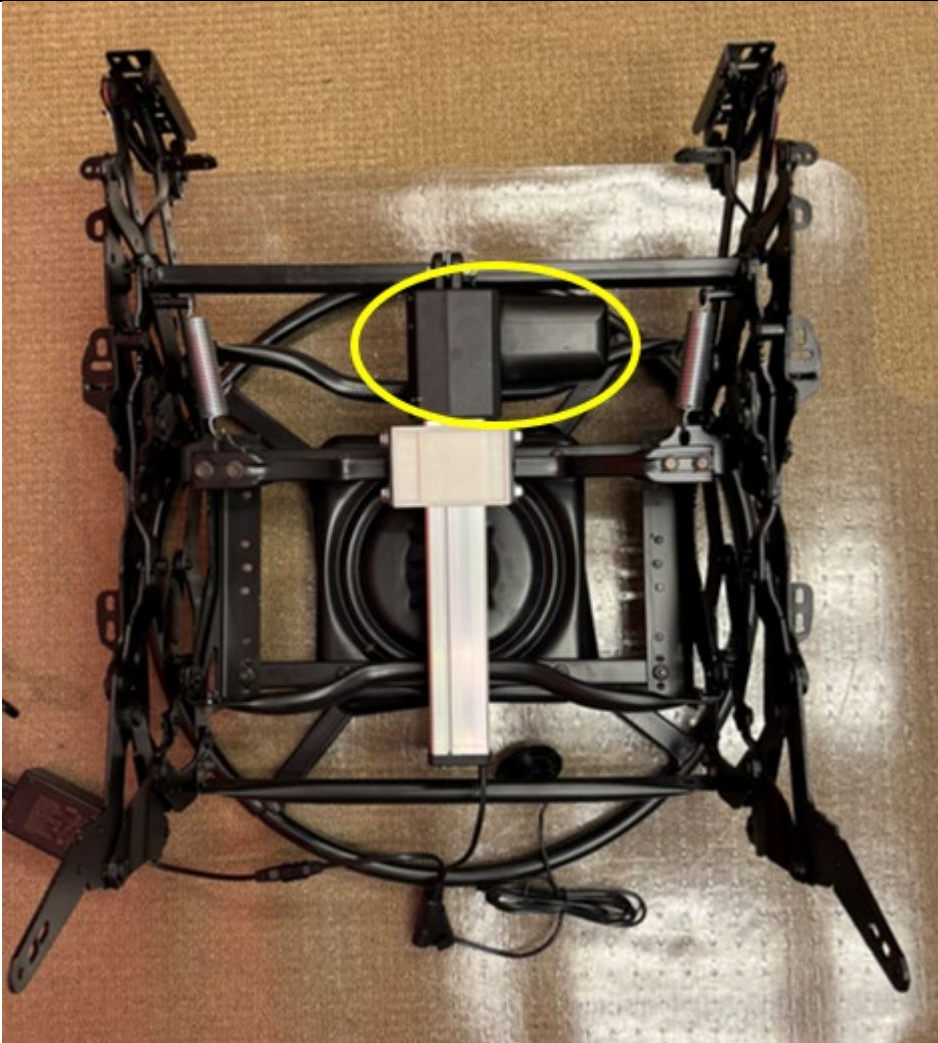
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The photograph shows a mechanical assembly for a glider. A black metal frame is visible, with a red motor tube and a black ottoman link. A blue bracket points to the front motor tube, and another blue bracket points to the footrest assembly. The text 'FRONT OTTOMAN LINK' is written in a white box, 'FRONT MOTOR TUBE' is written in a white box, and 'FOOTREST ASSEMBLY' is written in a white box. The background is a light-colored carpet.
1[i]	wherein the second phase moves the seat-adjustment assembly between the extended position and the reclined position.	The second phase of the Exemplary Covered Glider moves the seat-adjustment assembly between the extended position and the reclined position as shown below.

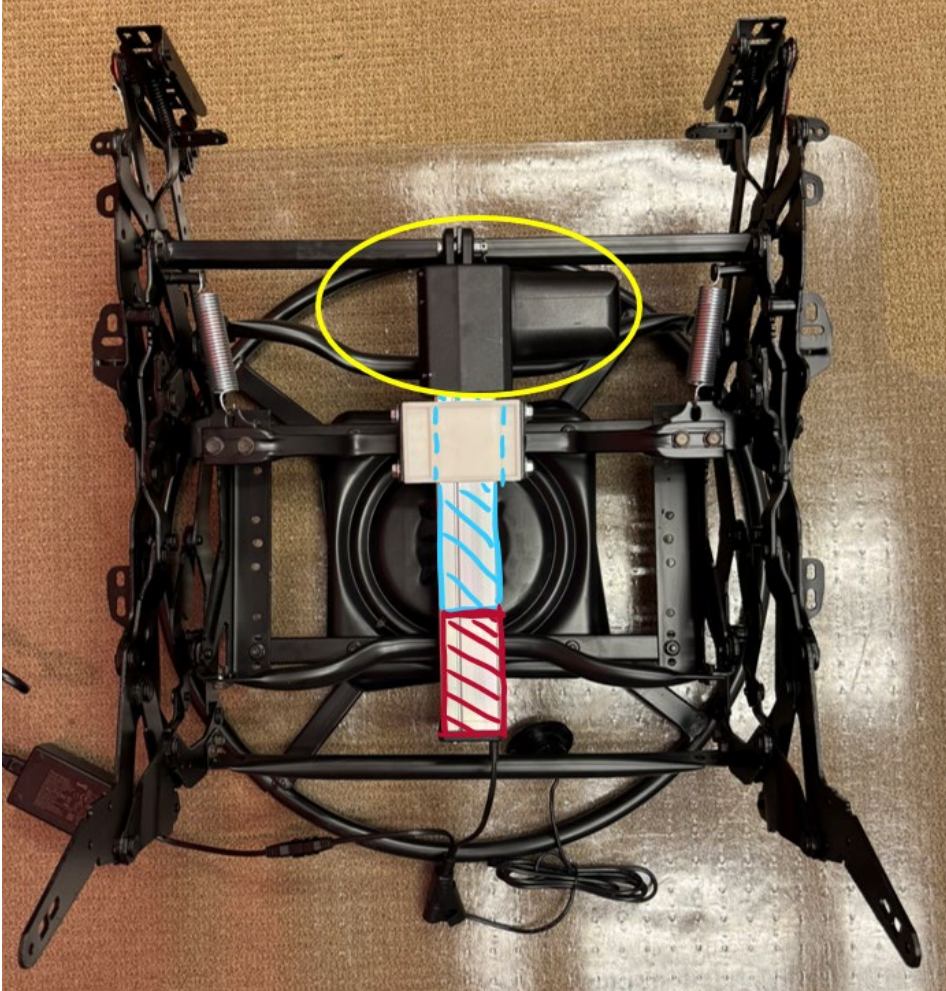
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		

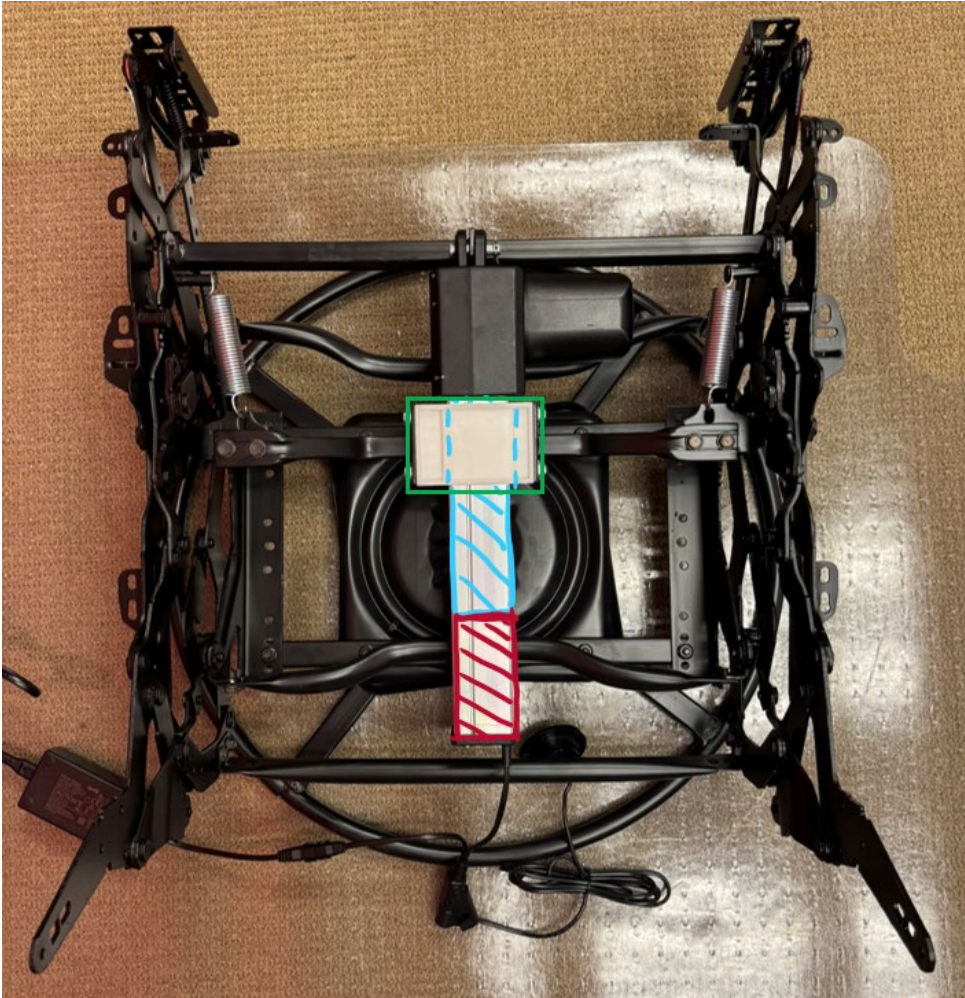
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		<u>Extended</u>  <u>Reclined</u> 
2	2. The seating unit of claim 1, further comprising an activator bar that spans and couples to the pair of linkage mechanisms.	The Exemplary Covered Glider includes an activator bar (blue) that spans and couples to the pair of linkage mechanisms (yellow) as shown below.



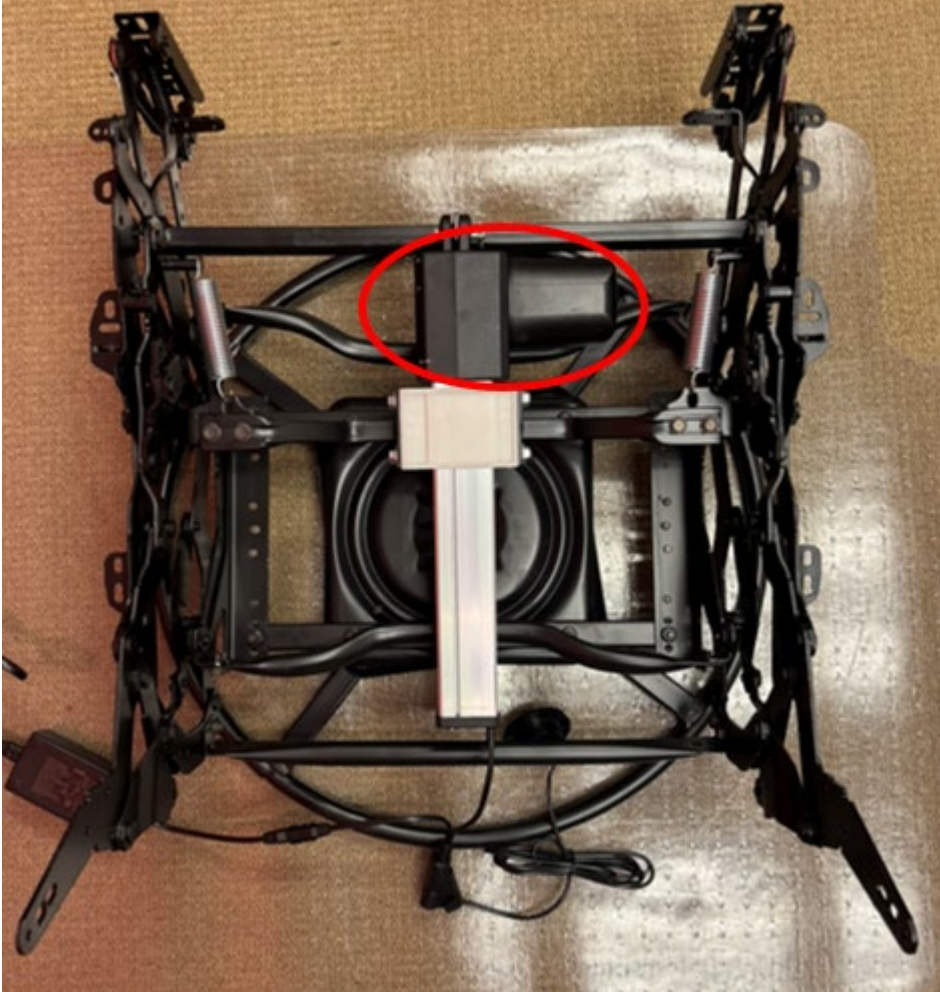
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The photograph shows a close-up of a mechanical assembly, likely a glider's linear actuator. A blue line is drawn around the main components of the mechanism, including a motor housing, a gear train, and a long, curved arm. The background is a red wall and a wooden cabinet.
3[a]	3. The seating unit of claim 2, wherein the linear actuator comprises: a motor mechanism;	The Exemplary Covered Glider's linear actuator includes a motor mechanism as shown below.

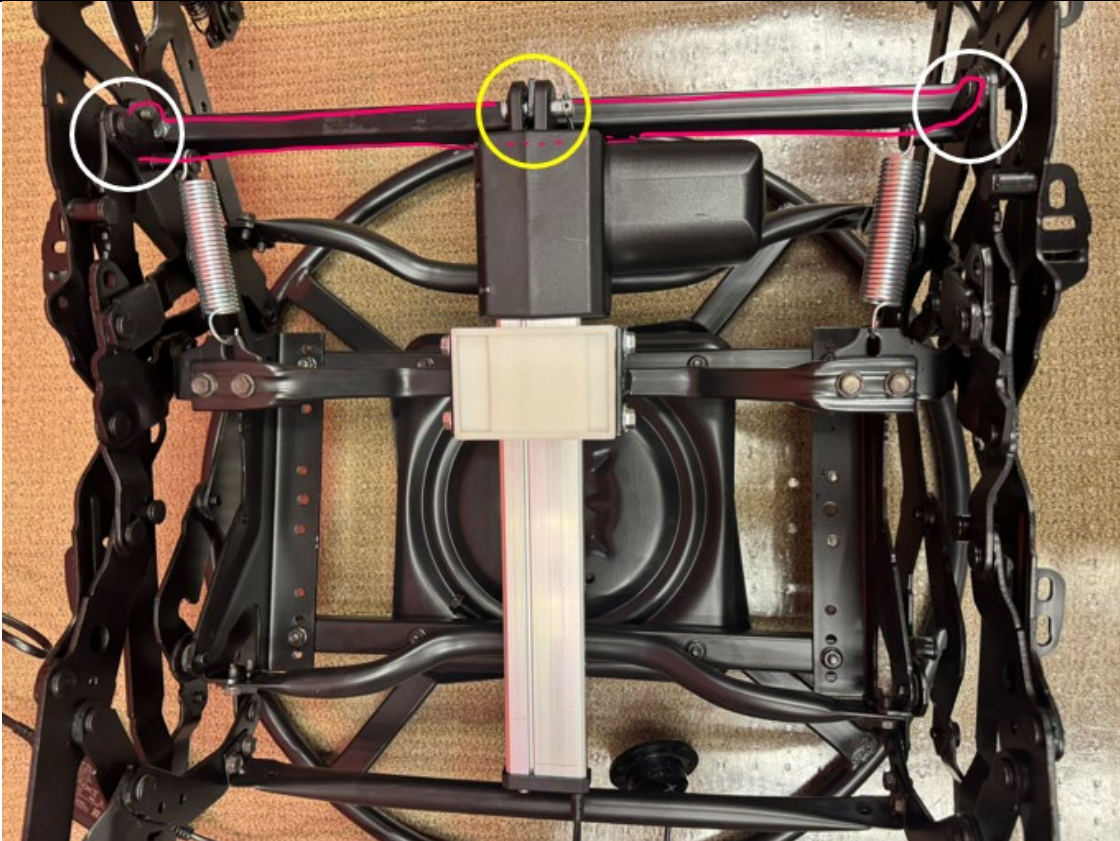
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 A photograph of a black metal glider frame, likely for a model aircraft or a small vehicle. The frame is rectangular with various mechanical components attached. A central motor or actuator is visible, and a yellow circle highlights a specific component on the right side of the frame. The frame is resting on a light-colored, textured surface.

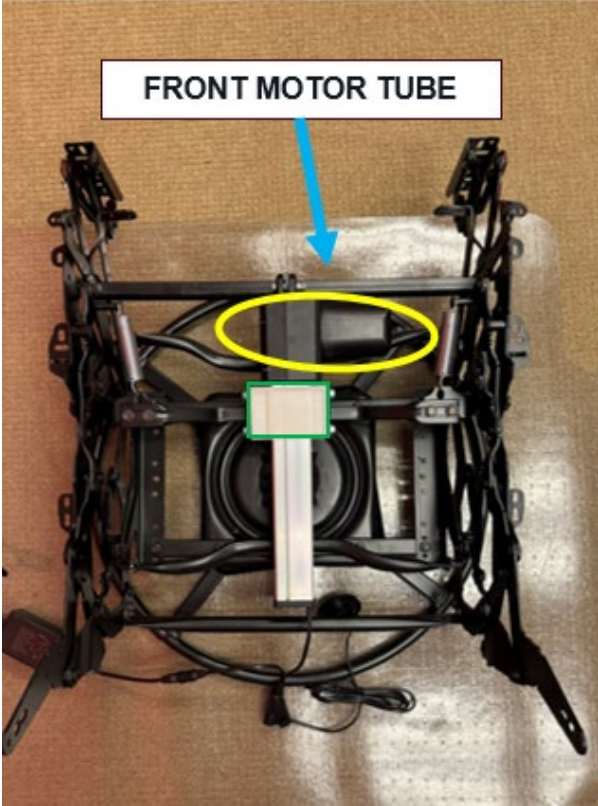
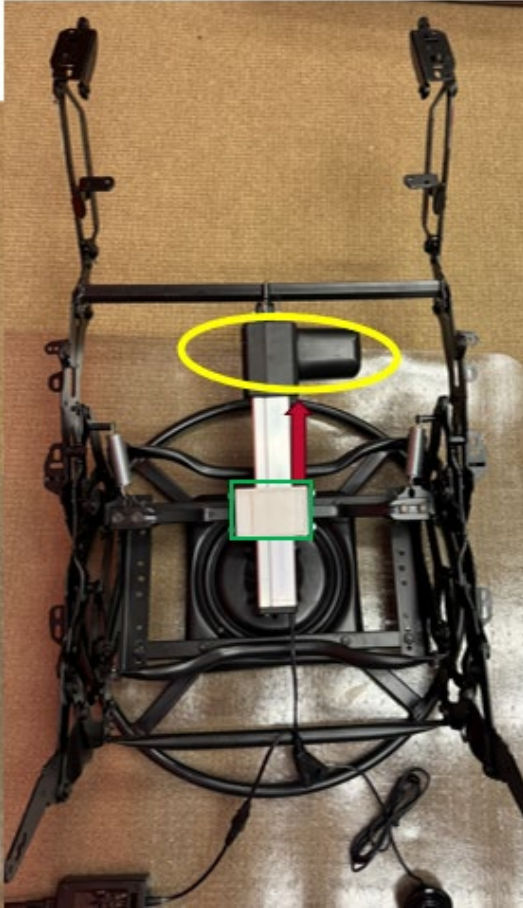
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
3[b]	a track operably coupled to the motor mechanism, wherein the track includes a first travel section and a second travel section;	The Exemplary Covered Glider includes a track operably coupled to the motor mechanism (yellow), wherein the track (blue/red) includes a first travel section (blue) and a second travel section (red) as shown below. 

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
3[c]	and a motor activator block that translates longitudinally along the track under automated control.	The Exemplary Covered Glider includes a motor activator block (green) that translates longitudinally along the track (blue/red) under automated control as shown below.  The photograph shows a complex mechanical assembly, likely a glider mechanism, mounted on a metal frame. A motor activator block, highlighted in green, is positioned on a track, which is highlighted in blue and red. The track is a long, narrow, rectangular block with a blue and red striped pattern. The motor activator block is a small, rectangular, light-colored block. The entire assembly is mounted on a metal frame with various components, including a motor, gears, and a track. The background is a textured, brown surface.

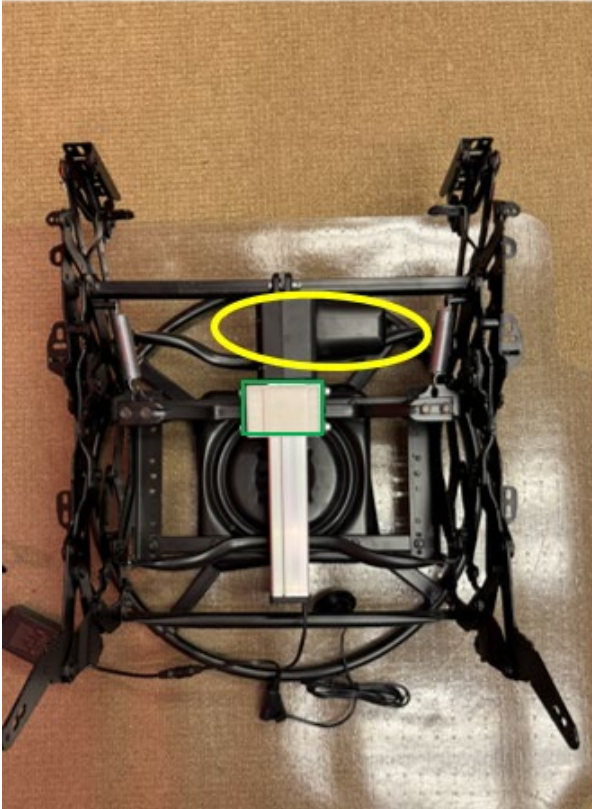
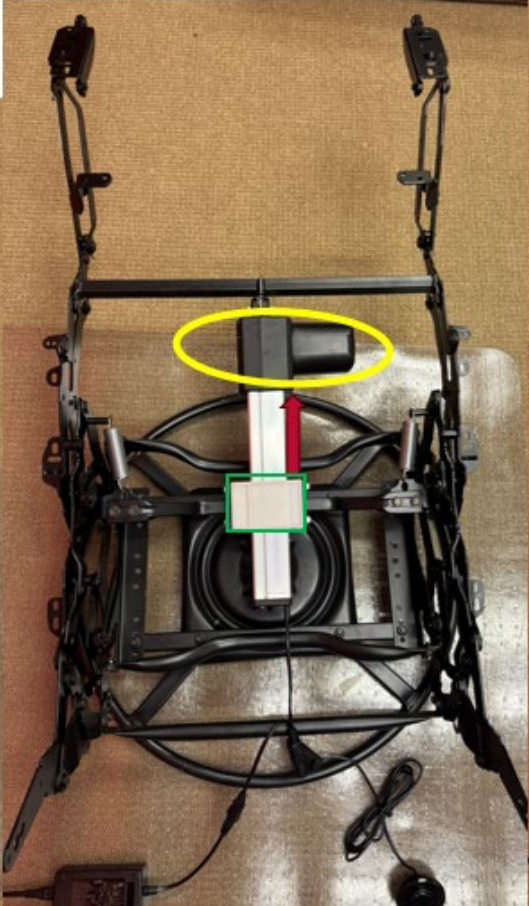
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
4	4. The seating unit of claim 3, wherein a housing of the motor mechanism is pivotably coupled to a section between the pair of ends of the front motor tube.	The Exemplary Covered Glider's housing of the motor mechanism (red) is pivotably coupled (yellow) to a section between the pair of ends (white) of the front motor tube (pink) as shown below.

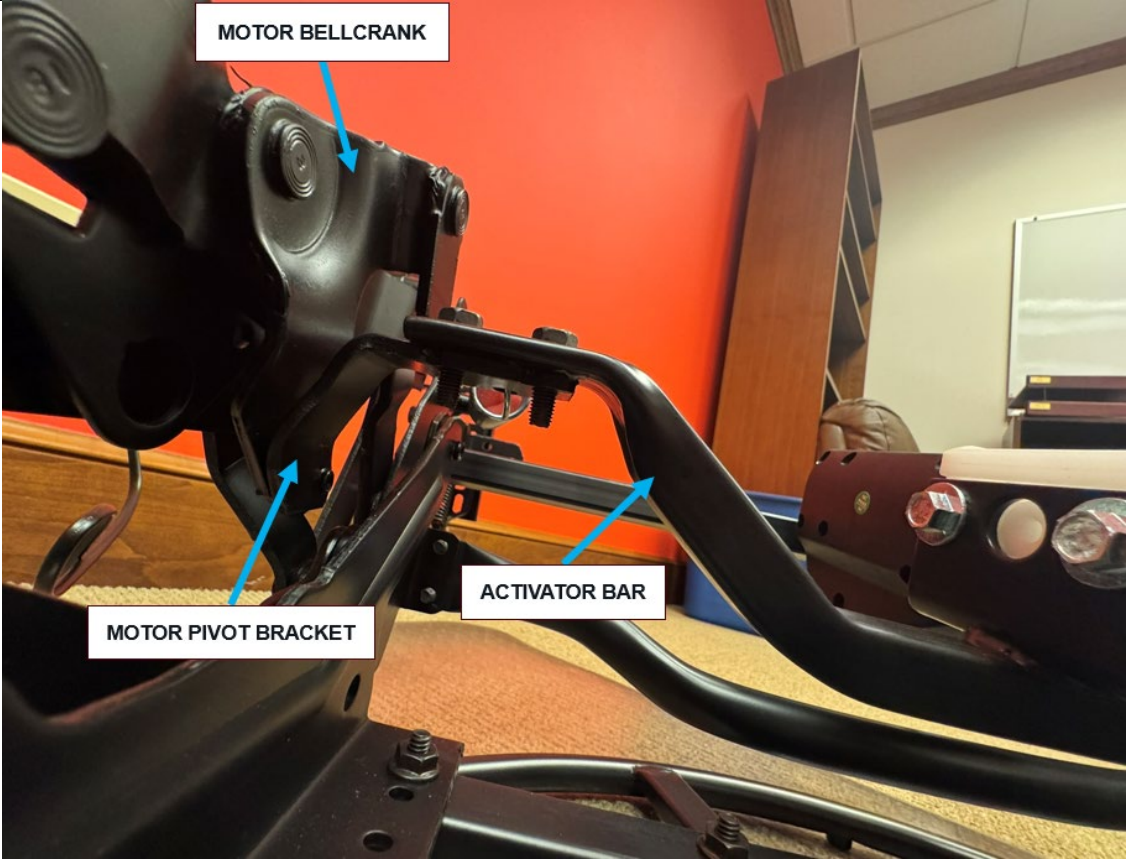
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 A photograph of a black metal glider frame, likely for a medical or dental procedure. The frame is complex, with various joints and components. A central motor or actuator is visible, and a red circle highlights a specific component on the right side of the frame. The frame is set against a light-colored, textured background.

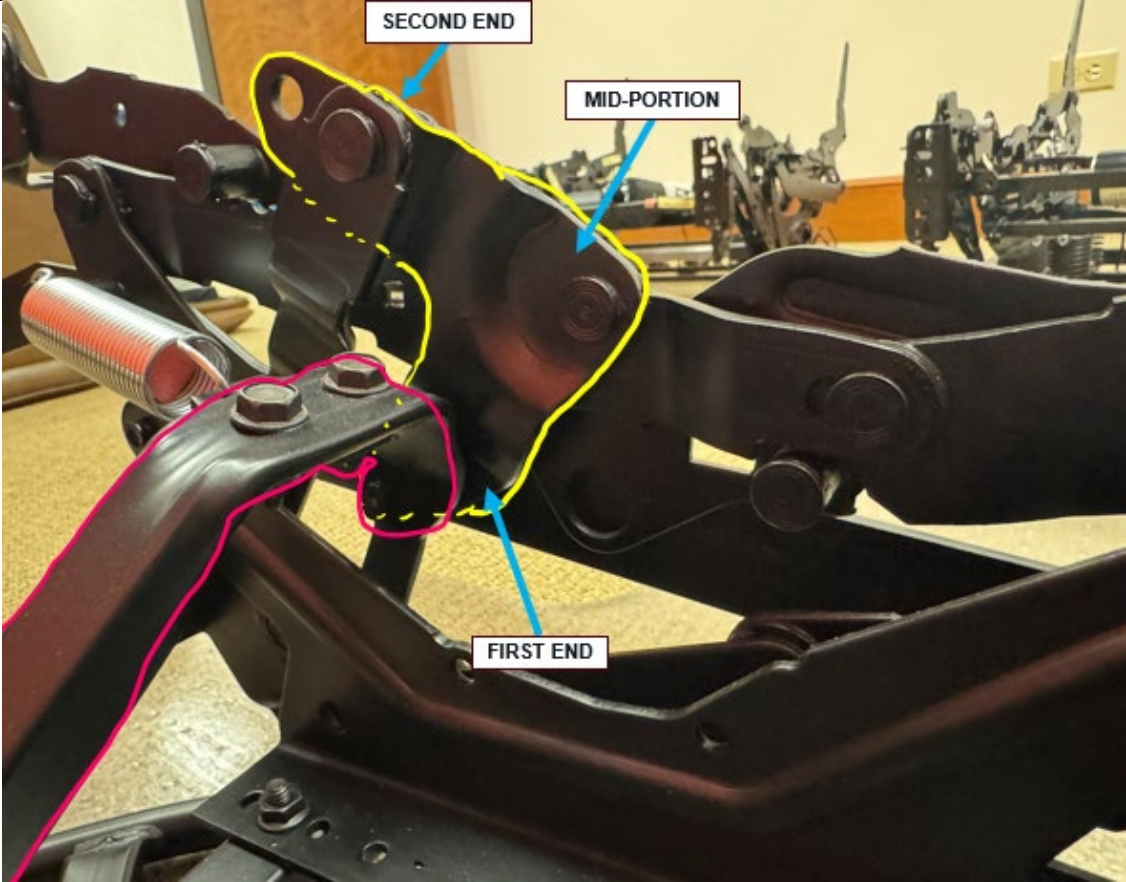
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
5	5. The seating unit of claim 4, wherein the first phase involves longitudinal translation of the motor activator block along the first travel section that	The Exemplary Covered Glider's first phase involves longitudinal translation of the motor activator block along the first travel section that creates a lateral thrust at the front motor tube as shown below.

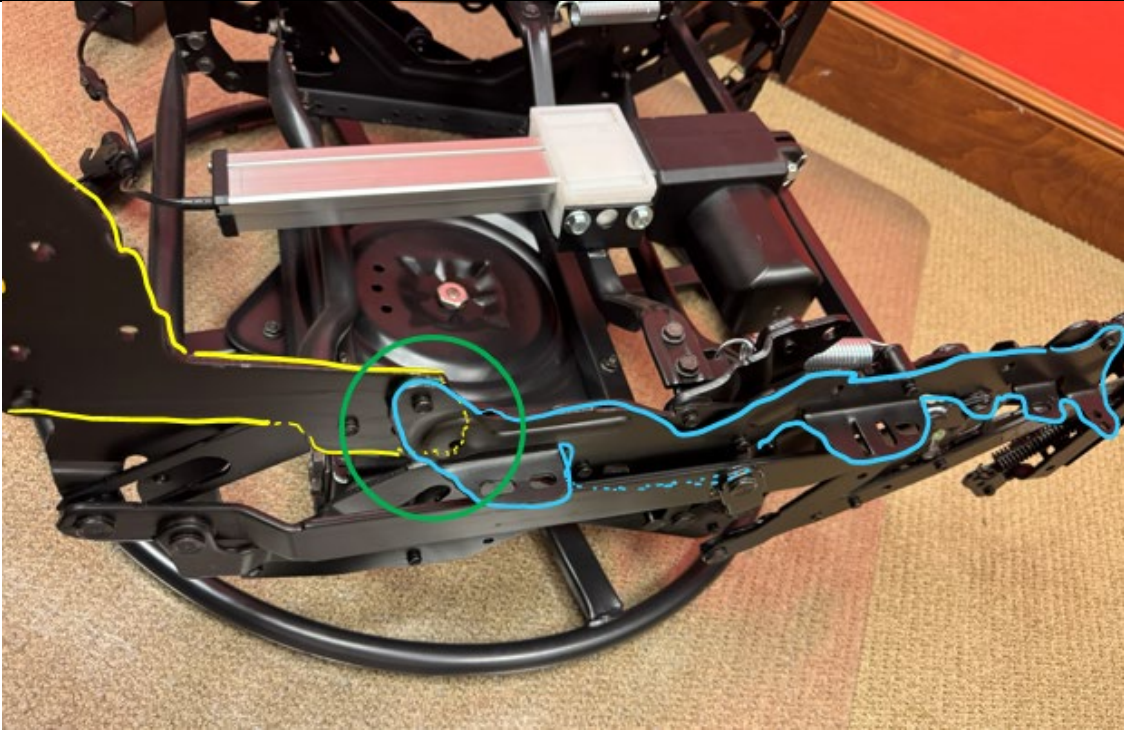
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	creates a lateral thrust at the front motor tube.	<u>Closed</u>  FRONT MOTOR TUBE <u>Extended</u> 
6	6. The seating unit of claim 5, wherein, during the stroke of the linear actuator within the first phase, the motor	The Exemplary Covered Glider motor mechanism (yellow) moves forward and upward with respect to the pair of glide brackets while the motor activator block (green) remains generally fixed in space within the first phase, as shown below.

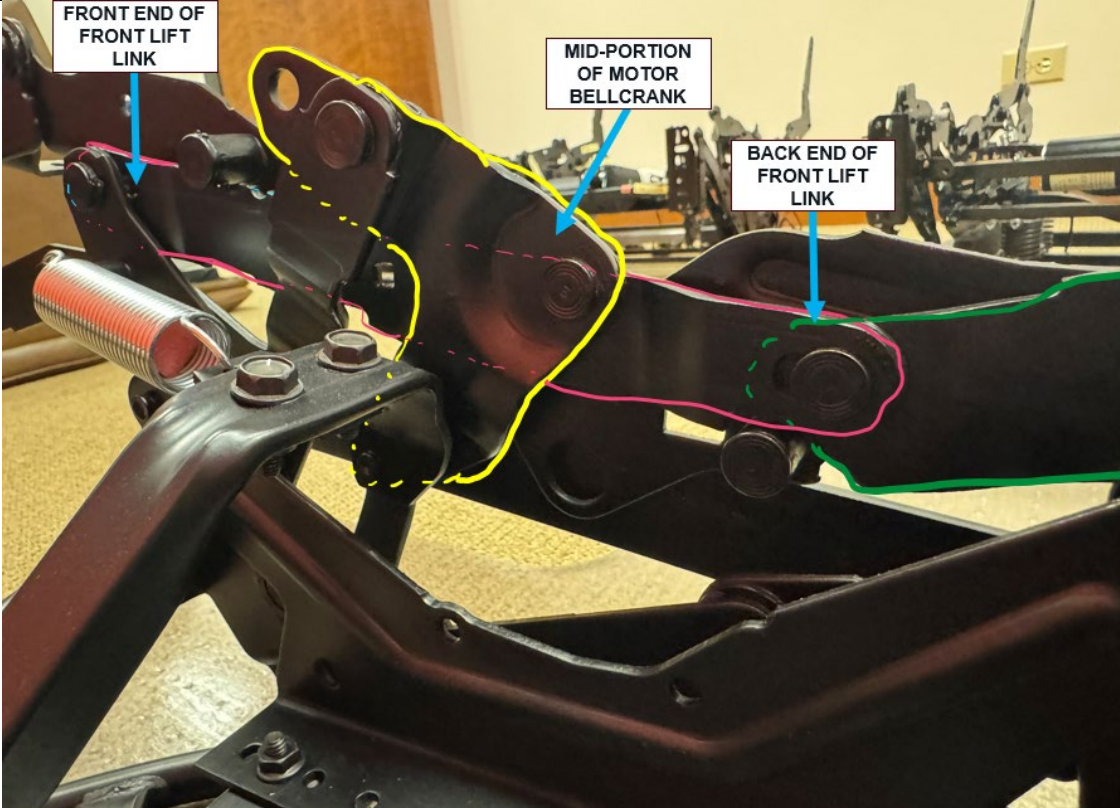
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	mechanism moves forward and upward with respect to the pair of glide brackets while the motor activator block remains generally fixed in space.	<u>Closed</u>  <u>Extended</u> 

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		<u>Closed</u>  <u>Extended</u> 
7	7. The seating unit of claim 3, wherein the activator bar having a pair of ends, wherein one of the ends of	The Exemplary Covered Glider's activator bar has a pair of ends wherein one of the ends of the activator bar is rotatably coupled to a motor bellcrank within the seat-adjustment assembly as shown below.

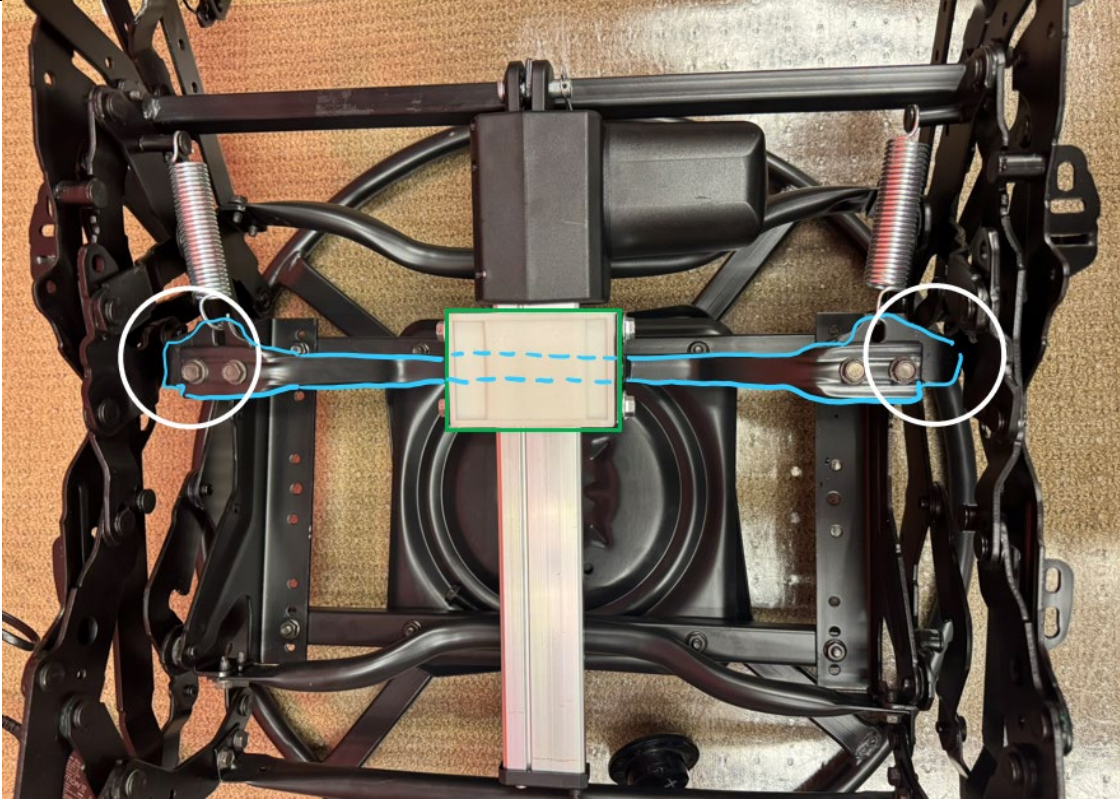
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	the activator bar is rotatably coupled to a motor bellcrank within the seat-adjustment assembly.	
8[a]	8. The seating unit of claim 7, wherein the seat-adjustment assembly comprises:	The Exemplary Covered Glider's seat-adjustment assembly includes the motor bellcrank (yellow) that includes a mid portion located between a first end and a second end, wherein the activator bar (pink) is rotatably coupled to the first end of the motor bellcrank (yellow) as shown below.

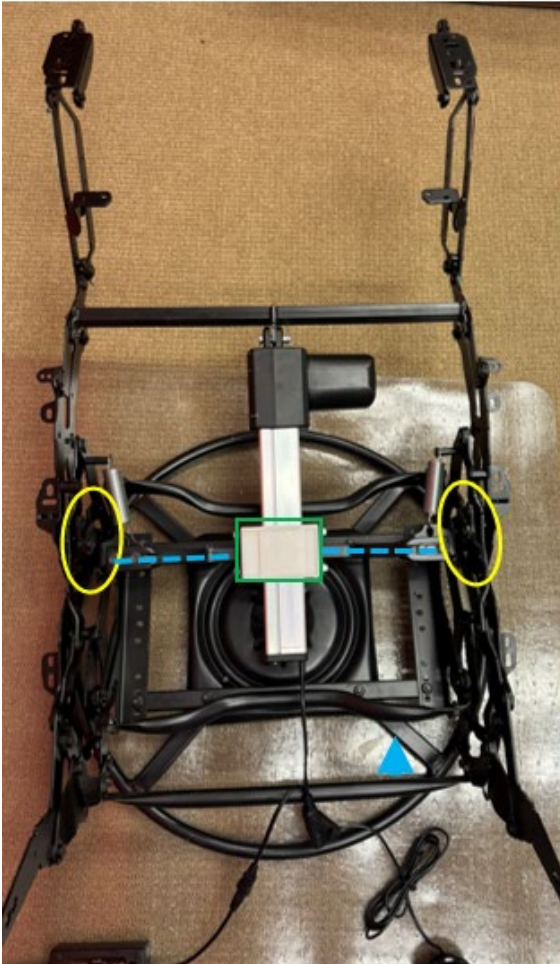
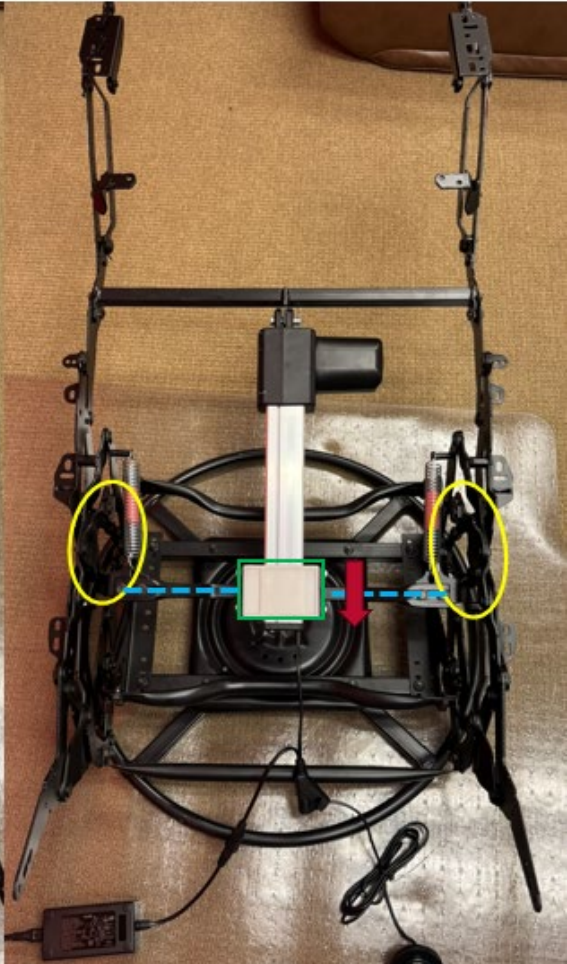
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	the motor bellcrank that includes a mid portion located between a first end and a second end, wherein the activator bar is rotatably coupled to the first end of the motor bellcrank;	
8[b]	a back-mounting link rotatably coupled to a respective seat-mounting plate, wherein the back-mounting link is configured to support the backrest; and	The Exemplary Covered Glider includes a back-mounting link (yellow) rotatably coupled (green) to a respective seat-mounting plate (blue), wherein the back-mounting link is configured to support the backrest.

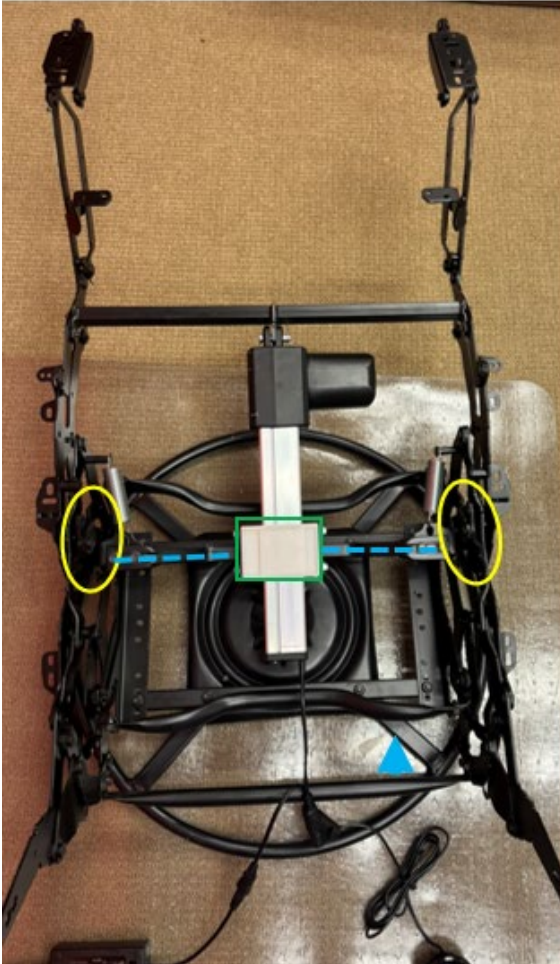
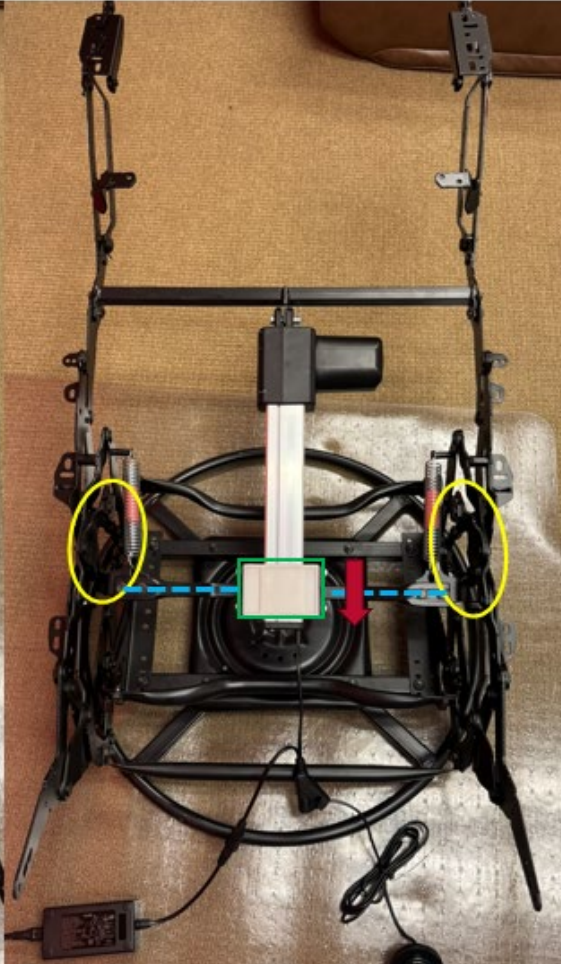
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
8[c]	a front lift link having a front end and a back end, wherein the back end of the front lift link is pivotably coupled to the back-mounting link, and wherein the mid portion of the motor bellcrank is rotatably coupled to a section between the front	The Exemplary Covered Glider includes a front lift link (pink) having a front end and a back end, wherein the back end of the front lift link is pivotably coupled to the back-mounting link (green), and wherein the mid portion of the motor bellcrank (yellow) is rotatably coupled to a section between the front end and the back end of the front lift link (pink).

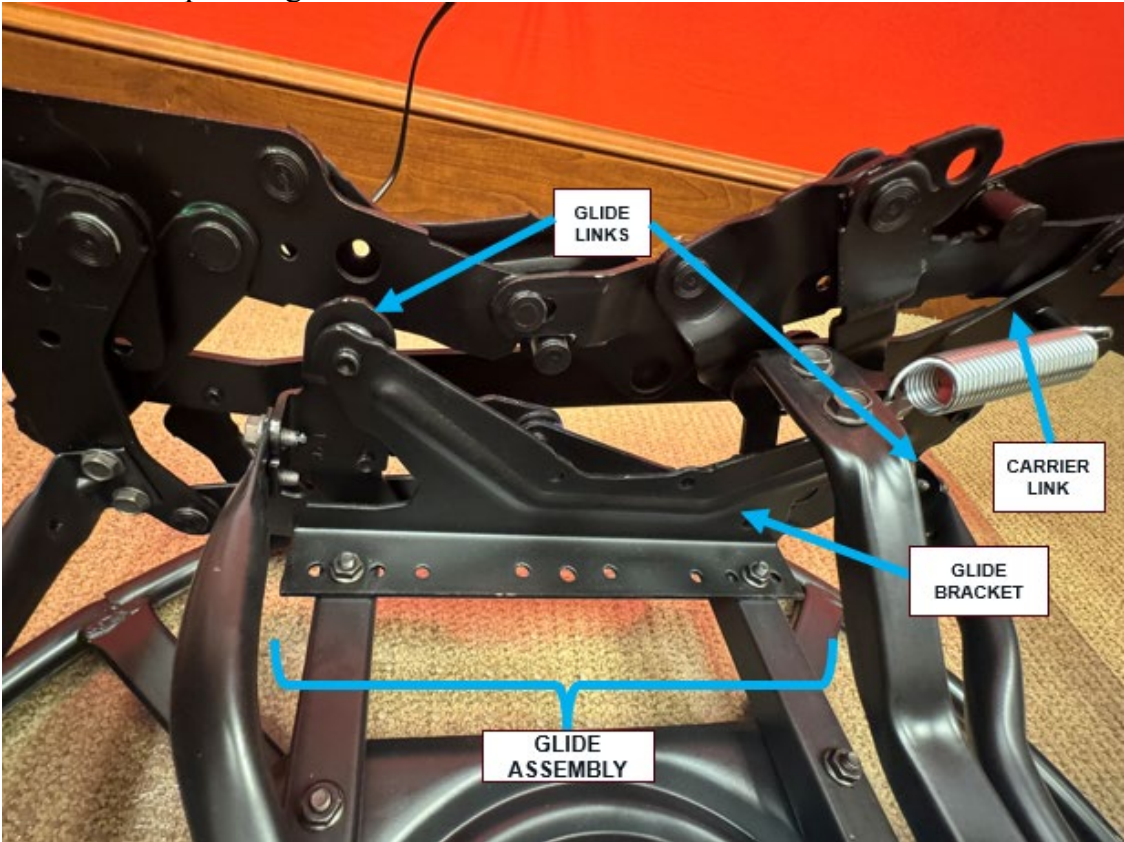
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	end and the back end of the front lift link.	 The photograph shows a mechanical assembly, likely a glider's lift mechanism. A pink line traces a path from a spring on the left, through a pivot point, and towards the right. A yellow dashed line highlights a curved section of the mechanism, identified as the mid-portion of a motor bellcrank. A green line continues the path from the pink line, ending at a pivot point on the right, identified as the back end of the front lift link. The front end of the front lift link is indicated by a blue arrow pointing to the start of the pink line. The entire mechanism is mounted on a dark, heavy-duty frame.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
9	9. The seating unit of claim 8, wherein the motor activator block is fixedly coupled to a section between the pair of ends of the activator bar.	The Exemplary Covered Glider's motor activator block (green) is fixedly coupled to a section between the pair of ends (white) of the activator bar (blue).

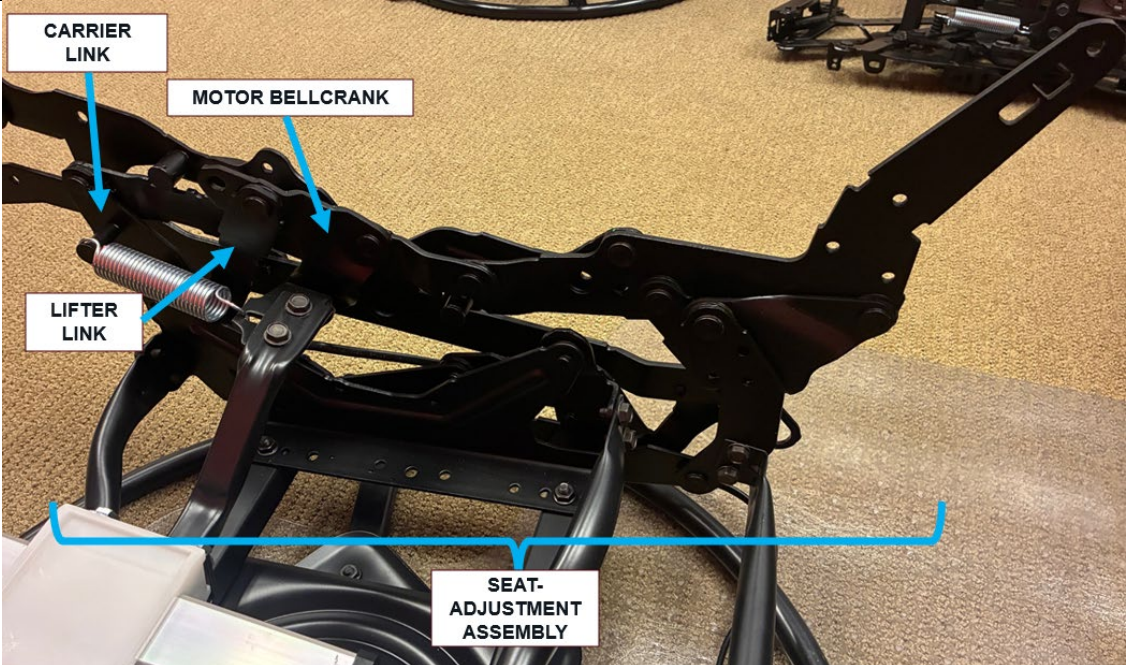
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
10	10. The seating unit of claim 9, wherein the second phase involves longitudinal translation of the motor activator block along the second travel section that creates a lateral thrust at the activator bar, thereby	The Exemplary Covered Glider's second phase involves longitudinal translation of the motor activator block (green) along the second travel section that creates a lateral thrust at the activator bar (blue) thereby invoking movement of the motor bellcrank, the movement of the motor bellcrank (yellow) controls adjustment of the seat-adjustment assembly between the extended position and the reclined position.

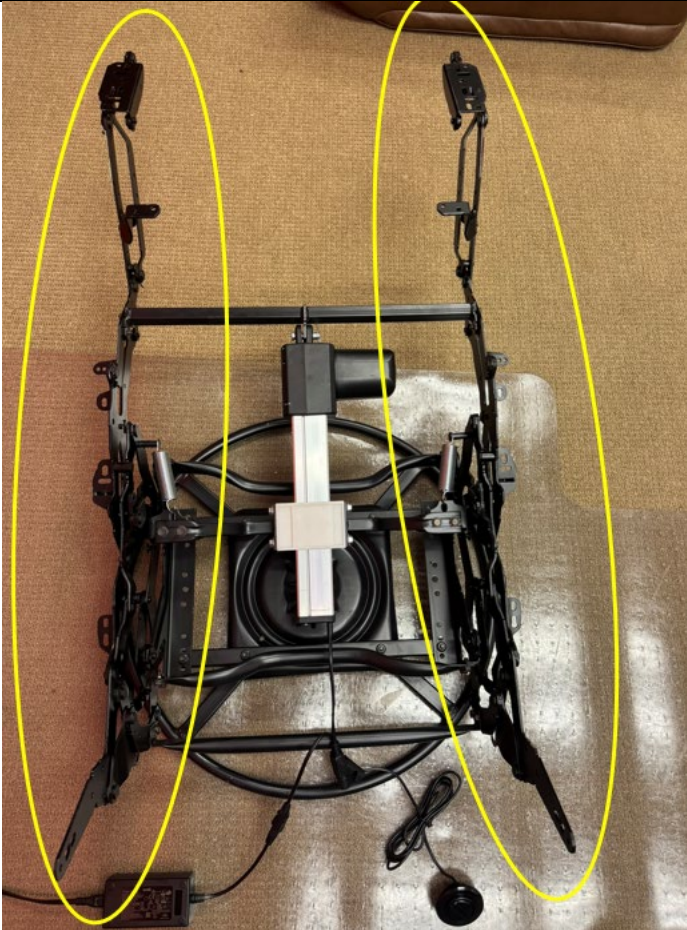
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	invoking movement of the motor bellcrank, the movement of the motor bellcrank controls adjustment of the seat-adjustment assembly between the extended position and the reclined position.	<u>Extended</u>  <u>Reclined</u> 

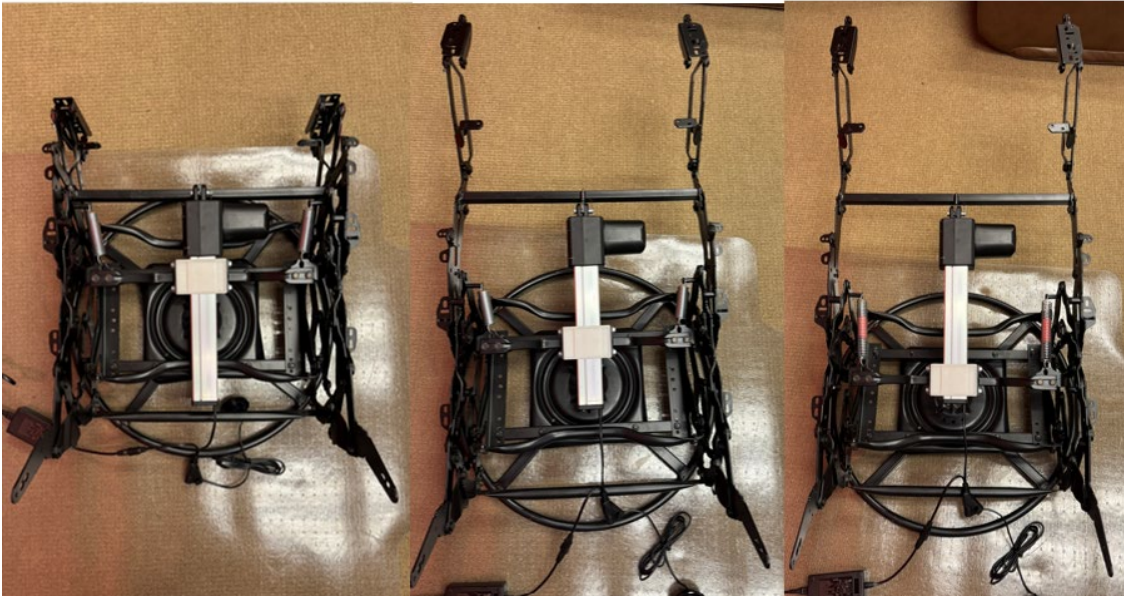
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
11	11. The seating unit of claim 10, wherein, during the stroke of the linear actuator within the second phase, the motor activator block moves rearward with respect to the pair of glide brackets while the motor mechanism remains generally fixed in space.	During the stroke of the linear actuator within the second phase, the Exemplary Covered Glider motor activator block moves rearward with respect to the pair of glide brackets while the motor mechanism remains generally fixed in space. <u>Extended</u>  <u>Reclined</u> 

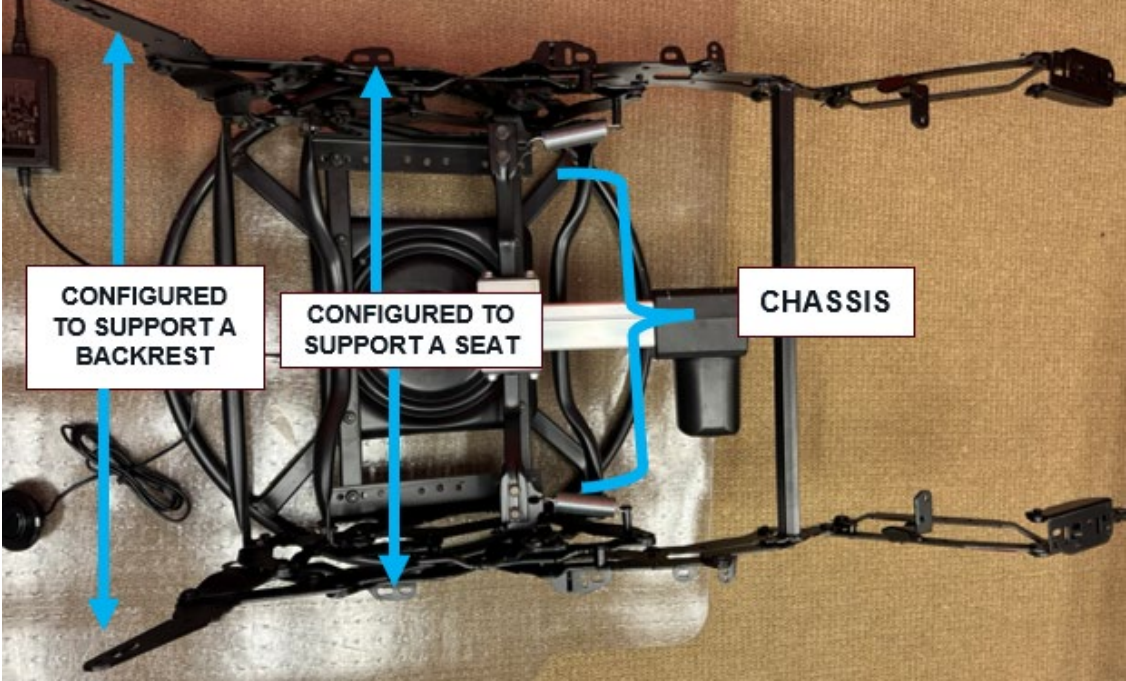
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
12	12. The seating unit of claim 11, wherein each of the linkage mechanisms further comprise a glide assembly that includes a pair of glide links that swing in concert to translate a carrier link of the seat-adjustment assembly forward and backward with respect to one of the pair of glide brackets.	The Exemplary Covered Glider's linkage mechanisms further comprise a glide assembly that includes a pair of glide links that swing in concert to translate a carrier link of the seat-adjustment assembly forward and backward with respect to one of the pair of glide brackets. 
13	13. The seating unit of claim 12, wherein the pair of	The Exemplary Covered Glider's linkage mechanisms are configured to translate the seat-mounting plates at a substantially consistent inclination angle

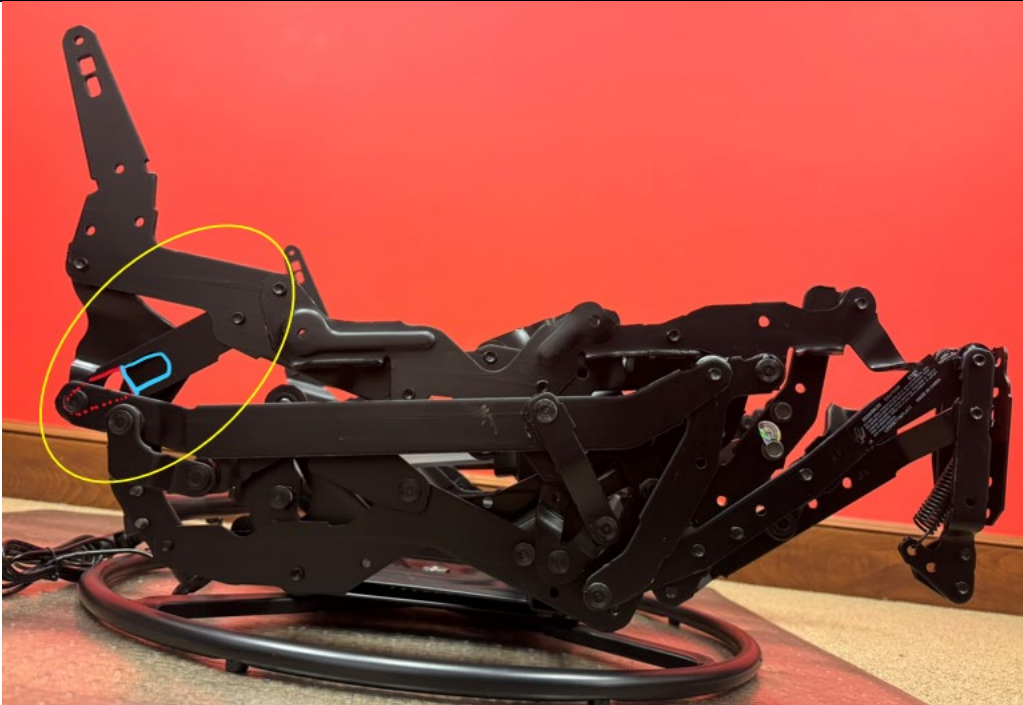
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	linkage mechanisms are configured to translate the seat-mounting plates at a substantially consistent inclination angle, with respect to the glide brackets, throughout the adjustment of the seating unit between the closed position, the extended position, and the reclined position.	(see blue lines), with respect to the glide brackets (see yellow lines), throughout the adjustment of the seating unit between the closed position, the extended position, and the reclined position.  The three photographs illustrate the glider mechanism in different states: Closed: The seat is in a compact, upright position. Extended: The seat is moved forward and slightly downward. Reclined: The seat is moved forward and tilted backward. In all three states, the blue line (glide bracket) maintains a consistent angle, while the yellow line (seat-mounting plate) translates the movement of the seat.
14	14. The seating unit of claim 13, wherein the seat-adjustment assembly further	The Exemplary Covered Glider's seat-adjustment assembly further comprises a lifter link that pivotably interconnects the second end of the motor bellcrank and the carrier link.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	comprises a lifter link that pivotably interconnects the second end of the motor bellcrank and the carrier link.	
15[p]	15. A pair of the generally mirror-image linkage mechanisms adapted to move a seating unit between a closed, an extended, and a reclined position, the seating unit having a chassis, a seat that is translatable with respect to the chassis, and a backrest that is angularly adjustable with respect to the seat	The Exemplary Covered Glider Mechanism includes a pair of the generally mirror-image linkage mechanisms adapted to move a seating unit between a closed, an extended, and a reclined position, the seating unit having a chassis, a seat that is translatable with respect to the chassis, and a backrest that is angularly adjustable with respect to the seat as shown below.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	seat, each of the linkage mechanisms comprising:	 The Exemplary Covered Glider Mechanism is adapted to move the Exemplary Covered Glider between a closed, an extended, and a reclined position as shown below.

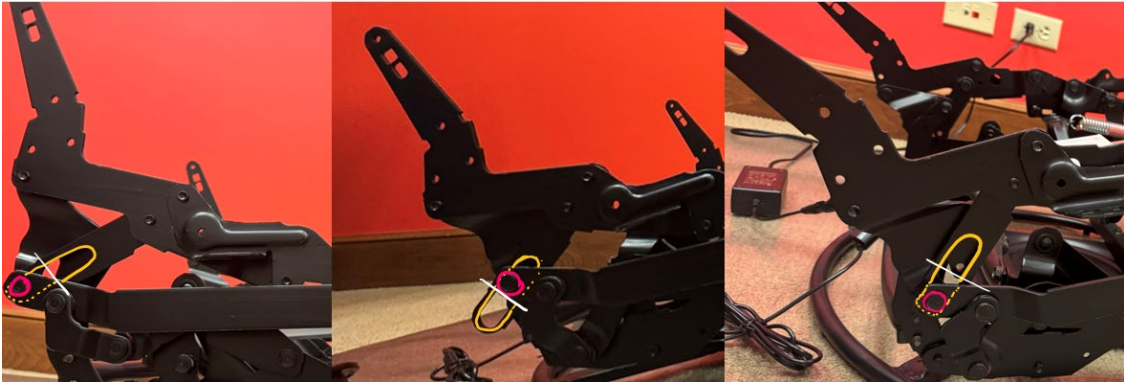
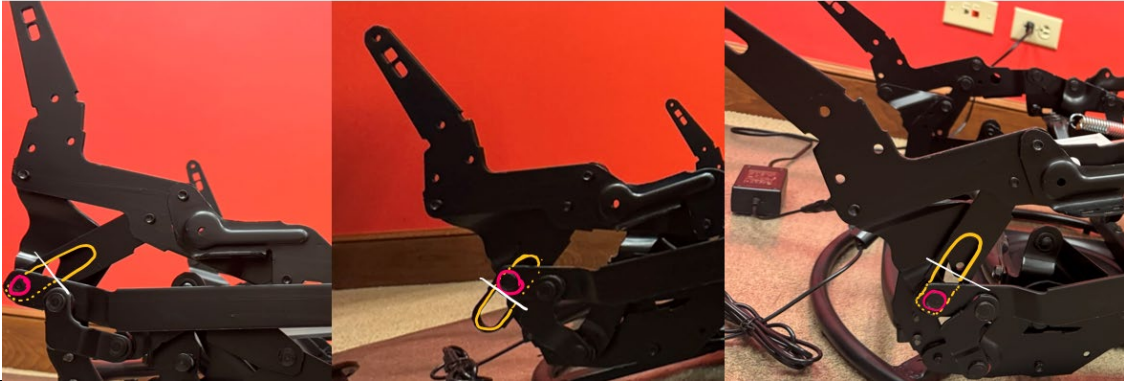
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		<u>Closed</u> <u>Extended</u> <u>Reclined</u>  The image displays three photographs of a mechanical glider device, likely a child's toy, shown in three different operational states: Closed, Extended, and Reclined. Each photograph shows the device from a top-down perspective, resting on a light-colored, textured surface. The device consists of a black metal frame with a central white rectangular component. In the 'Closed' state, the frame is compact. In the 'Extended' state, the frame is fully extended. In the 'Reclined' state, the frame is tilted back. The photographs are arranged side-by-side, with the 'Closed' state on the left, 'Extended' in the middle, and 'Reclined' on the right.

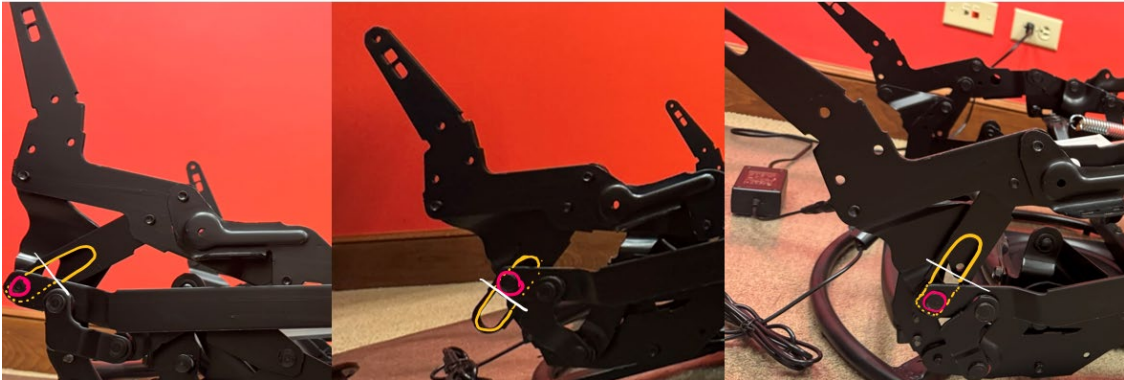
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
15[a]	a sequence link having a guide slot, wherein the guide slot represents an aperture formed within the sequence link, and wherein the guide slot includes a first region and a second region; and	The Exemplary Covered Glider Mechanism includes a sequence link having a guide slot (yellow), wherein the guide slot represents an aperture formed within the sequence link (blue/red), and wherein the guide slot includes a first region (blue) and a second region (red) as shown below.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		

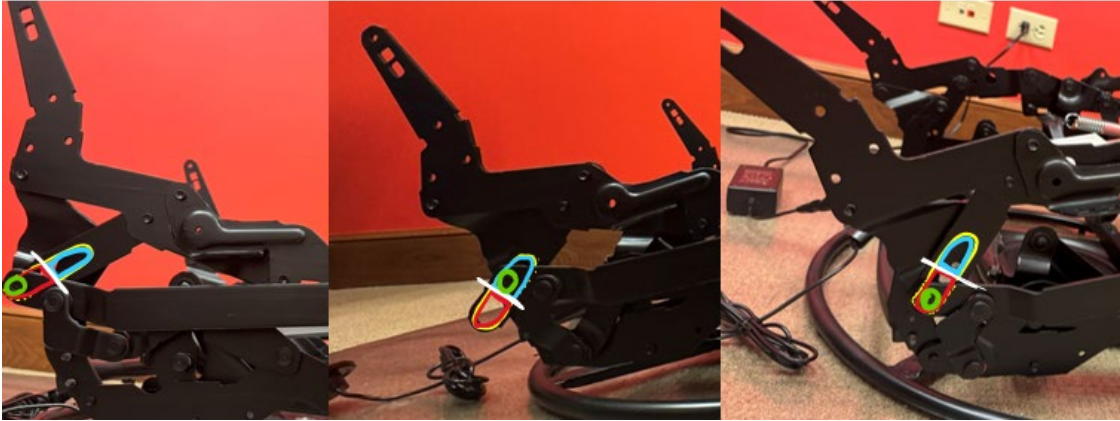


Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
15[b]	a sequence element that, at least partially, extends into the guide slot,	The Exemplary Covered Glider Mechanism includes a sequence element (yellow) that, at least partially, extends into the guide slot as shown below. 
15[c]	wherein the sequence element resides within the second region when the seating unit is adjusted to the reclined position, and when the seating unit is adjusted to the reclined position, the interaction of the sequence element and the sequence link resists adjustment of the seating unit to the closed position as shown below. The first (upper) and second (lower) regions are shown separated by a white line below.	The Exemplary Covered Glider Mechanism's sequence element (pink) resides within the second region when the seating unit is adjusted to the reclined position, and when the seating unit is adjusted to the reclined position, the interaction of the sequence element and the sequence link resists adjustment of the seating unit to the closed position as shown below. The first (upper) and second (lower) regions are shown separated by a white line below.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	link resists adjustment of the seating unit to the closed position,	<u>Closed</u> <u>Extended</u> <u>Reclined</u> 
15[d]	wherein the sequence element resides within the first region when the seating unit is adjusted to the extended position, and when the seating unit is adjusted to the extended position, the interaction of the sequence element and the sequence link allows adjustment of the seating unit to either the reclined position or to the closed position, and	The Exemplary Covered Glider Mechanism's sequence element (pink) resides within the first region when the seating unit is adjusted to the extended position, and when the seating unit is adjusted to the extended position, the interaction of the sequence element and the sequence link allows adjustment of the seating unit to either the reclined position or to the closed position as shown below. The first (upper) and second (lower) regions are shown separated by a white line below. <u>Closed</u> <u>Extended</u> <u>Reclined</u> 

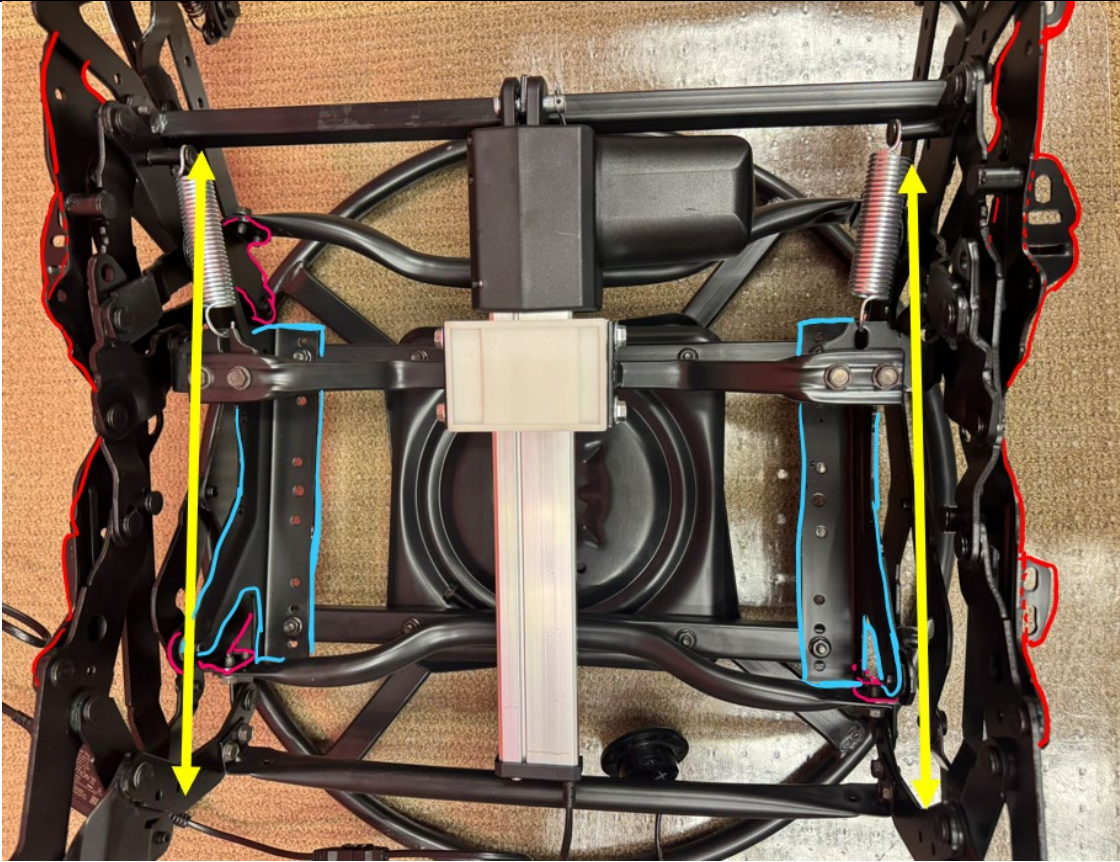
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
15[e]	wherein the sequence element resides within the second region when the seating unit is adjusted to the closed position, and when the seating unit is adjusted to the closed position, the interaction of the sequence element and the sequence link resists adjustment of the seating unit to the reclined position.	The Exemplary Covered Glider Mechanism's sequence element (pink) resides within the second region when the seating unit is adjusted to the closed position, and when the seating unit is adjusted to the closed position, the interaction of the sequence element and the sequence link resists adjustment of the seating unit to the reclined position as shown below. The first (upper) and second (lower) regions are shown separated by a white line below. <u>Closed</u> <u>Extended</u> <u>Reclined</u> 
16	16. The linkage mechanism of claim 15, further comprising a back-mounting link that is configured to support the backrest, wherein the sequence link includes an upper portion and a lower portion, and wherein the upper portion is	The Exemplary Covered Glider Mechanism includes a back-mounting link (green) that is configured to support the backrest, wherein the sequence link includes an upper portion and a lower portion (shown divided by a white line), and wherein the upper portion is rotatably coupled to the back-mounting bracket (circled in blue).

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	rotatably coupled to the back-mounting bracket.	<u>Closed</u> <u>Extended</u> <u>Reclined</u> 
17	17. The linkage mechanism of claim 16, wherein the sequence element fully extends through the guide slot, wherein the sequence element includes a cap that retains the sequence link onto the sequence element, and wherein the first region is above the second region within the guide slot.	The Exemplary Covered Glider Mechanism's sequence element fully extends through the guide slot (yellow), wherein the sequence element includes a cap (green) that retains the sequence link onto the sequence element, and wherein the first region (blue) is above the second region (red) within the guide slot as shown below.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		<u>Closed</u> <u>Extended</u> <u>Reclined</u> 
18[a]	18. The linkage mechanism of claim 17, further comprising: a seat-mounting plate that supports the seat, the seat-mounting plate rotatably coupled to the back-mounting link;	The Exemplary Covered Glider Mechanism includes a seat-mounting plate (green) that supports the seat and is rotatably coupled to the back-mounting link (blue) as shown in the image below.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
18[b]	a glide bracket fixedly mounted to the chassis, the glide bracket pivotably coupled to a pair of glide links that swing in concert to translate the seat-mounting plate forward and backward with respect to the glide bracket;	The Exemplary Covered Glider Mechanism includes a glide bracket (blue) fixedly mounted to the chassis (green) that is pivotably coupled to a pair of glide links (pink) that swing in concert to translate the seat-mounting plate (red) forward and backward with respect to the glide bracket as shown below.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The photograph shows a mechanical assembly, likely a glider mechanism, with several technical annotations overlaid. A horizontal yellow double-headed arrow spans the width of the main horizontal beam. A blue dashed line traces the upper profile of the beam and its connecting arms. A red dashed line traces the lower profile of the same components. A green dashed line outlines the base structure and support elements. A large, coiled metal spring is visible at the top of the assembly. The background is a textured, light-colored surface.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
18[c]	a rear pivot link rotatably coupled to the back-mounting link, wherein the rear pivot link is rotatably coupled to the sequence element.	The Exemplary Covered Glider Mechanism includes a rear pivot link (purple) rotatably coupled to the back-mounting link (green) and rotatably coupled to the sequence element (blue) as shown below.

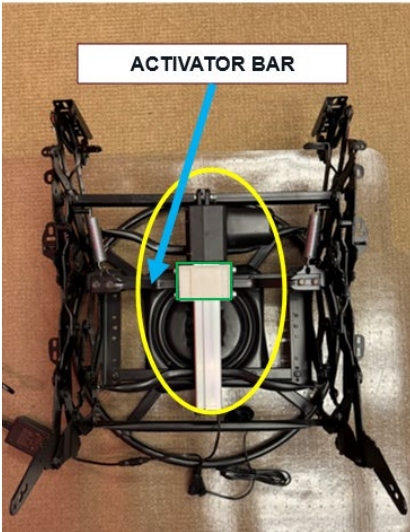
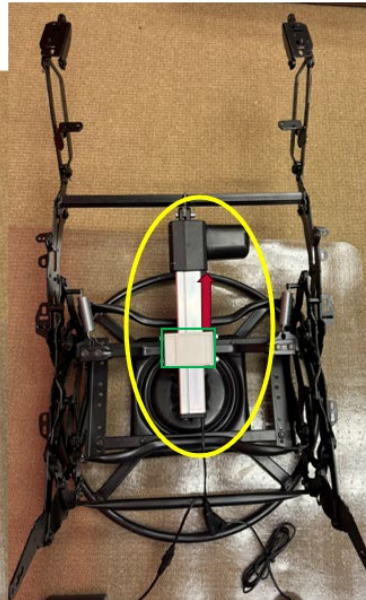
Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 A photograph of a black glider mechanism, likely a model airplane's wing or fuselage, resting on a wooden surface. The mechanism is outlined in green. A purple dashed line traces a path along the side of the mechanism, possibly indicating a hinge or a joint. A blue circle highlights a specific joint or pivot point at the bottom of the mechanism. A black cable is visible in the foreground, and a small black electronic component is attached to the mechanism.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The image shows a black metal glider mechanism, likely part of a vehicle's suspension or steering system. A green dashed line outlines the main horizontal beam and its upper mounting points. A purple dashed line outlines a lower bracket or control arm assembly. The mechanism is set against a light brown, textured background.
19[p]	19. A seating unit, comprising:	<i>See claim [1.p].</i>
19[a]	a pair of glide brackets in substantially parallel-spaced relation, wherein the glide brackets are rigidly	<i>See claim [1.a].</i>

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	supported above an underlying surface;	
19[b]	a pair of seat-mounting plates in substantially parallel-spaced relation, wherein each of the seat-mounting plates is disposed in an inclined orientation in relation to each of the glide brackets, respectively;	<i>See claim [1.b].</i>
19[c]	a pair of generally mirror-image linkage mechanisms each moveably interconnecting each of the seat-mounting plates to a respective glide bracket, and adapted to move the seating unit between a closed position, an extended position, and a reclined position, wherein each of the linkage mechanisms comprise:	<i>See claim [1.c].</i>
19[c-a]	(a) a back-mounting link rotatably coupled to a respective seat-mounting plate and configured to support a backrest of the seating unit;	<i>See claim [8.b].</i>

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
19[c-b]	(b) a sequence link rotatably coupled to the back-mounting link, wherein the sequence link includes a guide slot;	<i>See claim [16]. The sequence link is rotatably coupled (blue) to the back-mounting link (green), wherein the sequence link includes a guide slot (yellow).</i> <u>Closed</u> <u>Extended</u> <u>Reclined</u> 
19[c-c]	(c) a rear pivot link rotatably coupled to the back-mounting link at a pivot location rearward of the sequence link, wherein the rear pivot link is rotatably coupled to the sequence element, wherein the sequence element extends into the guide slot, and wherein interaction between the sequence element and the sequence link resists direct adjustment between the closed position and the reclined position;	<i>See claims [15.a], [15.b], [15.c], [15.e], and [18.c].</i>

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
19[c-d]	(d) a motor bellcrank having a mid portion located between a first end and a second end, wherein an activator bar is rotatably coupled to the first end of the motor bellcrank; and	<i>See claim [8.a].</i>
19[c-e]	(e) a front lift link having a front end and a back end, wherein the back end of the front lift link is pivotably coupled to the back-mounting link, and wherein the mid portion of the motor bellcrank is rotatably coupled to a section between the front end and the back end of the front lift link; and	<i>See claim [8.c].</i>
19[d]	a linear actuator, coupled to the activator bar, that is sequenced into a mutually exclusive first phase and second phase, wherein the first phase moves the linkage mechanisms between the closed position and the extended position, and wherein the second phase moves the linkage	The Exemplary Covered Glider includes a linear actuator (yellow), coupled to the activator bar, that is sequenced into a mutually exclusive first phase and second phase, wherein the first phase moves the linkage mechanisms between the closed position and the extended position, and wherein the second phase moves the linkage mechanisms between the extended position and the reclined position.

Claim	U.S. Patent No. 8,398,168	Exemplary Covered Glider with Exemplary Covered Glider Mechanism		
	mechanisms between the extended position and the reclined position.	<u>Closed</u> 	<u>Extended</u> 	<u>Reclined</u> 