

Exhibit 13

Exemplary Covered Rocker that Practices Ultra-Mek's U.S. Patent No. 8,016,348

Powered Rocker-Recliner with the Ultra-Mek 7800 Mechanism

The following chart illustrates how an Exemplary Powered Rocker-Recliner (the “Exemplary Covered Rocker”) containing Ultra-Mek’s 7800 Mechanism (the “Exemplary Covered Rocker Mechanism”) falls within the claim scope of U.S. Patent No. 8,016,348. The Exemplary Covered Rocker and/or Exemplary Covered Rocker Mechanism are exemplary products only and illustrate the practice of the above-referenced patent. The following chart contains highlighting, color-coding, and other annotations which are intended to assist the reader in identifying relevant elements, and are not intended to be binding or limiting. Complainants reserve the right to modify the structures associated with identified elements, to identify other functions for identified structures, and/or to adjust the identification of one or more components identified herein.

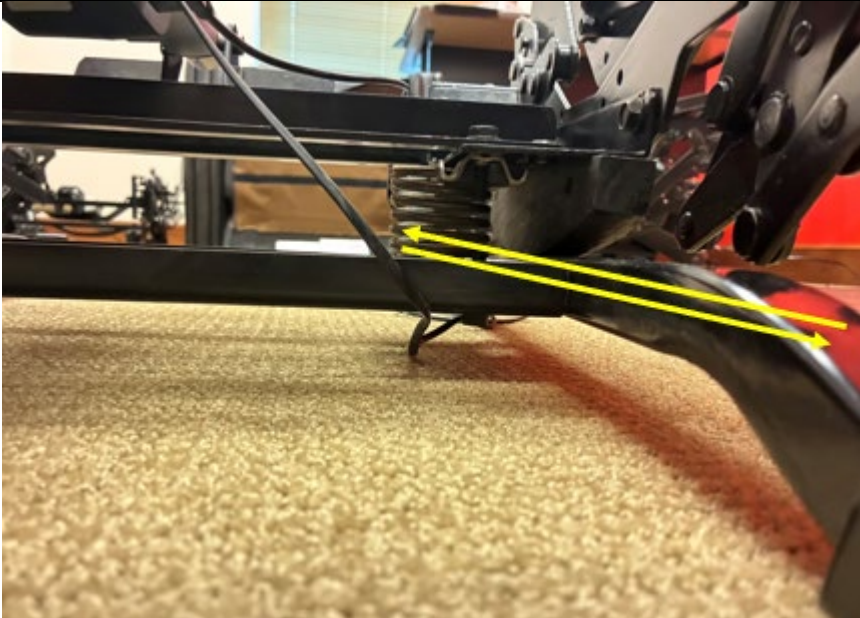
Complainants reserve the right to offer additional evidence to prove that the Exemplary Covered Rocker(s) practice the claims below in their expert reports, and in motions and at trial. Complainants reserve the right to supplement, amend, or modify the foregoing based on new information that becomes available during discovery, the exchange of proposed claim constructions, and/or issuance of a claim construction order.

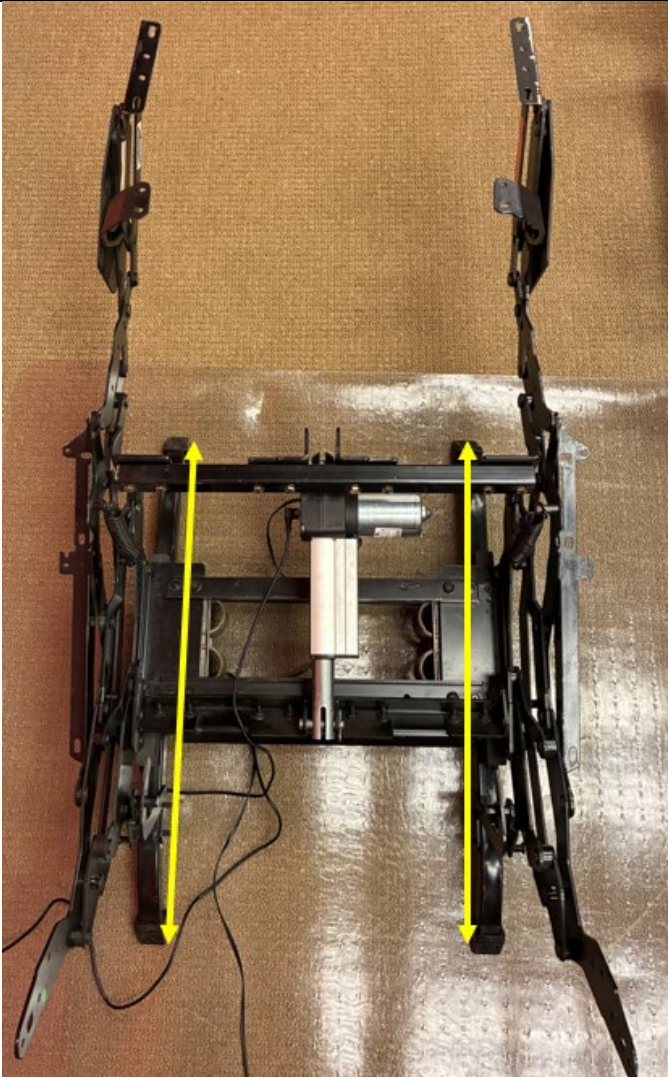
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
1[p]	1. A seating unit, comprising:	The Exemplary Covered Rocker is a seating unit that comprises an Ultra-Mek 7800 mechanism, as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The image shows a mechanical assembly, likely a rocker mechanism, constructed from black-painted metal. It features a central horizontal silver-colored cylinder, possibly a piston or a shaft, which is connected to various levers and arms. Two coiled springs are visible near the center. The mechanism is mounted on a base that allows it to pivot or rock. It is placed on a light brown, textured carpet. In the background, a wooden baseboard and a wall are visible. To the right, some electrical wires and a power strip are partially seen.

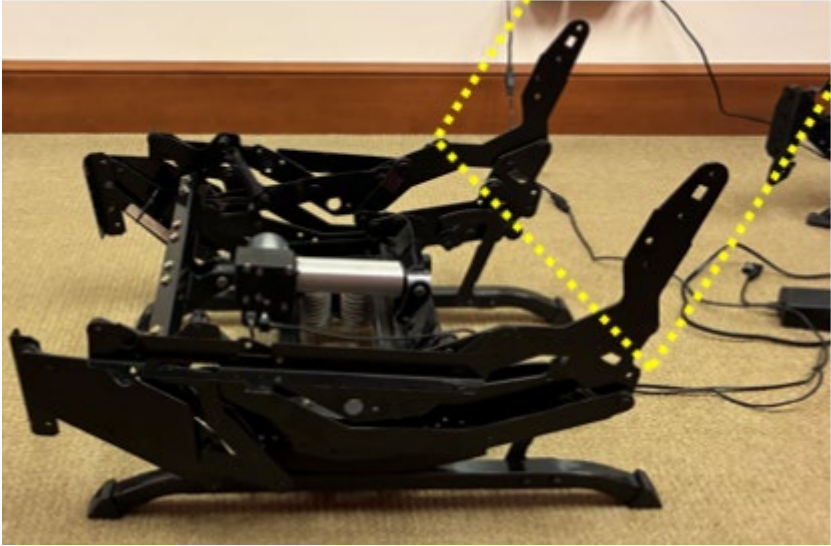
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[a]	a base unit with a first bearing surface;	The Exemplary Covered Rocker includes a base unit as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 BASE UNIT The base unit includes multiple bearing surfaces including a first bearing surface on the upper portion of the base unit.

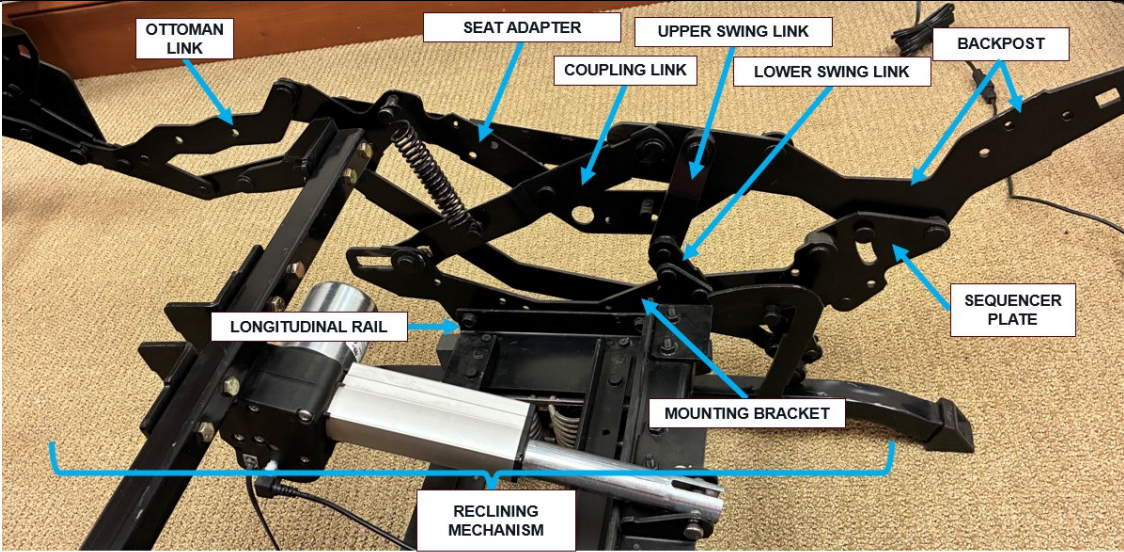
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		

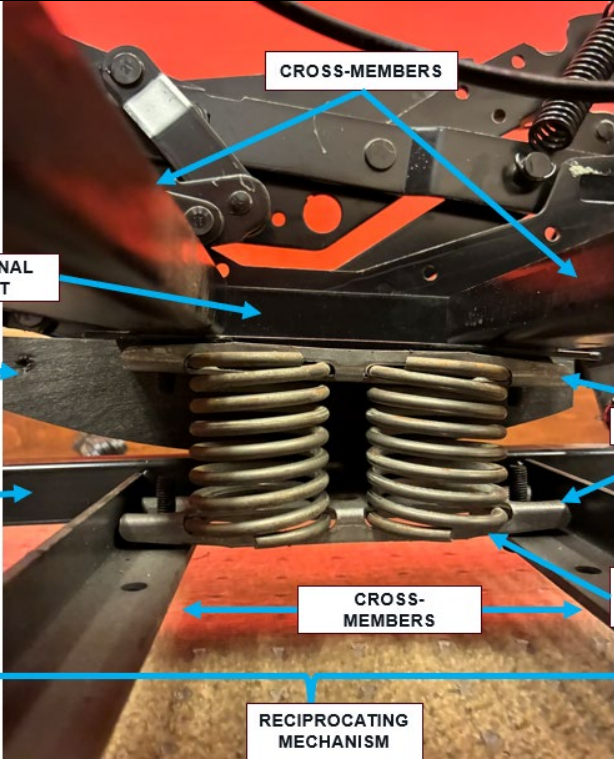
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		

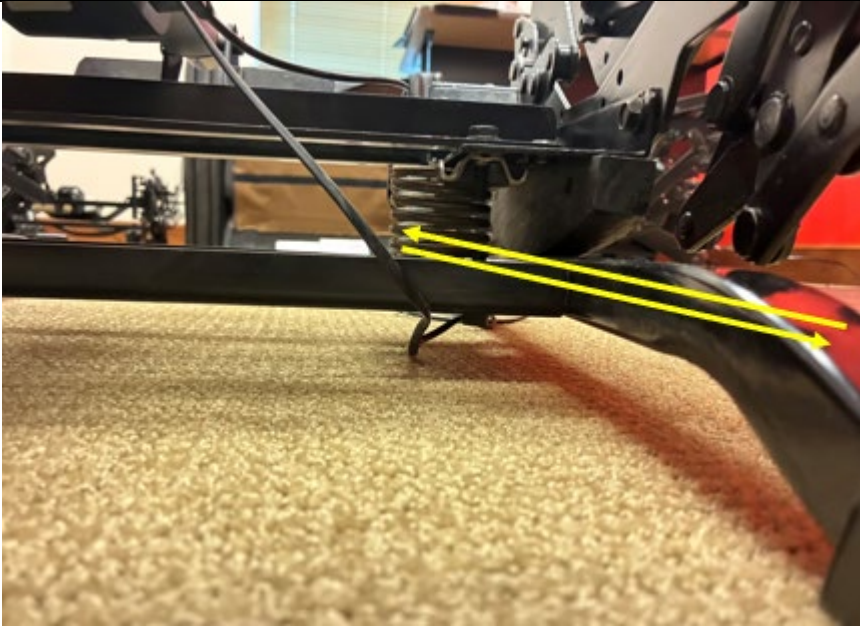
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
1[b]	a generally horizontally-disposed seat positioned above the base unit;	The Exemplary Covered Rocker includes a generally horizontally-disposed seat positioned above the base unit, which would be attached to the Exemplary Covered Rocker Mechanism and positioned approximately as shown below. 
1[c]	a generally upright backrest positioned above the base unit and substantially rearward of the seat;	The Exemplary Covered Rocker includes a generally upright backrest positioned above the base unit and substantially rearward of the seat, which would be attached to the Exemplary Covered Rocker Mechanism and positioned approximately as shown below.

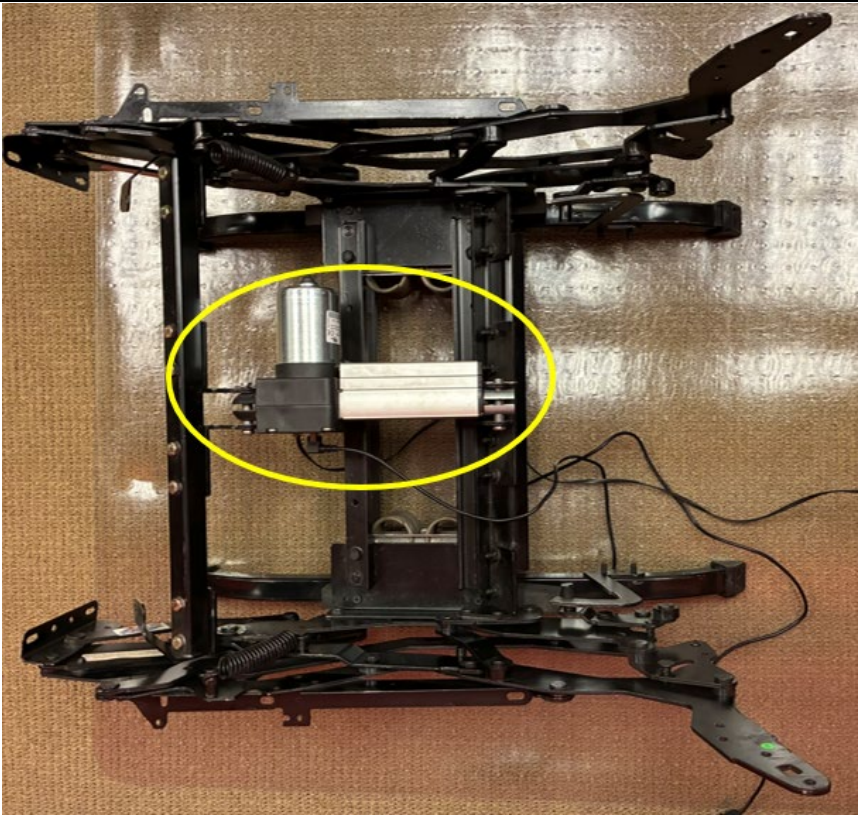
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[d]	an extendable ottoman;	The Exemplary Covered Rocker includes an extendable ottoman, which would be attached to the Exemplary Covered Rocker Mechanism and positioned approximately as shown below.

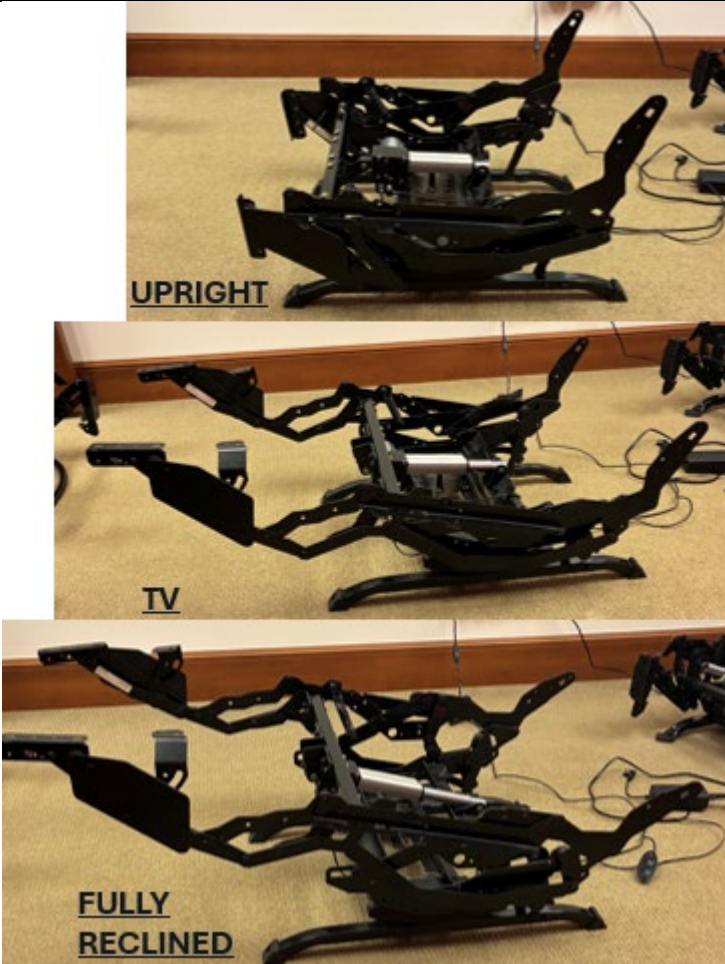
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[e]	a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links;	The Exemplary Covered Rocker includes a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit as shown below. The reclining mechanism further comprises a plurality of pivotally interconnected links, as shown below.

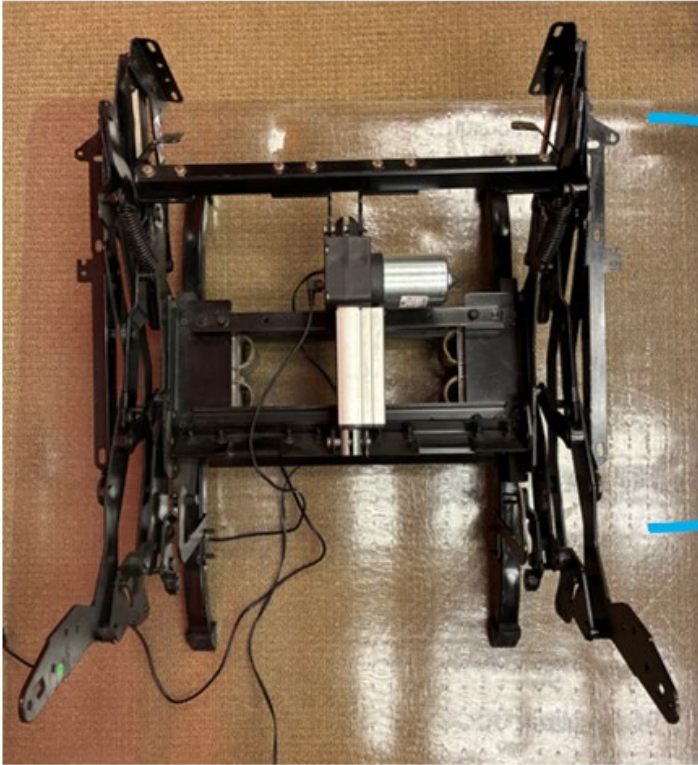
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[f]	a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and	The Exemplary Covered Rocker includes a reciprocating mechanism attached to the base unit and the reclining mechanism that is configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force as shown below.

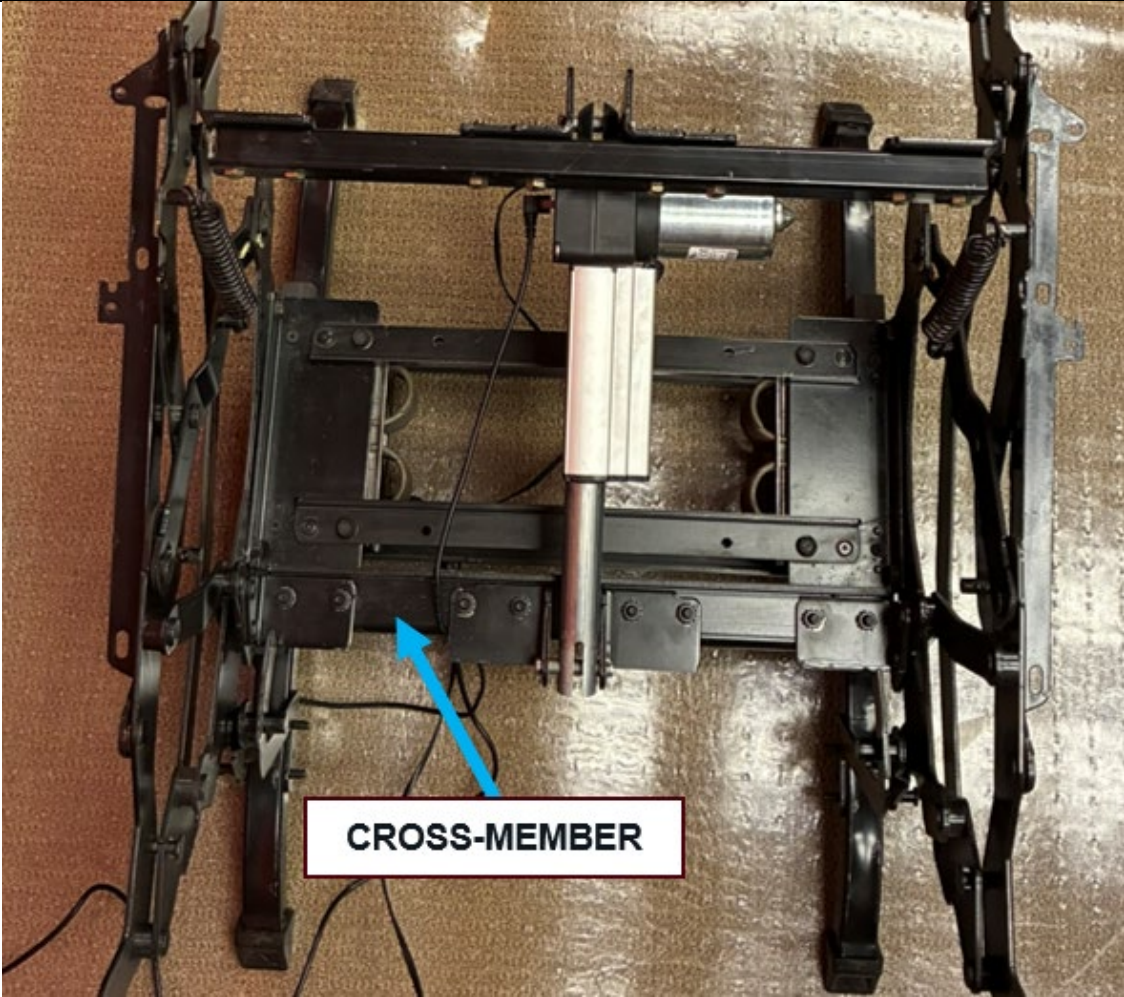
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The reciprocating mechanism comprises at least the rocker cam, rocker spring assembly, and brackets shown above. As shown below, when a longitudinally-directed force is applied, the reciprocating mechanism allows the chair to rock forward and backward.

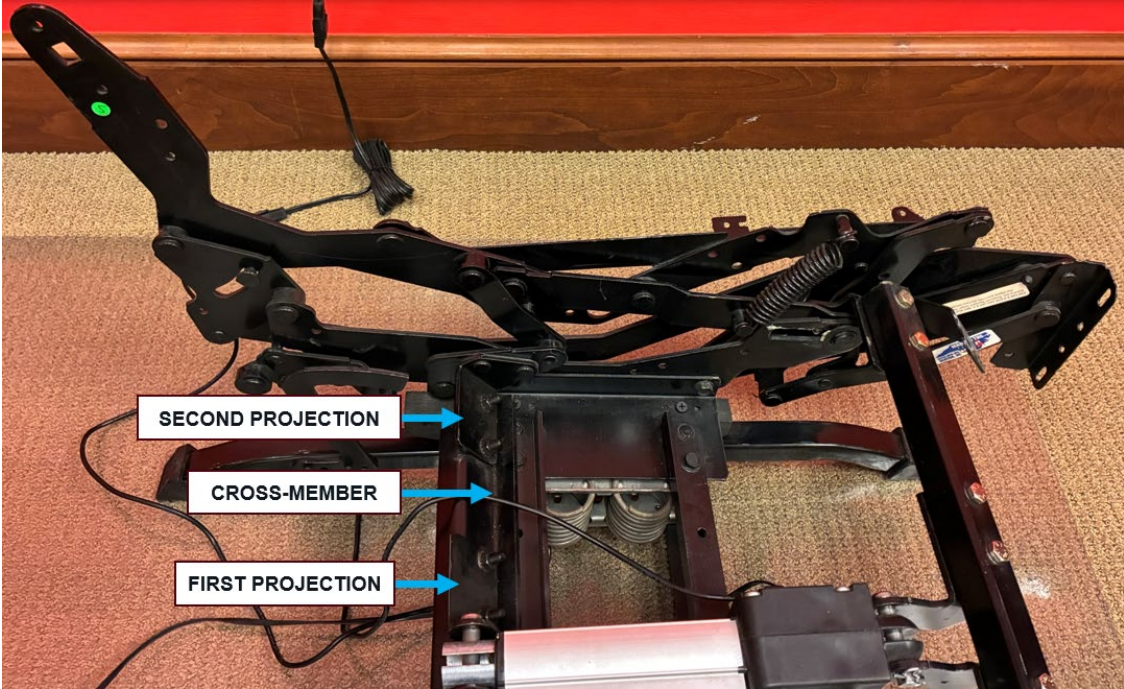
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[g]	a power actuating unit attached to the reclining mechanism, the actuating unit configured to move the seating unit between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman is generally vertically disposed and positioned below the seat, (b)	The Exemplary Covered Rocker includes a power actuating unit attached to the reclining mechanism that is configured to move the seating unit between an upright position, an intermediate TV position, and a fully reclined position. The power actuating unit is shown below.

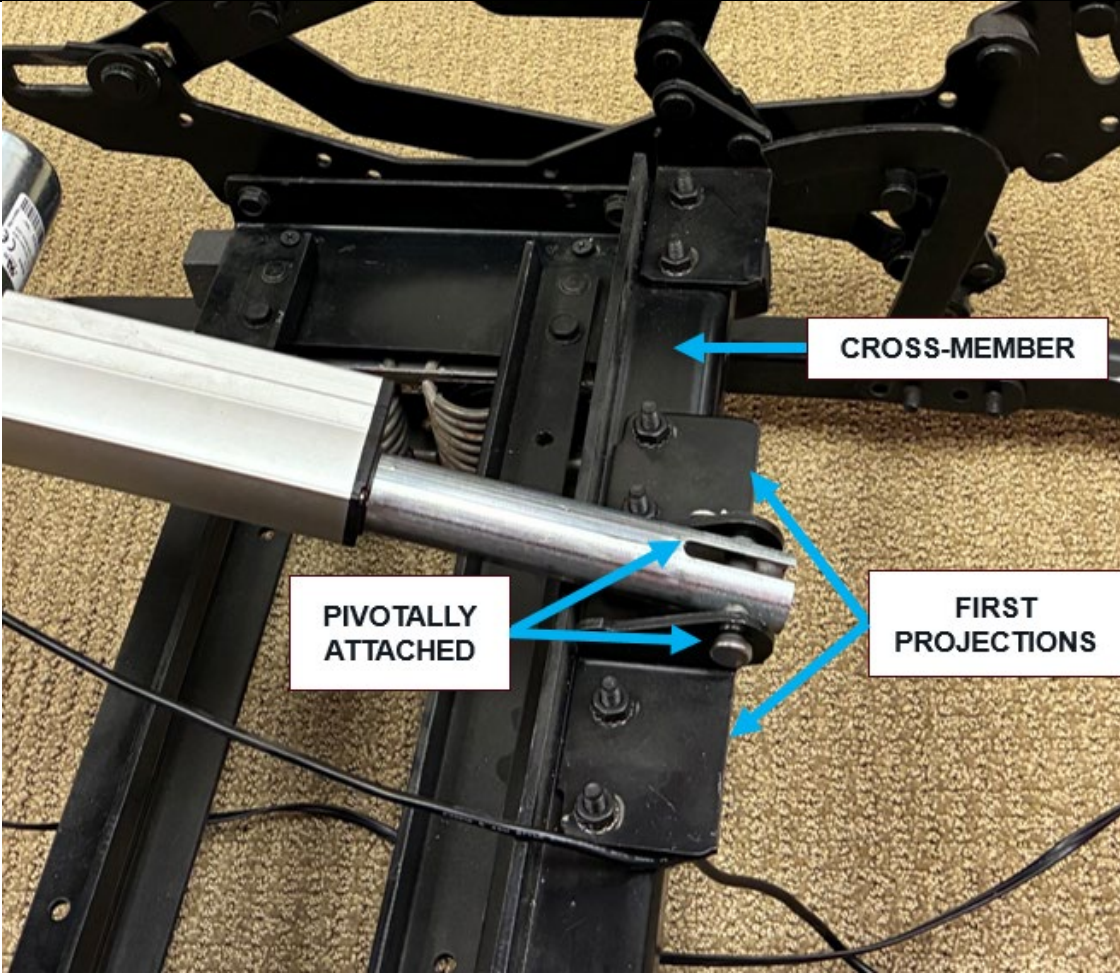
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;	 The photos below depict the three positions between which the Exemplary Covered Rocker may be moved by the power actuating unit.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The image contains three photographs of a mechanical rocker assembly, likely for a chair or vehicle seat, demonstrating its range of motion. The top photograph shows the assembly in an 'UPRIGHT' position. The middle photograph shows it in a 'TV' position, which is a reclined state. The bottom photograph shows it in a 'FULLY RECLINED' position. Each photograph is labeled with its respective position in blue text at the bottom left of the image. The assembly consists of a black metal frame with various joints and a central actuating unit.
1[h]	wherein the actuating unit is attached to an actuating	The Exemplary Covered Rocker's actuating unit (not labeled) is attached to an actuating mechanism as shown below.

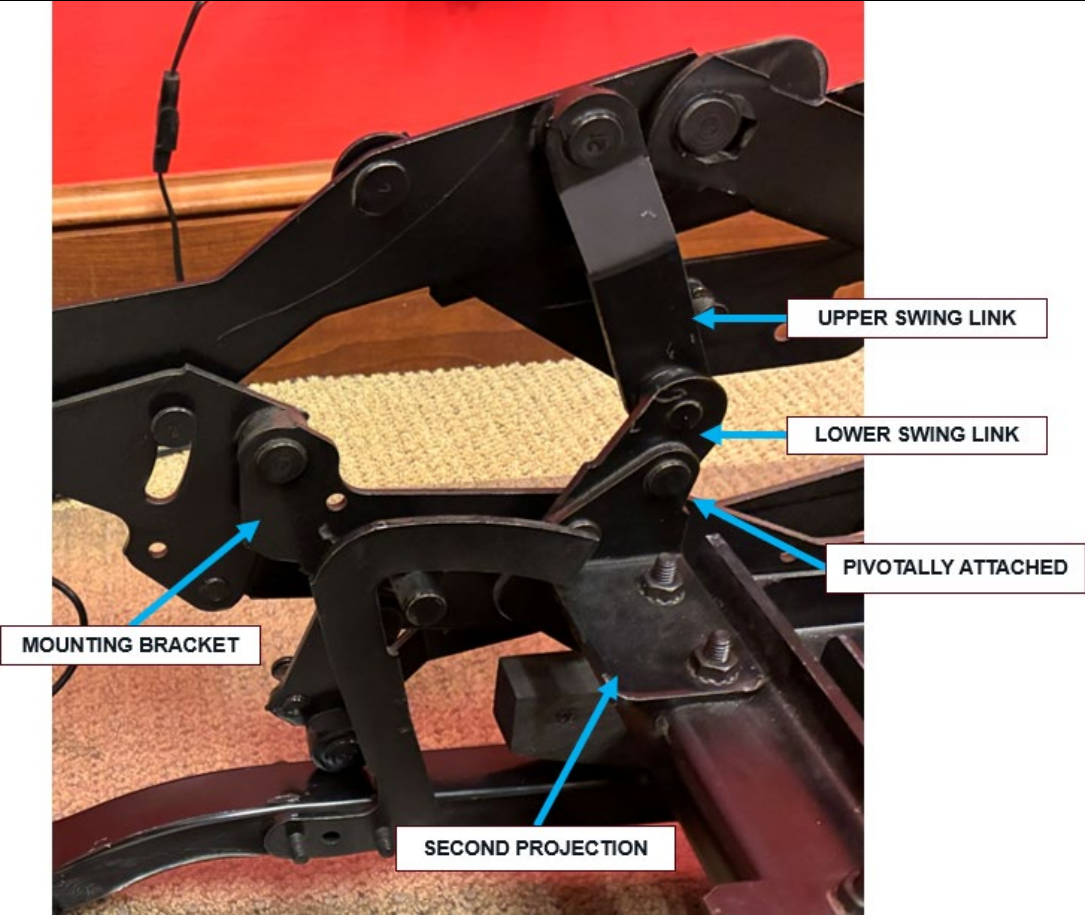
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	mechanism, the actuating mechanism comprising:	
1[i]	a cross-member extending transversely across the seating unit;	The Exemplary Covered Rocker's actuating mechanism includes a cross-member extending transversely across the seating unit as shown below.

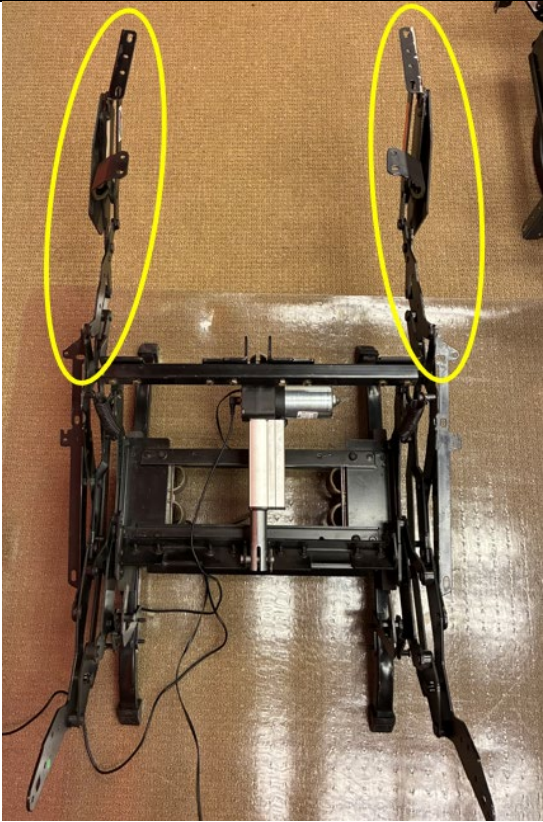
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[j]	first and second projections fixed to the cross-member;	The Exemplary Covered Rocker's actuating mechanism includes first and second projections fixed to the cross-member as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[k]	wherein the first projection is pivotally attached to the actuating unit; and	The Exemplary Covered Rocker's first projection is pivotally attached to the actuating unit (not labeled) as shown below.

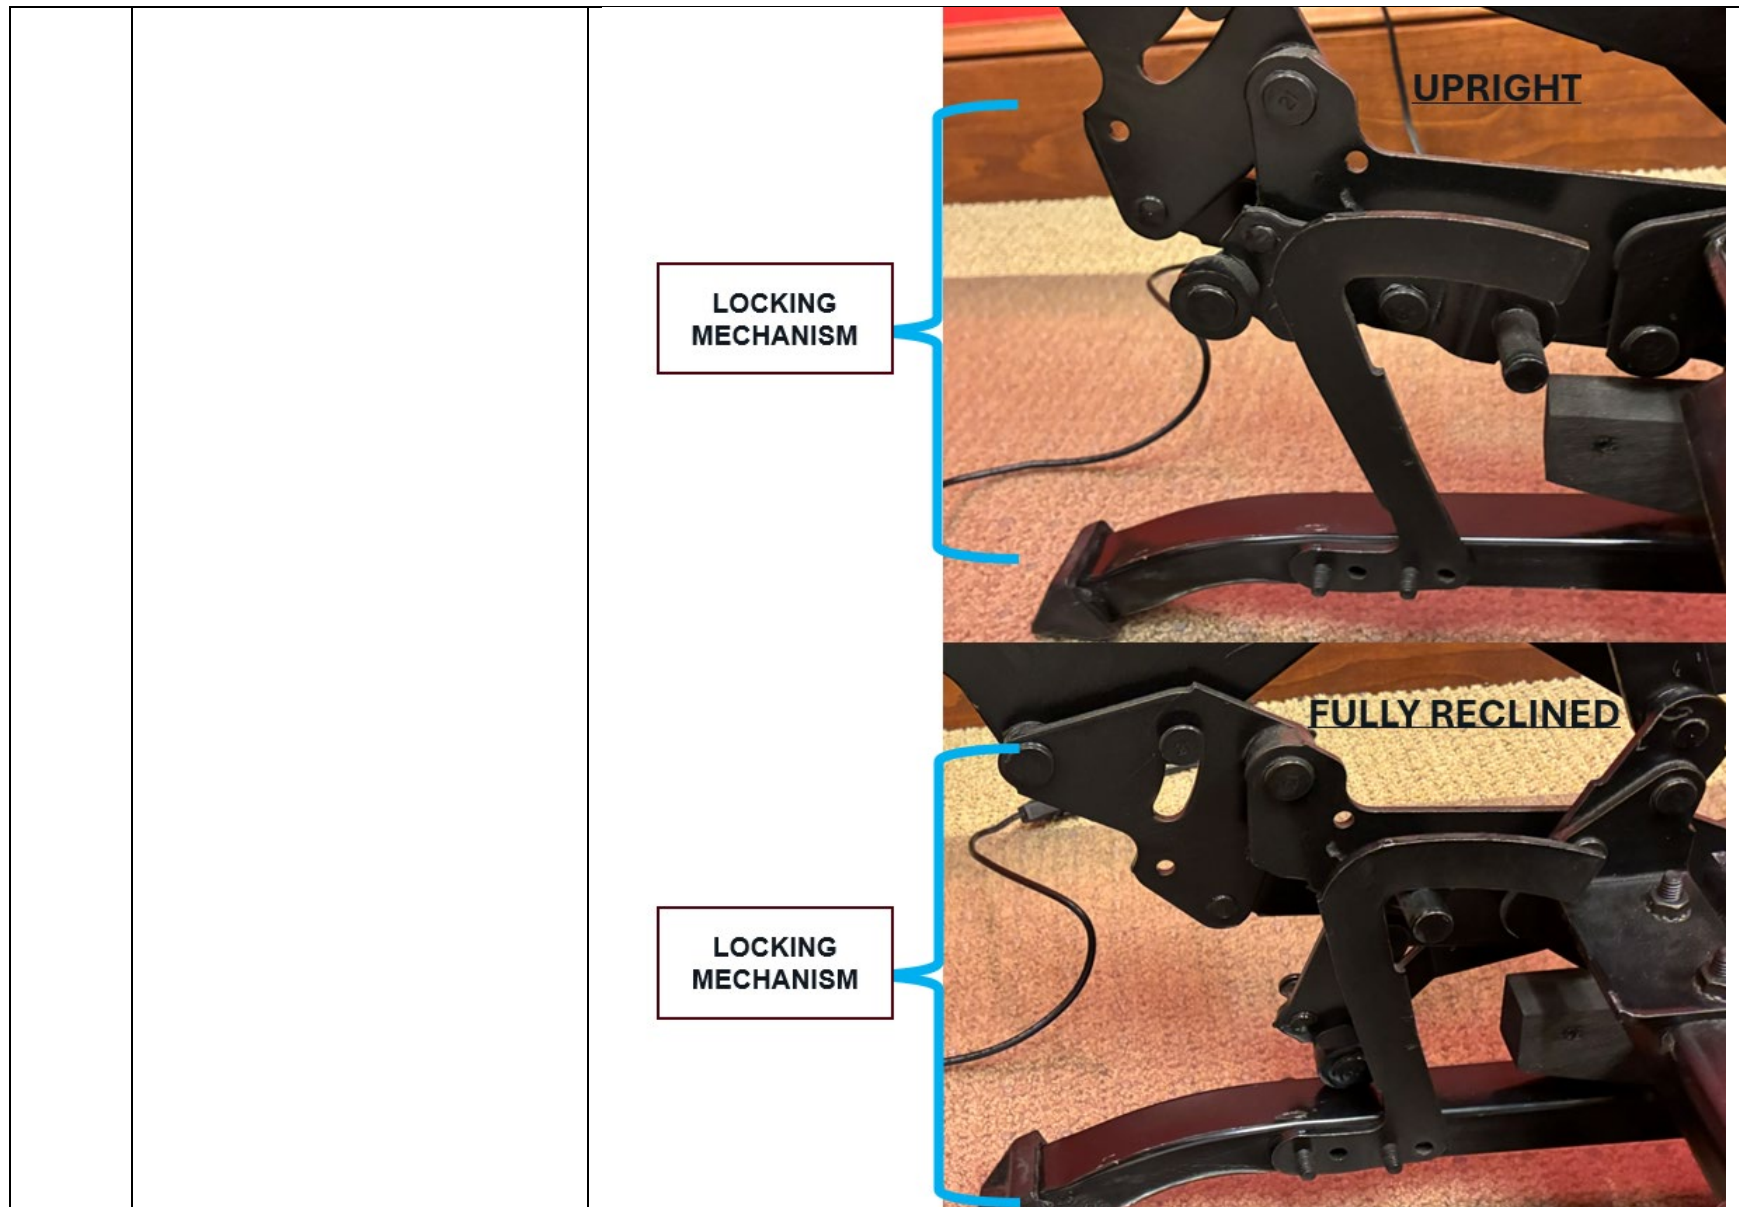
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The first projection is attached to the actuating unit such that the first projection and actuating unit can pivot within the mechanism.

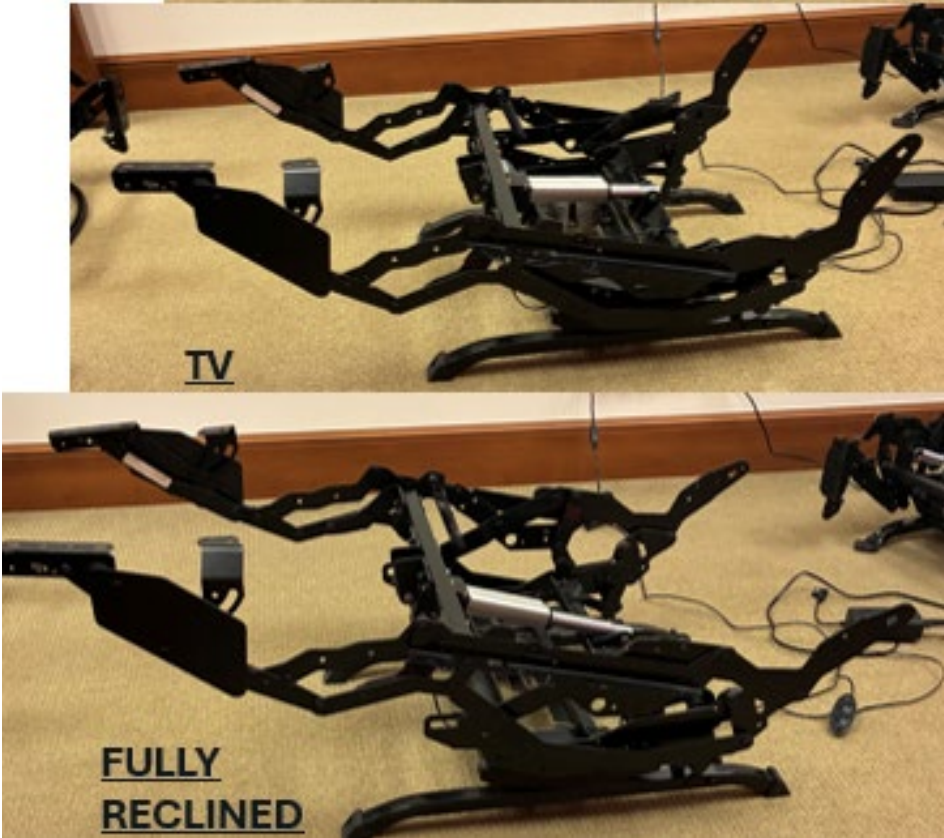
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
1[1]	wherein the second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism.	The Exemplary Covered Rocker's second projection is pivotally attached to a lower swing link, and the lower swing link is pivotally attached to the upper swing link and a mounting bracket that is attached to the reciprocating mechanism as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
2	2. The seating unit defined in claim 1, wherein the reclining mechanism includes a pantographic linkage on	The Exemplary Covered Rocker's reclining mechanism includes a pantographic linkage on which the ottoman is mounted as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	which the ottoman is mounted, and wherein in the TV and fully reclined positions, pivots between links of the pantographic linkage form a near over-center arrangement that locks the ottoman in position.	 When the Exemplary Covered Rocker is in the intermediate TV and fully reclined positions, the ottoman is locked into position by the near over-center arrangement of pivots between the ottoman links.

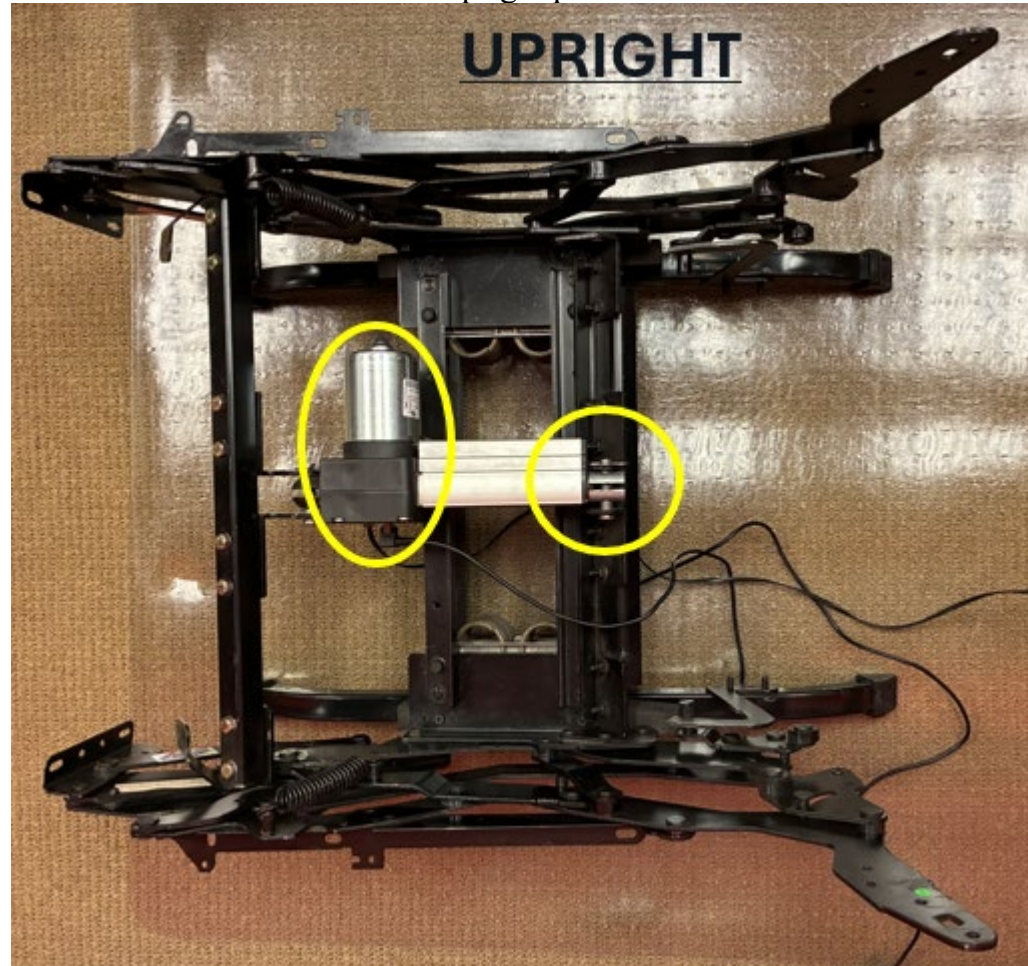
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
3	3. The seating unit defined in claim 1, further comprising a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions.	The Exemplary Covered Rocker includes a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions as shown below.



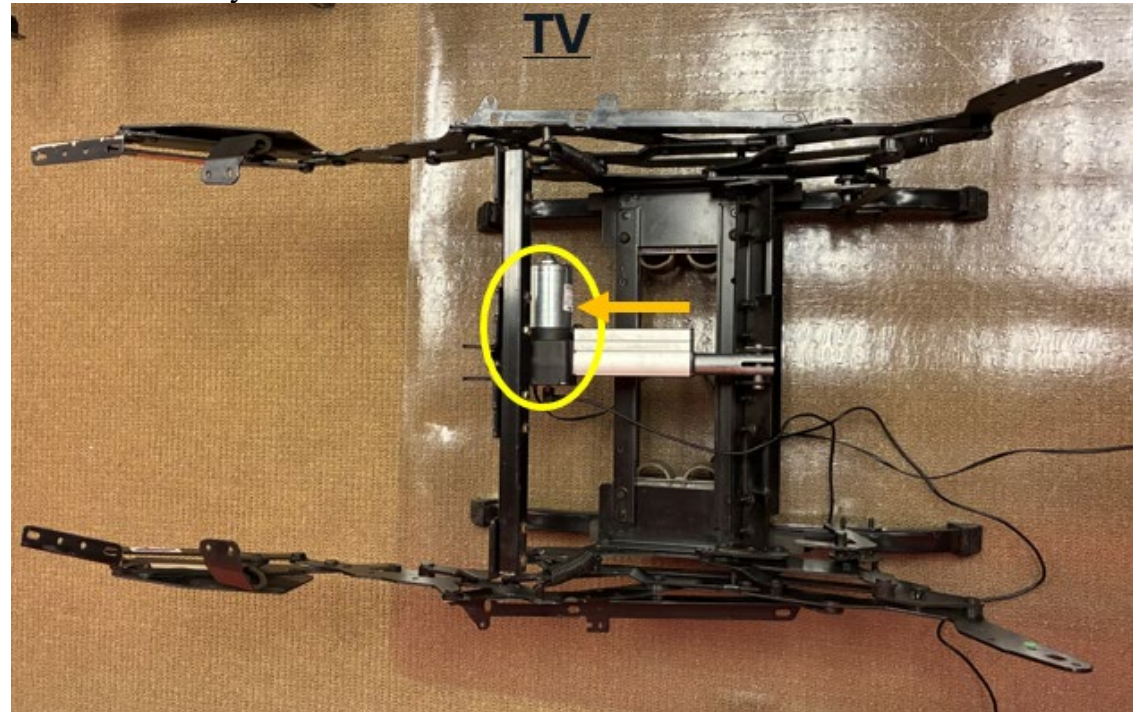
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
4	4. The seating unit defined in claim 1, wherein the seat rises in moving from the TV position to the fully reclined position.	The Exemplary Covered Rocker's seat rises in moving from the TV position to the fully reclined position as shown below. 

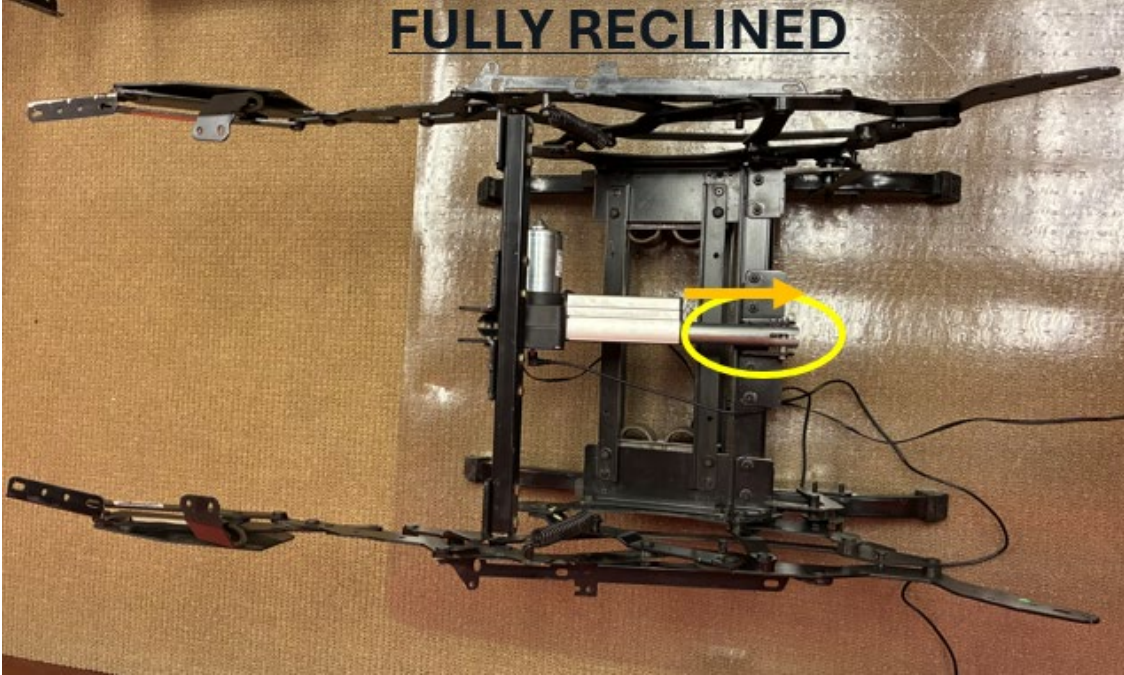
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
7	7. The seating unit defined in claim 1, wherein the power actuating unit includes opposed first and second ends, and wherein the first end of the power actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the power actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.	The Exemplary Covered Rocker's linear actuating unit includes opposed first and second ends where the first end of the linear actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the linear actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.

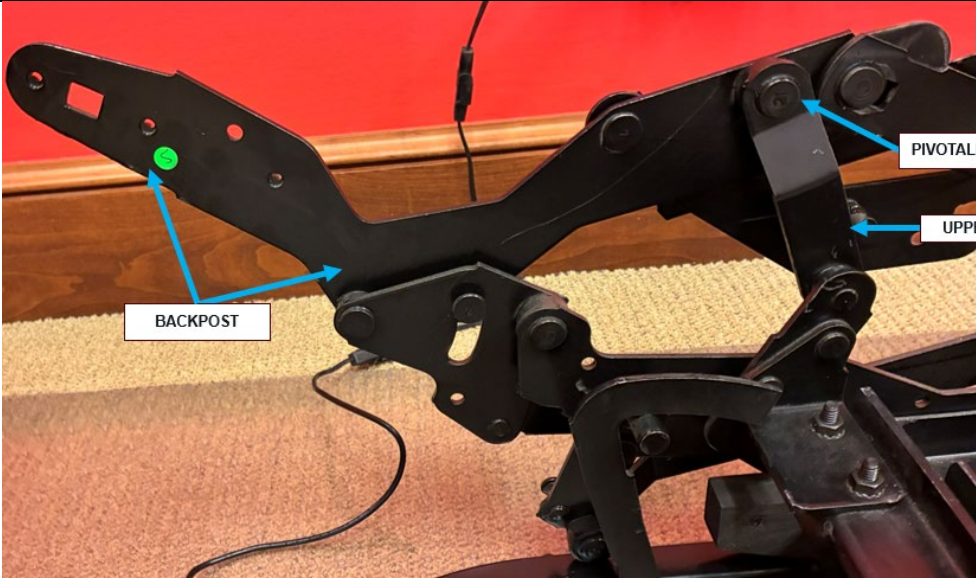
As shown below, the linear actuating unit includes opposed first and second ends. The chair below is in the upright position.

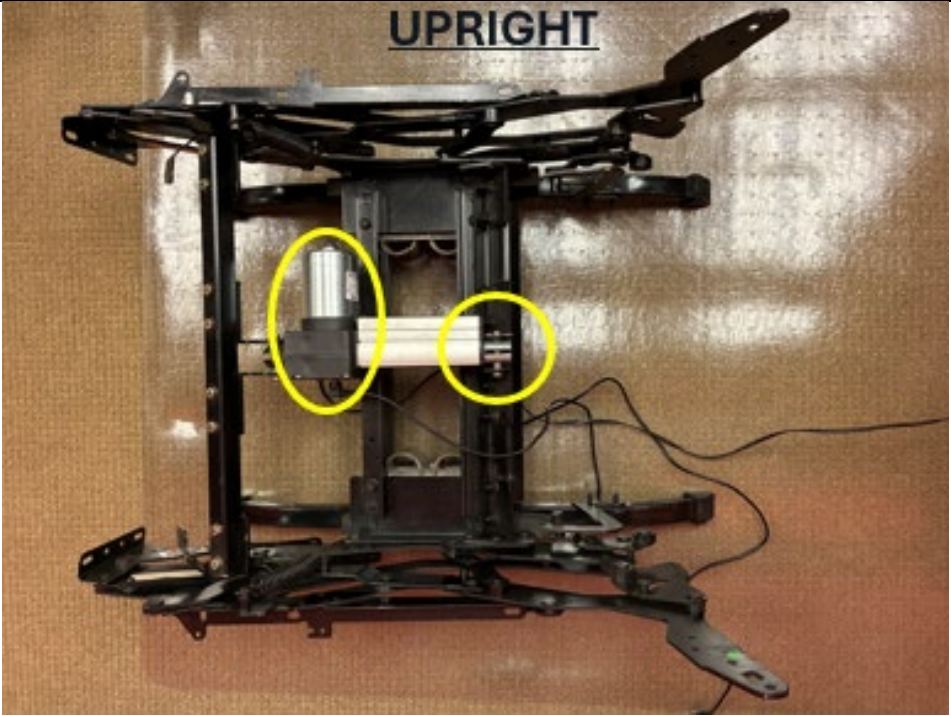


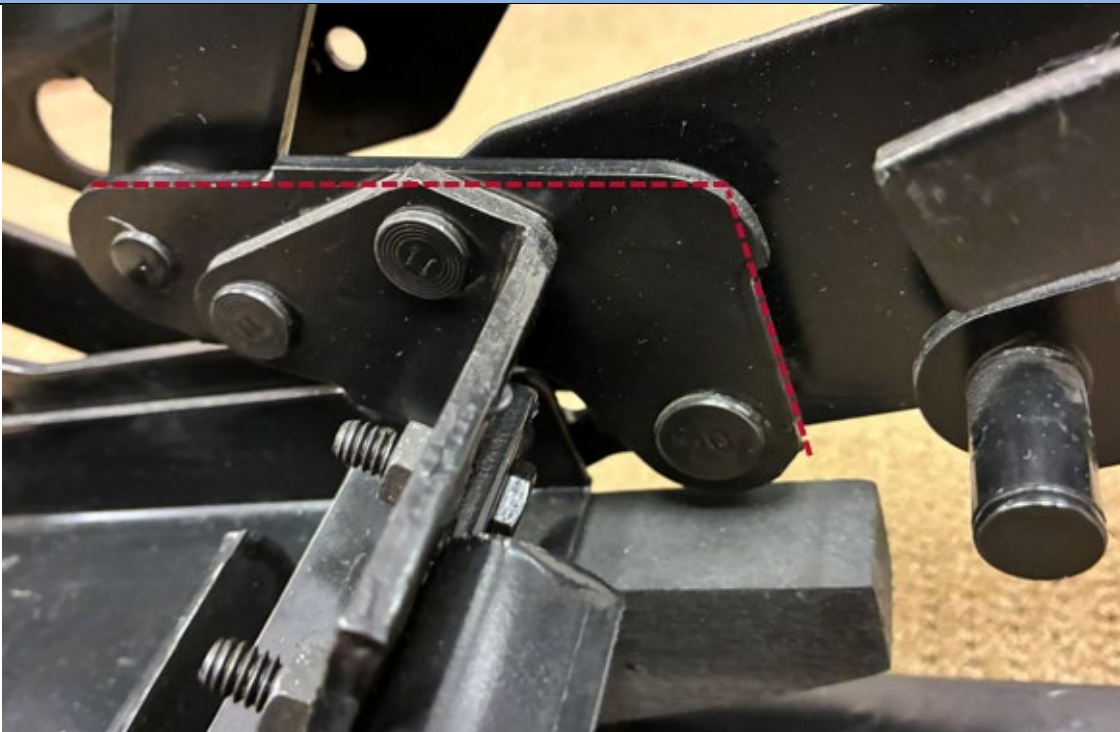
When the chair moves from the upright to intermediate TV position, the first end moves forwardly as shown below.

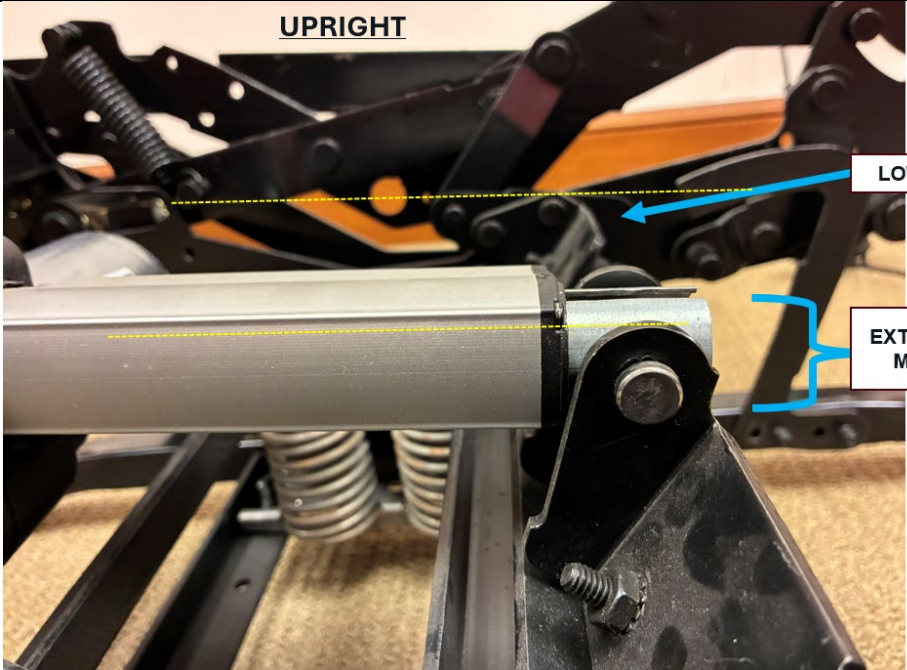


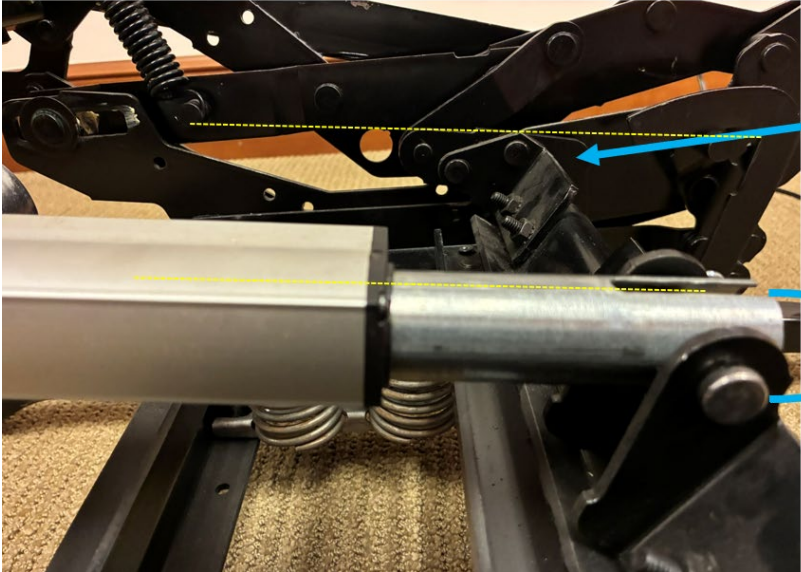
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		When the chair moves from the intermediate TV position to the fully reclined position, the second end moves rearwardly as shown below. 
8	8. The seating unit defined in claim 7, wherein the upper swing link is pivotally attached with the backrest.	The Exemplary Covered Rocker's upper swing link is pivotally attached with the backrest (via the backpost) as shown below.

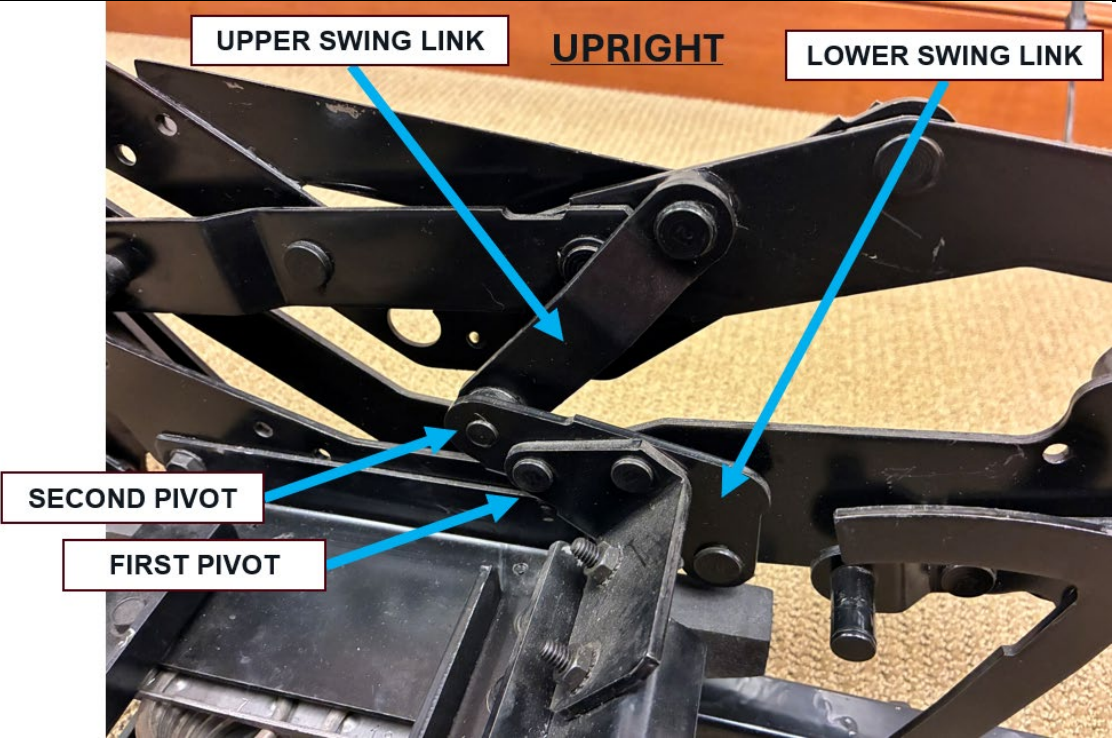
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
9	9. The seating unit defined in claim 7, wherein the power actuating unit includes a motor and an extendable member at the first and second ends.	The Exemplary Covered Rocker's power actuating unit includes a motor and an extendable member at the first and second ends as shown in the images below.

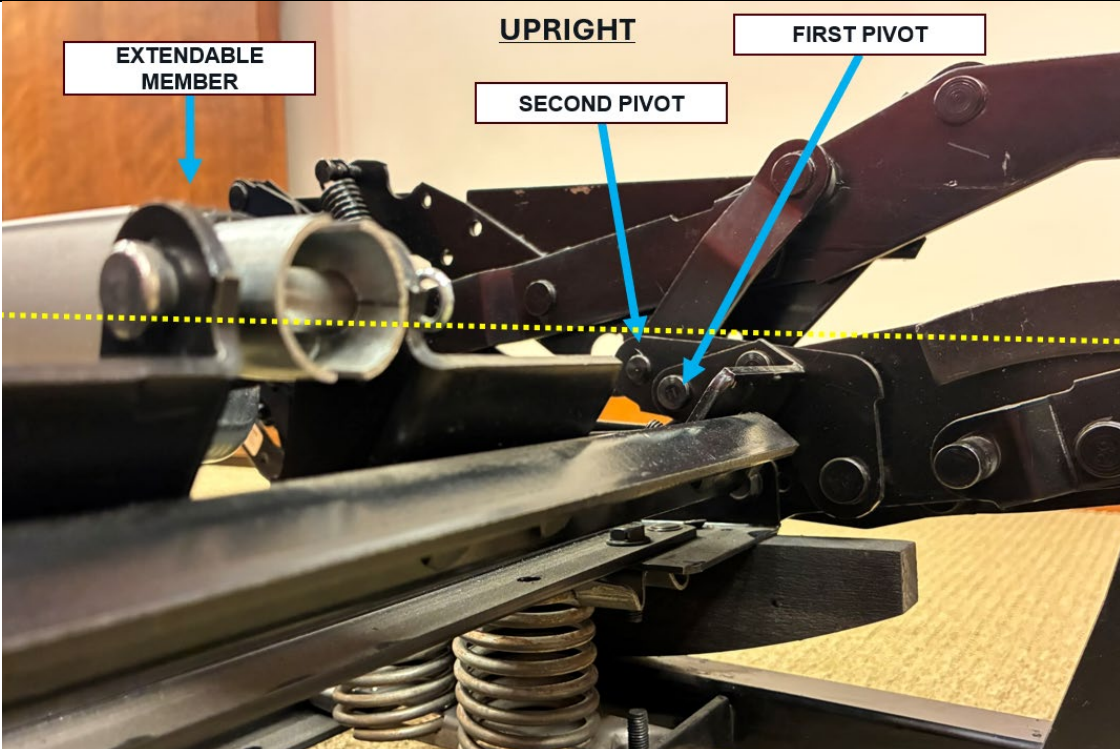
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
10	10. The seating unit defined in claim 9, wherein the lower swing link is angled, and wherein a segment of the lower swing link attached to the upper swing link is generally parallel to an axis defined by the extendable member of the actuating unit	The Exemplary Covered Rocker's lower swing link is angled, and a segment of the lower swing link attached to the upper swing link is generally parallel to an axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions, as shown below. The Exemplary Covered Rocker's lower swing link is angled, as shown below.

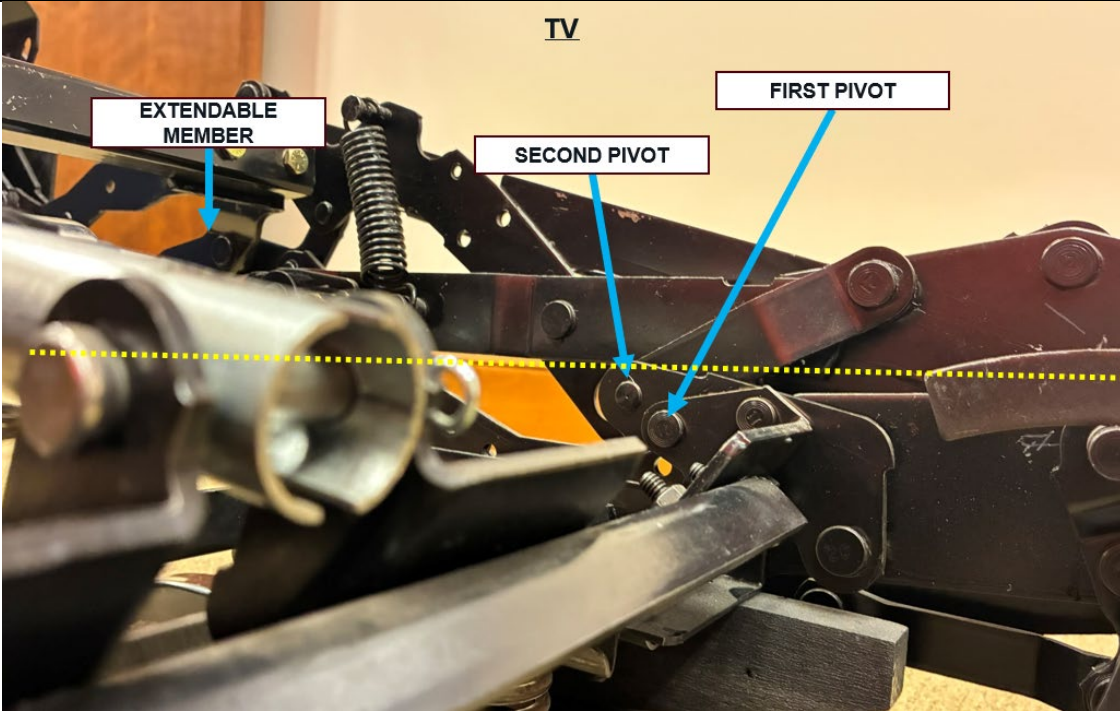
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	when the seating unit is in the upright and TV positions.	 The Exemplary Covered Rocker further comprises a segment of the lower swing link attached to the upper swing link that is generally parallel to an axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions, as shown below.

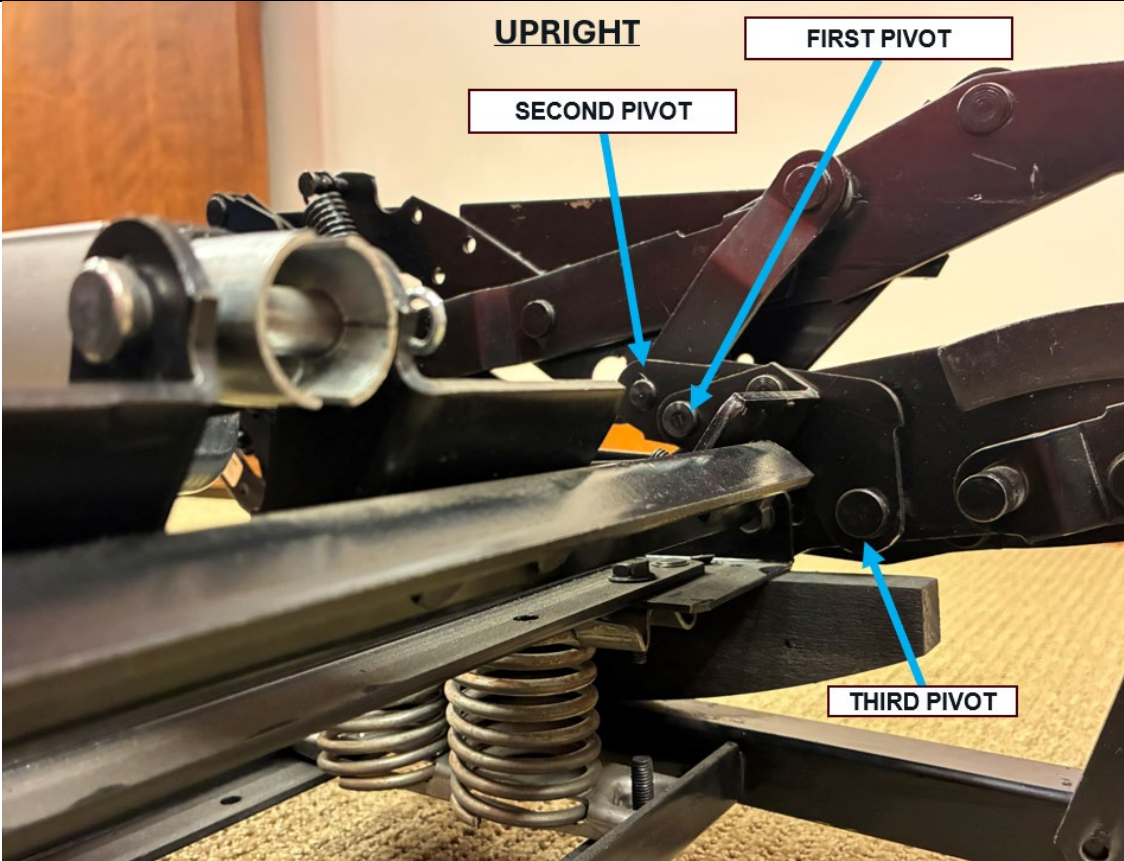
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 <u>UPRIGHT</u> LOWER SWING LINK EXTENDABLE MEMBER

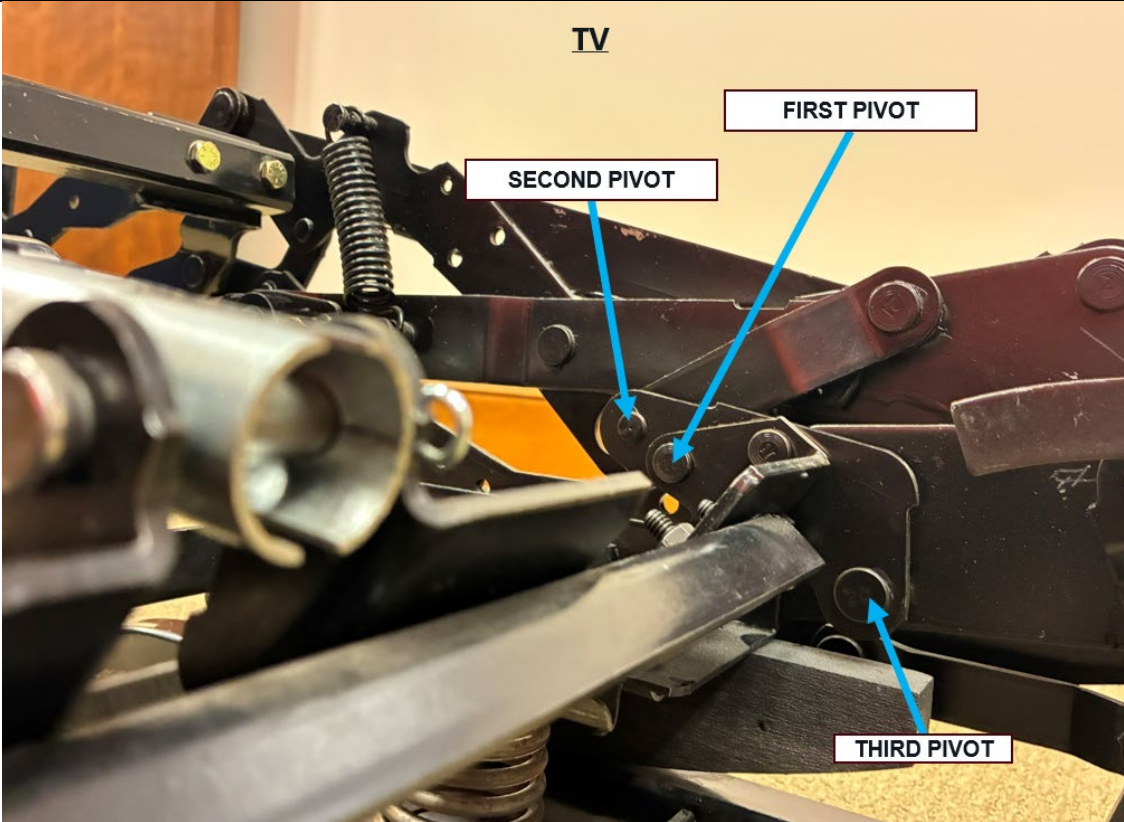
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		TV 
11	11. The seating unit defined in claim 10, wherein a first pivot defined by the second projection and the lower swing link and a second pivot defined by the lower swing link and the upper swing link that are below the axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions.	The Exemplary Covered Rocker comprises a first pivot defined by the second projection and the lower swing link and a second pivot defined by the lower swing link and the upper swing link that are below the axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions, as shown below. The first and second pivots are shown below.

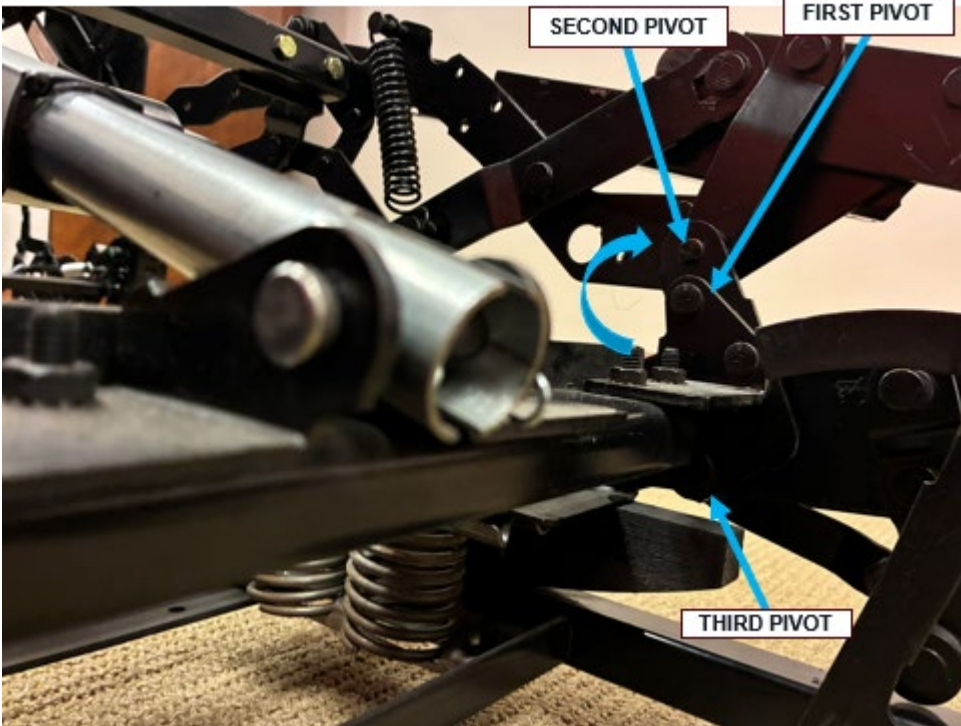
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The first and second pivots are below the axis (yellow) defined by the extendable member of the actuating unit when the seating unit is in the upright position and in the TV position, as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
12	12. The seating unit defined in claim 11, wherein the lower swing link is attached to the mounting bracket at a third pivot, and wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots	The Exemplary Covered Rocker comprises a lower swing link that is attached to the mounting bracket at a third pivot, wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots define a second angle that is larger than the first angle, as shown below. The first, second, and third pivots when the seating unit is in the upright position are shown below, defining a first angle.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	define a second angle that is larger than the first angle.	 The first, second, and third pivots when the seating unit is in the TV position are shown below, defining the first angle.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The first, second, and third pivots when the seating unit is in the fully reclined position are shown below, defining a second angle that is greater than the first angle.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		FULLY RECLINED 
13[p]	13. A reciprocating and reclining seating unit, comprising:	<i>See claim 1[p].</i>
13[a]	a base unit with a first bearing surface;	<i>See claim 1[a].</i>
13[b]	a generally horizontally-disposed seat positioned above the base unit;	<i>See claim 1[b].</i>

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
13[c]	a generally upright backrest positioned above the base unit and substantially rearward of the seat;	<i>See claim 1[c].</i>
13[d]	an extendable ottoman;	<i>See claim 1[d].</i>
13[e]	a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links;	<i>See claim 1[e].</i>
13[f]	a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and	<i>See claim 1[f].</i>
13[g]	a power linear actuating unit attached to the reclining mechanism, the actuating unit including a motor and an extendable rod and configured	<i>See claim 1[g].</i>

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	to move the seating unit between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman are is [sic] generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;	
13[h]	wherein the actuating unit is attached to an actuating mechanism, the actuating mechanism comprising:	<i>See claim 1[h].</i>
13[i]	a cross-member extending transversely across the seating unit;	<i>See claim 1[i].</i>

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
13[j]	first and second projections fixed to the cross-member;	<i>See claim 1[j].</i>
13[k]	wherein the first projection is pivotally attached to the actuating unit; and	<i>See claim 1[k].</i>
13[l]	wherein the second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism; and	<i>See claim 1[l].</i>
13[m]	wherein the actuating unit includes opposed first and second ends, and wherein the first end of the actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.	<i>See claim 7.</i>

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
14	14. The seating unit defined in claim 13, wherein a first pivot defined by the second projection and the lower swing link and a second pivot defined by the lower swing link and the upper swing link are below an axis defined by the extendable rod of the actuating unit when the seating unit is in the upright and TV positions.	<i>See claim 11.</i>
15	15. The seating unit defined in claim 14, wherein in the upright and TV positions, the lower swing link is attached to the mounting bracket at a third pivot, and wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots define a second angle that is larger than the first angle.	<i>See claim 12.</i>