

Exhibit 14

Exemplary Covered Rocker that Practices Ultra-Mek's U.S. Patent No. 8,297,693

Powered Rocker-Recliner with the Ultra-Mek 7800 Mechanism

The following chart illustrates how an Exemplary Powered Rocker-Recliner (the “Exemplary Covered Rocker”) containing Ultra-Mek’s 7800 Mechanism (the “Exemplary Covered Rocker Mechanism”) falls within the claim scope of U.S. Patent No. 8,297,693. The Exemplary Covered Rocker and/or Exemplary Covered Rocker Mechanism are exemplary products only and illustrate the practice of the above-referenced patent. The following chart contains highlighting, color-coding, and other annotations which are intended to assist the reader in identifying relevant elements, and are not intended to be binding or limiting. Complainants reserve the right to modify the structures associated with identified elements, to identify other functions for identified structures, and/or to adjust the identification of one or more components identified herein.

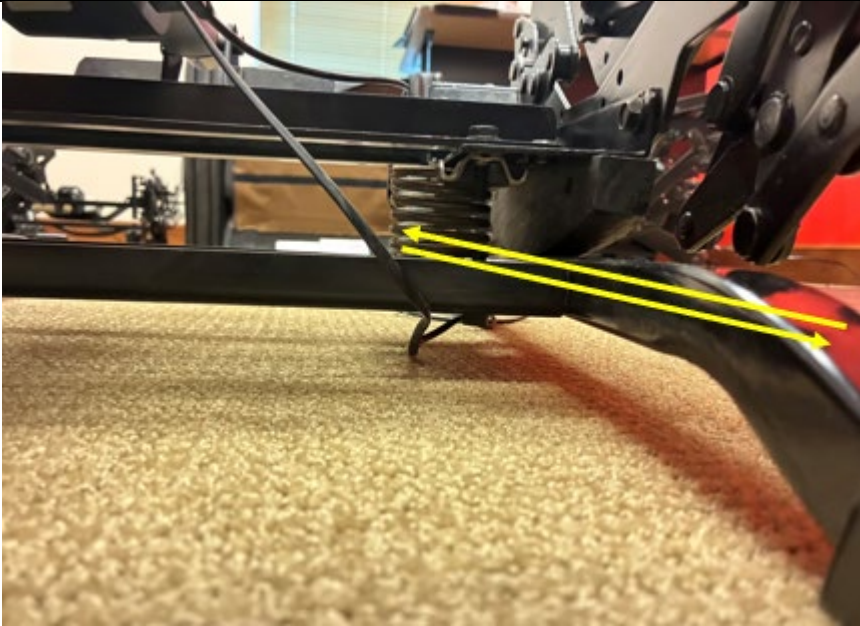
Complainants reserve the right to offer additional evidence to prove that the Exemplary Covered Rocker(s) practice the claims below in their expert reports, and in motions and at trial. Complainants reserve the right to supplement, amend, or modify the foregoing based on new information that becomes available during discovery, the exchange of proposed claim constructions, and/or issuance of a claim construction order.

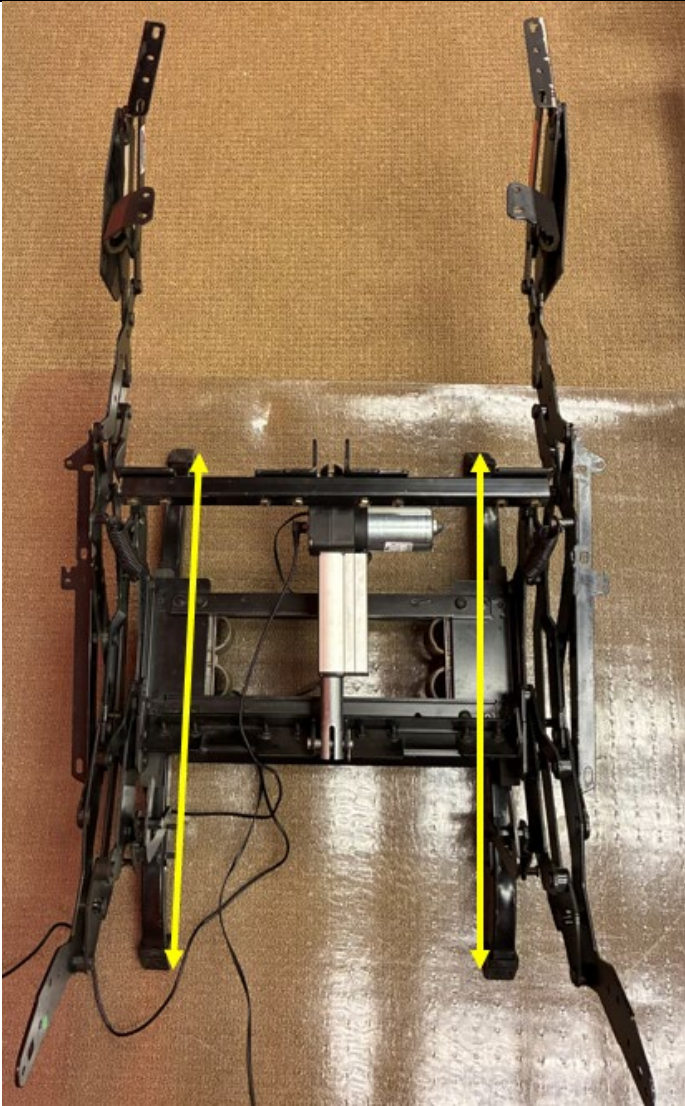
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
1[p]	A seating unit, comprising:	The Exemplary Covered Rocker is a seating unit that comprises an Ultra-Mek 7800 mechanism, as shown below.

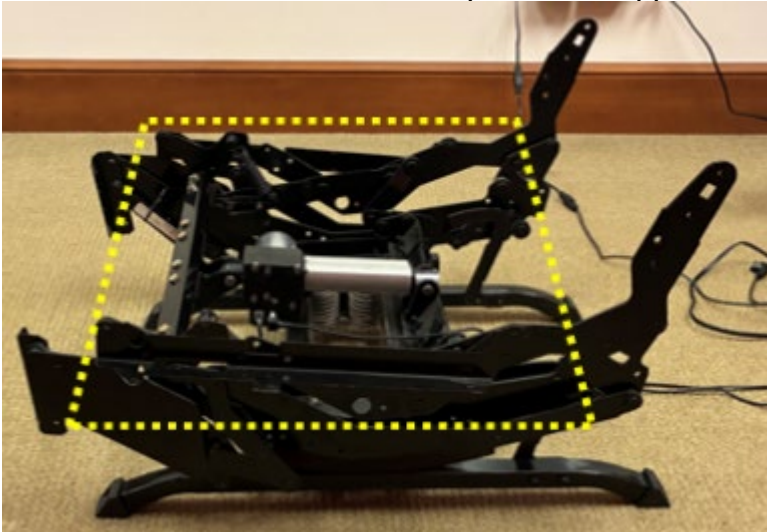
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The image shows a mechanical assembly, likely a rocker mechanism, constructed from black metal or plastic components. It features a central silver-colored actuator or cylinder. The assembly is mounted on a base and has several articulated arms and linkages extending from it. It is positioned on a light-colored, textured carpet. In the background, a wooden baseboard and a wall are visible. To the right, some electrical wiring and a power supply unit are partially visible.

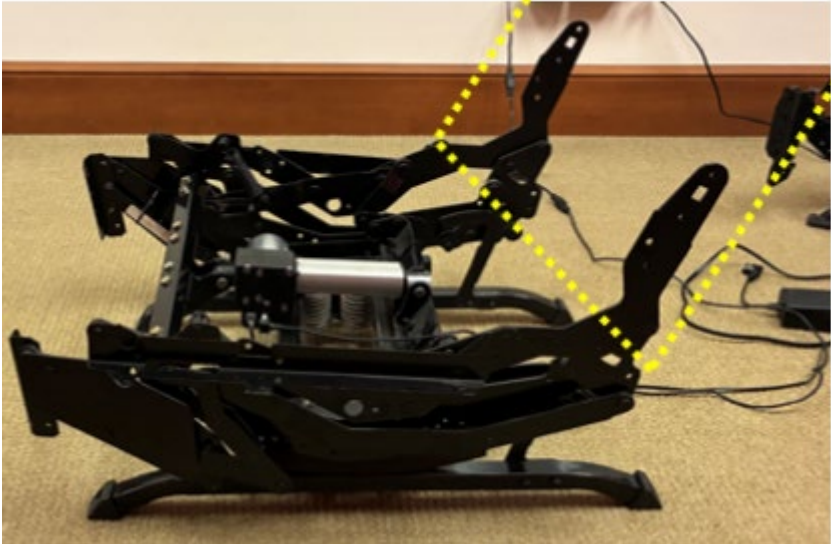
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[a]	a base unit with a first bearing surface;	The Exemplary Covered Rocker includes a base unit as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 BASE UNIT The base unit includes multiple bearing surfaces including a first bearing surface on the upper portion of the base unit.

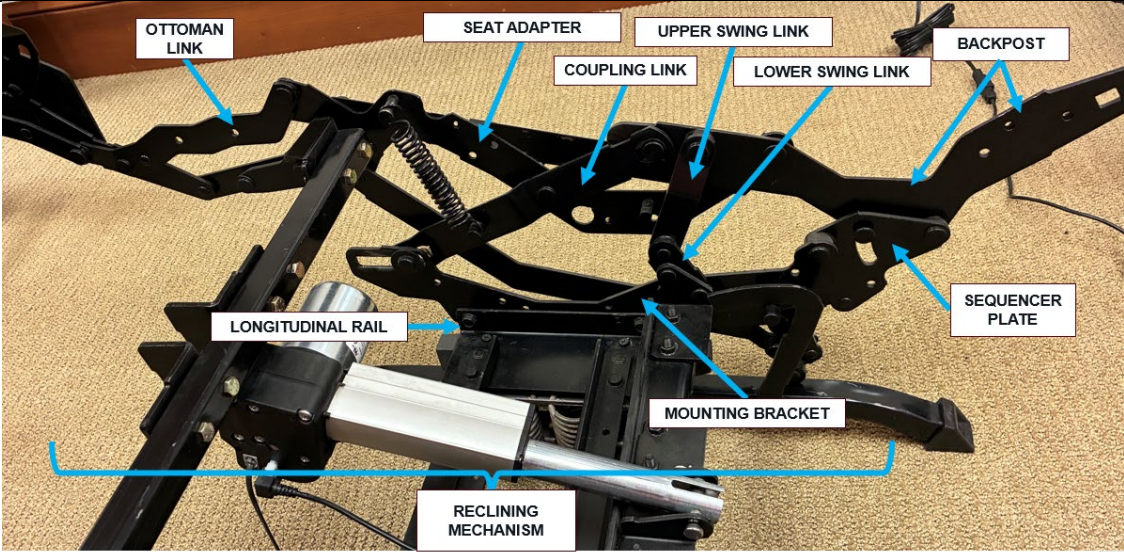
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		

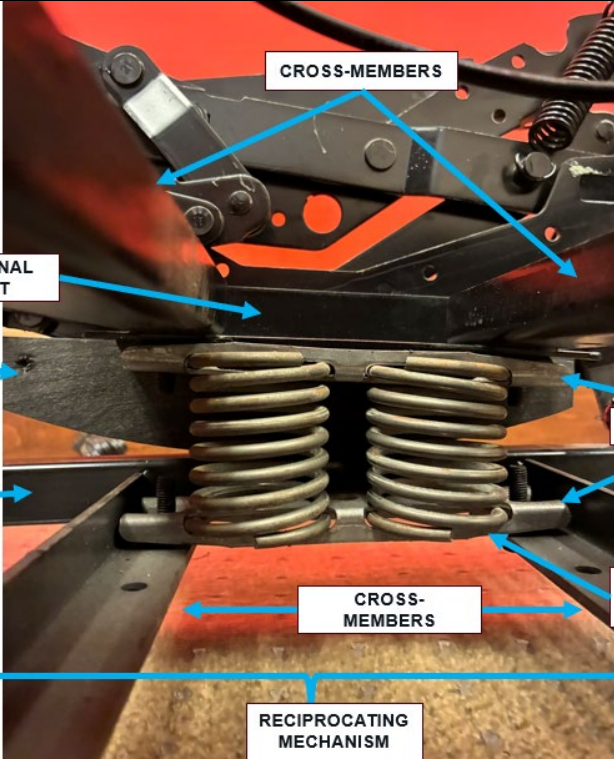
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The photograph shows a mechanical assembly, likely a covered rocker mechanism, mounted on a brown, textured surface. The assembly consists of a central actuator (a small motor or solenoid) connected to a vertical linkage. This linkage is part of a larger mechanism that includes two vertical linkages, each with a yellow arrow pointing downwards, indicating the direction of movement. The assembly is connected to a power source via black wires.

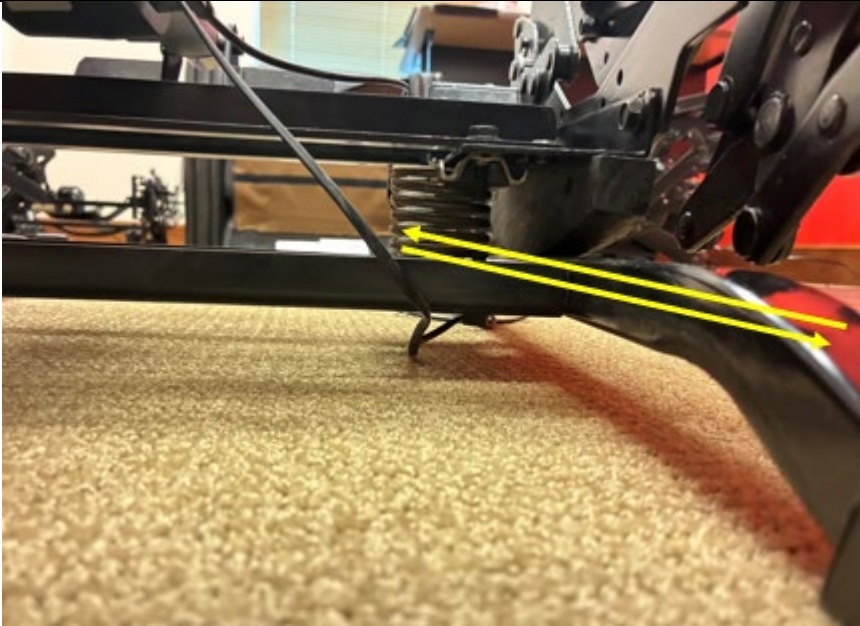
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
1[b]	a generally horizontally-disposed seat positioned above the base unit;	The Exemplary Covered Rocker includes a generally horizontally-disposed seat positioned above the base unit, which would be attached to the Exemplary Covered Rocker Mechanism and positioned approximately as shown below. 
1[c]	a generally upright backrest positioned above the base unit and substantially rearward of the seat;	The Exemplary Covered Rocker includes a generally upright backrest positioned above the base unit and substantially rearward of the seat, which would be attached to the Exemplary Covered Rocker Mechanism and positioned approximately as shown below.

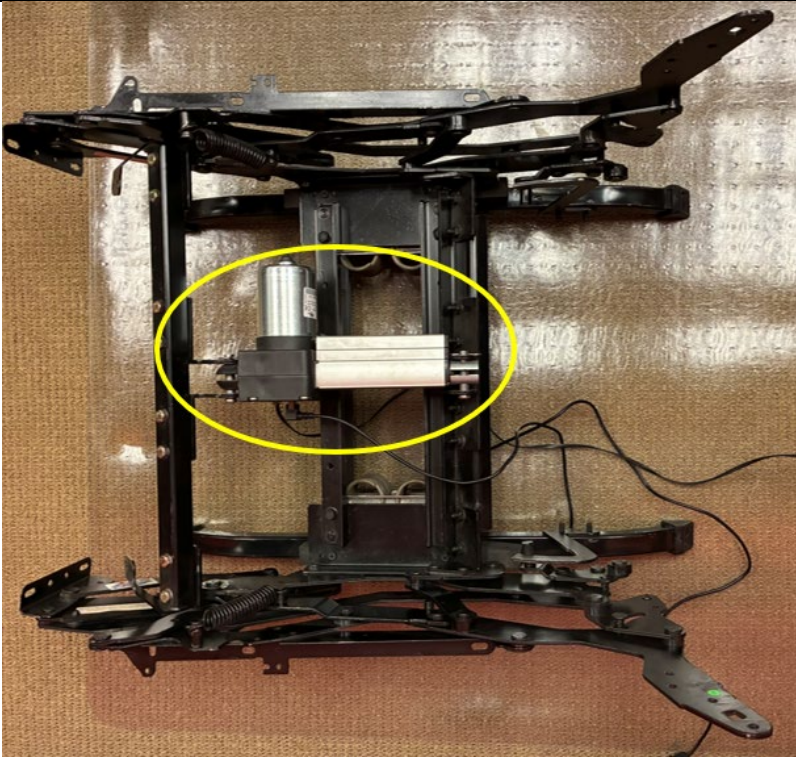
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[d]	an extendable ottoman;	The Exemplary Covered Rocker includes an extendable ottoman, which would be attached to the Exemplary Covered Rocker Mechanism and positioned approximately as shown below.

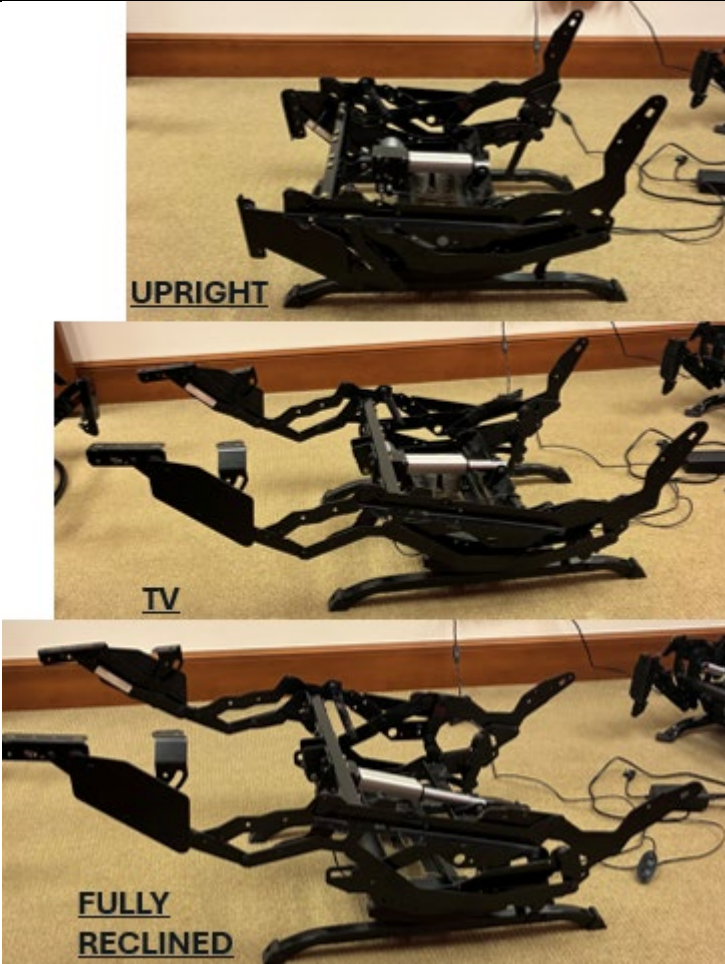
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[e]	a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links;	The Exemplary Covered Rocker includes a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit as shown below. The reclining mechanism further comprises a plurality of pivotally interconnected links, as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[f]	a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and	The Exemplary Covered Rocker includes a reciprocating mechanism attached to the base unit and the reclining mechanism that is configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force, as shown below.

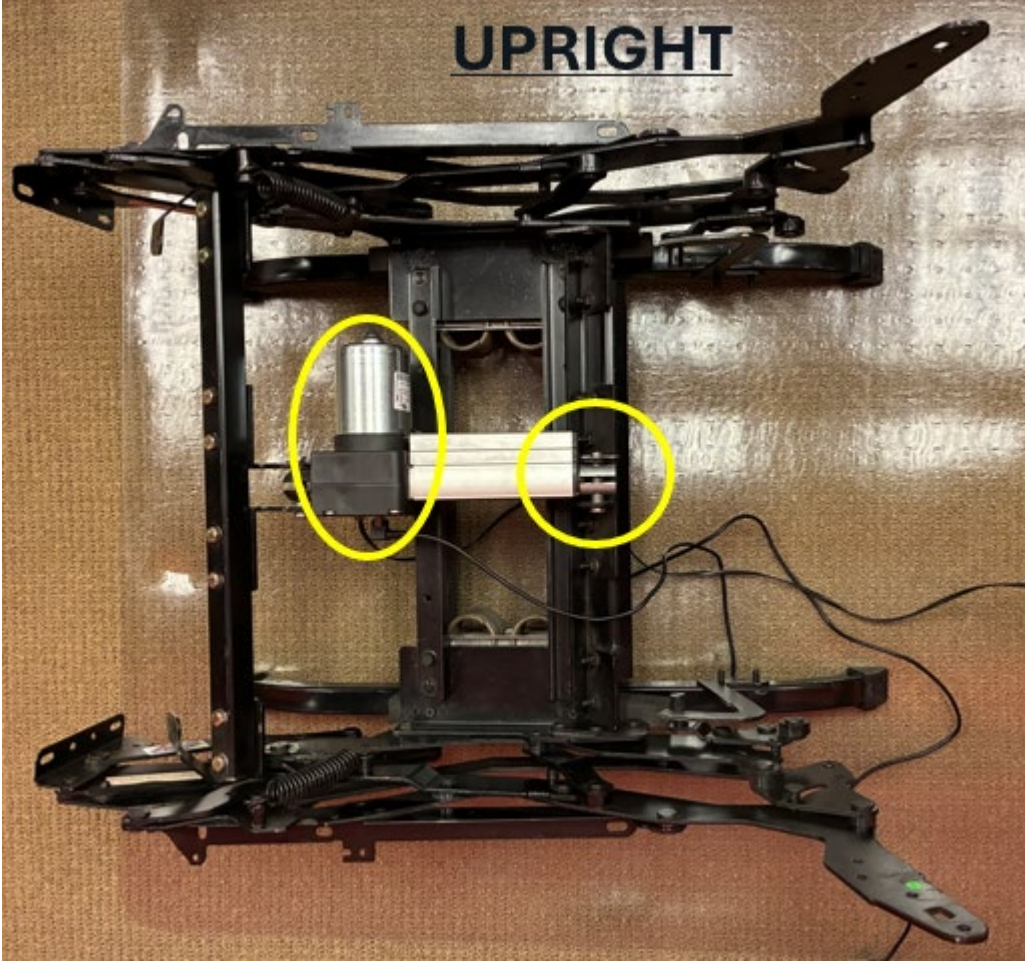
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The reciprocating mechanism comprises at least the rocker cam, rocker spring assembly, and brackets shown above. As shown below, when a longitudinally-directed force is applied, the reciprocating mechanism allows the chair to rock forward and backward.

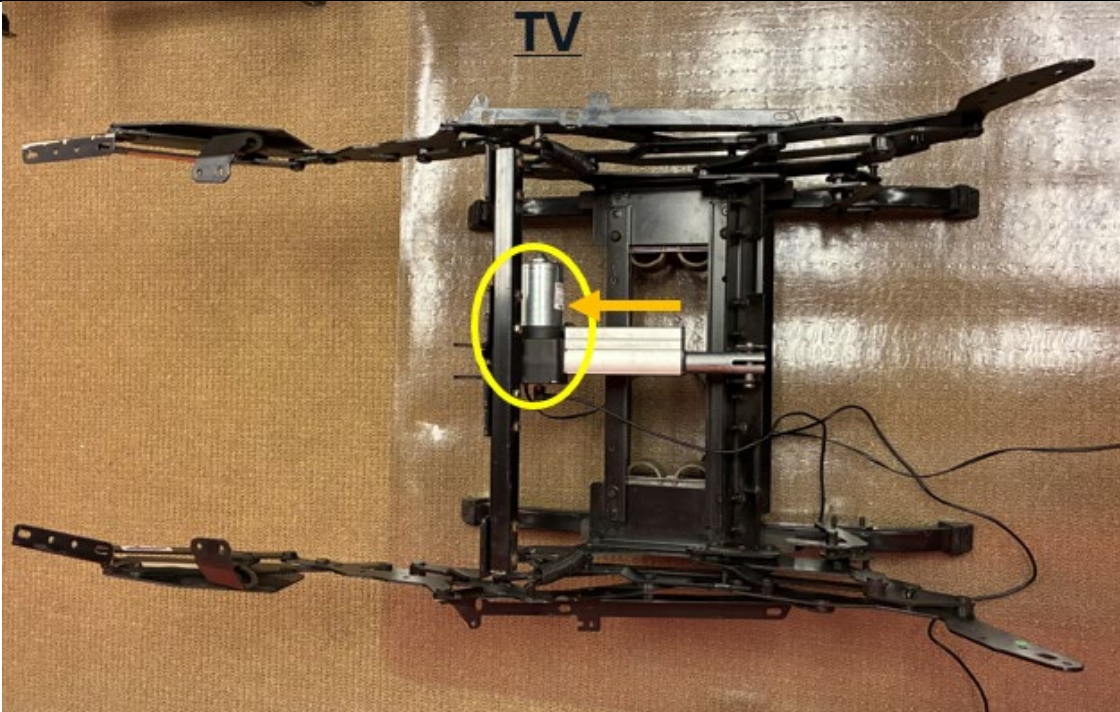
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
1[g]	a linear actuating unit attached to the reclining mechanism, the linear actuating unit configured to move the seating unit between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman is generally vertically disposed and	The Exemplary Covered Rocker includes a linear actuating unit attached to the reclining mechanism that is configured to move the seating unit between an upright position, an intermediate TV position, and a fully reclined position. The linear actuating unit is shown below.

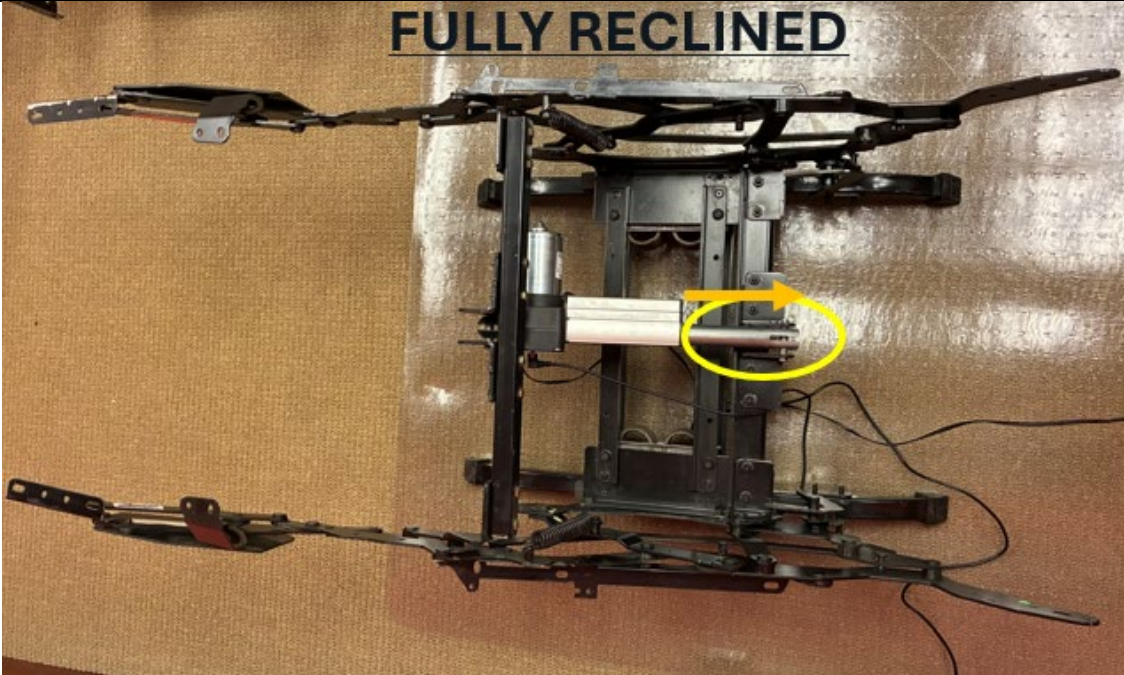
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;	 The photos below depict the three positions between which the Exemplary Covered Rocker may be moved by the linear actuating unit.

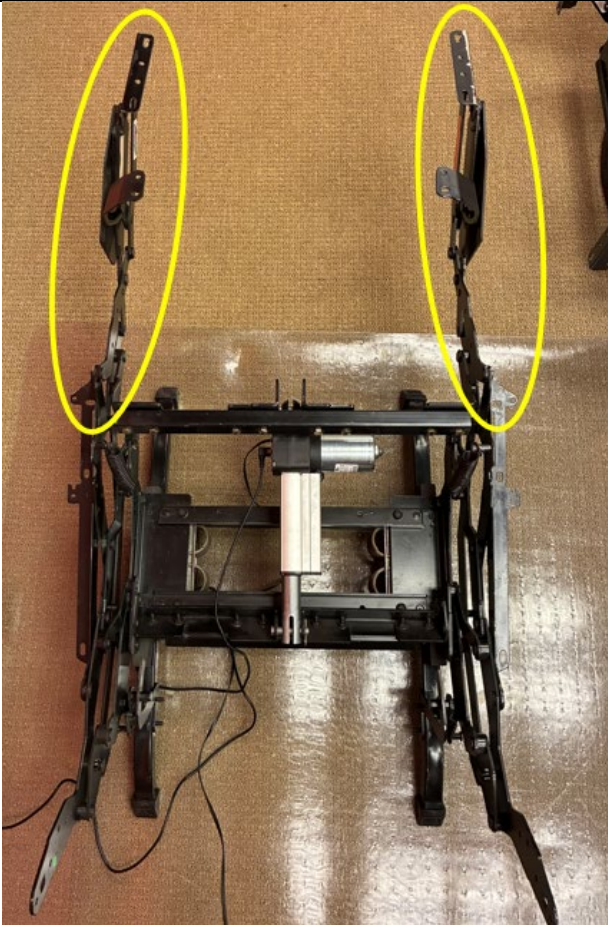
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The image contains three photographs of a black metal frame assembly, which is the Exemplary Covered Rocker, shown in different positions. The top photograph is labeled 'UPRIGHT' and shows the frame in a vertical position. The middle photograph is labeled 'TV' and shows the frame tilted back. The bottom photograph is labeled 'FULLY RECLINED' and shows the frame in a more horizontal position. The frame consists of various interconnected metal parts, including a central pivot point and a linear actuating unit.
1[h]	wherein the linear actuating unit includes opposed first and second ends, and wherein the first end of the linear actuating	The Exemplary Covered Rocker's linear actuating unit (not labeled) includes opposed first and second ends where the first end of the linear actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the linear actuating unit moves

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the linear actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.	rearwardly when the seating unit moves from the TV position to the fully reclined position. As shown below, the linear actuating unit includes opposed first and second ends. The chair below is in the upright position.

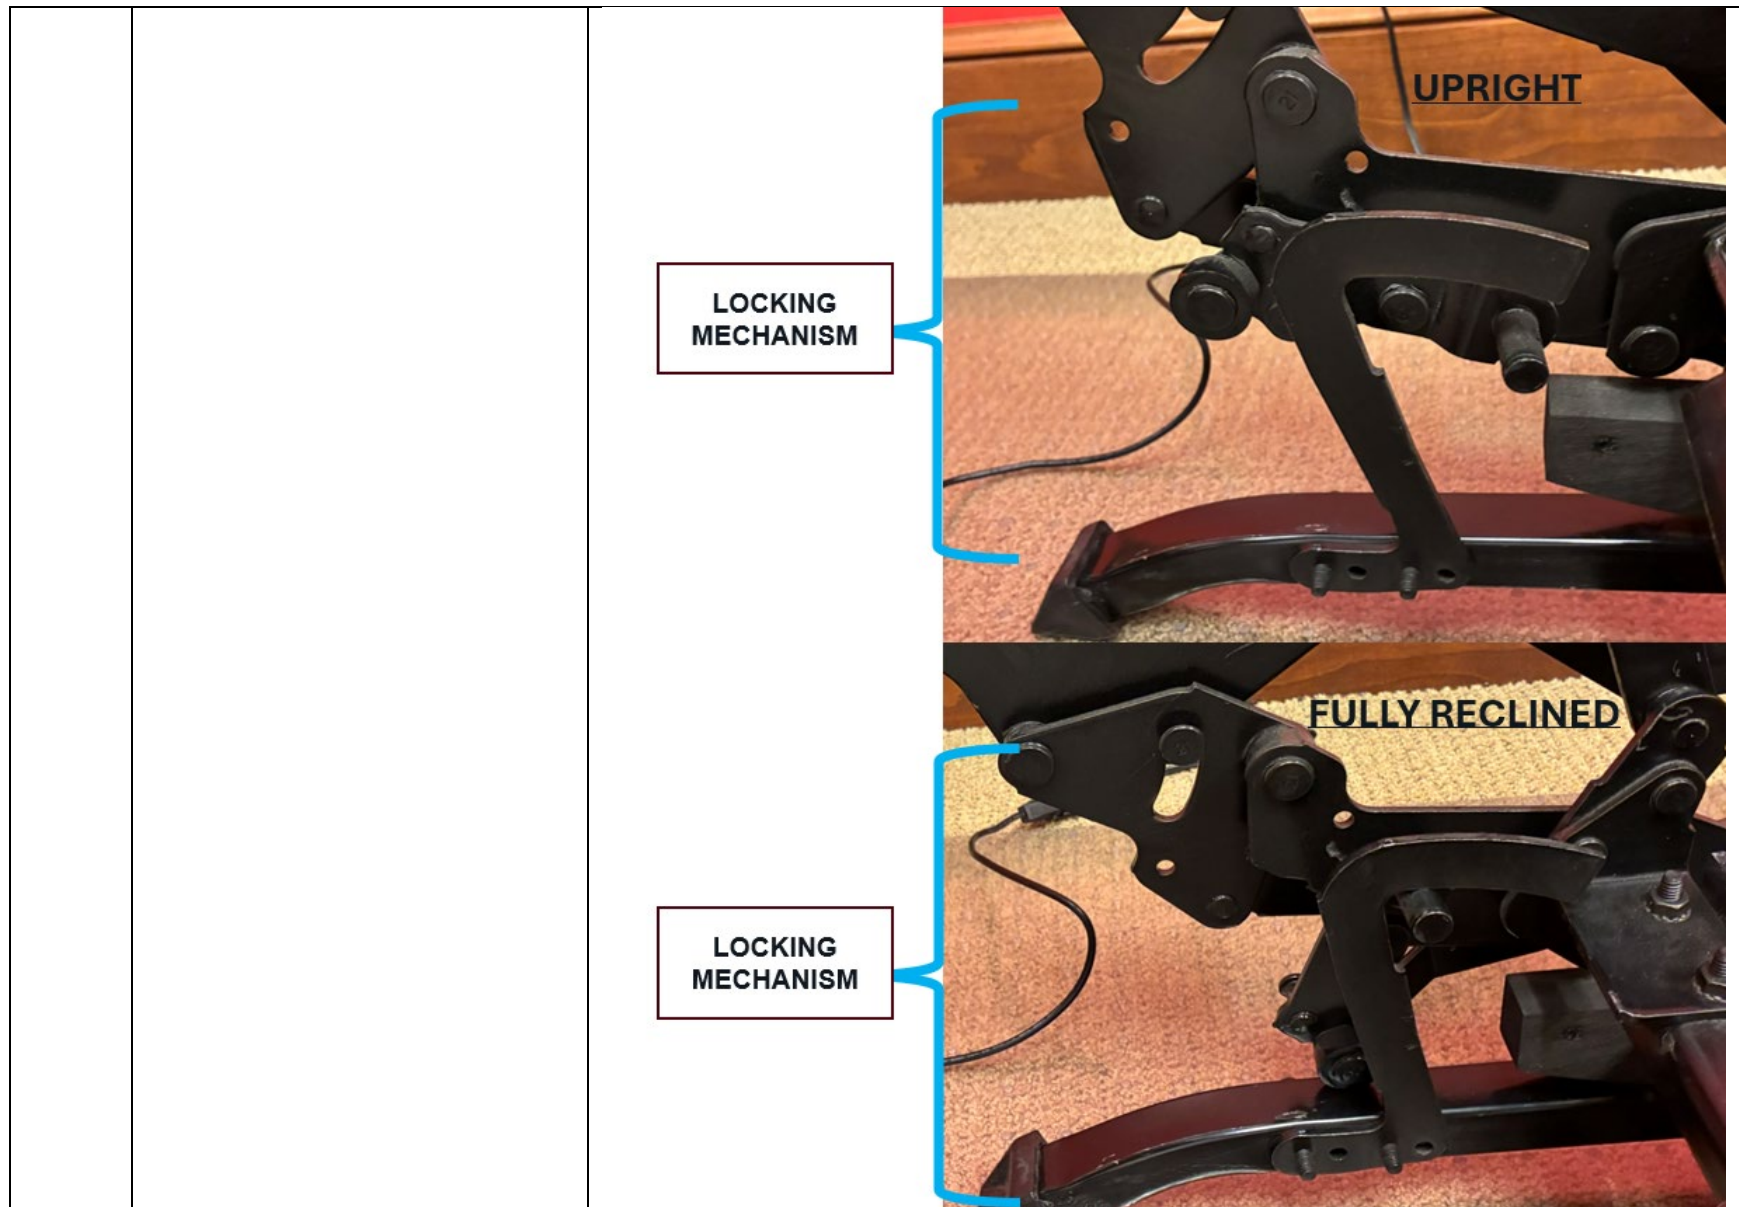
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 When the chair moves from the upright to intermediate TV position, the first end moves forwardly as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 When the chair moves from the intermediate TV position to the fully reclined position, the second end moves rearwardly as shown below.

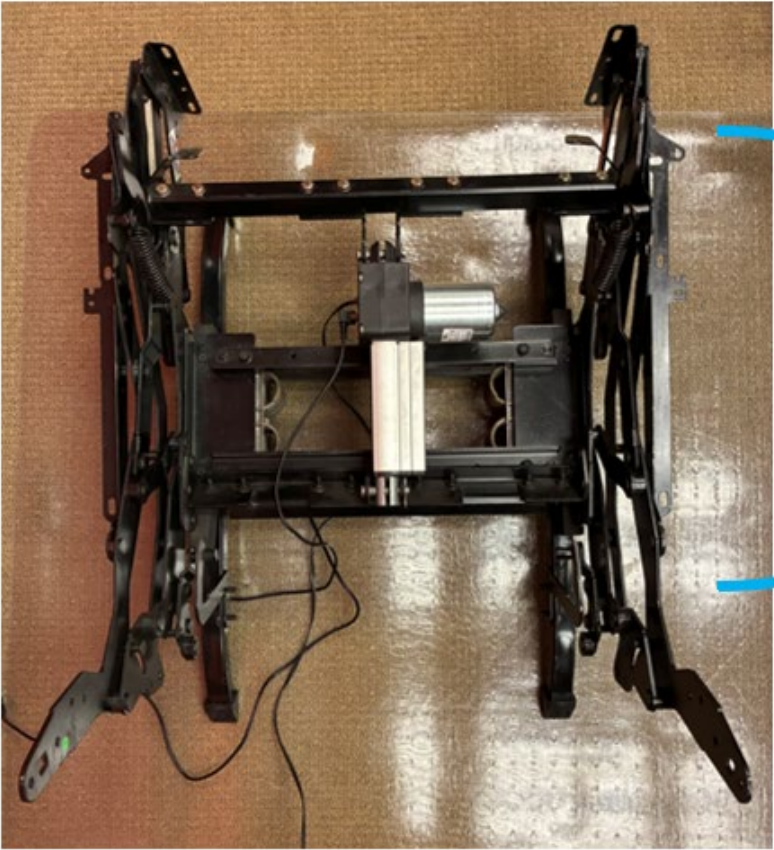
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
2	2. The seating unit defined in claim 1, wherein the reclining mechanism includes a pantographic linkage on which the ottoman is mounted, and wherein in the TV and fully reclined positions, pivots between links of the pantographic	The Exemplary Covered Rocker Mechanism includes a reclining mechanism which includes a pantographic linkage on which the ottoman is mounted as shown below.

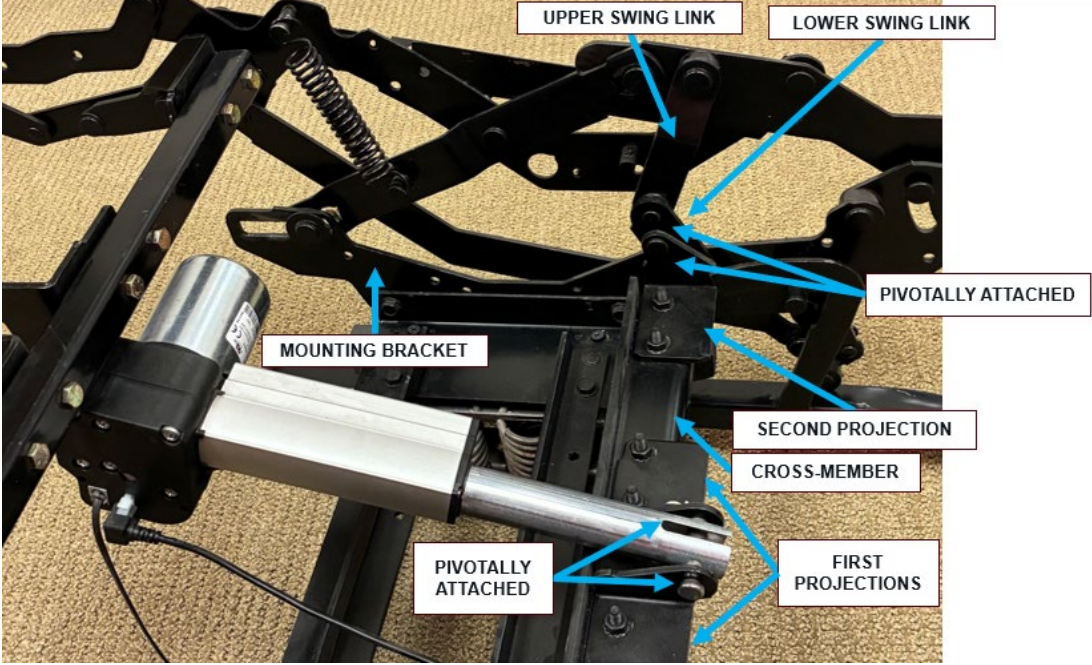
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	linkage form a near over-center arrangement that locks the ottoman in position.	 When the Exemplary Covered Rocker is in the intermediate TV and fully reclined positions, the reclining mechanism on which the ottoman is mounted includes pivots between links of the pantographic linkage that form a near over-center arrangement that locks the ottoman in position.

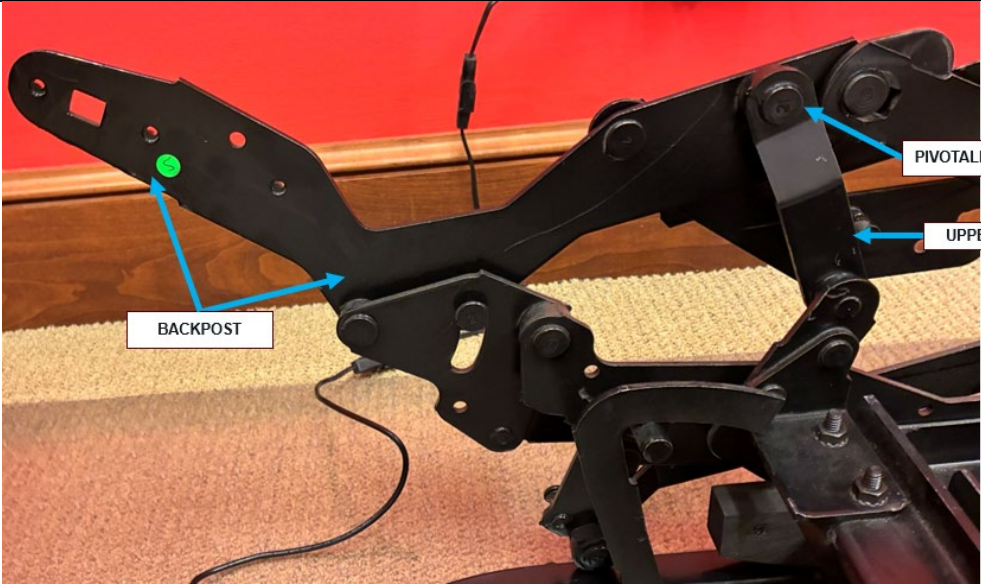
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
3	3. The seating unit defined in claim 1, further comprising a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions.	The Exemplary Covered Rocker includes a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions as shown below.

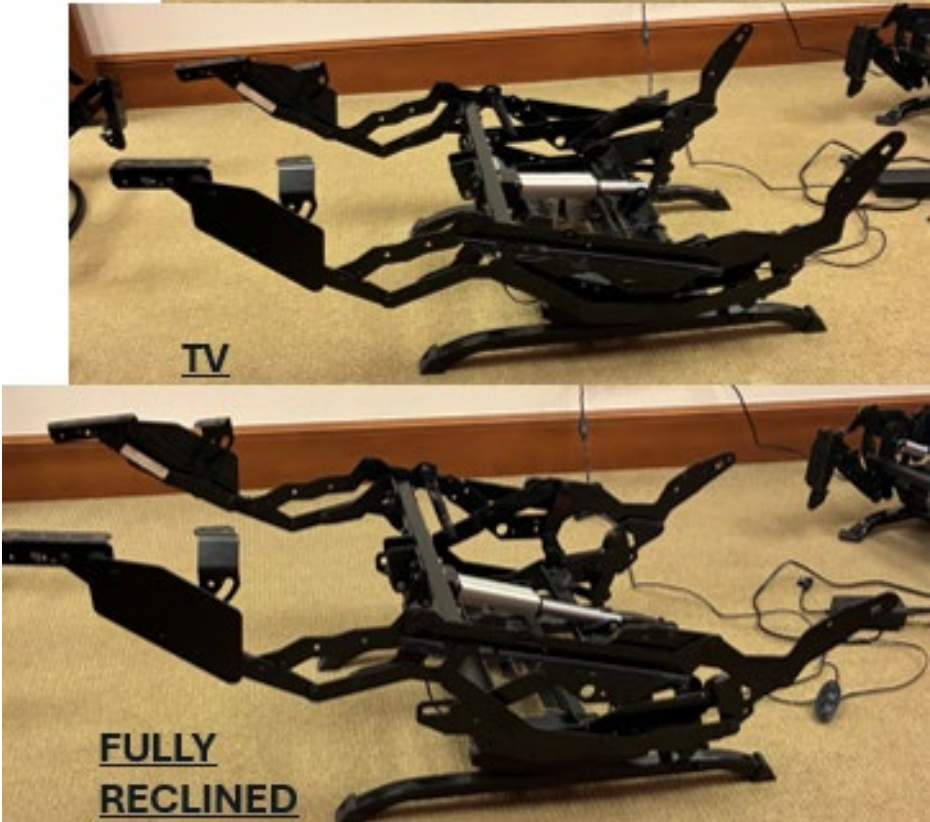


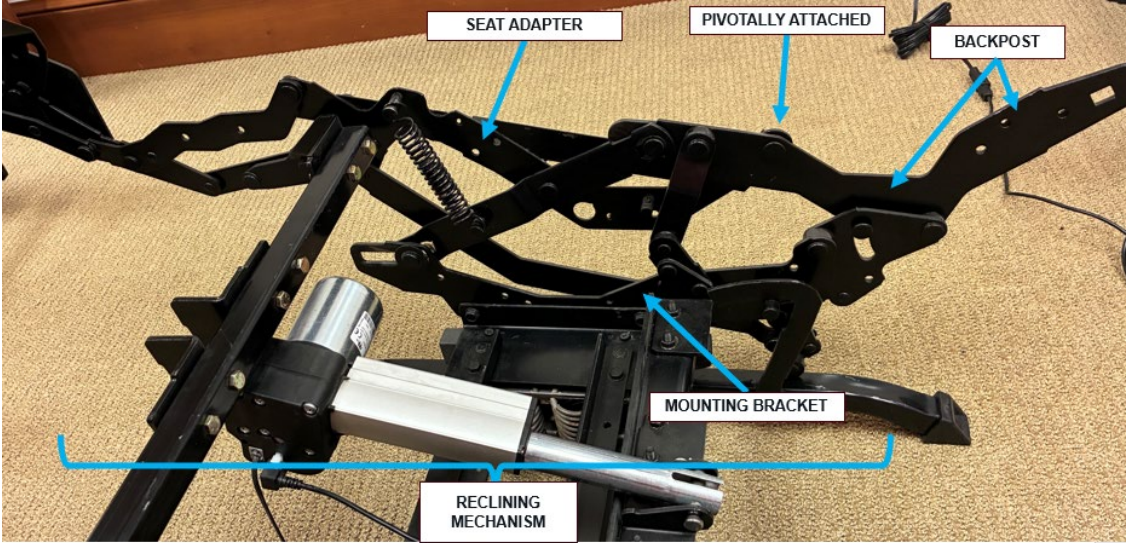
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
4	4. The seating unit defined in claim 1, wherein the linear actuating unit is attached to an actuating mechanism, the actuating mechanism comprising a cross-member extending transversely across the seating unit, wherein the cross-member is pivotally attached to the actuating unit; and wherein the cross-member is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism.	The Exemplary Covered Rocker's linear actuating unit is attached to an actuating mechanism, the actuating mechanism comprising a cross-member extending transversely across the seating unit, wherein the cross-member is pivotally attached to the actuating unit; and wherein the cross-member is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism, as shown below.

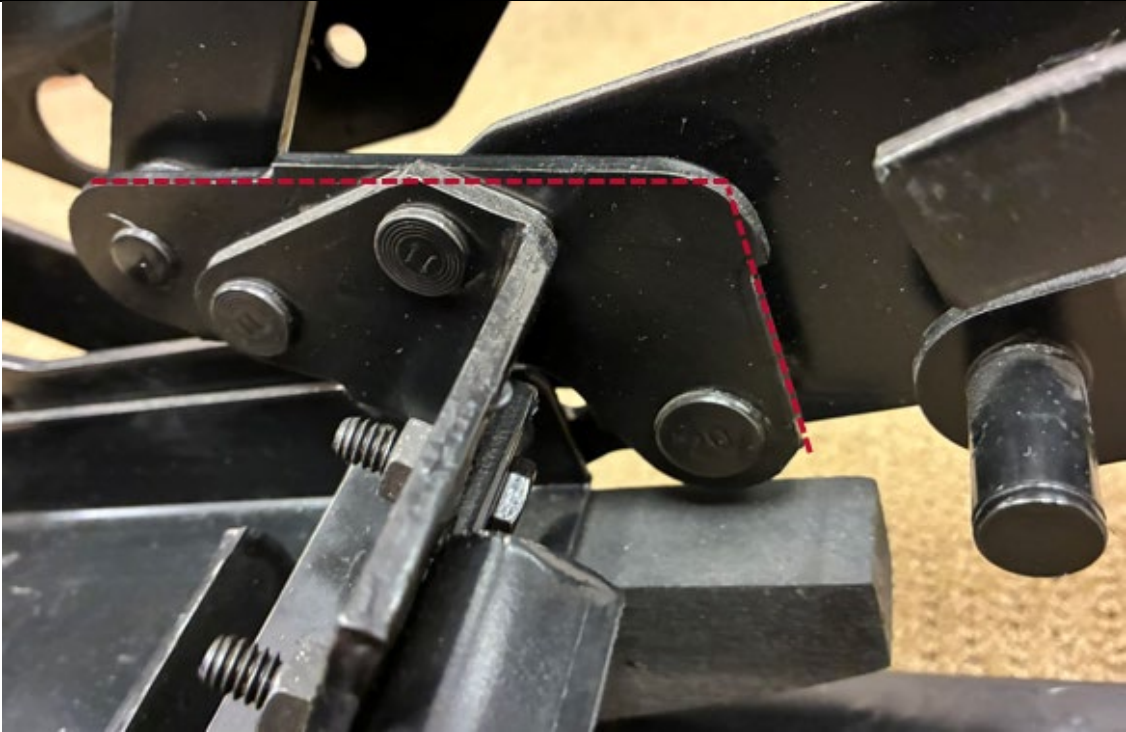
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 ACTUATING MECHANISM

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The cross-member is attached to the linear actuating unit such that the cross-member and the linear actuating unit can pivot within the mechanism.
5	5. The seating unit defined in claim 4, wherein the upper swing link is pivotally attached with the backrest.	The Exemplary Covered Rocker's upper swing link is pivotally attached with the backrest (via the backpost) as shown below. The upper swing link is pivotally connected to the backpost.

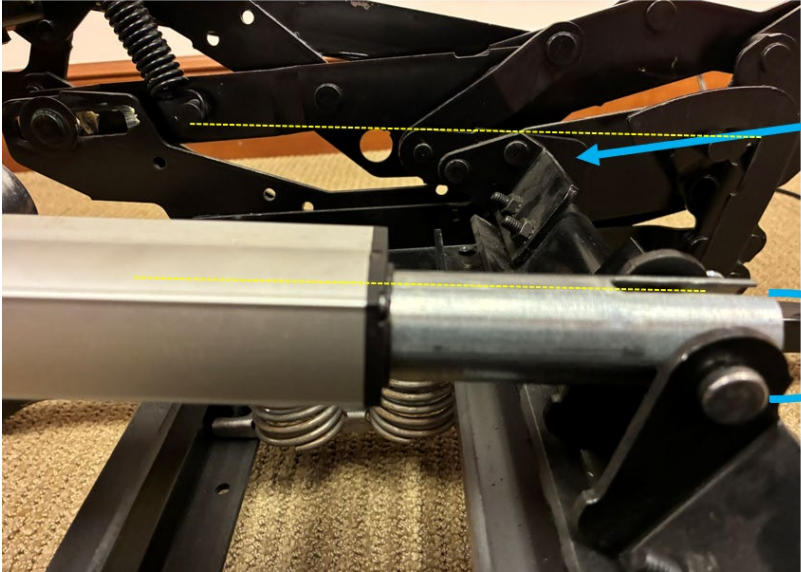
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The photograph shows a black metal mechanical assembly against a red background. A blue arrow points to a green dot on a horizontal plate, labeled 'BACKPOST'. Another blue arrow points to a pivot point on a vertical link, labeled 'PIVOTALLY ATTACHED'. A third blue arrow points to a horizontal link, labeled 'UPPER SWING LINK'. The assembly is mounted on a wooden base.
6	6. The seating unit defined in claim 1, wherein the seat rises in moving from the TV position to the fully reclined position.	The Exemplary Covered Rocker's seat rises in moving from the TV position to the fully reclined position as shown below.

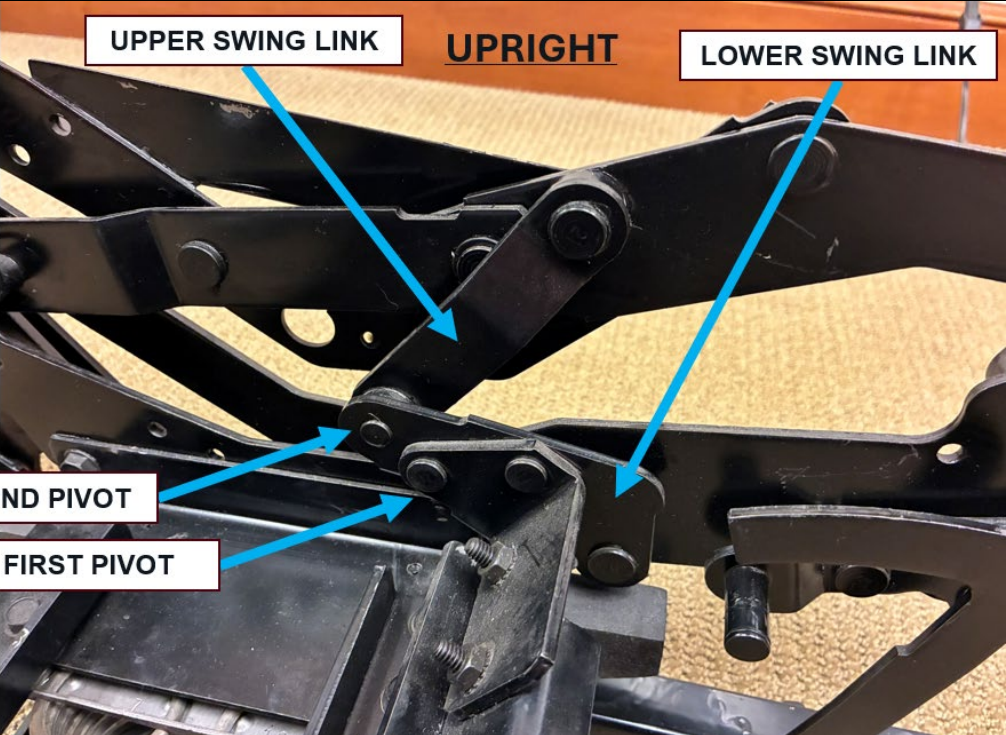
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
7	7. The seating unit defined in claim 1, wherein the reclining mechanism includes a backpost that is fixed relative to the backrest, a	The Exemplary Covered Rocker's reclining mechanism includes a backpost that is fixed relative to the backrest, a mounting bracket that is fixed relative to the reciprocating mechanism and pivotally attached to the backpost, and a seat adapter that is fixed relative to the seat and pivotally attached to the backpost as shown below.

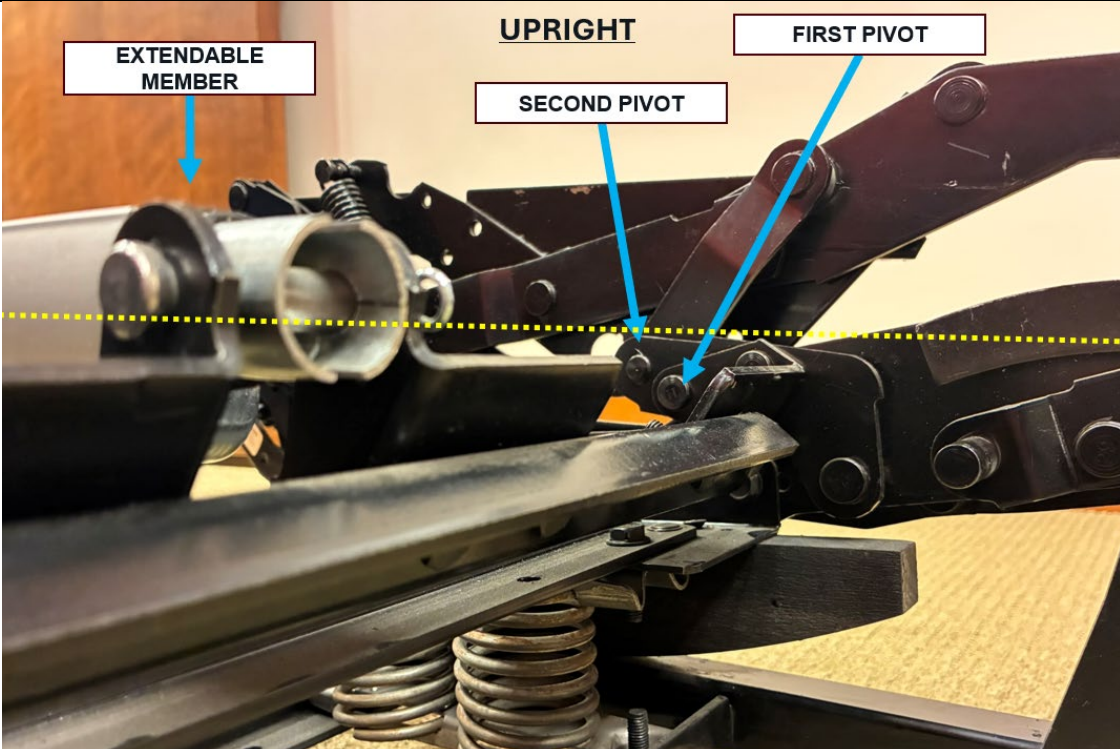
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	mounting bracket that is fixed relative to the reciprocating mechanism and pivotally attached to the backpost, and a seat adapter that is fixed relative to the seat and pivotally attached to the backpost.	
8	8. The seating unit defined in claim 7, wherein the lower swing link is angled, and wherein a segment of the lower swing link attached to the upper swing link is generally parallel to an axis defined by an extendable member of the linear actuating unit when the seating unit is in the upright and TV positions.	The Exemplary Covered Rocker's reclining mechanism includes a lower swing link that is angled, wherein a segment of the lower swing link attached to the upper swing link is generally parallel to an axis defined by an extendable member of the linear actuating unit when the seating unit is in the upright and TV positions, as shown below. The Exemplary Covered Rocker's lower swing link is angled, as shown below.

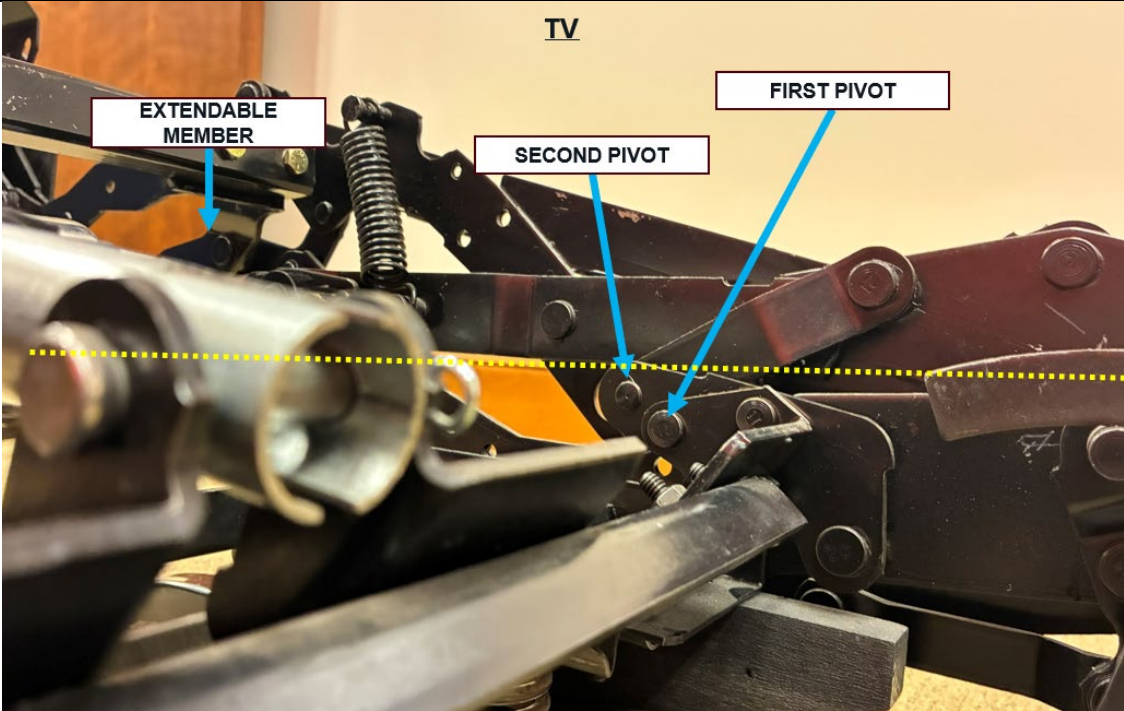
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 As shown below in the upright position, a segment of the lower swing link attached to the upper swing link is generally parallel to an axis defined by an extendable member of the linear actuating unit.

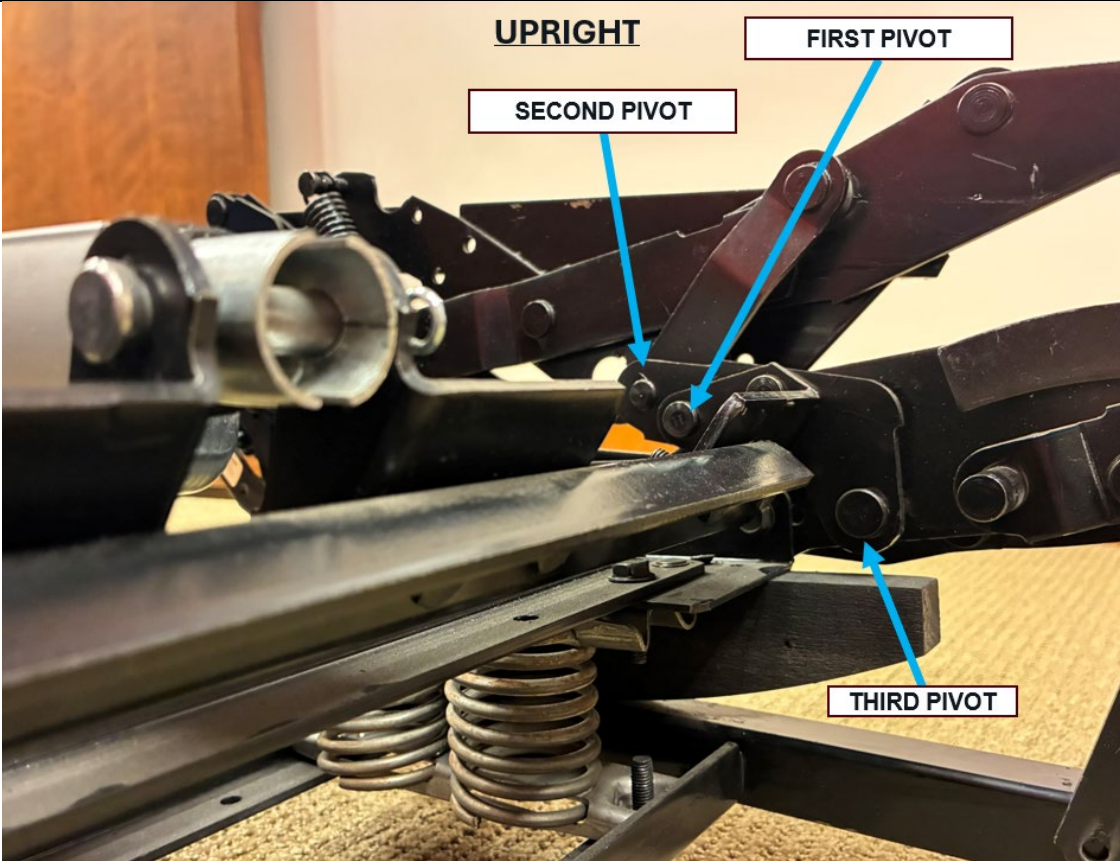
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		UPRIGHT LOWER SWING LINK EXTENDABLE MEMBER As shown below in the TV position, a segment of the lower swing link attached to the upper swing link is generally parallel to an axis defined by an extendable member of the linear actuating unit.

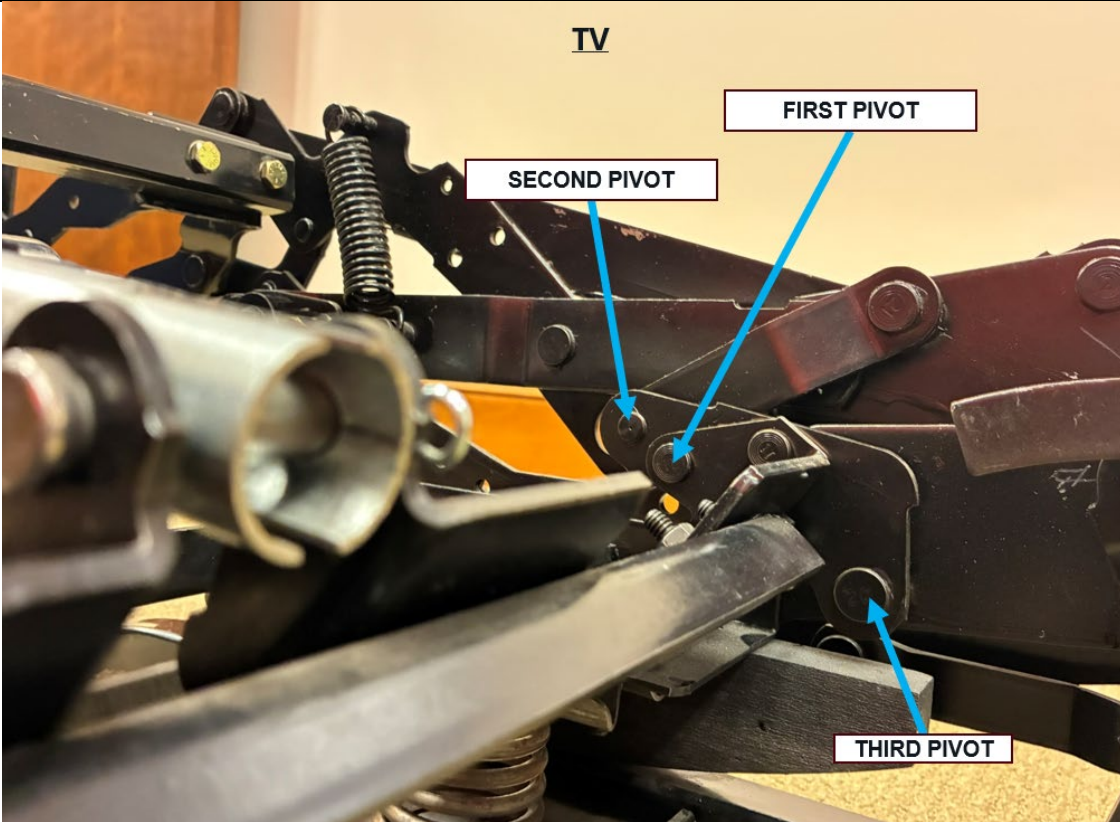
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		TV  LOWER SWING LINK EXTENDABLE MEMBER
9	9. The seating unit defined in claim 8, wherein a first pivot defined by the cross-member and the lower swing link and a second pivot defined by the lower swing link and the upper swing link are below the axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions.	The Exemplary Covered Rocker includes a first pivot defined by the cross-member and the lower swing link and a second pivot defined by the lower swing link and the upper swing link, wherein the first and second pivots are below the axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions. The first and second pivots when the seating unit is in the upright position are shown below.

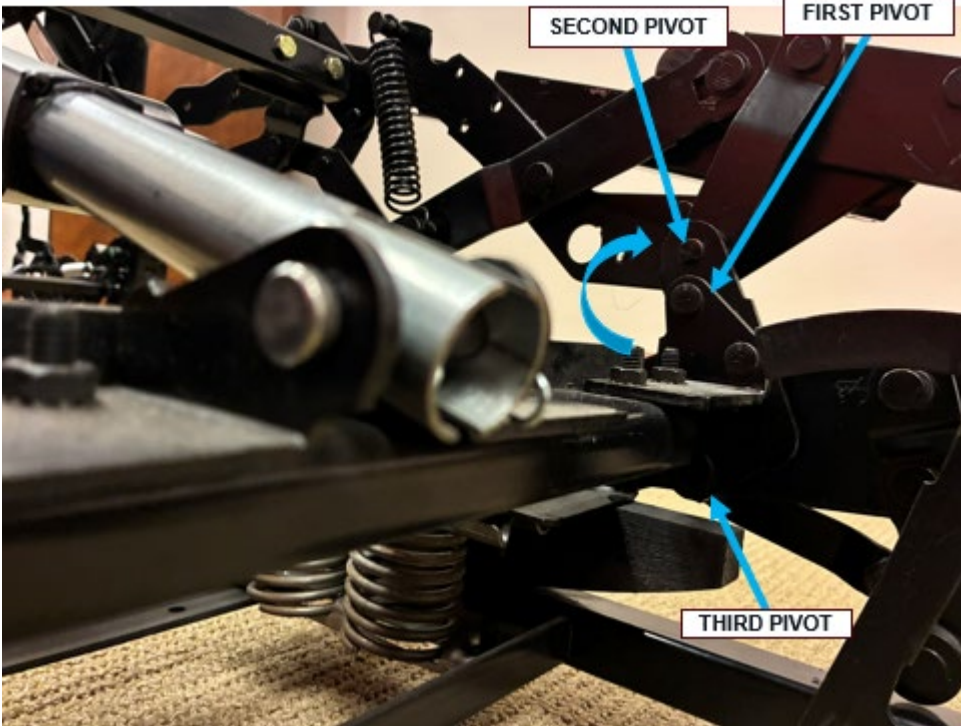
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The first and second pivots are below the axis (yellow) defined by the extendable member of the actuating unit when the seating unit is in the upright position and in the TV position, as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		

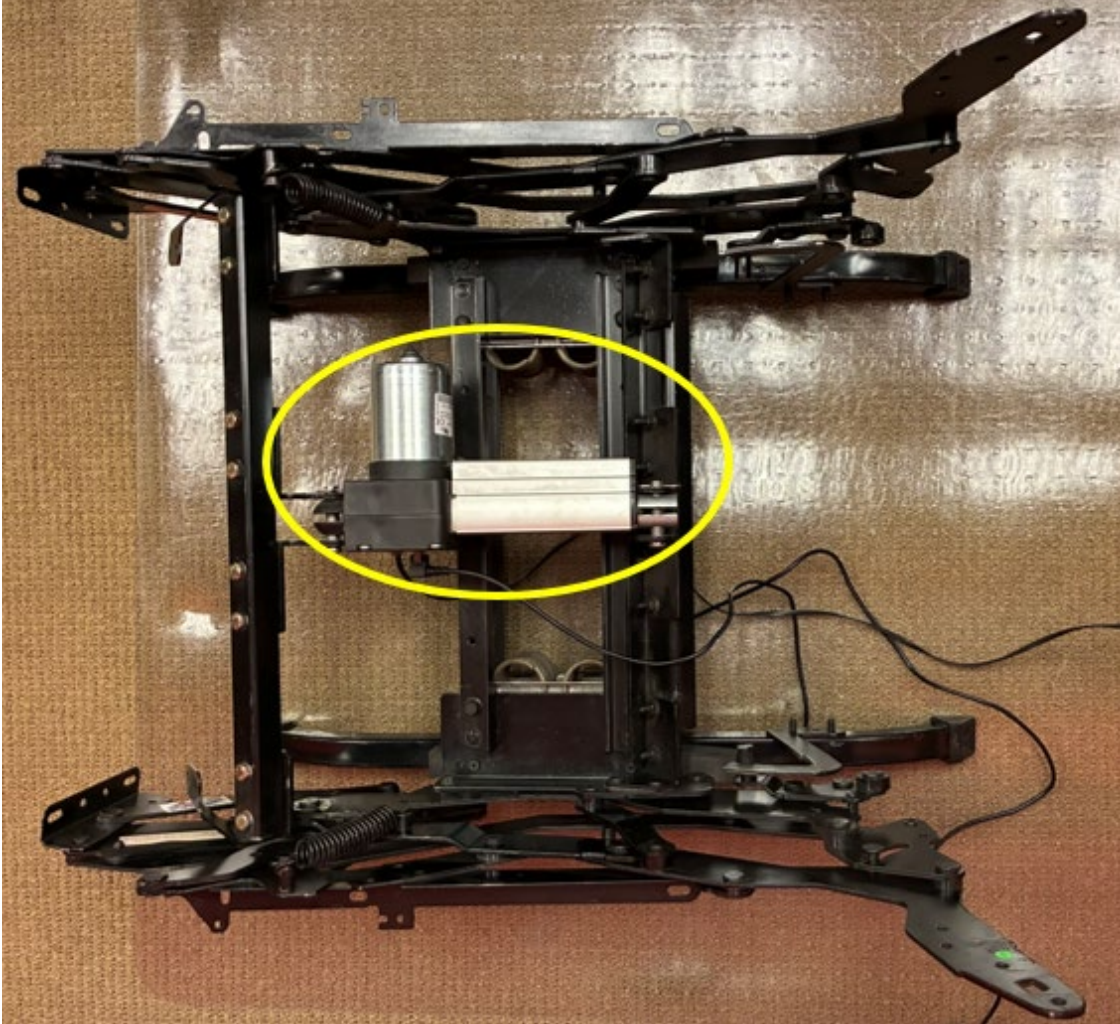
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
10	10. The seating unit defined in claim 9, wherein the lower swing link is attached to the mounting bracket at a third pivot, and wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots	The Exemplary Covered Rocker comprises a lower swing link that is attached to the mounting bracket at a third pivot, wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots define a second angle that is larger than the first angle, as shown below. The first, second, and third pivots when the seating unit is in the upright position are shown below, defining a first angle.

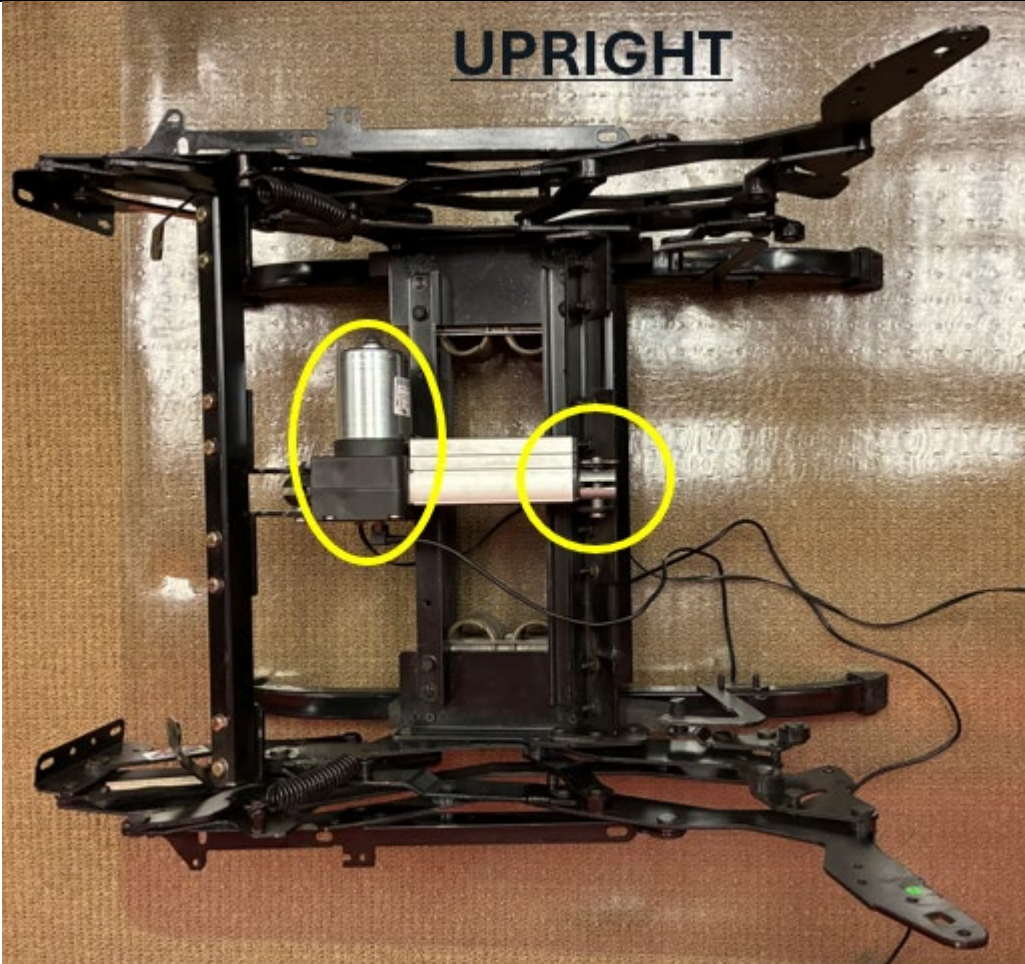
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	define a second angle that is larger than the first angle.	 The first, second, and third pivots when the seating unit is in the TV position are shown below, defining the first angle.

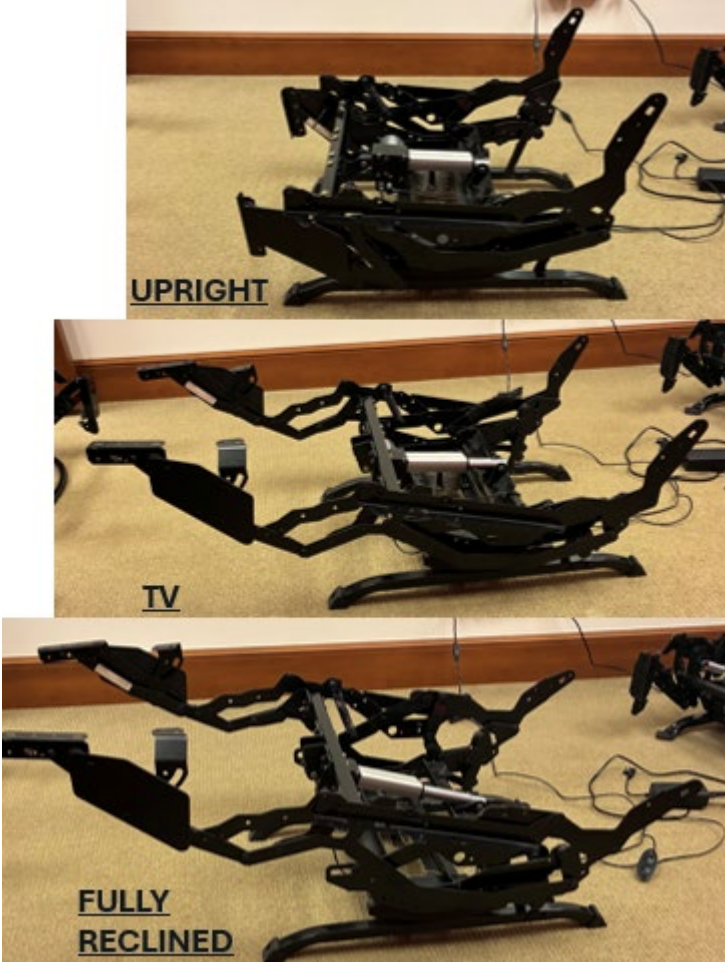
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The first, second, and third pivots when the seating unit is in the fully reclined position are shown below, defining a second angle that is greater than the first angle.

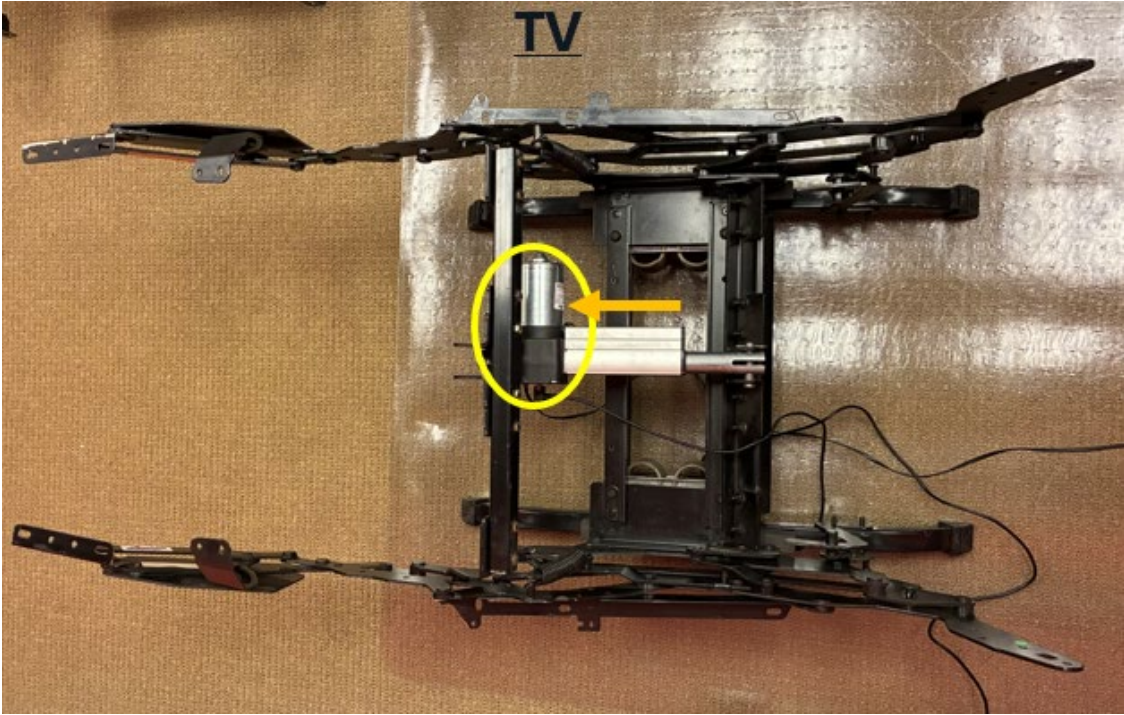
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		FULLY RECLINED 
12[p]	A reciprocating seating unit, comprising:	<i>See claim 1[p].</i>
12[a]	a base;	<i>See claim 1[a].</i>
12[b]	a generally horizontally-disposed seat positioned above the base;	<i>See claim 1[b].</i>
12[c]	a generally upright backrest positioned above the base and	<i>See claim 1[c].</i>

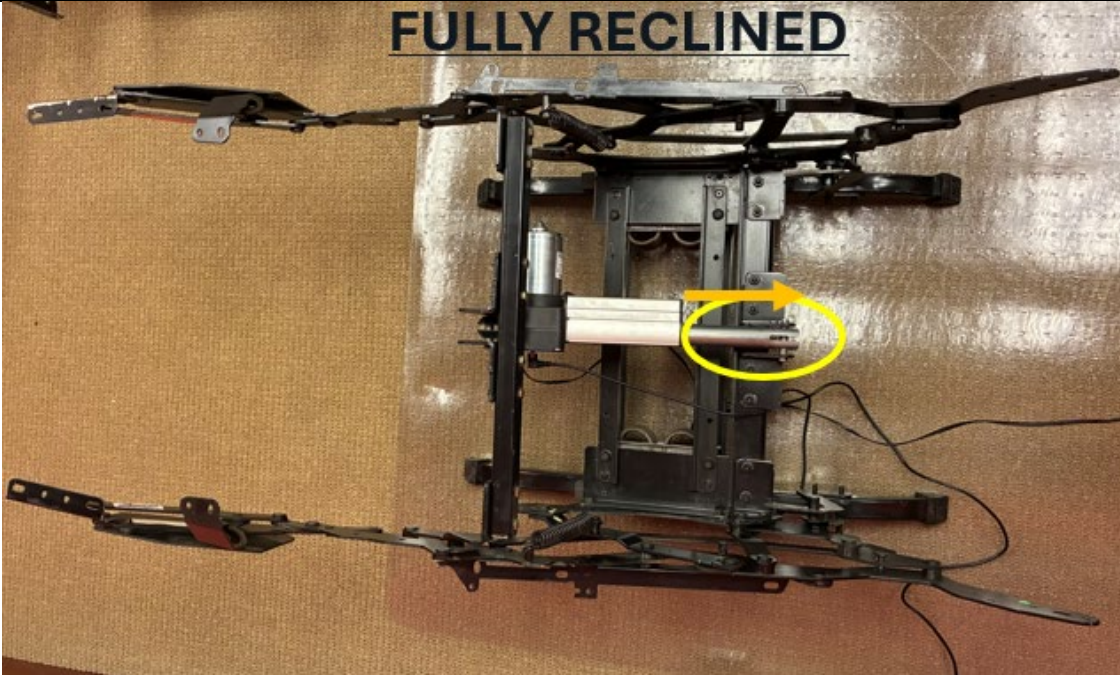
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	substantially rearward of the seat;	
12[d]	an extendable ottoman;	<i>See claim 1[d].</i>
12[e]	a reclining mechanism attached to the seat, the backrest, the ottoman and the base, the reclining mechanism comprising a plurality of pivotally interconnected links;	<i>See claim 1[e].</i>
12[f]	a reciprocating mechanism attached with the base unit and the reclining mechanism, the reciprocating mechanism configured to enable the seat, backrest and reclining mechanism to experience a longitudinally-directed reciprocating motion relative to the base unit; and	<i>See claim 1[f].</i>
12[g]	a linear actuator attached to the reclining mechanism, the linear actuator having first and second movable members, wherein the relative movement of the first and second movable members moves the chair between (a) an upright position, in which	The Exemplary Covered Rocker includes a linear actuator attached to the reclining mechanism that has first and second movable members as shown below.

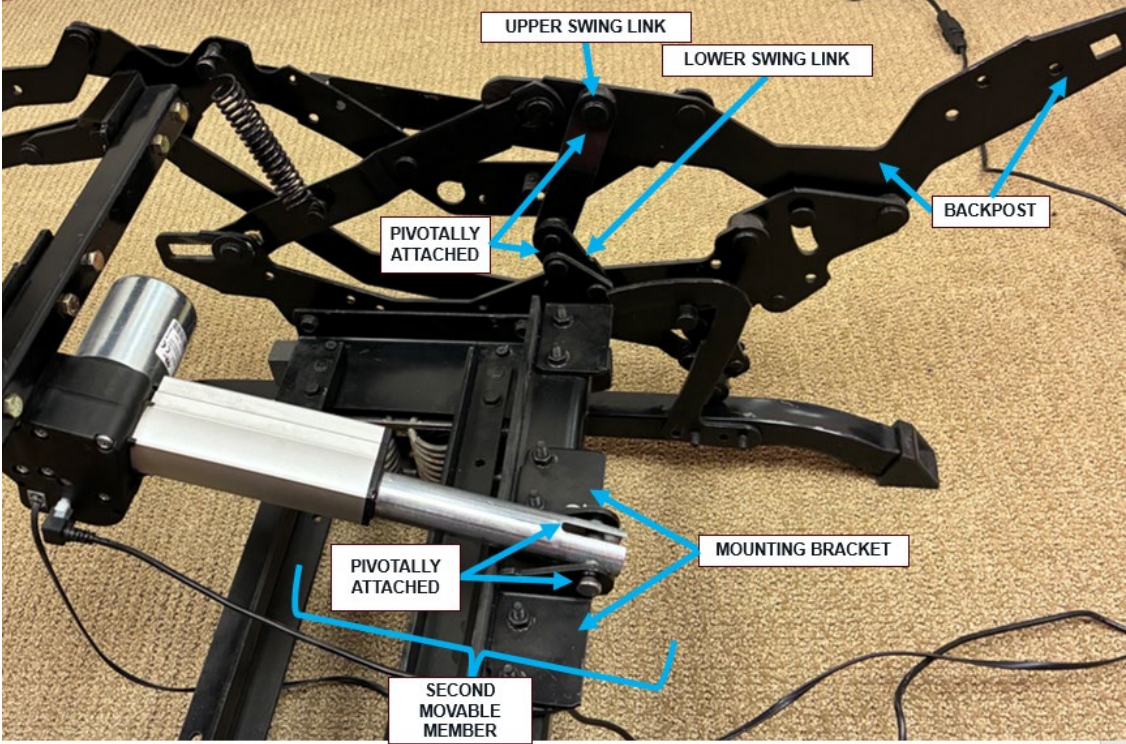
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman is generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;	 The photograph shows a complex mechanical assembly, likely a reclining chair mechanism, mounted on a wooden surface. A yellow circle highlights a central component, which appears to be a motor or actuator, possibly a linear actuator, used for reclining. The mechanism includes various metal brackets, springs, and a black frame. Wires are visible extending from the bottom right of the assembly.

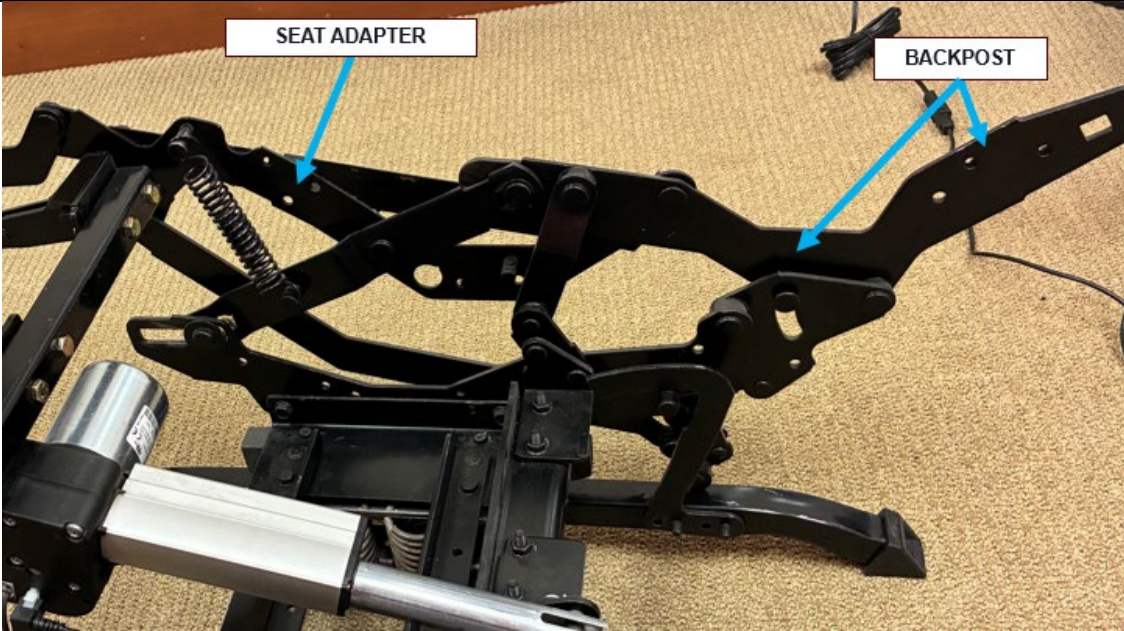
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The relative movement of the first and second movable members moves the seating unit between an upright position, an intermediate TV position, and a

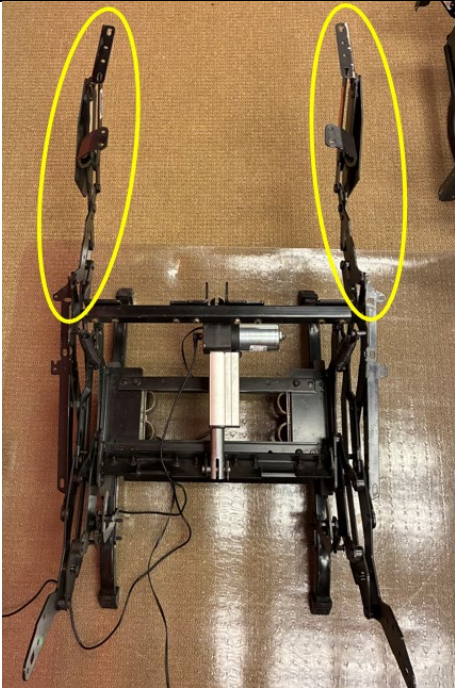
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		fully reclined position. The photos below depict the three positions between which the Exemplary Covered Rocker may be moved by the linear actuator.  The three photographs illustrate the range of motion of the Exemplary Covered Rocker. The top photo shows the device in an UPRIGHT position, where the seat is vertical. The middle photo shows the device in a TV position, where the seat is tilted back at an intermediate angle. The bottom photo shows the device in a FULLY RECLINED position, where the seat is tilted back to its maximum extent. Each photo includes a label at the bottom: UPRIGHT, TV, and FULLY RECLINED respectively.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		When the chair moves from the upright to intermediate TV position, the first movable member moves forwardly as shown below.  When the chair moves from the intermediate TV position to the fully reclined position, the second movable member moves rearwardly as shown below.

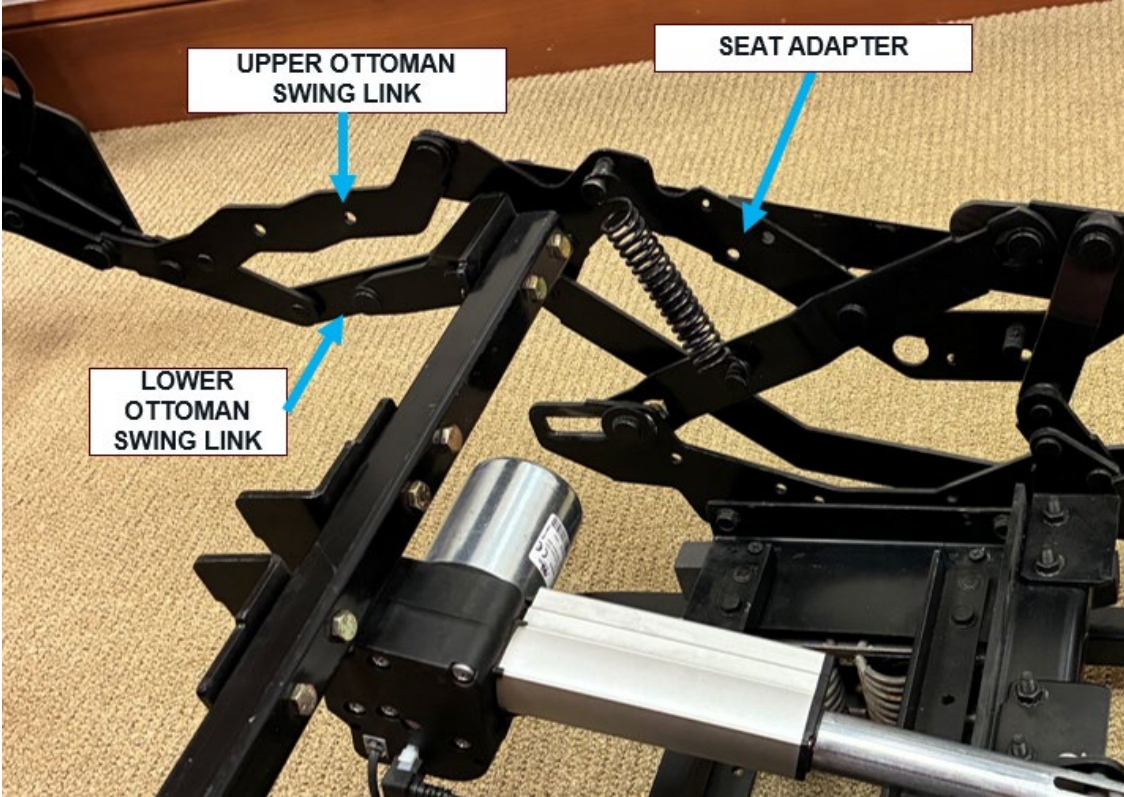
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
12[h]	wherein the reclining mechanism includes: a backpost that is fixed relative to the backrest; a mounting bracket that is attached to the second movable member of the linear actuator; a lower swing link that is attached to the mounting bracket; and an upper swing link that is	The Exemplary Covered Rocker's reclining mechanism includes a backpost that is fixed relative to the backrest; a mounting bracket that is attached to the second movable member of the linear actuator; a lower swing link that is attached to the mounting bracket; and an upper swing link that is pivotally attached to the lower swing link and to the backpost, as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	pivotally attached to the lower swing link and to the backpost.	
13	13. The seating unit defined in claim 12, further comprising a seat adapter that is fixed relative to the seat and directly pivotally attached to the backpost.	The Exemplary Covered Rocker includes a seat adapter that is fixed relative to the seat and directly pivotally attached to the backpost as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		
14	14. The reciprocating seating unit defined in claim 13, wherein the reclining mechanism includes a pantographic linkage that extends the footrest in the TV and fully reclined positions, and wherein the pantographic linkage comprises upper and lower ottoman swing links	The Exemplary Covered Rocker's reclining mechanism includes a pantographic linkage that extends the footrest in the TV and fully reclined positions, and wherein the pantographic linkage comprises upper and lower ottoman swing links that are directly pivotally attached to the seat adapter as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
	that are directly pivotally attached to the seat adapter.	

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		 The Exemplary Covered Rocker's pantographic linkage comprises upper and lower ottoman swing links that are directly pivotally attached to the seat adapter

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Rocker containing the Exemplary Covered Rocker Mechanism
		as shown below.  The photograph shows a mechanical assembly mounted on a wooden base. Three labels with blue arrows point to specific components: 'UPPER OTTOMAN SWING LINK' points to a black metal link at the top left; 'SEAT ADAPTER' points to a black metal link at the top right; and 'LOWER OTTOMAN SWING LINK' points to a black metal link at the bottom left. A coiled spring is visible between the upper and lower links. A hydraulic cylinder with a silver piston rod is connected to the lower link. The entire assembly is set against a light-colored, textured background.