

Exhibit 15

Exemplary Covered Glider that Practices Ultra-Mek's U.S. Patent No. 8,016,348

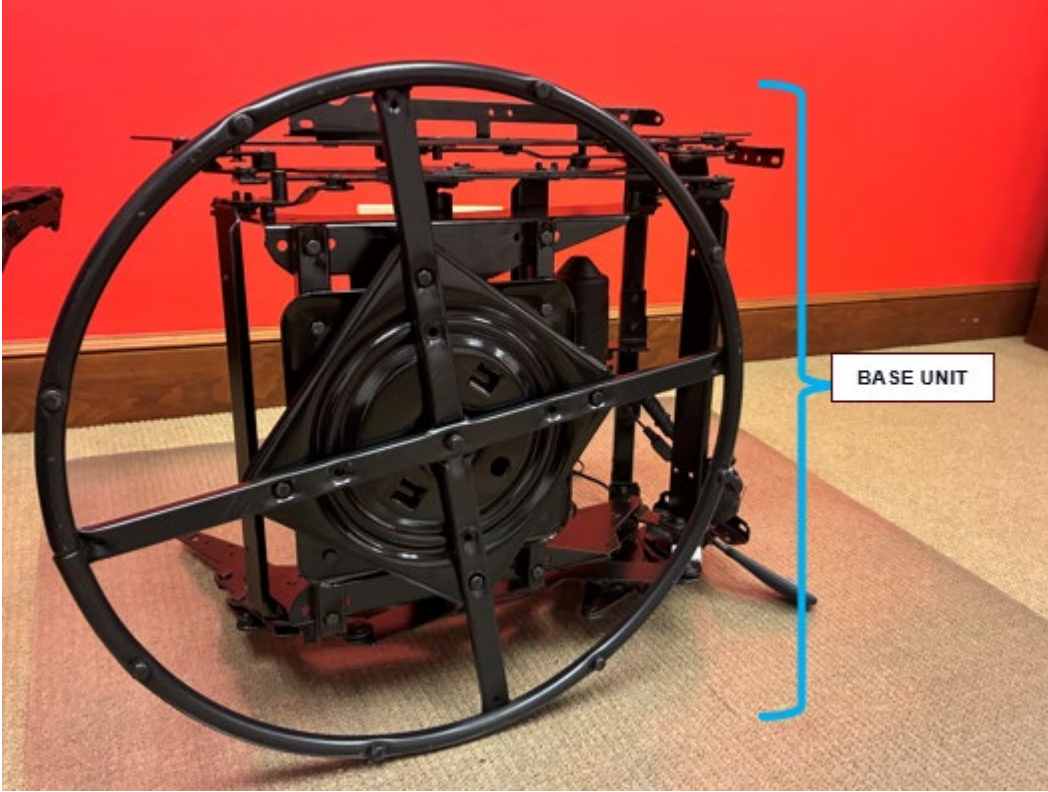
Powered Glider-Recliner with the Ultra-Mek 7900 Mechanism

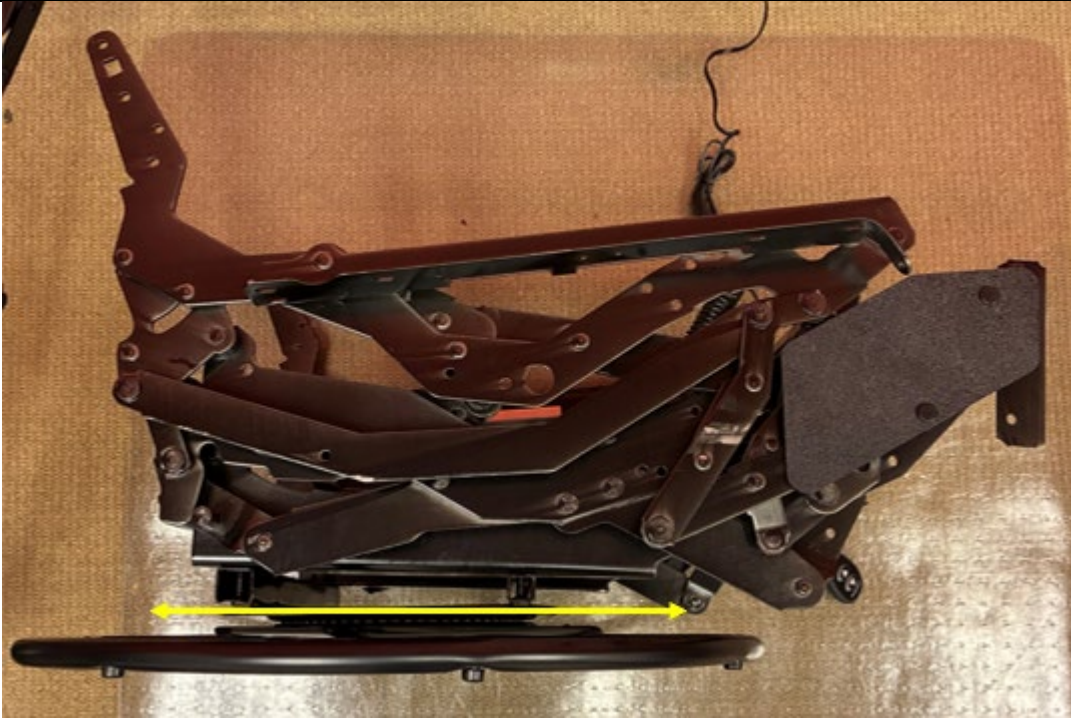
The following chart illustrates how an Exemplary Powered Glider-Recliner (the “Exemplary Covered Glider”) containing Ultra-Mek’s 7900 Mechanism (the “Exemplary Covered Glider Mechanism”) falls within the claim scope of U.S. Patent No. 8,016,348. The Exemplary Covered Glider and/or Exemplary Covered Glider Mechanism are exemplary products only and illustrate the practice of the above-referenced patent. The following chart contains highlighting, color-coding, and other annotations which are intended to assist the reader in identifying relevant elements, and are not intended to be binding or limiting. Complainants reserve the right to modify the structures associated with identified elements, to identify other functions for identified structures, and/or to adjust the identification of one or more components identified herein.

Complainants reserve the right to offer additional evidence to prove that the Exemplary Covered Glider(s) practice the claims below in their expert reports, and in motions and at trial. Complainants reserve the right to supplement, amend, or modify the foregoing based on new information that becomes available during discovery, the exchange of proposed claim constructions, and/or issuance of a claim construction order.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
1[p]	1. A seating unit, comprising:	The Exemplary Covered Glider is a seating unit that comprises an Ultra-Mek 7900 mechanism, as shown below.

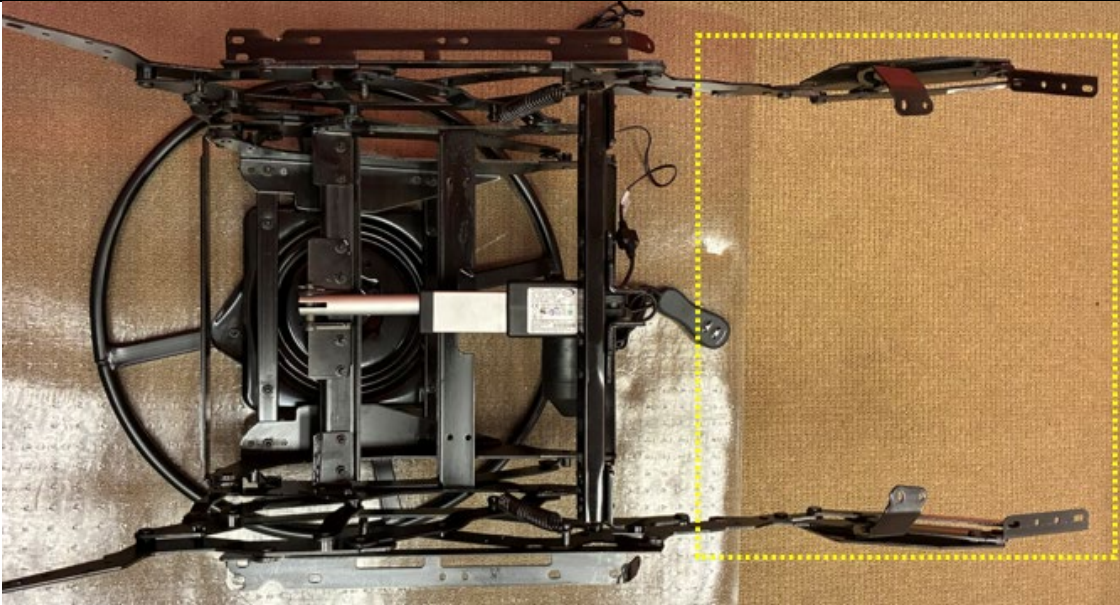
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[a]	a base unit with a first bearing surface;	The Exemplary Covered Glider includes a base unit as shown in the image below.

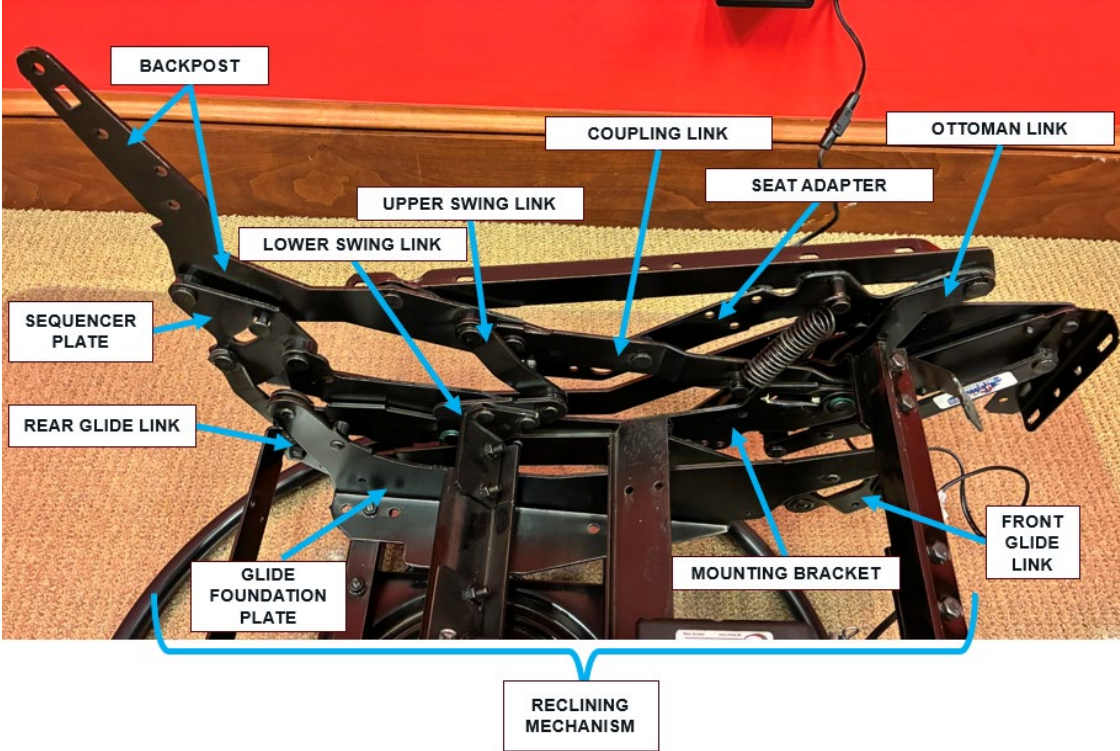
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The base unit includes multiple bearing surfaces including a first bearing surface on the upper portion of the base unit.

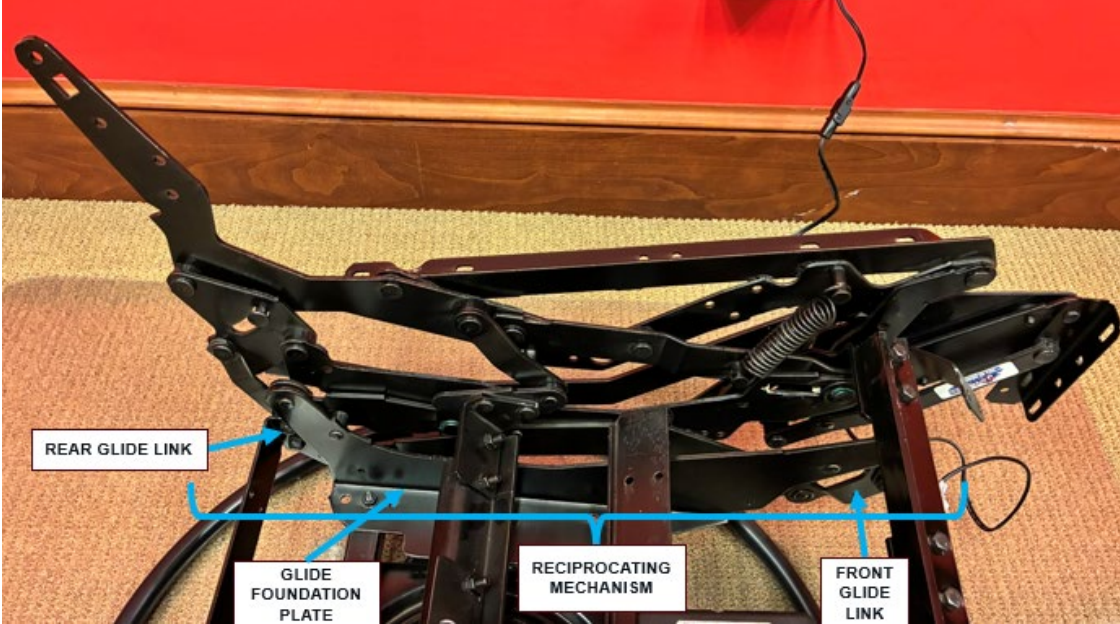
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[b]	a generally horizontally-disposed seat positioned above the base unit;	The Exemplary Covered Glider includes a generally horizontally-disposed seat positioned above the base unit, which would be attached to the Exemplary Covered Glider Mechanism and positioned approximately as shown below.

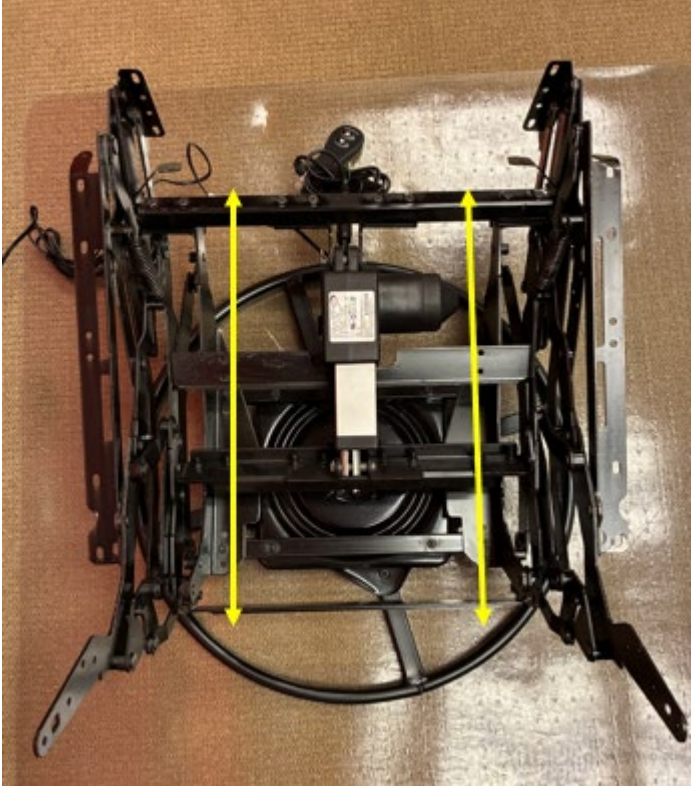
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[c]	a generally upright backrest positioned above the base unit and substantially rearward of the seat;	The Exemplary Covered Glider includes a generally upright backrest positioned above the base unit and substantially rearward of the seat, which would be attached to the Exemplary Covered Glider Mechanism and positioned approximately as shown below.

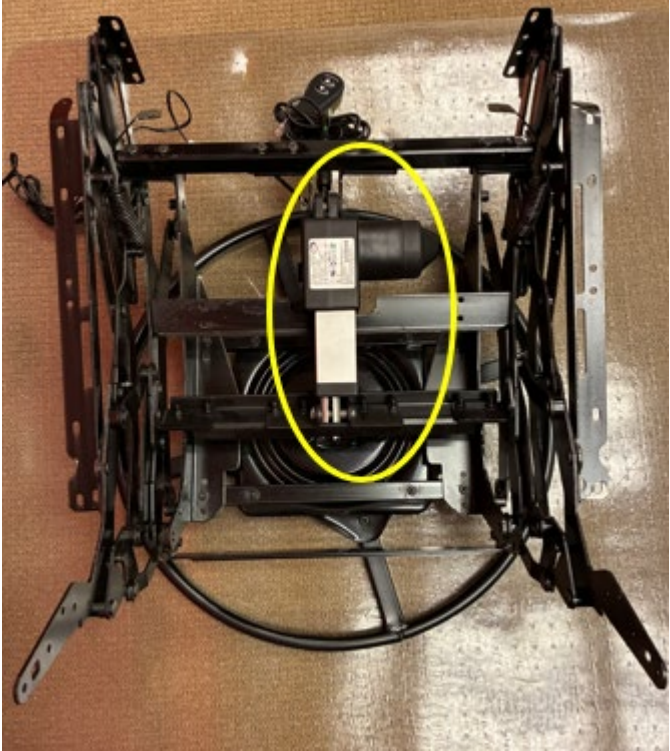
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[d]	an extendable ottoman;	The Exemplary Covered Glider includes an extendable ottoman, which would be attached to the Exemplary Covered Glider Mechanism and positioned approximately as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[e]	a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links;	The Exemplary Covered Glider includes a reclining mechanism attached to the seat, the backrest, the ottoman, and the base unit, as shown below. The reclining mechanism further comprises a plurality of pivotally interconnected links, as shown below.

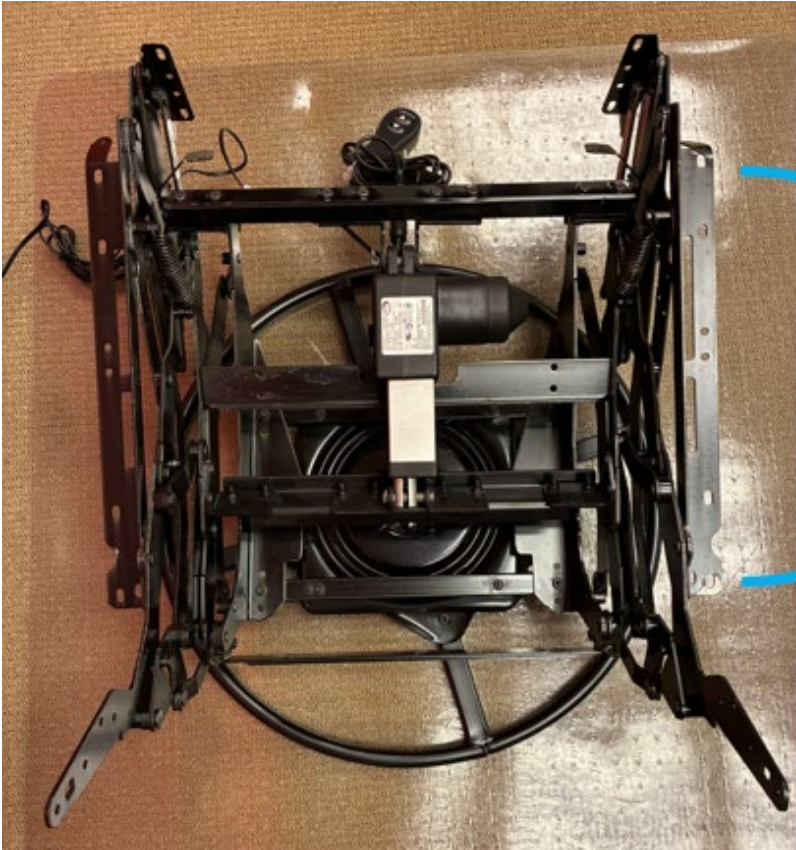
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[f]	a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive	The Exemplary Covered Glider includes a reciprocating mechanism attached to the base unit and the reclining mechanism that is configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force, as shown below.

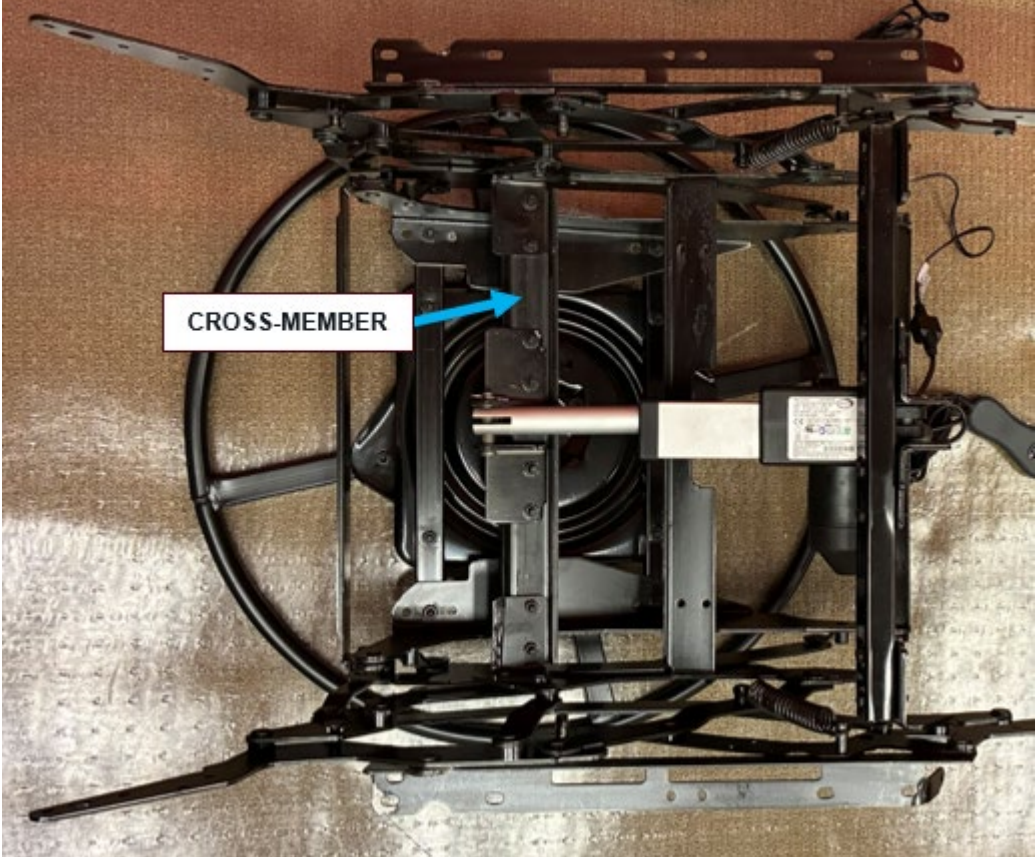
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	to a longitudinally-directed force; and	 The reciprocating mechanism comprises at least the glide foundation plate and front and rear glide links shown above. As shown below, when a longitudinally-directed force is applied, the reciprocating mechanism allows the chair to glide forward and backward.

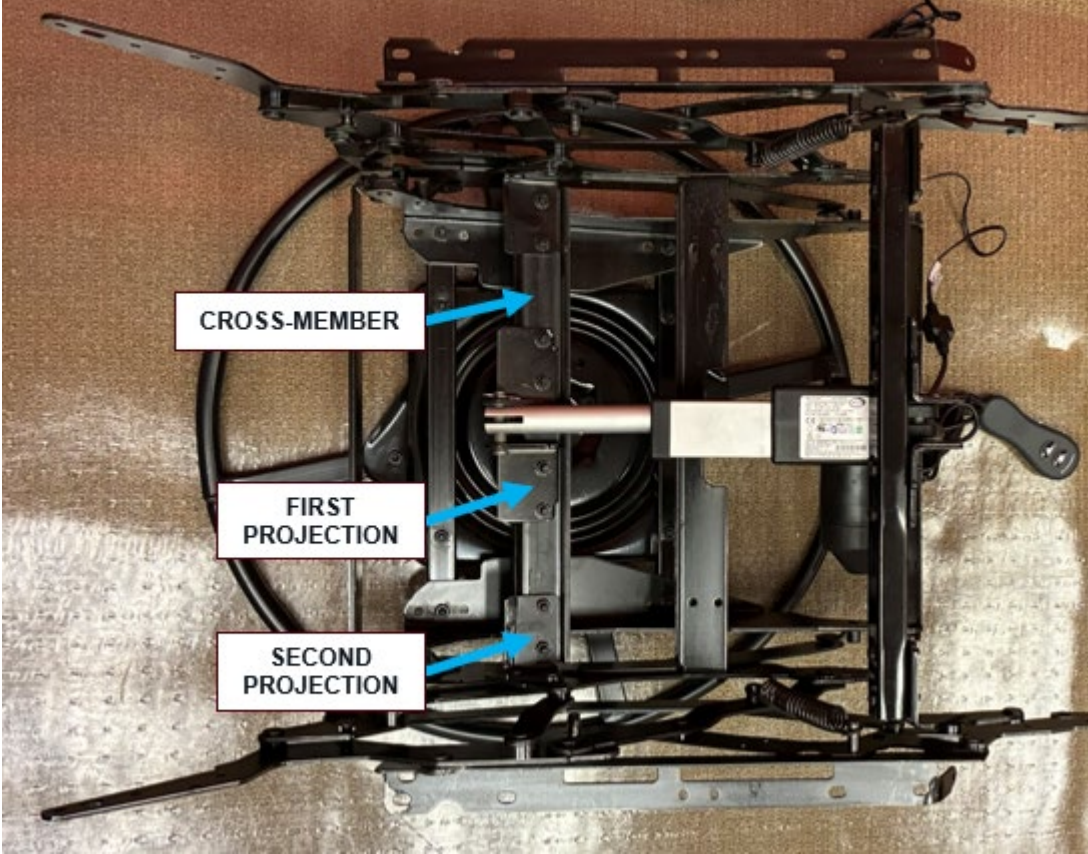
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[g]	a power actuating unit attached to the reclining mechanism, the actuating unit configured to move the seating unit between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is	The Exemplary Covered Glider includes a power actuating unit attached to the reclining mechanism that is configured to move the seating unit between an upright position, an intermediate TV position, and a fully reclined position.

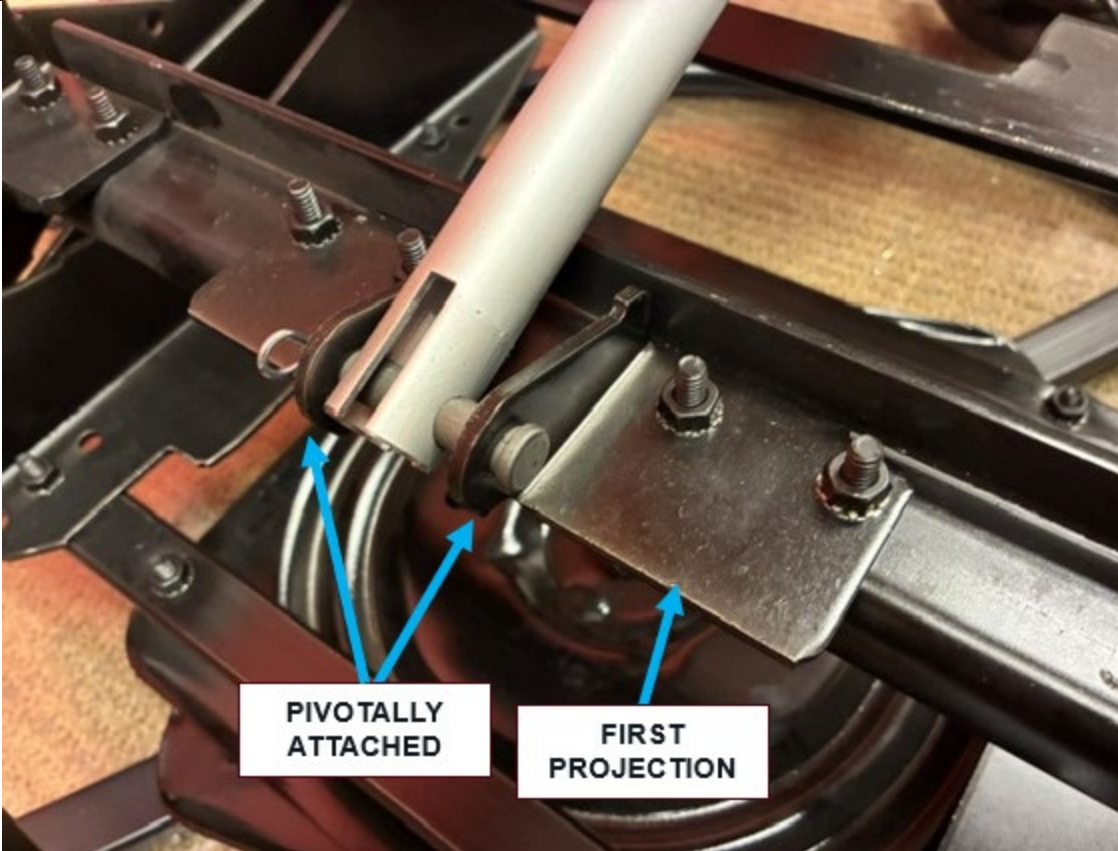
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	generally vertically disposed, and the ottoman is generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;	 The photos below depict the three positions between which the Exemplary Covered Glider may be moved by the power actuating unit.

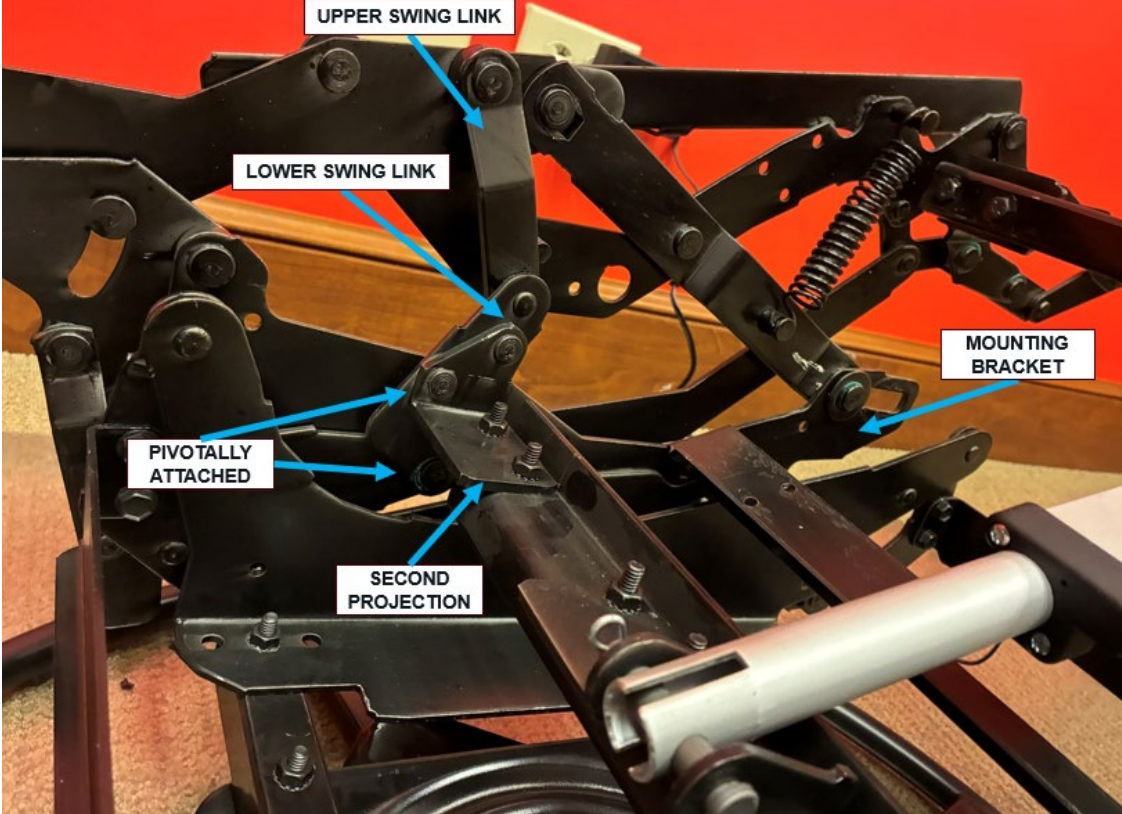
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The image contains three photographs of a black metal glider mechanism, likely for a chair or sofa, mounted on a circular base. The top photo shows the mechanism in an 'Upright' position, with the seat back angled back. The middle photo shows it in a 'TV' position, with the seat back further reclined. The bottom photo shows it in a 'Fully Reclined' position, with the seat back nearly horizontal. Each photo is labeled with its respective position in the bottom right corner.
1[h]	wherein the actuating unit is attached to an actuating	The Exemplary Covered Glider actuating unit (not labeled) is attached to an actuating mechanism as shown below.

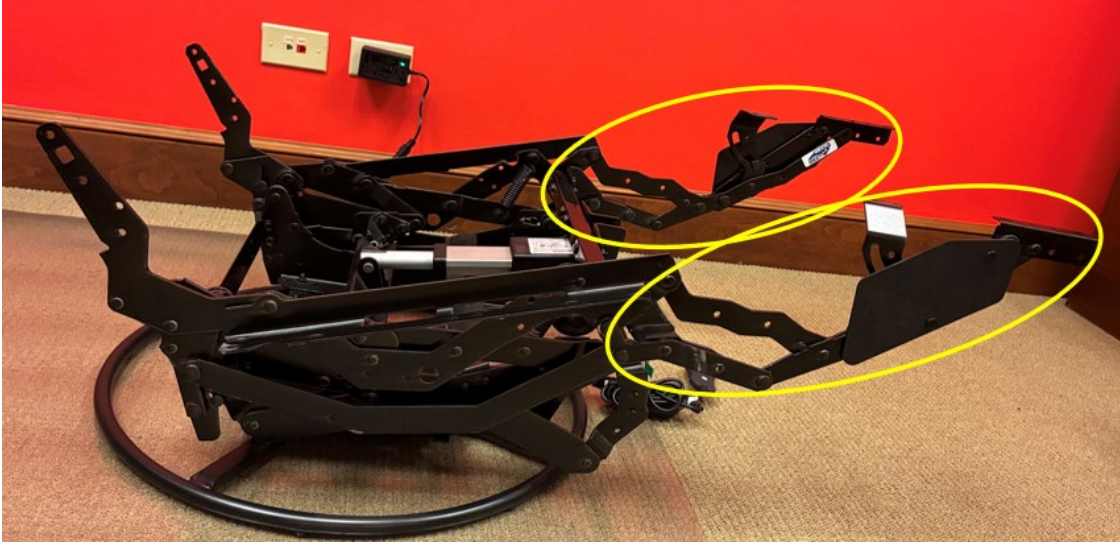
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	mechanism, the actuating mechanism comprising:	 ACTUATING MECHANISM
1[i]	a cross-member extending transversely across the seating unit;	The Exemplary Covered Glider actuating mechanism includes a cross-member extending transversely across the seating unit as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The image shows a complex mechanical assembly, possibly a glider mechanism, with various metal components, springs, and a central vertical member. A blue arrow points to a vertical component labeled "CROSS-MEMBER".
1[j]	first and second projections fixed to the cross-member;	The Exemplary Covered Glider actuating mechanism includes first and second projections fixed to the cross-member as shown in the image below.

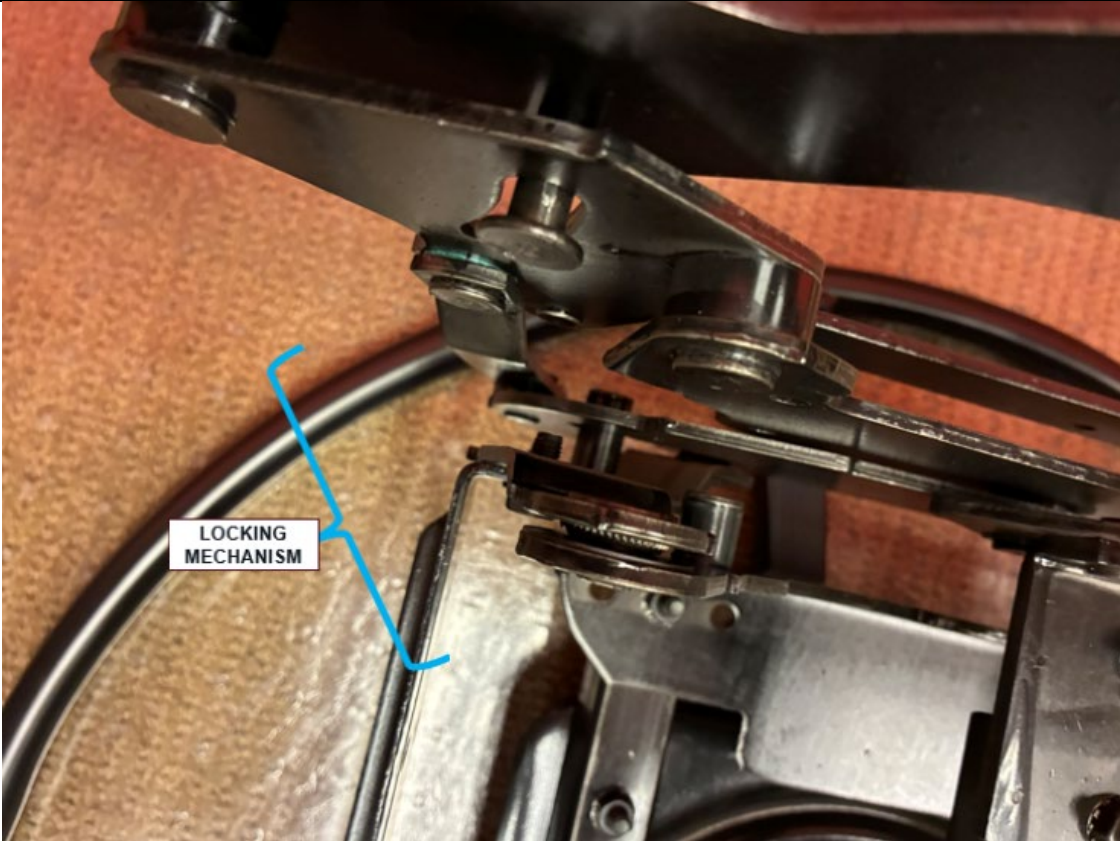
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The image shows a complex mechanical assembly, likely a glider mechanism. Three labels with blue arrows point to specific components: 'CROSS-MEMBER' points to a horizontal bar, 'FIRST PROJECTION' points to a vertical pin or rod, and 'SECOND PROJECTION' points to a lower vertical component. The assembly is mounted on a base and includes various structural members and a central actuating unit.
1[k]	wherein the first projection is pivotally attached to the actuating unit; and	The Exemplary Covered Glider first projection is pivotally attached to the actuating unit (not labeled) as shown in the image below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The first projection is attached to the actuating unit such that the first projection and actuating unit can pivot within the mechanism.
1[1]	wherein the second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing	The Exemplary Covered Glider's second projection is pivotally attached to a lower swing link of the reclining mechanism, and the lower swing link is pivotally attached to the upper swing link and to a mounting bracket that is attached to the reciprocating mechanism as shown in the image below.

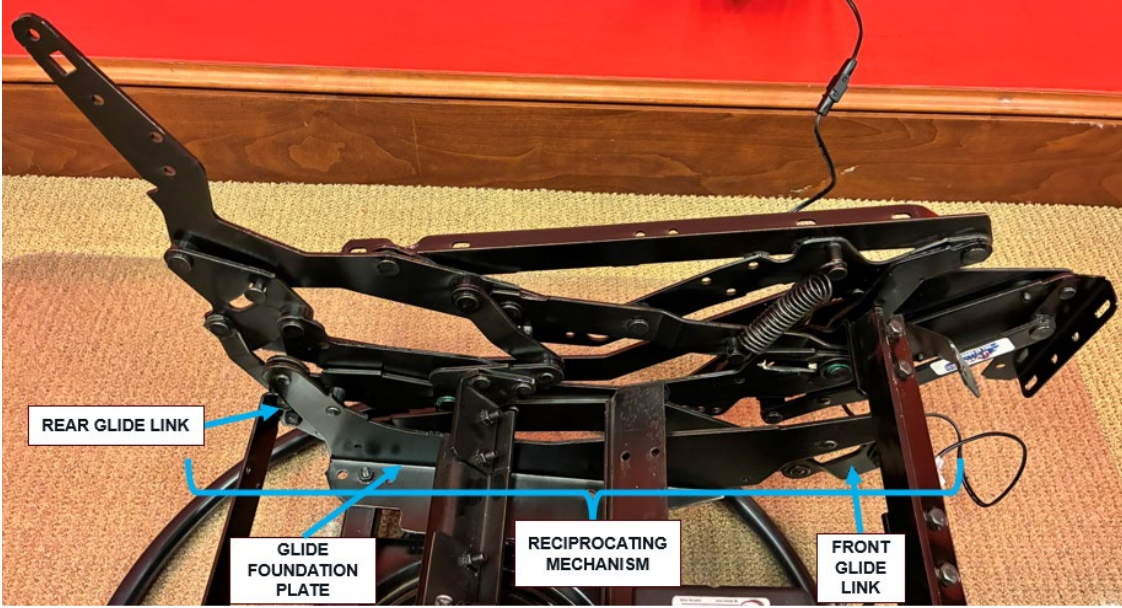
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism.	
2	2. The seating unit defined in claim 1, wherein the reclining mechanism includes a pantographic linkage on which the ottoman is mounted, and wherein in the TV and fully reclined positions, pivots between	The Exemplary Covered Glider includes a pantographic linkage on which the ottoman is mounted, as shown below.

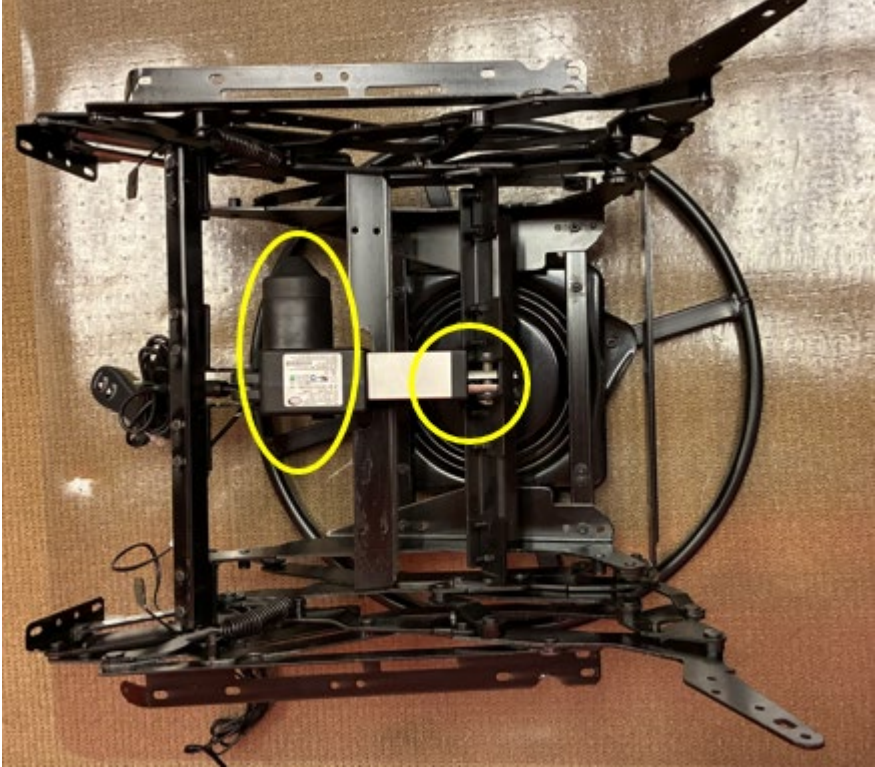
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	links of the pantographic linkage form a near over-center arrangement that locks the ottoman in position.	 When the Exemplary Covered Glider is in the intermediate TV and fully reclined positions, the ottoman is locked in place by the near over-center arrangement of pivots between the ottoman links as shown below.

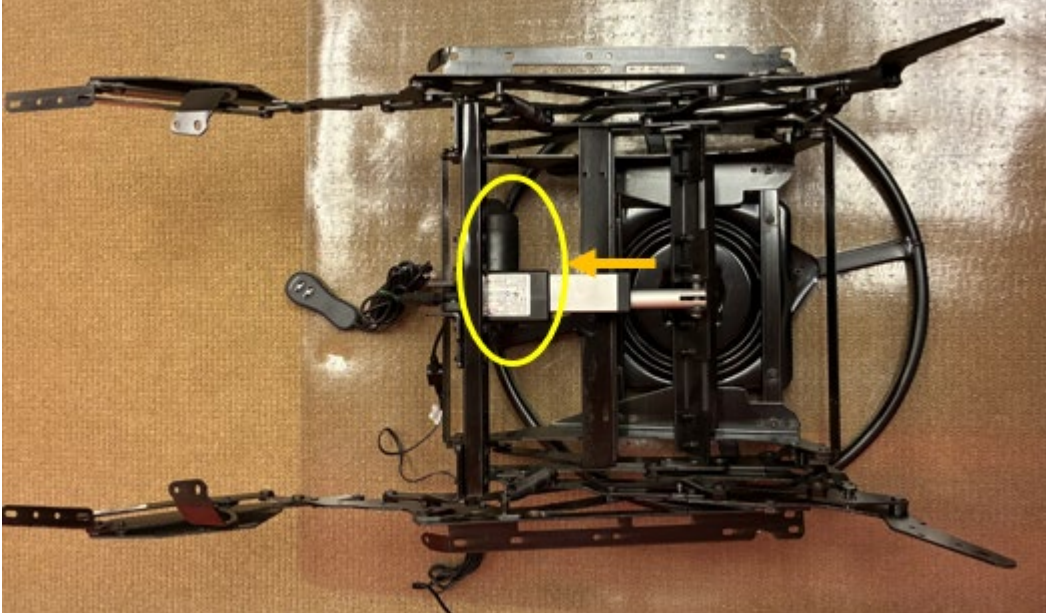
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
3	3. The seating unit defined in claim 1, further comprising a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions.	The Exemplary Covered Glider includes a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions as shown below.

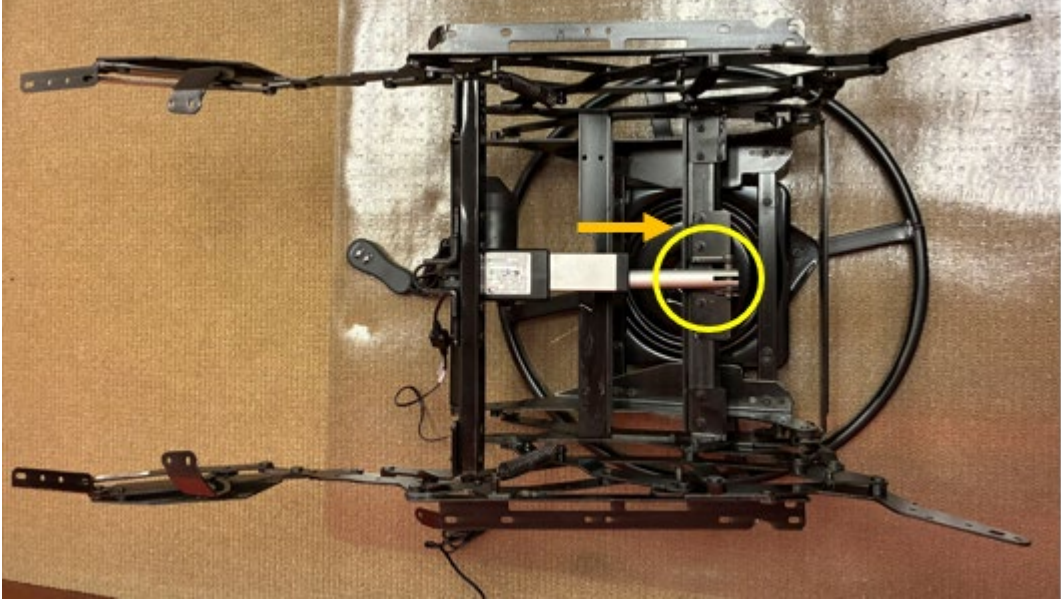
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
4	4. The seating unit defined in claim 1, wherein the seat rises in moving from the TV position to the fully reclined position.	The Exemplary Covered Glider seat rises in moving from the TV position to the fully reclined position as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
6	6. The seating unit defined in claim 1, wherein the reciprocating mechanism is a gliding mechanism.	The Exemplary Covered Glider reciprocating mechanism is a gliding mechanism as shown below.

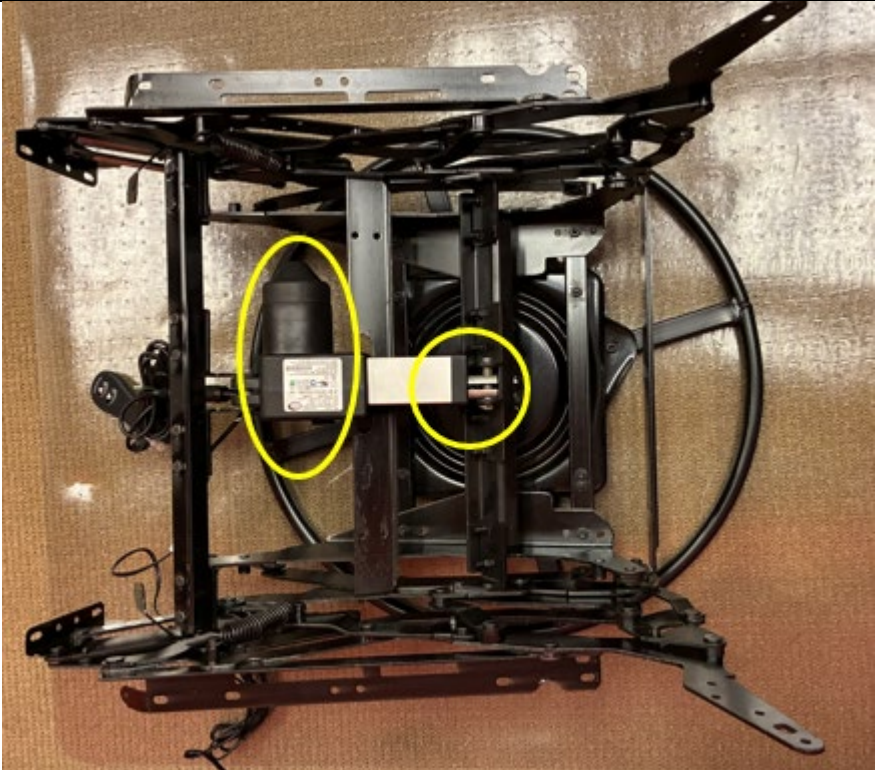
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The gliding mechanism comprises at least the glide foundation plate and the front and rear glide links shown above.
7	7. The seating unit defined in claim 1, wherein the power actuating unit includes opposed first and second ends, and wherein the first end of the power actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the power actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.	The Exemplary Covered Glider power actuating unit includes opposed first and second ends where the first end of the power actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the power actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position. As shown below, the power actuating unit includes opposed first and second ends. The mechanism below is in the upright position.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.	 When the seating unit moves from the upright to intermediate TV position, the first end moves forwardly as shown below.

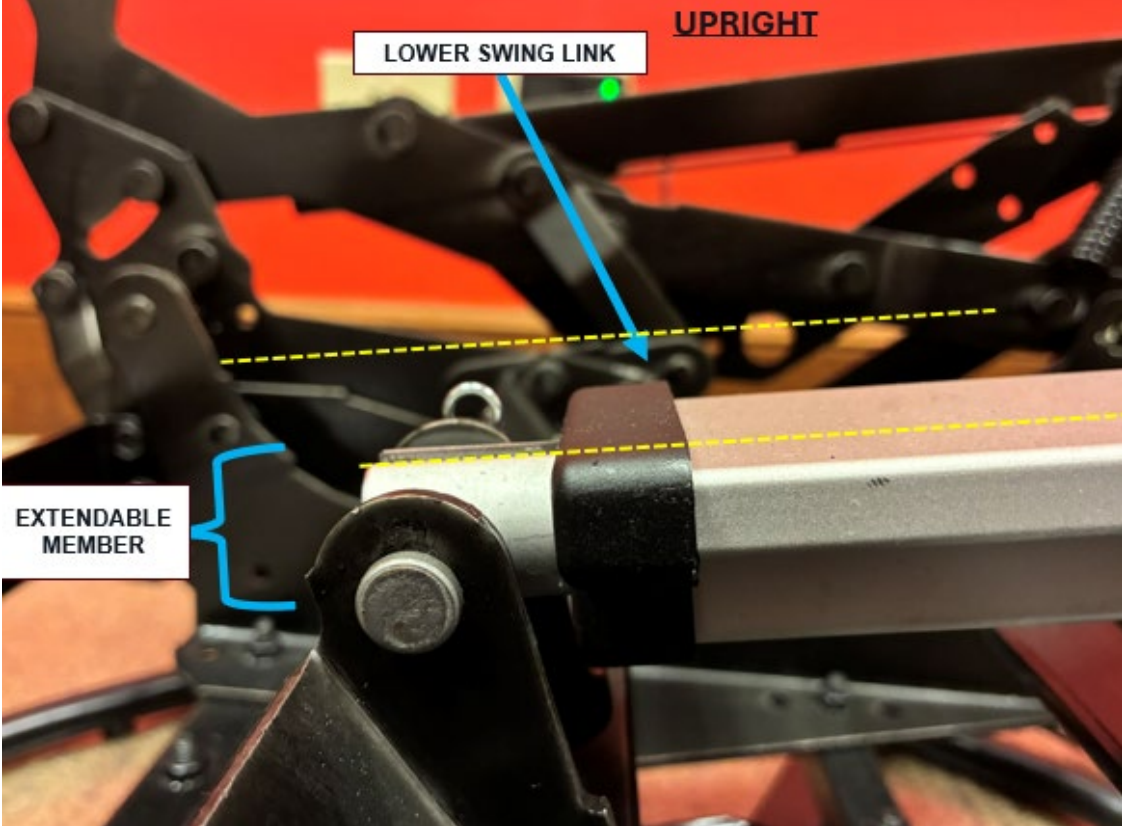
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 When the seating unit moves from the intermediate TV position to the fully reclined position, the second end moves rearwardly as shown below.

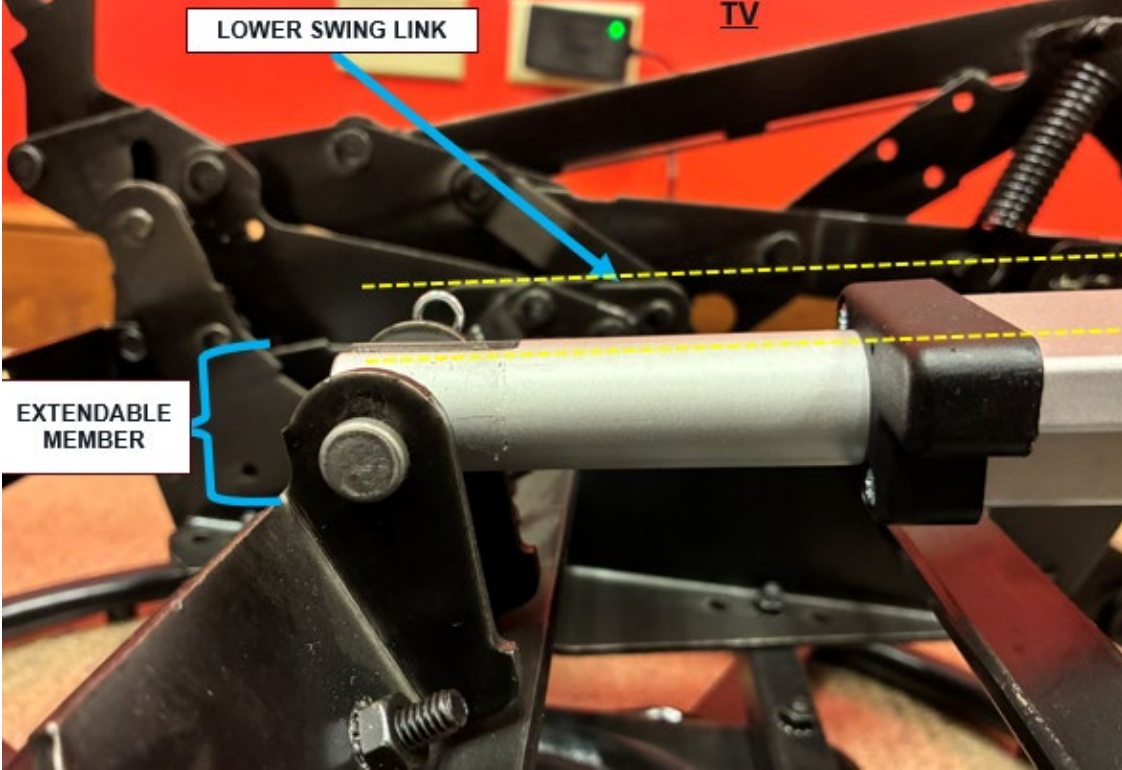
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
8	8. The seating unit defined in claim 7, wherein the upper swing link is pivotally attached with the backrest.	The Exemplary Covered Glider upper swing link is pivotally attached with the backrest as shown below (via the backpost).

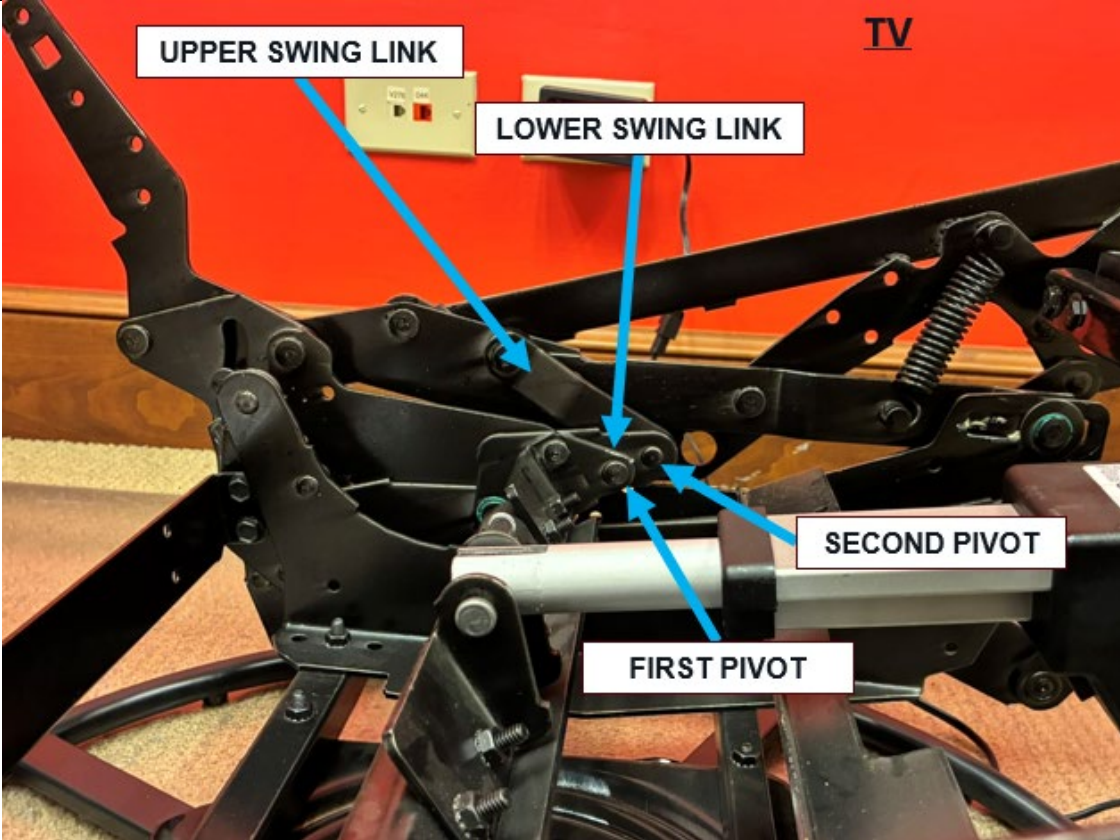
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
9	9. The seating unit defined in claim 7, wherein the power actuating unit includes a motor and an extendable member at the first and second ends.	The Exemplary Covered Glider power actuating unit includes a motor and an extendable member at the first and second ends as shown below.

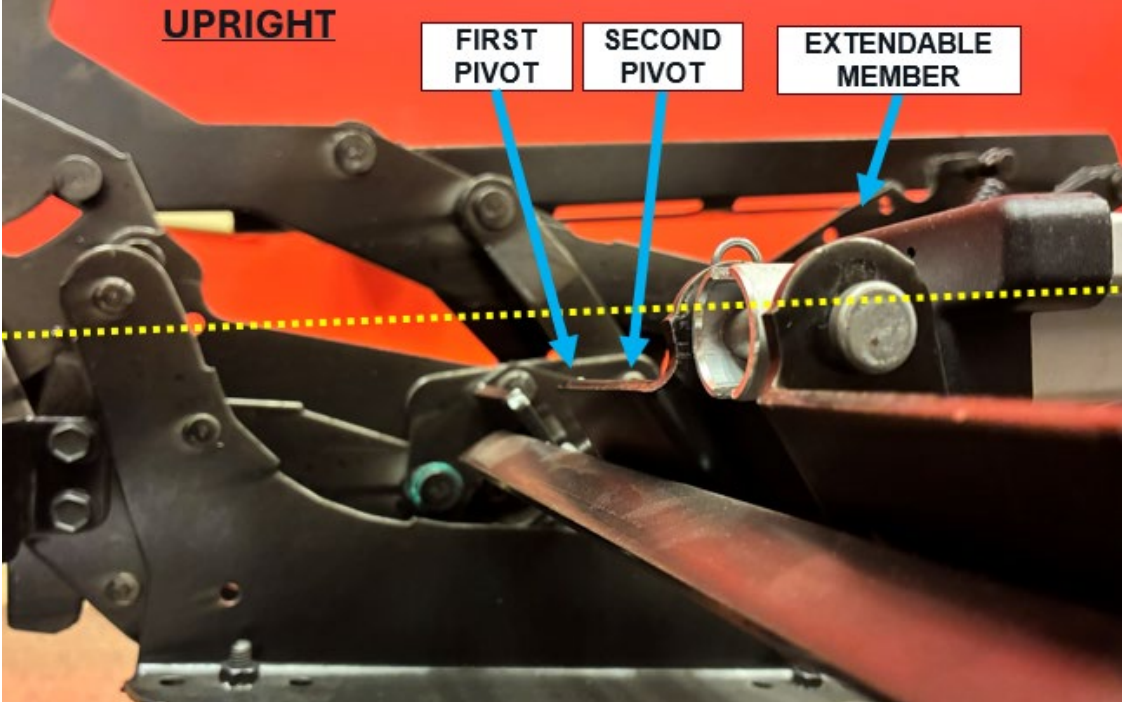
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
10	10. The seating unit defined in claim 9, wherein the lower swing link is angled, and wherein a segment of the lower swing link attached to the upper swing link is generally parallel to an axis defined by the extendable member of the actuating unit	The Exemplary Covered Glider's lower swing link is angled, and a segment of the lower swing link attached to the upper swing link is generally parallel to an axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions, as shown below. The Exemplary Covered Glider's lower swing link is angled, as shown below.

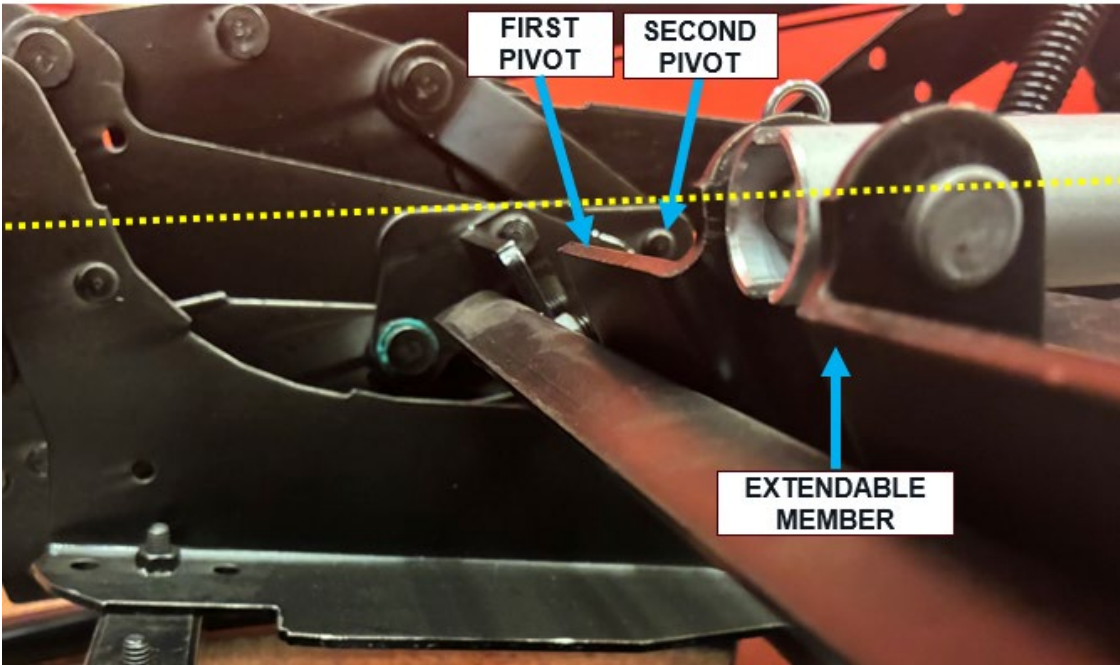
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	when the seating unit is in the upright and TV positions.	 The Exemplary Covered Glider further comprises a segment of the lower swing link attached to the upper swing link that is generally parallel to an axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions, as shown below.

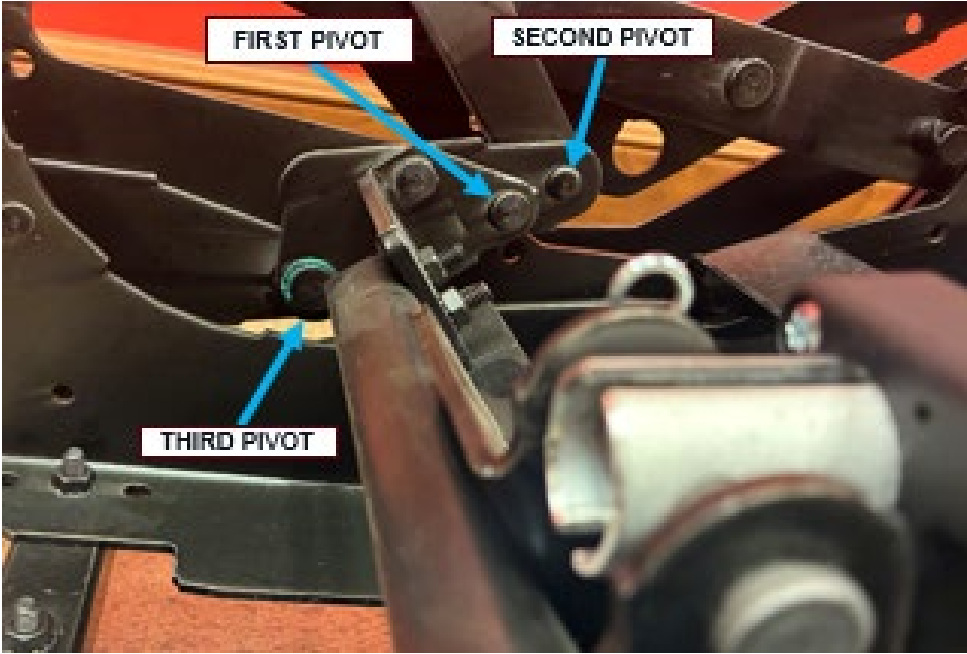
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 UPRIGHT LOWER SWING LINK EXTENDABLE MEMBER

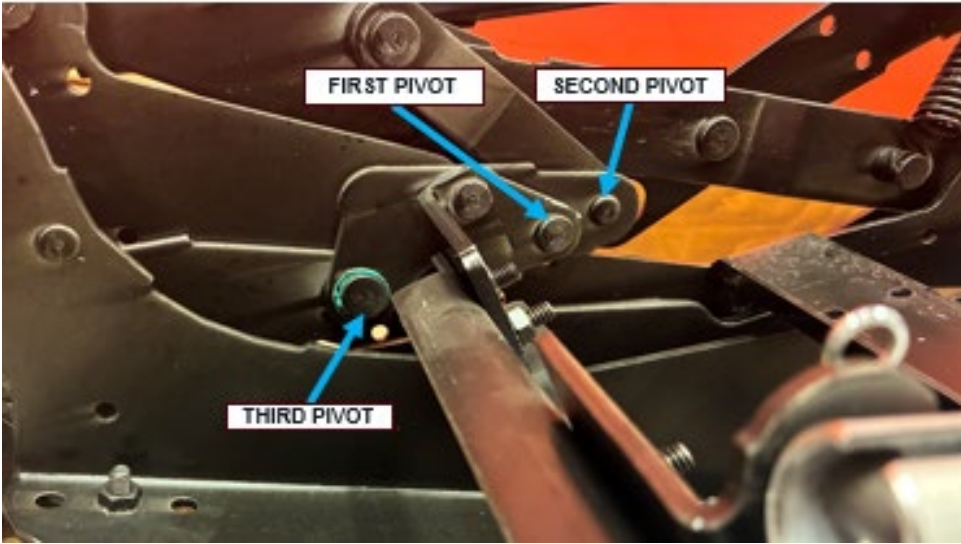
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
11	11. The seating unit defined in claim 10, wherein a first pivot defined by the second projection and the lower swing link and a second pivot defined by the lower swing link and the upper swing link that are below the axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions, as shown below.	The Exemplary Covered Glider comprises a first pivot defined by the second projection and the lower swing link and a second pivot defined by the lower swing link and the upper swing link that are below the axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions, as shown below. The first and second pivots are shown below.

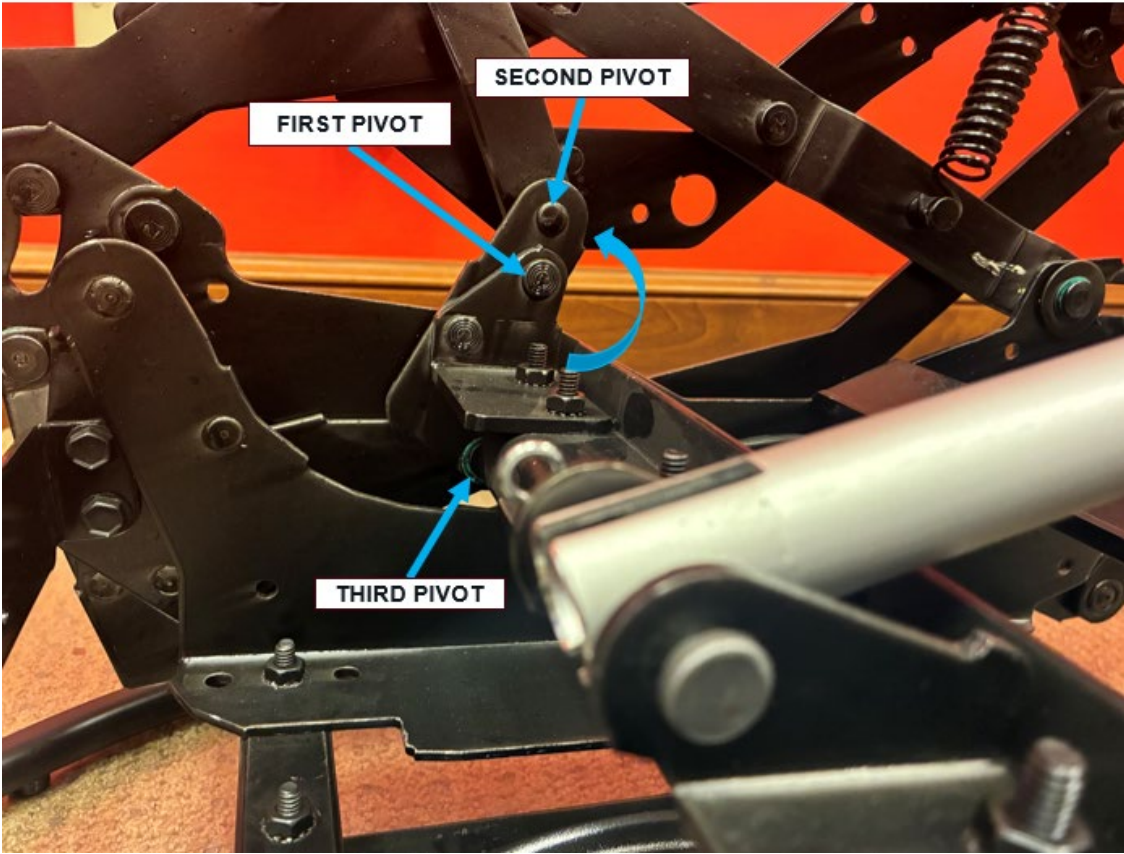
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	the extendable member of the actuating unit when the seating unit is in the upright and TV positions.	 The first and second pivots are below the axis (yellow) defined by the extendable member of the actuating unit when the seating unit is in the upright position and in the TV position, as shown below.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 UPRIGHT FIRST PIVOT SECOND PIVOT EXTENDABLE MEMBER

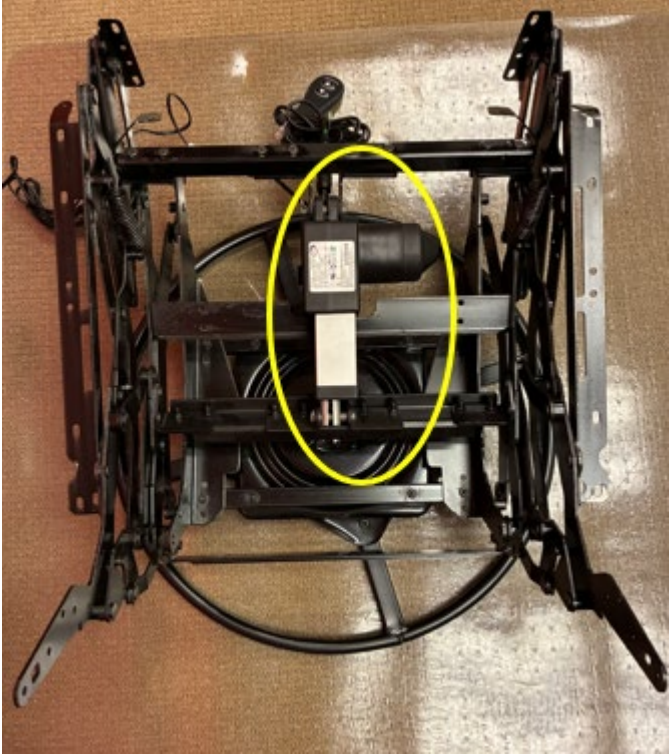
Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		TV 
12	12. The seating unit defined in claim 11, wherein the lower swing link is attached to the mounting bracket at a third pivot, and wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots	The Exemplary Covered Glider comprises a lower swing link that is attached to the mounting bracket at a third pivot, wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots define a second angle that is larger than the first angle, as shown below. The first, second, and third pivots when the seating unit is in the upright position are shown below, defining a first angle.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	define a second angle that is larger than the first angle.	<u>UPRIGHT</u>  The first, second, and third pivots when the seating unit is in the TV position are shown below, defining the first angle.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		<u>TV</u>  The first, second, and third pivots when the seating unit is in the fully reclined position are shown below, defining a second angle that is greater than the first angle.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		FULLY RECLINED 
13[p]	13. A reciprocating and reclining seating unit, comprising:	<i>See claim 1[p].</i>
13[a]	a base unit with a first bearing surface;	<i>See claim 1[a].</i>

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
13[b]	a generally horizontally-disposed seat positioned above the base unit;	<i>See claim 1[b].</i>
13[c]	a generally upright backrest positioned above the base unit and substantially rearward of the seat;	<i>See claim 1[c].</i>
13[d]	an extendable ottoman;	<i>See claim 1[d].</i>
13[e]	a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links;	<i>See claim 1[e].</i>
13[f]	a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force; and	<i>See claim 1[f].</i>
13[g]	a power linear actuating unit attached to the reclining mechanism, the actuating unit	The Exemplary Covered Glider includes a power linear actuating unit attached to the reclining mechanism that is configured to move the seating unit between an upright position, an intermediate TV position, and a fully reclined position.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	including a motor and an extendable rod and configured to move the seating unit between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is generally vertically disposed, and the ottoman are is generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;	<i>See claim 1[g].</i>  The photos below depict the three positions between which the Exemplary Covered Glider may be moved by the power linear actuating unit.

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The image contains three photographs of a black metal glider mechanism, likely for a chair or sofa, demonstrating its range of motion. The top photo is labeled 'Upright' and shows the mechanism in a vertical position. The middle photo is labeled 'TV' and shows the mechanism tilted back at an angle. The bottom photo is labeled 'Fully Reclined' and shows the mechanism in a horizontal position. Each photo includes a small white label with the respective position name in the bottom right corner.
13[h]	wherein the actuating unit is attached to an actuating mechanism, the actuating mechanism comprising:	<i>See claim 1[h].</i>
13[i]	a cross-member extending transversely across the seating unit;	<i>See claim 1[i].</i>
13[j]	first and second projections fixed to the cross-member;	<i>See claim 1[j].</i>

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
13[k]	wherein the first projection is pivotally attached to the actuating unit; and	<i>See claim 1[k].</i>
13[l]	wherein the second projection is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism; and	<i>See claim 1[l].</i>
13[m]	wherein the actuating unit includes opposed first and second ends, and wherein the first end of the actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.	<i>See claim 7.</i>
14	14. The seating unit defined in claim 13, wherein a first pivot defined by the second	<i>See claim 11.</i>

Claim	U.S. Patent No. 8,016,348	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	projection and the lower swing link and a second pivot defined by the lower swing link and the upper swing link are below an axis defined by the extendable rod of the actuating unit when the seating unit is in the upright and TV positions.	
15	15. The seating unit defined in claim 14, wherein in the upright and TV positions, the lower swing link is attached to the mounting bracket at a third pivot, and wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots define a second angle that is larger than the first angle.	<i>See claim 12.</i>