

Exhibit 16

Exemplary Covered Glider that Practices Ultra-Mek's U.S. Patent No. 8,297,693

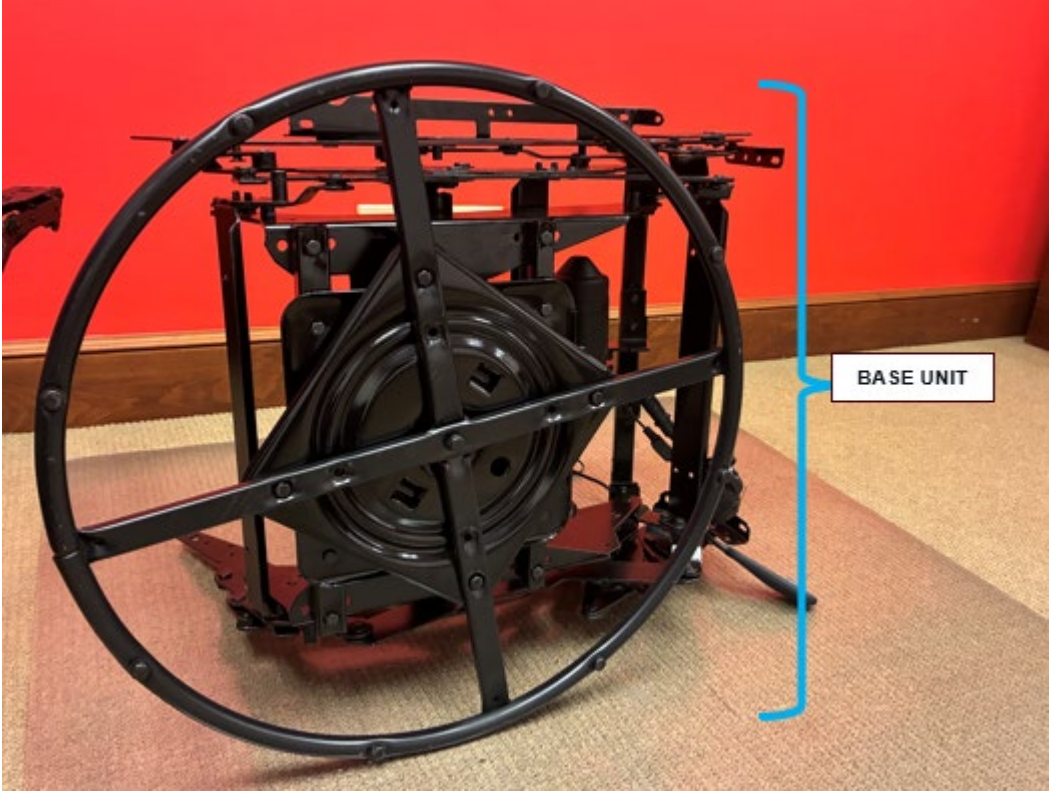
Powered Glider-Recliner with the Ultra-Mek 7900 Mechanism

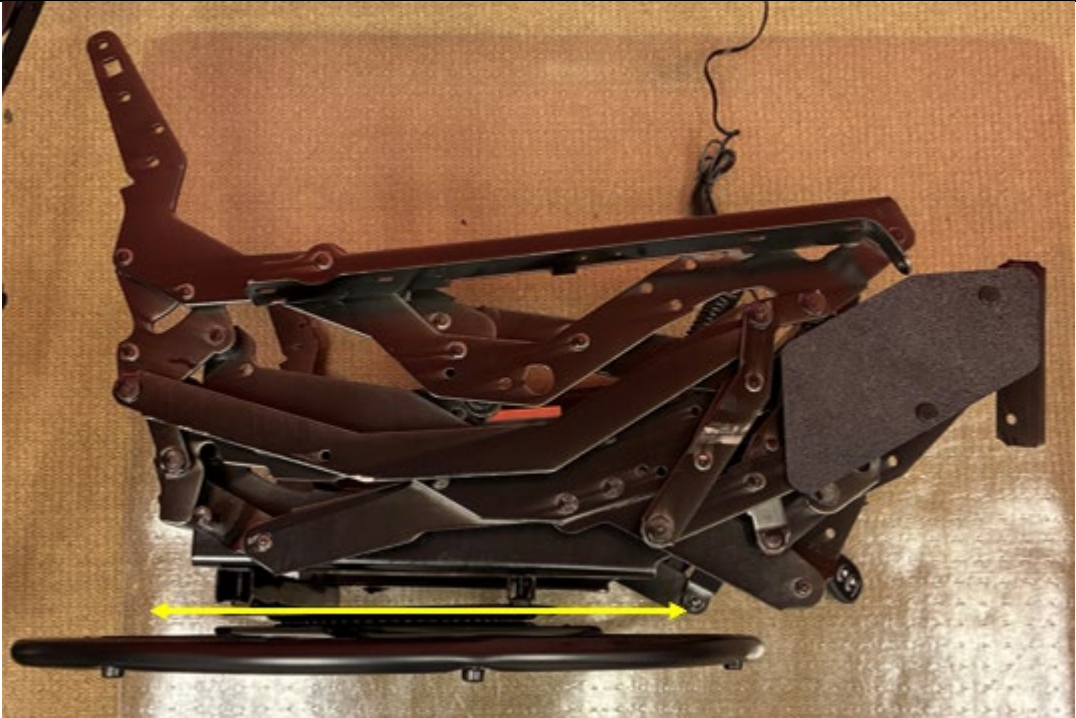
The following chart illustrates how an Exemplary Powered Glider-Recliner (the “Exemplary Covered Glider”) containing Ultra-Mek’s 7900 Mechanism (the “Exemplary Covered Glider Mechanism”) falls within the claim scope of U.S. Patent No. 8,297,693. The Exemplary Covered Glider and/or Exemplary Covered Glider Mechanism are exemplary products only and illustrate the practice of the above-referenced patent. The following chart contains highlighting, color-coding, and other annotations which are intended to assist the reader in identifying relevant elements, and are not intended to be binding or limiting. Complainants reserve the right to modify the structures associated with identified elements, to identify other functions for identified structures, and/or to adjust the identification of one or more components identified herein.

Complainants reserve the right to offer additional evidence to prove that the Exemplary Covered Glider(s) practice the claims below in their expert reports, and in motions and at trial. Complainants reserve the right to supplement, amend, or modify the foregoing based on new information that becomes available during discovery, the exchange of proposed claim constructions, and/or issuance of a claim construction order.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
1[p]	A seating unit, comprising:	The Exemplary Covered Glider is a seating unit that comprises an Ultra-Mek 7900 mechanism, as shown below.

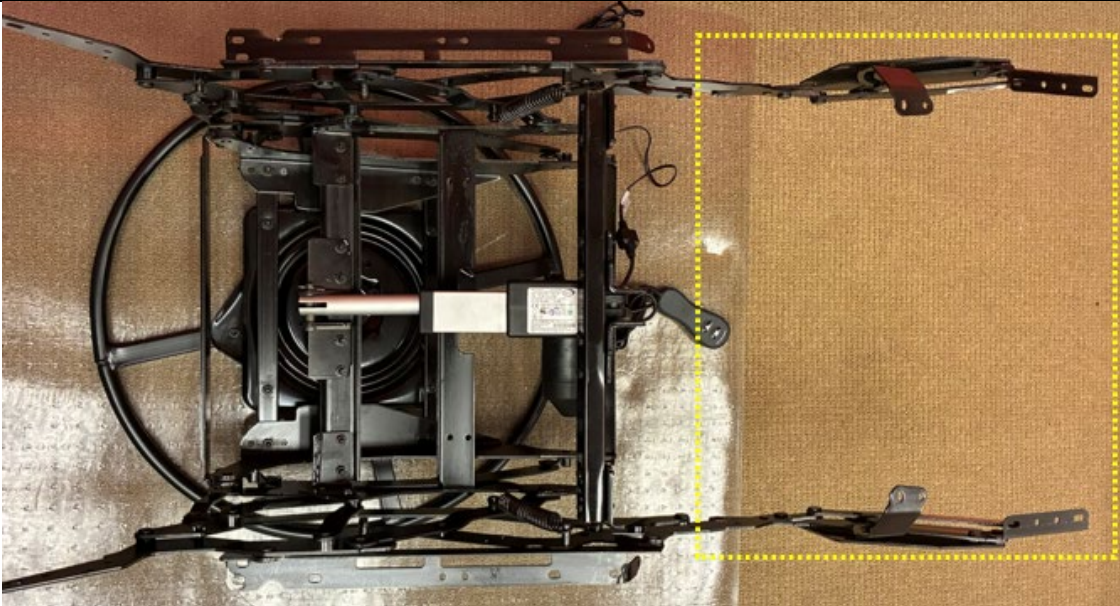
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The image shows a complex mechanical assembly, likely a glider mechanism, constructed from black metal plates and rods. It features a prominent curved base and several articulated arms extending upwards and outwards. The mechanism is positioned against a bright red wall, with a beige carpeted floor visible in the foreground. A power outlet and a small black device are visible on the wall behind the mechanism.
1[a]	a base unit with a first bearing surface;	The Exemplary Covered Glider includes a base unit as shown below.

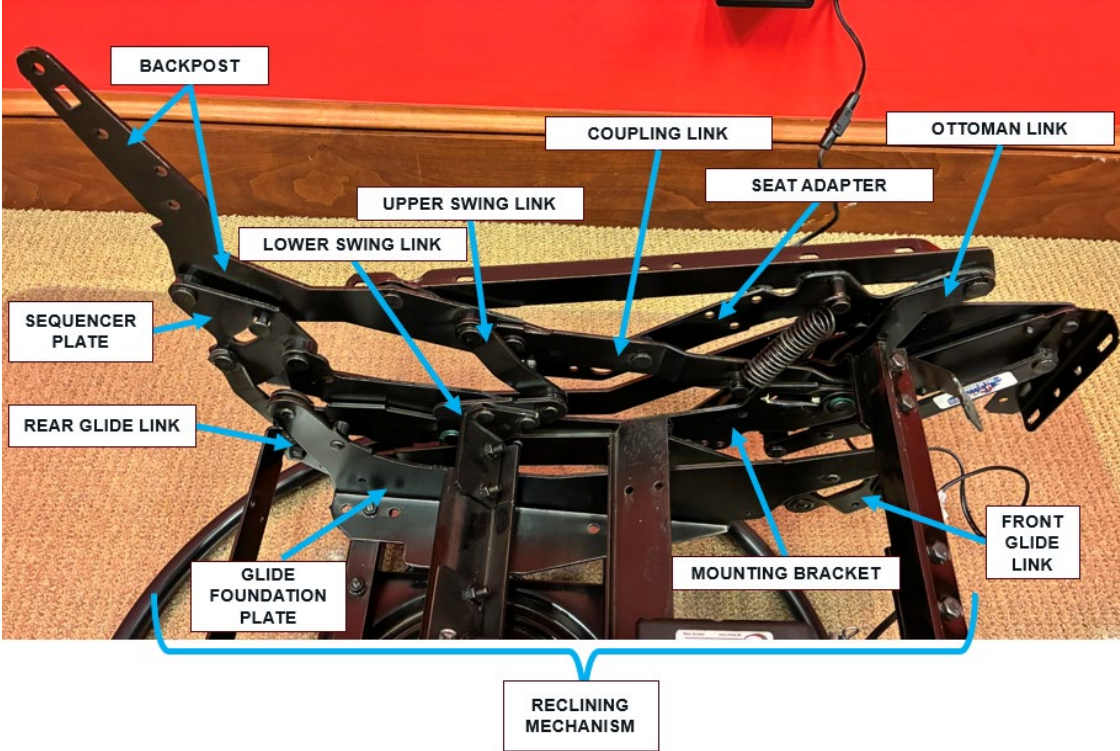
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The base unit includes multiple bearing surfaces including a first bearing surface on the upper portion of the base unit.

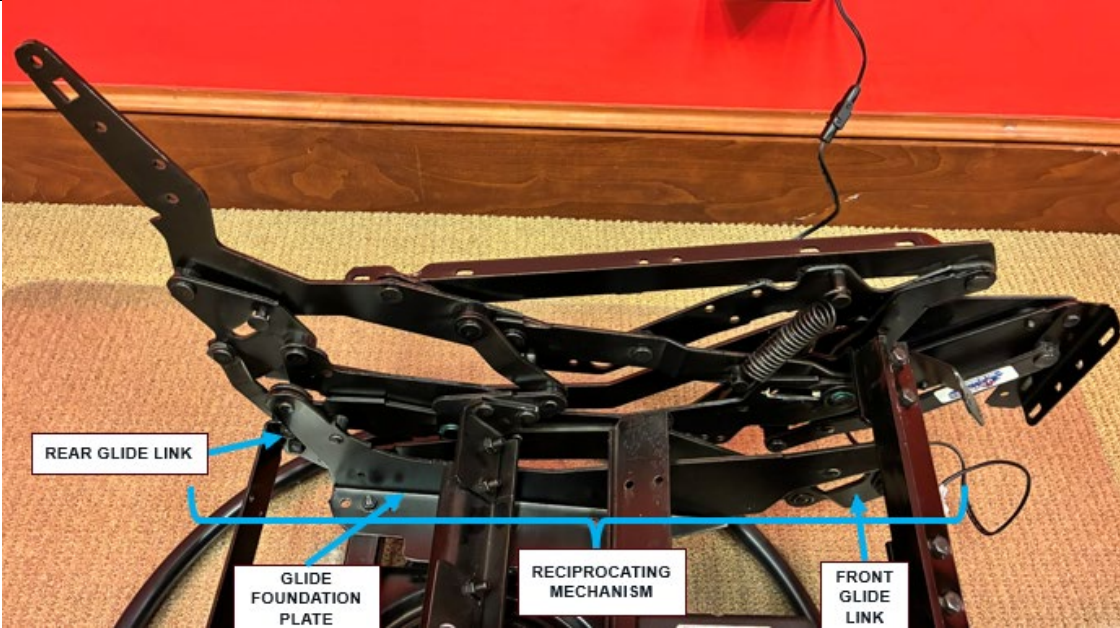
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[b]	a generally horizontally-disposed seat positioned above the base unit;	The Exemplary Covered Glider includes a generally horizontally-disposed seat positioned above the base unit, which would be attached to the Exemplary Covered Glider Mechanism and positioned approximately as shown below.

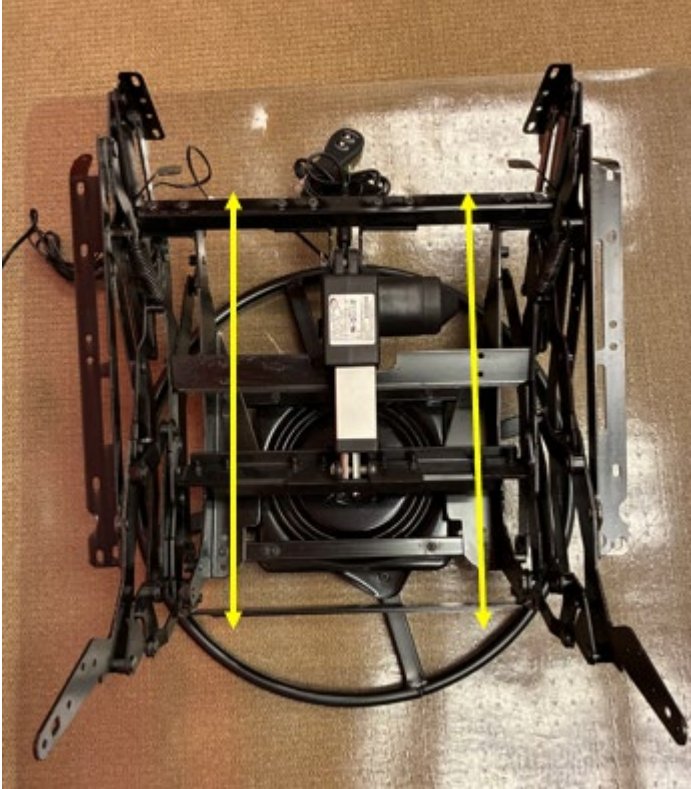
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[c]	a generally upright backrest positioned above the base unit and substantially rearward of the seat;	The Exemplary Covered Glider includes a generally upright backrest positioned above the base unit and substantially rearward of the seat, which would be attached to the Exemplary Covered Glider Mechanism and positioned approximately as shown below.

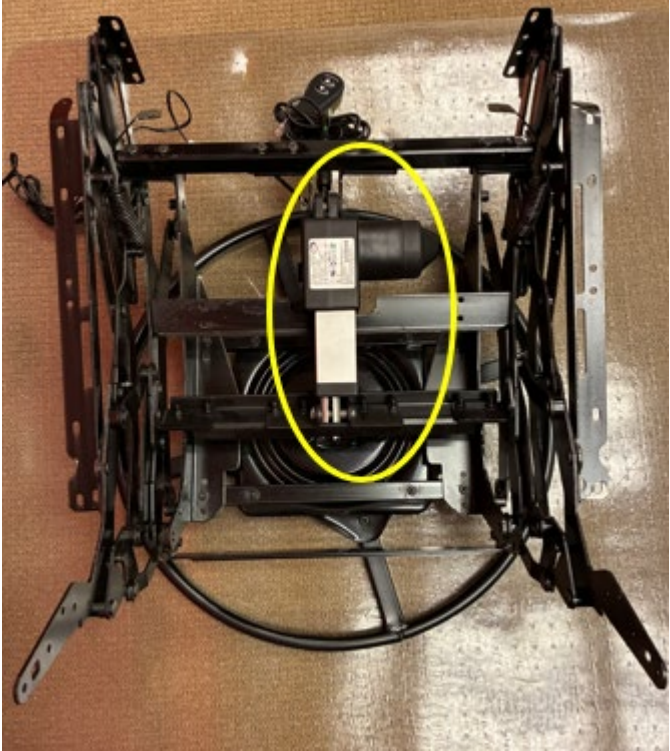
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[d]	an extendable ottoman;	The Exemplary Covered Glider includes an extendable ottoman, which would be attached to the Exemplary Covered Glider Mechanism and positioned approximately as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[e]	a reclining mechanism attached to the seat, the backrest, the ottoman and the base unit, the reclining mechanism comprising a plurality of pivotally interconnected links;	The Exemplary Covered Glider includes a reclining mechanism attached to the seat, the backrest, the ottoman, and the base unit, as shown below. The reclining mechanism further comprises a plurality of pivotally interconnected links, as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[f]	a reciprocating mechanism attached to the base unit and the reclining mechanism, the reciprocating mechanism being configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive	The Exemplary Covered Glider includes a reciprocating mechanism attached to the base unit and the reclining mechanism that is configured to enable the seat, backrest and reclining mechanism to reciprocate relative to the base unit along a longitudinal path responsive to a longitudinally-directed force shown in the image below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	to a longitudinally-directed force; and	 The reciprocating mechanism comprises at least the glide foundation plate and front and rear glide links shown above. As shown below, when a longitudinally-directed force is applied, the reciprocating mechanism allows the chair to glide forward and backward.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
1[g]	a linear actuating unit attached to the reclining mechanism, the linear actuating unit configured to move the seating unit between (a) an upright position, in which the seat is generally horizontally disposed, the backrest is	The Exemplary Covered Glider includes a linear actuating unit attached to the reclining mechanism that is configured to move the seating unit between an upright position, an intermediate TV position, and a fully reclined position. The linear actuating unit is shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	generally vertically disposed, and the ottoman is generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;	 The photos below depict the three positions between which the Exemplary Covered Glider may be moved by the linear actuating unit.



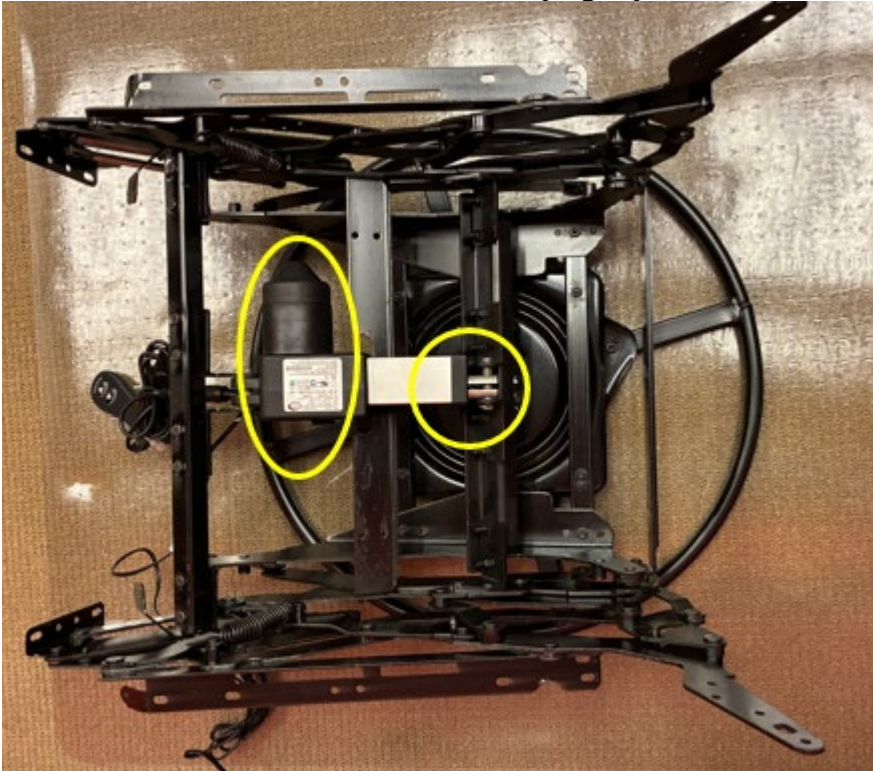
Upright

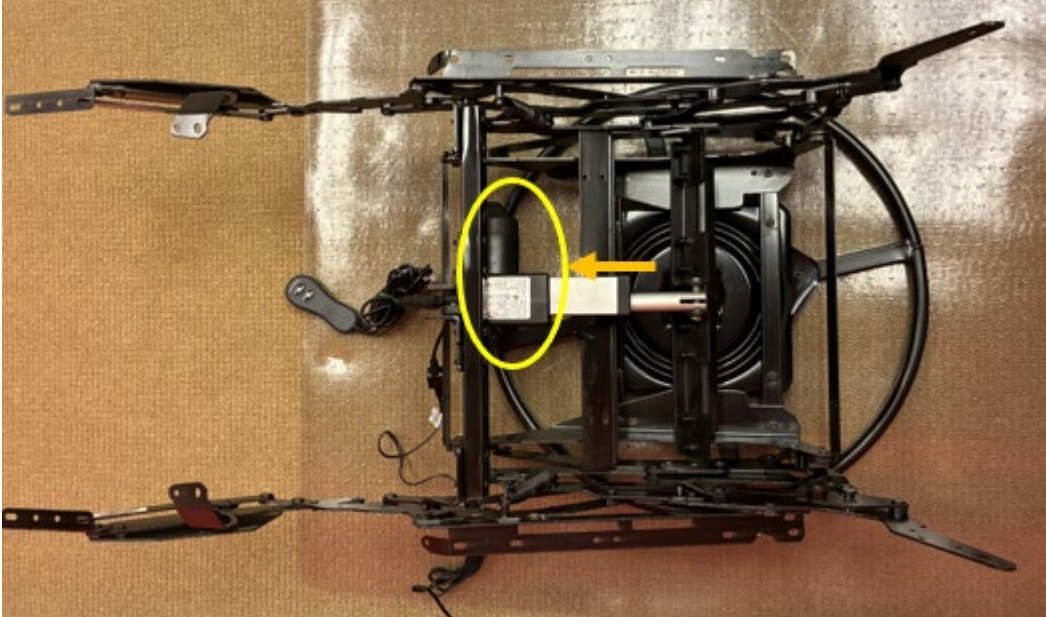


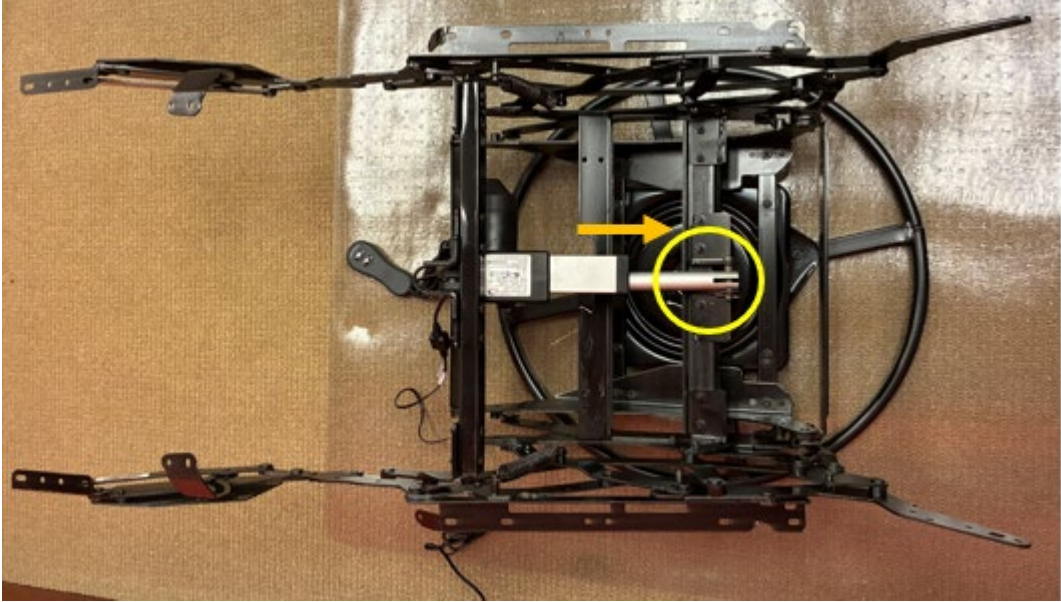
TV



Fully
Reclined

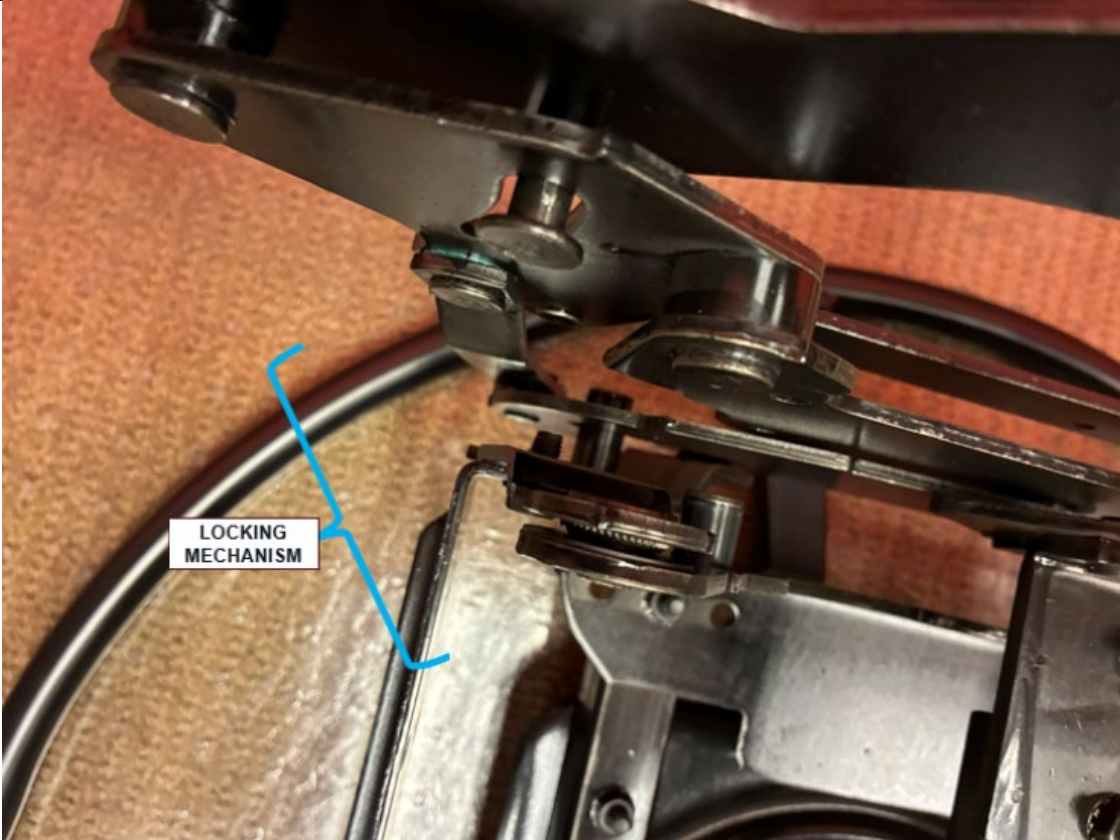
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
1[h]	wherein the linear actuating unit includes opposed first and second ends, and wherein the first end of the linear actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the linear actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position.	The Exemplary Covered Glider's linear actuating unit includes opposed first and second ends where the first end of the linear actuating unit moves forwardly as the seating unit moves from the upright position to the TV position, and wherein the second end of the linear actuating unit moves rearwardly when the seating unit moves from the TV position to the fully reclined position. As shown below, the linear actuating unit includes opposed first and second ends. The mechanism below is in the upright position. 

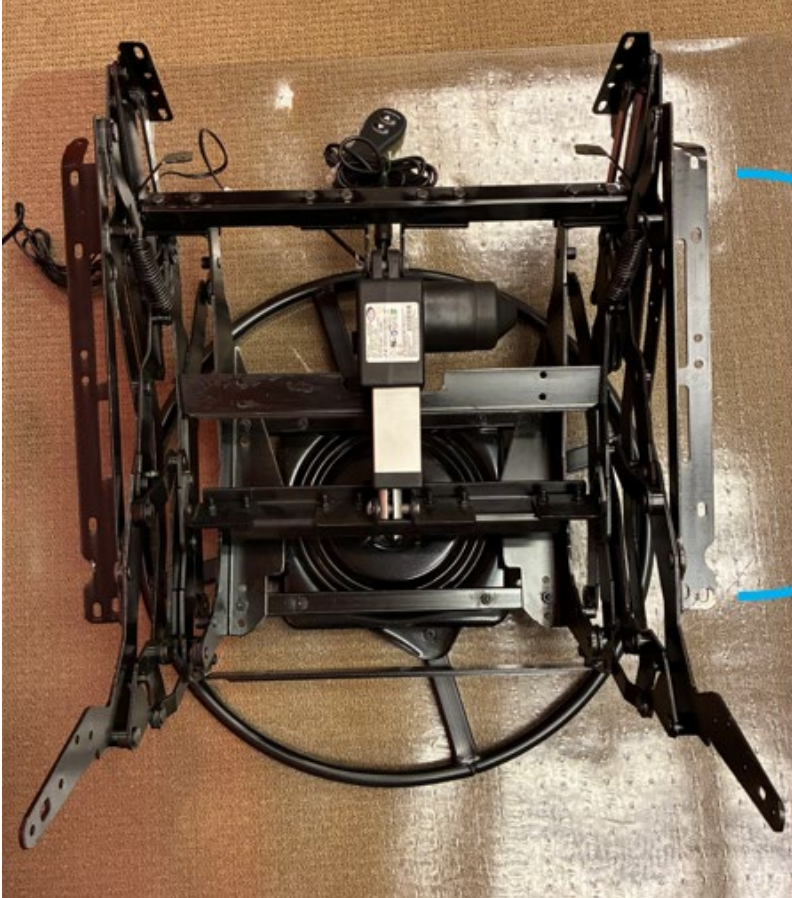
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		When the chair moves from the upright to intermediate TV position, the first end moves forwardly as shown below.  When the chair moves from the intermediate TV position to the fully reclined position, the second end moves rearwardly as shown below.

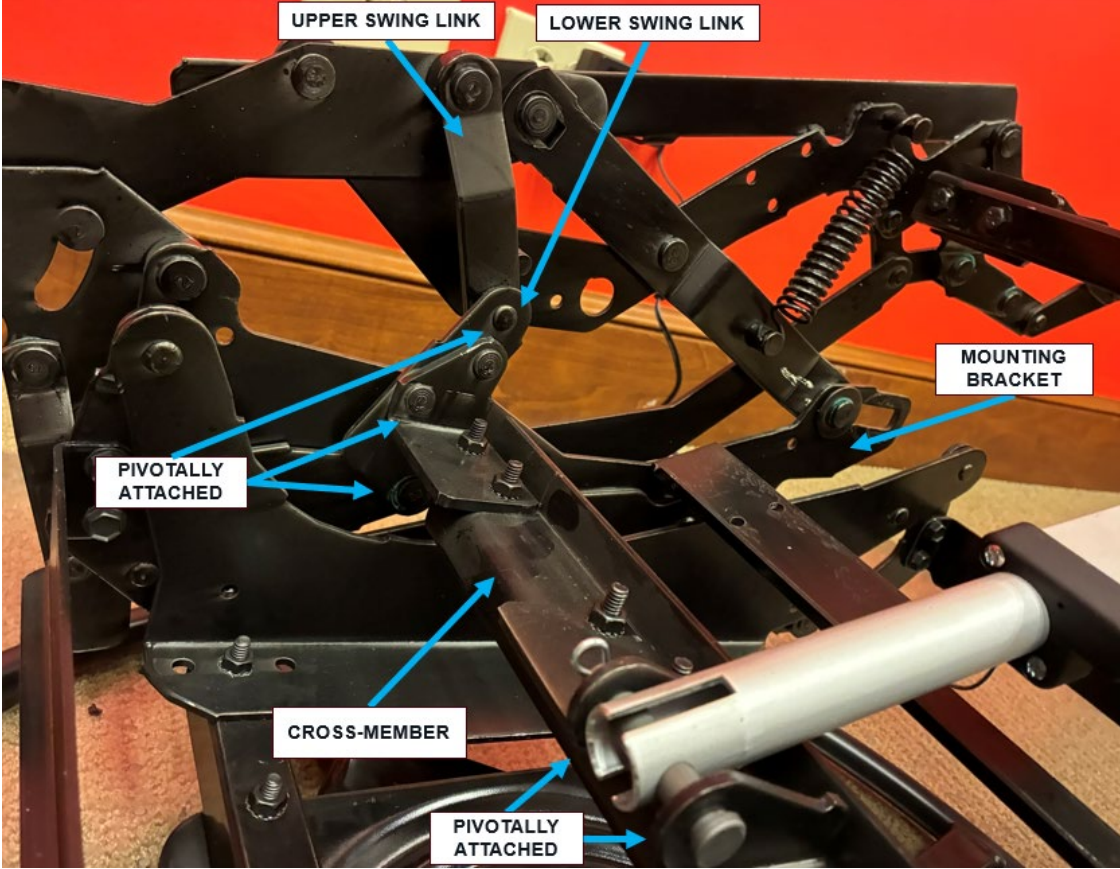
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
2	2. The seating unit defined in claim 1, wherein the reclining mechanism includes a pantographic linkage on which the ottoman is mounted, and wherein in the TV and fully reclined positions, pivots between links of the pantographic linkage form a near over-center arrangement that locks the ottoman in position.	The Exemplary Covered Glider reclining mechanism includes a pantographic linkage on which the ottoman is mounted as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 When the Exemplary Covered Glider is in the intermediate TV and fully reclined positions, the ottoman is locked in place by the near over-center arrangement of pivots between the ottoman links.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
3	3. The seating unit defined in claim 1, further comprising a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions.	The Exemplary Covered Glider includes a locking mechanism that allows the seating unit to reciprocate while in the upright position but prevents reciprocating of the seating unit while in the TV and fully reclined positions as shown below.

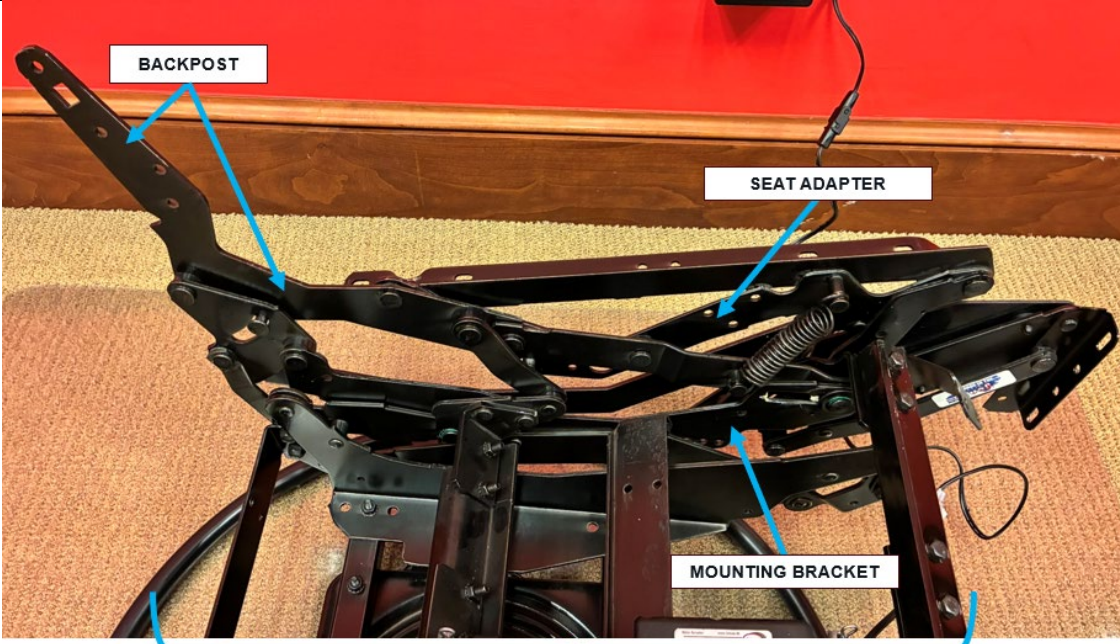
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
4	4. The seating unit defined in claim 1, wherein the linear actuating unit is attached to an actuating mechanism, the actuating mechanism comprising a cross-member extending transversely across	The Exemplary Covered Glider linear actuating unit (not labeled) is attached to an actuating mechanism, the actuating mechanism comprising a cross-member extending transversely across the seating unit, wherein the cross-member is pivotally attached to the actuating unit; and wherein the cross-member is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to the upper swing link and to a mounting bracket that is attached to the reciprocating mechanism, as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	the seating unit, wherein the cross-member is pivotally attached to the actuating unit; and wherein the cross-member is pivotally attached to a lower swing link of the reclining mechanism, the lower swing link being pivotally attached to an upper swing link of the reclining mechanism and to a mounting bracket that is attached to the reciprocating mechanism.	 ACTUATING MECHANISM

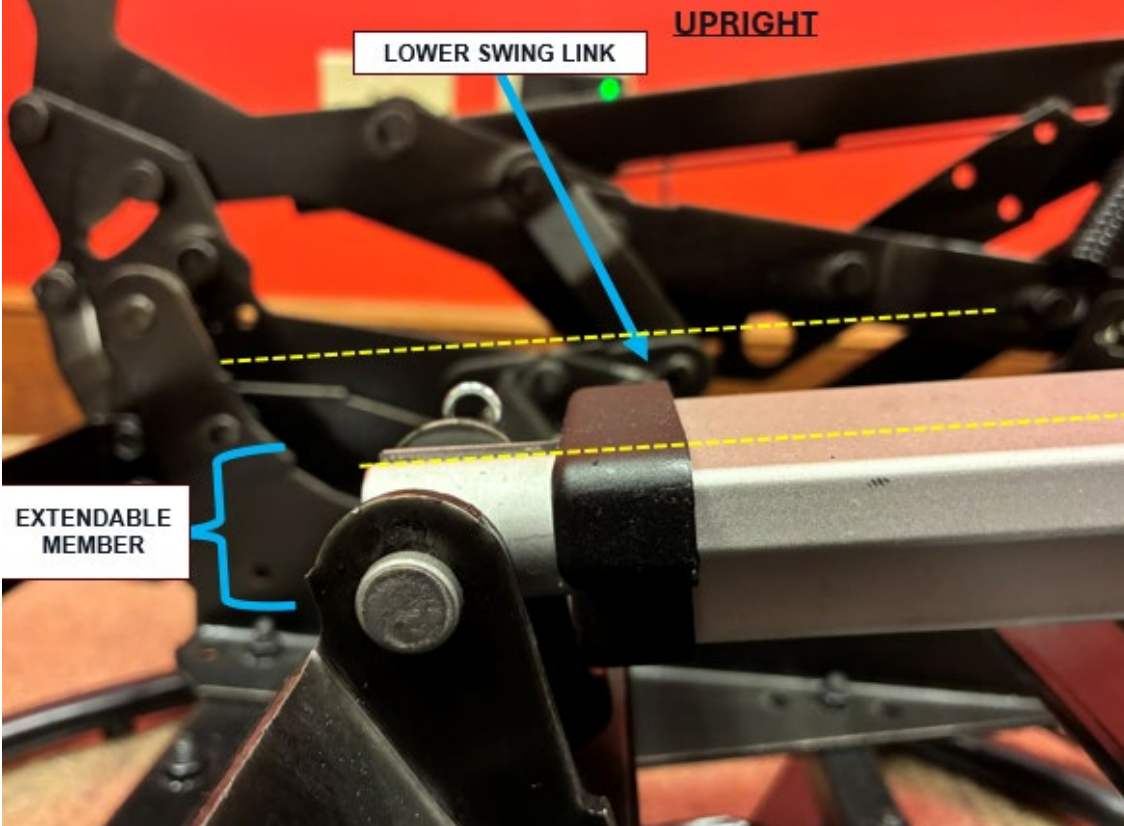
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The linear actuating unit is attached to the cross-member such that the linear actuating unit and the cross-member can pivot within the mechanism.
5	5. The seating unit defined in claim 4, wherein the upper	The Exemplary Covered Glider's upper swing link is pivotally attached with the backrest as shown below (via the backpost).

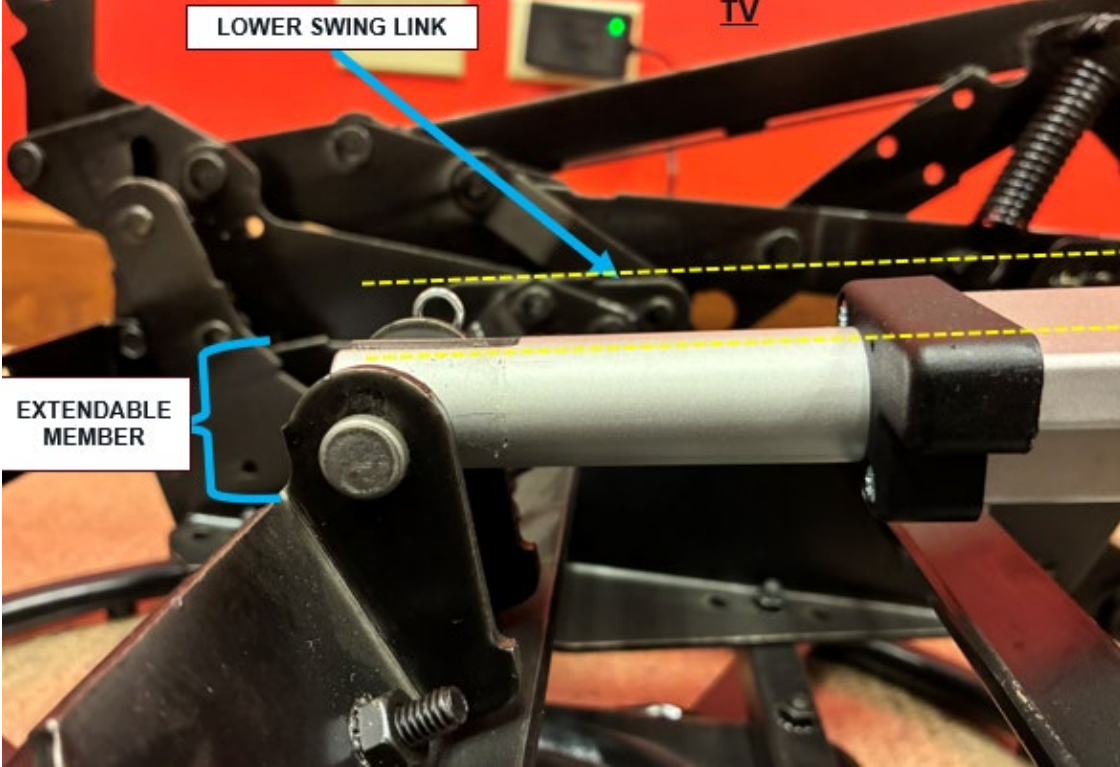
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	swing link is pivotally attached with the backrest.	
6	6. The seating unit defined in claim 1, wherein the seat rises in moving from the TV position to the fully reclined position.	The Exemplary Covered Glider seat rises in moving from the TV position to the fully reclined position as shown below.

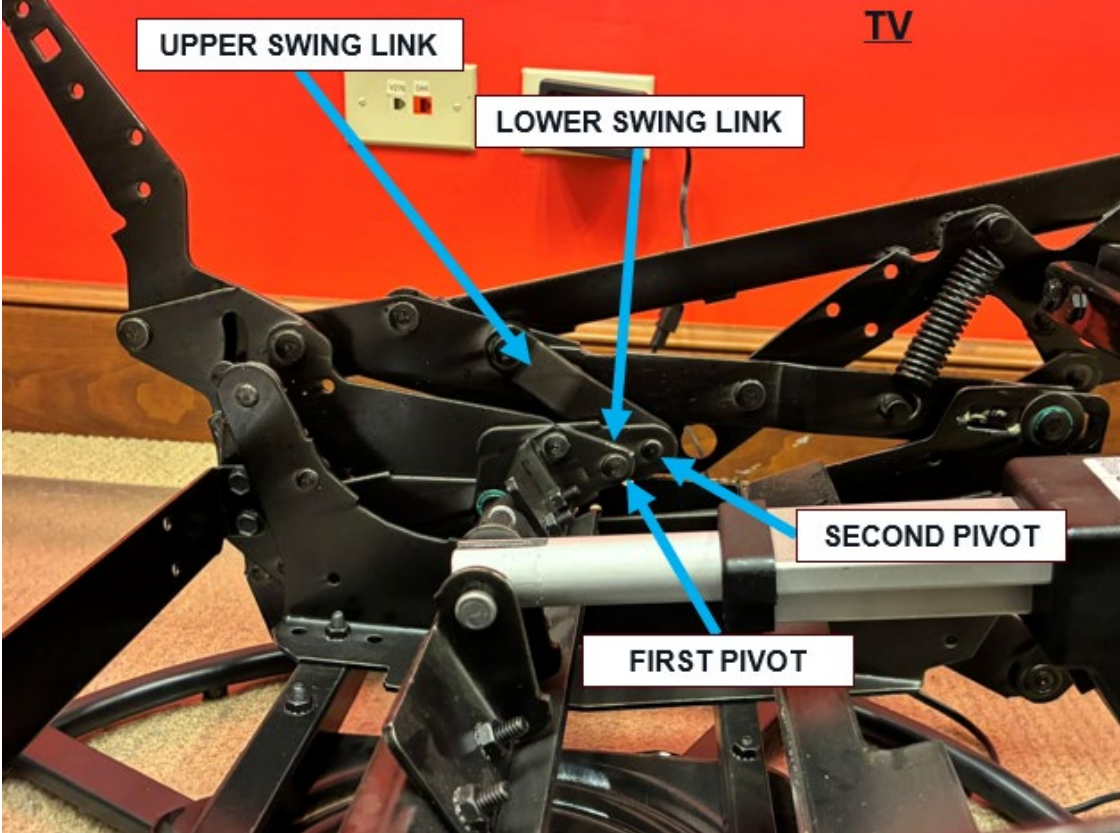
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The image consists of two photographs of a black metal glider reclining mechanism. The top photograph shows the mechanism in a 'TV' position, with the seat backrest angled back. The bottom photograph shows the mechanism in a 'Fully Reclined' position, with the seat backrest fully extended. Both photographs are set against a red wall and a light-colored floor.
7	7. The seating unit defined in claim 1, wherein the reclining mechanism includes a backpost that is fixed relative to the backrest, a mounting bracket that is fixed relative to the reciprocating mechanism and pivotally attached to the backpost, and a seat adapter that is fixed relative to the seat	The Exemplary Covered Glider reclining mechanism includes a backpost that is fixed relative to the backrest, a mounting bracket that is fixed relative to the reciprocating mechanism and pivotally attached to the backpost, and a seat adapter that is fixed relative to the seat and pivotally attached to the backpost as shown in the image below.

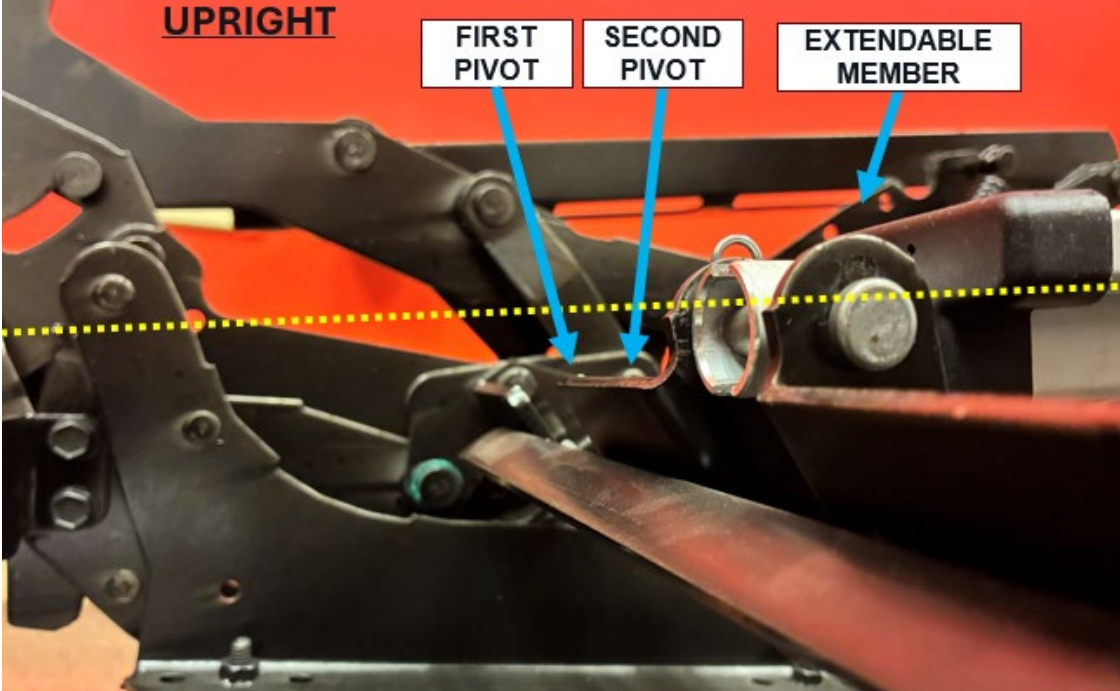
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	and pivotally attached to the backpost.	
8	8. The seating unit defined in claim 7, wherein the lower swing link is angled, and wherein a segment of the lower swing link attached to the upper swing link is generally parallel to an axis	The Exemplary Covered Glider's lower swing link is angled, and a segment of the lower swing link attached to the upper swing link is generally parallel to an axis defined by the extendable member of the linear actuating unit when the seating unit is in the upright and TV positions, as shown below. The Exemplary Covered Glider's lower swing link is angled, as shown below.

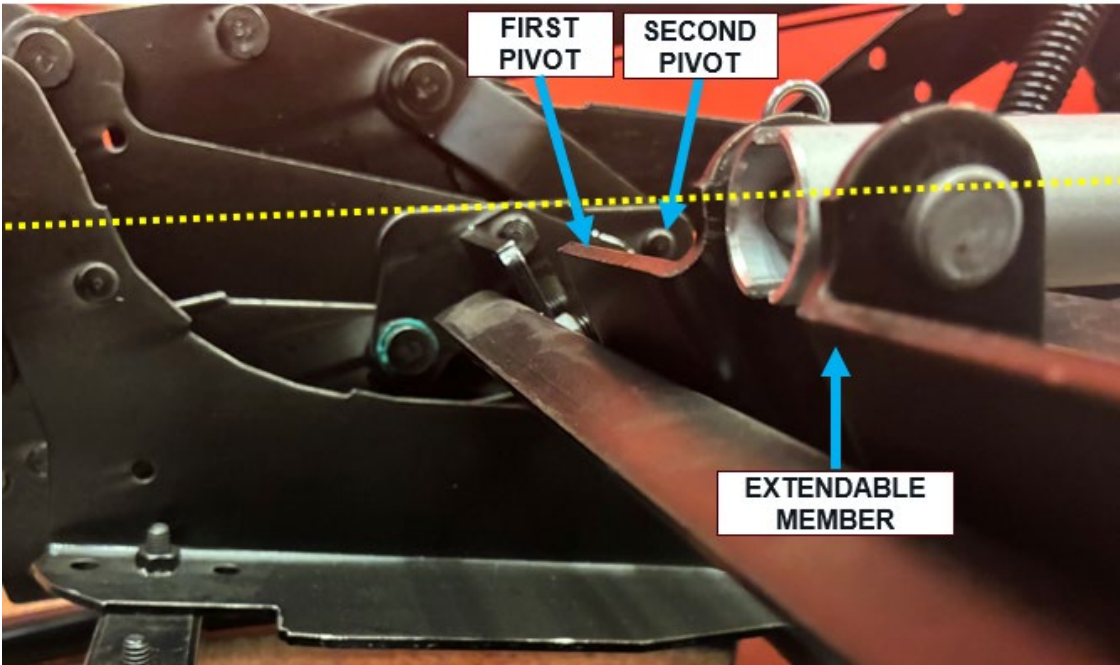
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	defined by an extendable member of the linear actuating unit when the seating unit is in the upright and TV positions.	 The Exemplary Covered Glider further comprises a segment of the lower swing link attached to the upper swing link that is generally parallel to an axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions, as shown below.

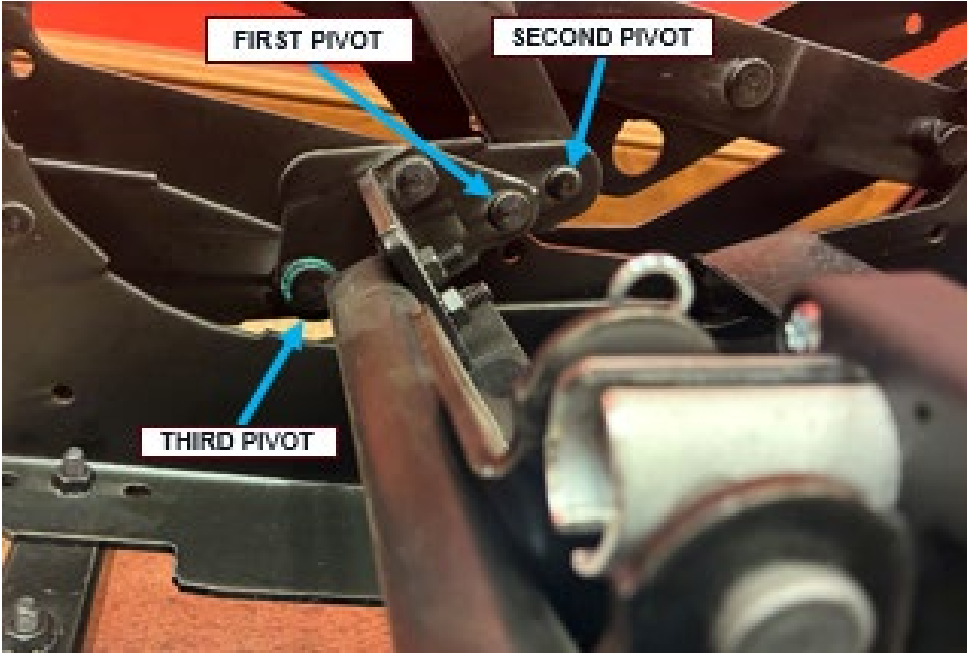
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 UPRIGHT LOWER SWING LINK EXTENDABLE MEMBER

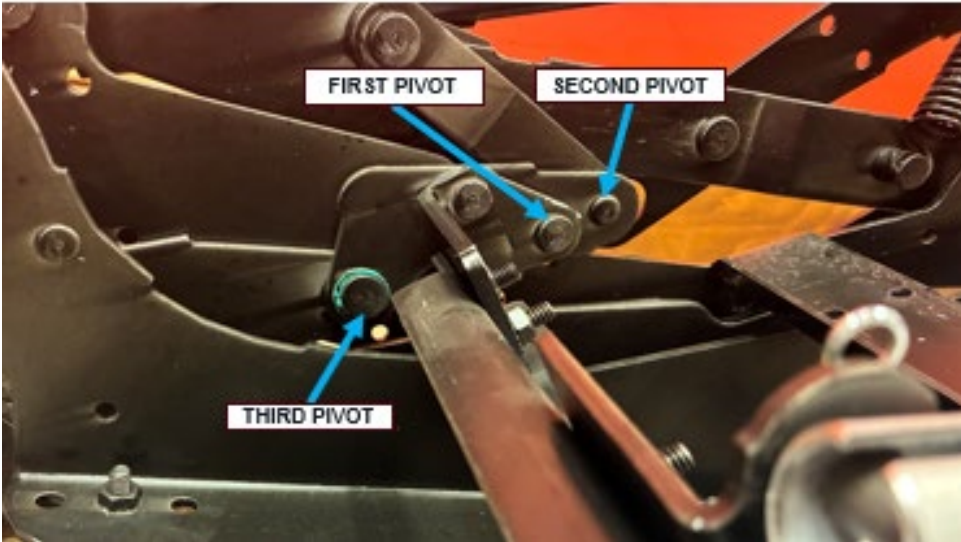
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
9	9. The seating unit defined in claim 8, wherein a first pivot defined by the cross-member and the lower swing link and a second pivot defined by the lower swing link and the upper swing link are below the axis defined by the extendable member of the	The Exemplary Covered Glider comprises a first pivot defined by the cross-member and the lower swing link and a second pivot defined by the lower swing link and the upper swing link that are below the axis defined by the extendable member of the actuating unit when the seating unit is in the upright and TV positions, as shown below. The first and second pivots are shown below.

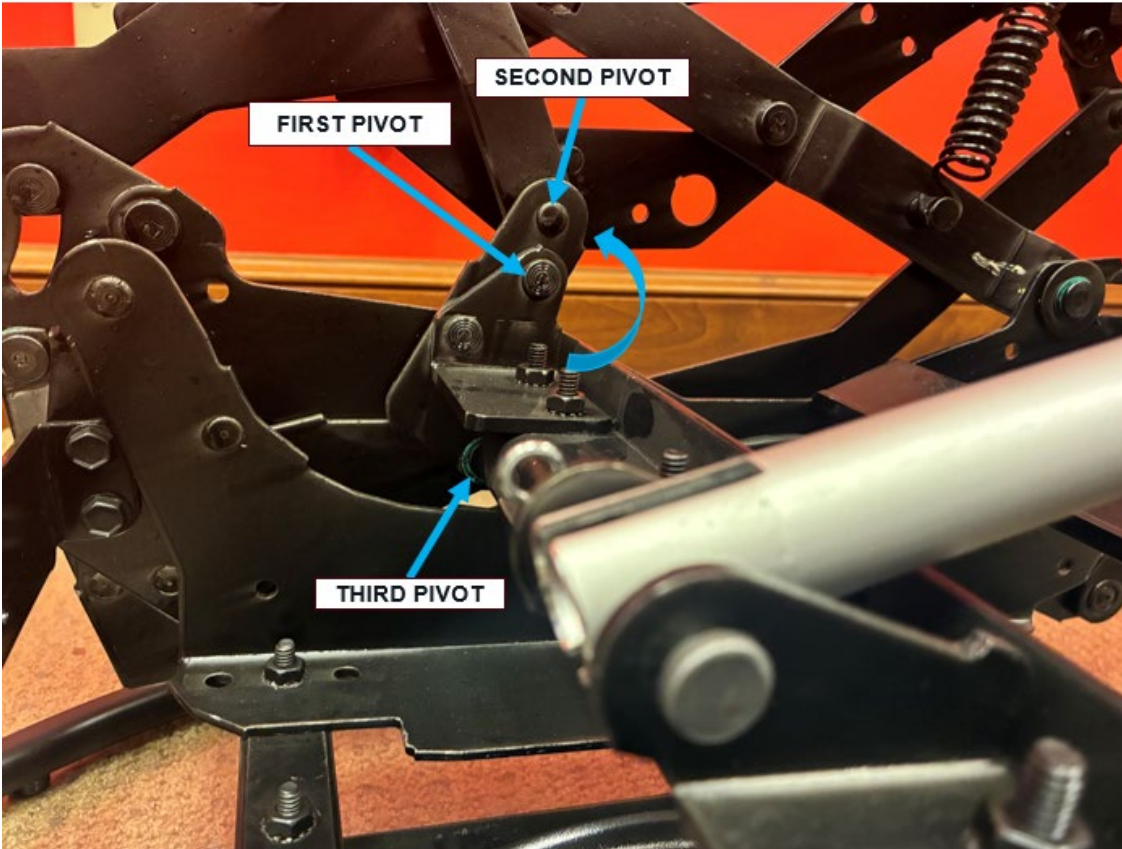
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	actuating unit when the seating unit is in the upright and TV positions.	 The first and second pivots are below the axis (yellow) defined by the extendable member of the actuating unit when the seating unit is in the upright position and in the TV position, as shown below.

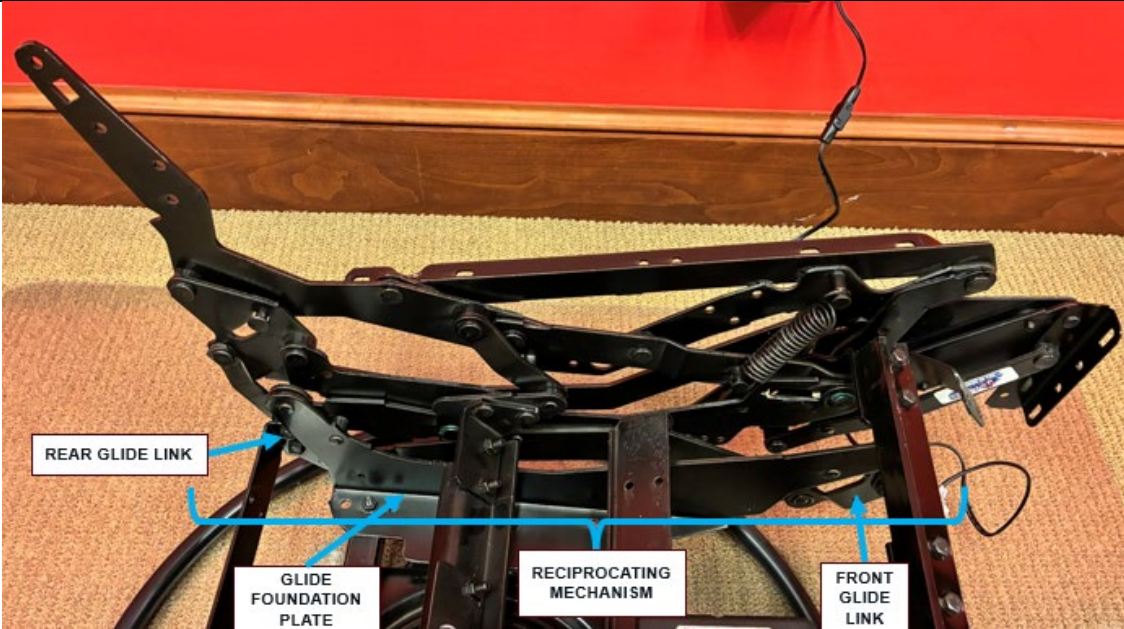
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 UPRIGHT FIRST PIVOT SECOND PIVOT EXTENDABLE MEMBER

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		TV 
10	10. The seating unit defined in claim 9, wherein the lower swing link is attached to the mounting bracket at a third pivot, and wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots	The Exemplary Covered Glider comprises a lower swing link that is attached to the mounting bracket at a third pivot, wherein in the upright and TV positions, the first, second and third pivots define a first angle, and in the fully reclined position, the first, second and third pivots define a second angle that is larger than the first angle, as shown below. The first, second, and third pivots when the seating unit is in the upright position are shown below, defining a first angle.

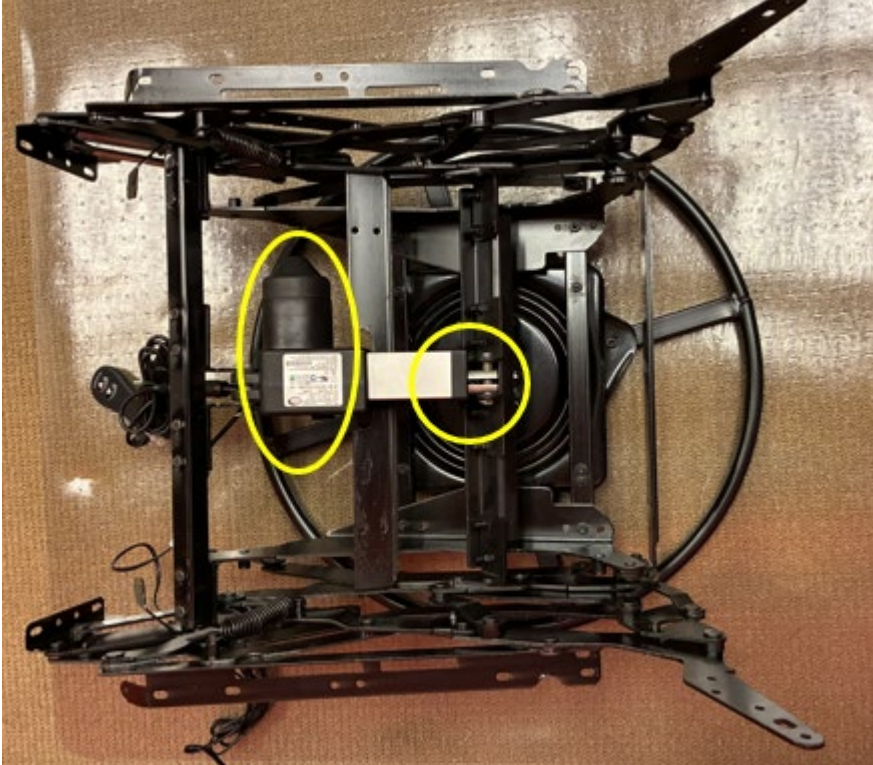
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	define a second angle that is larger than the first angle.	<u>UPRIGHT</u>  The first, second, and third pivots when the seating unit is in the TV position are shown below, defining the first angle.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		<u>TV</u>  The first, second, and third pivots when the seating unit is in the fully reclined position are shown below, defining a second angle that is greater than the first angle.

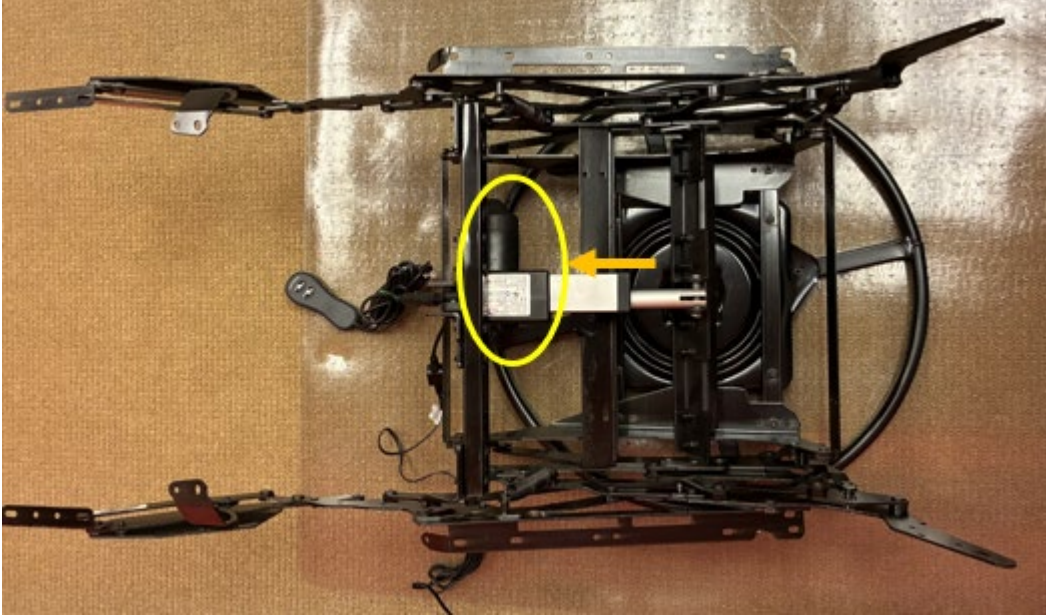
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		FULLY RECLINED 
11	11. The seating unit defined in claim 1, wherein the reciprocating mechanism is a gliding mechanism.	The Exemplary Covered Glider's reciprocating mechanism is a gliding mechanism as shown below.

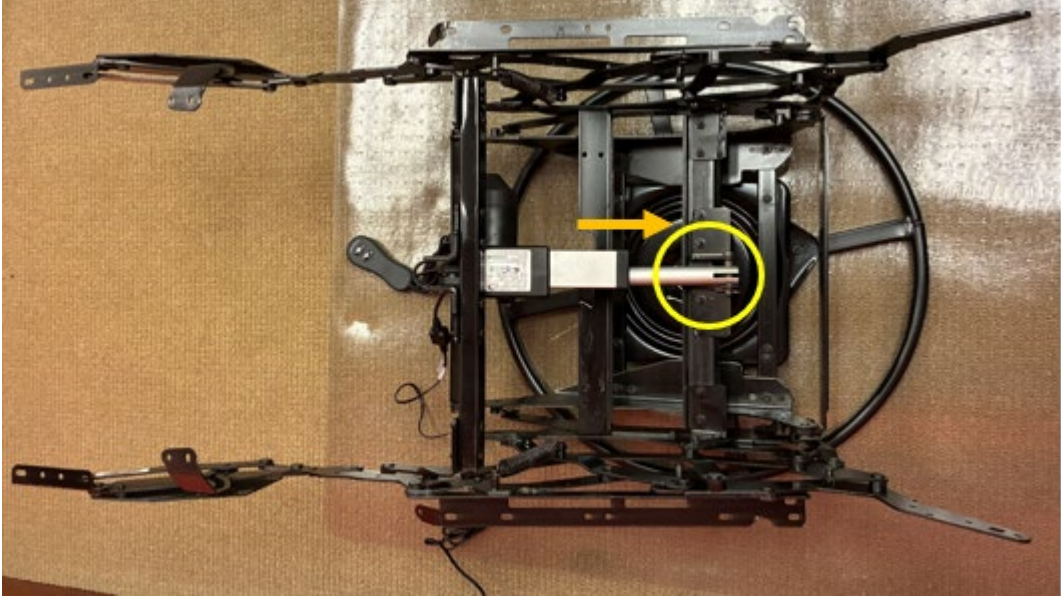
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The gliding mechanism comprises at least the glide foundation plate and the front and rear glide links shown above.
12[p]	A reciprocating seating unit, comprising:	<i>See claim 1[p].</i>
12[a]	a base;	<i>See claim 1[a].</i>
12[b]	a generally horizontally-disposed seat positioned above the base;	<i>See claim 1[b].</i>
12[c]	a generally upright backrest positioned above the base and	<i>See claim 1[c].</i>

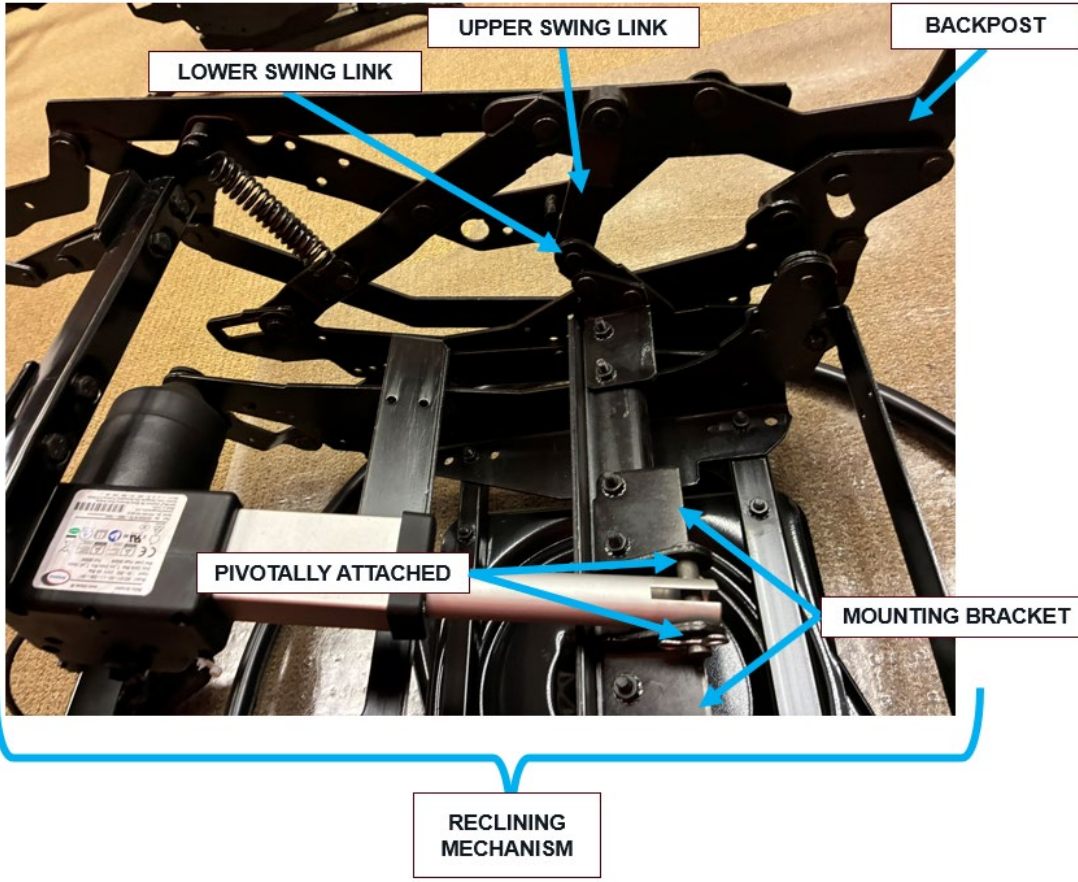
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	substantially rearward of the seat;	
12[d]	an extendable ottoman;	<i>See claim 1[d].</i>
12[e]	a reclining mechanism attached to the seat, the backrest, the ottoman and the base, the reclining mechanism comprising a plurality of pivotally interconnected links;	<i>See claim 1[e].</i>
12[f]	a reciprocating mechanism attached with the base unit and the reclining mechanism, the reciprocating mechanism configured to enable the seat, backrest and reclining mechanism to experience a longitudinally-directed reciprocating motion relative to the base unit; and	<i>See claim 1[f].</i>
12[g]	a linear actuator attached to the reclining mechanism, the linear actuator having first and second movable members, wherein the relative movement of the first and second movable members moves the chair between (a) an upright position, in which the seat is generally	The Exemplary Covered Glider includes a linear actuator attached to the reclining mechanism that has first and second movable members as shown below. <i>See claim 1[g].</i>

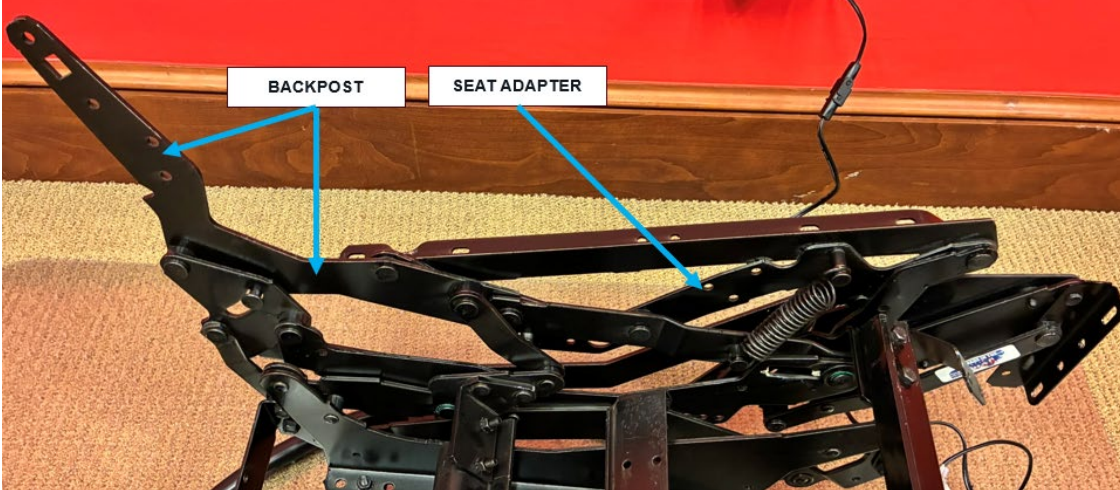
Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	horizontally disposed, the backrest is generally vertically disposed, and the ottoman is generally vertically disposed and positioned below the seat, (b) an intermediate TV position, in which the ottoman is generally horizontally disposed in front of the seat and the backrest and the seat substantially maintain the same relationship as they have in the upright position, and (c) a fully reclined position, in which the angle between the backrest and the seat increases;	 The relative movement of the first and second movable members moves the chair between an upright position, an intermediate TV position, and a fully reclined position. The linear actuator is shown in the image above. The photos below depict the three positions between which the Exemplary Covered Glider may be moved by the linear actuator.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The figure consists of three vertically stacked photographs of a black metal chair frame with a rocking base, set against a red wall and a light-colored carpet. The top photograph shows the chair in an upright position, with the label <u>Upright</u> in the bottom right corner. The middle photograph shows the chair in a TV position, with the label <u>TV</u> in the bottom right corner. The bottom photograph shows the chair in a fully reclined position, with the label <u>Fully Reclined</u> in the bottom right corner. The mechanism includes a central pivot point and various linkages that allow the chair to rock and recline. When the chair moves from the upright to intermediate TV position, the first movable member moves forwardly as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 When the chair moves from the intermediate TV position to the fully reclined position, the second movable member moves rearwardly as shown below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
12[h]	wherein the reclining mechanism includes: a backpost that is fixed relative to the backrest; a mounting bracket that is attached to the second movable member of the linear actuator; a lower swing link that is attached to the mounting bracket; and an upper swing link that is pivotally attached to the lower swing link and to the backpost.	The Exemplary Covered Glider's reclining mechanism includes a backpost that is fixed relative to the backrest; a mounting bracket that is attached to the second movable member of the linear actuator (not labeled); a lower swing link that is attached to the mounting bracket; and an upper swing link that is pivotally attached to the lower swing link and to the backpost.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		
13	13. The seating unit defined in claim 12, further comprising a seat adapter that is fixed relative to the seat and directly	The Exemplary Covered Glider includes a seat adapter that is fixed relative to the seat and directly pivotally attached to the backpost as shown in the image below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
	pivotally attached to the backpost.	
14	14. The reciprocating seating unit defined in claim 13, wherein the reclining mechanism includes a pantographic linkage that extends the footrest in the TV and fully reclined positions, and wherein the pantographic linkage comprises upper and lower ottoman swing links that are directly pivotally attached to the seat adapter.	The Exemplary Covered Glider's reclining mechanism includes a pantographic linkage that extends the footrest in the TV and fully reclined positions, and wherein the pantographic linkage comprises upper and lower ottoman swing links that are directly pivotally attached to the seat adapter as shown in the images below.

Claim	U.S. Patent No. 8,297,693	Exemplary Covered Glider with Exemplary Covered Glider Mechanism
		 The top photograph shows a black metal glider mechanism with a curved base, set against a red wall. Two yellow circles highlight the upper and lower swing links. The bottom photograph shows the same mechanism with three blue arrows pointing to specific components: the seat adapter, the upper ottoman swing link, and the lower ottoman swing link. Labels for these components are provided in white boxes above the arrows. SEAT ADAPTER UPPER OTTOMAN SWING LINK LOWER OTTOMAN SWING LINK