
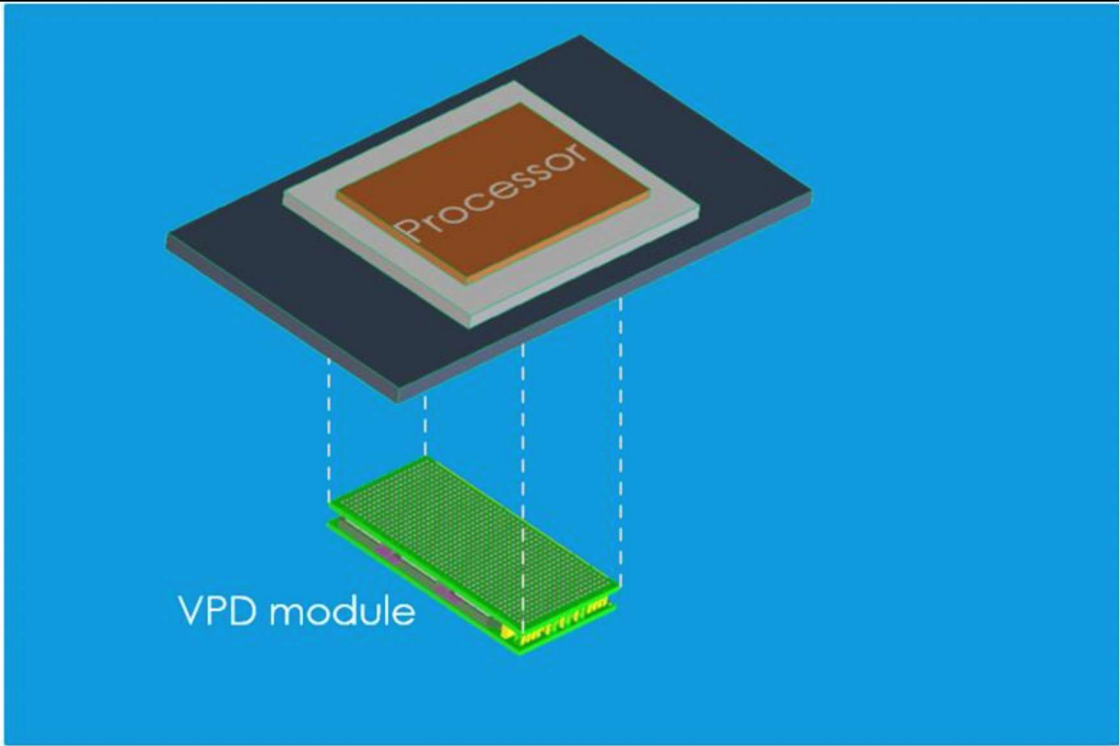



Exhibit 35Claim Chart for the Practice of Independent Claims 1, 2, 40, 45, 49, 53, 67, and 68 of Complainant Vicor Corporation's United States Patent No. 10,903,734 by Flex VPD Module Power Module ("Flex VPD Module") and Circuit Board Assemblies and Computing Systems Containing the Same¹Claim 1

#	Limitation	Practice Evidence
1.pre	A method of powering a semiconductor device having power input terminals, the method comprising:	The Flex VPD Module practices "[a] method of powering a semiconductor device having power input terminals."  Ex. 36C at 6.

¹ The following analysis of Flex VPD Module is applicable to all other equivalent Flex power modules as well as to circuit board assemblies and computing systems containing the same.


#	Limitation	Practice Evidence
		 The diagram shows a 3D perspective view of a processor and a VPD module. The processor is a brown square chip with the word "Processor" written on it, mounted on a dark grey square base. Below the base, a green rectangular VPD module is shown, connected to the base by four vertical dashed lines. The VPD module has a grid of small green squares on its top surface and a yellowish-green border. The entire scene is set against a solid blue background. Ex. 36C at 4.
1.a	providing a power conversion module having conversion circuitry arranged in a multi-cell structure having a plurality of conversion cells,	The Flex VPD Module practices a method comprising “providing a power conversion module having conversion circuitry arranged in a multi-cell structure having a plurality of conversion cells [blue].”


PUBLIC VERSION



#	Limitation	Practice Evidence
		 Ex. 36C at 10.
1.b	each conversion cell including one or more converter output terminals,	The Flex VPD Module practices a method comprising “each conversion cell including one or more converter output terminals [purple].”

#	Limitation	Practice Evidence
		Ex. 36C at 10. <i>See also</i> 1.a.
1.c	the conversion circuitry being configured to convert power received at a first voltage for delivery via the converter output terminals of the plurality of conversion cells at a second lower voltage,	The Flex VPD Module practices a method comprising “the conversion circuitry being configured to convert power received at a first voltage [red] for delivery via the converter output terminals of the plurality of conversion cells at a second lower voltage [green].” Ex. 36C at 3.

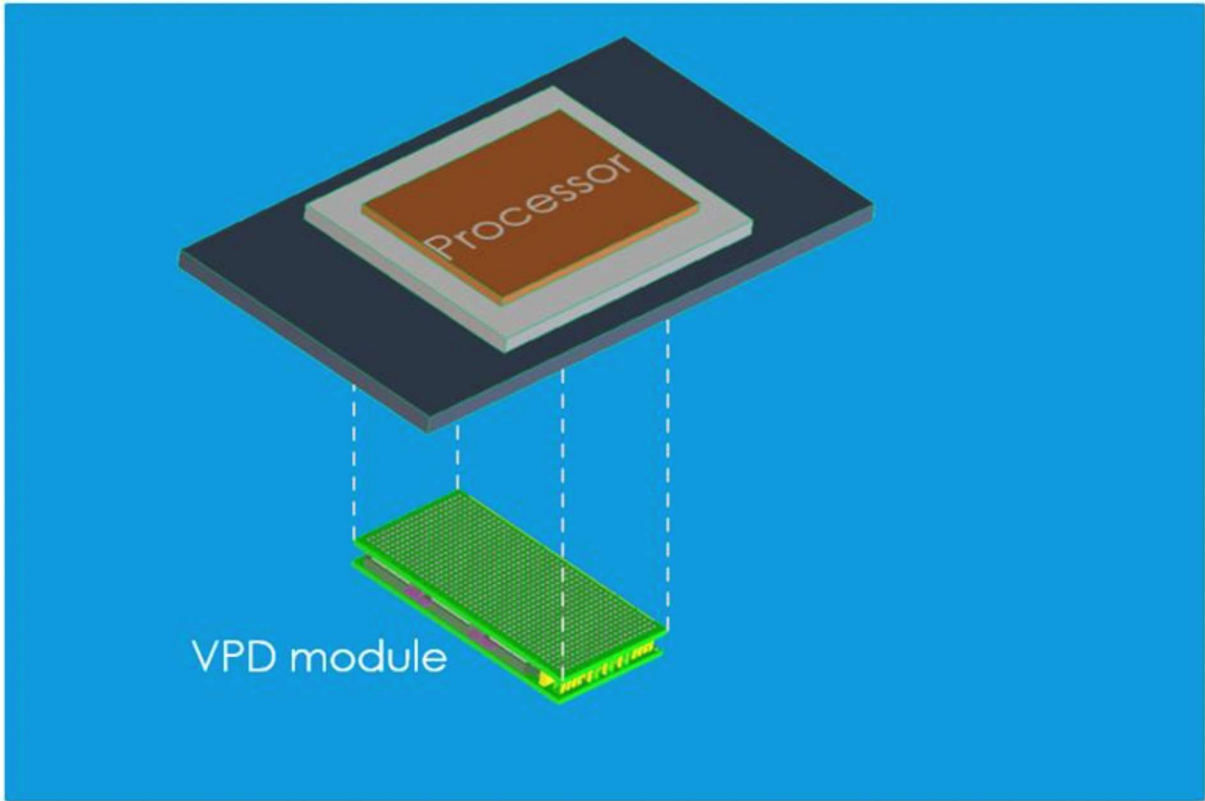
PUBLIC VERSION

#	Limitation	Practice Evidence
1.d	the converter output terminals being arranged in a first pattern having a first spacing between the converter output terminals	The Flex VPD Module practices a method comprising “the converter output terminals being arranged in a first pattern [blue] having a first spacing [yellow] between the converter output terminals [purple].”  Ex. 36C at 10.


#	Limitation	Practice Evidence
		 Ex. 36C at 10.
1.e	providing an interconnection module having x-input terminals arranged on a first side of the interconnection module in a pattern configured to align with the first pattern of converter output terminals, and	The Flex VPD Module practices a method comprising “providing an interconnection module [purple] having x-input terminals [green] arranged on a first side [orange] of the interconnection module in a pattern configured to align with the first pattern of converter output terminals [blue].”

#	Limitation	Practice Evidence
		 Ex. 36C at 6.  Ex. 36C at 10.
1.f	x-output terminals arranged on a surface of a second opposite side of the interconnection module in a second pattern configured to align with the power input terminals of the semiconductor	The Flex VPD Module practices a method comprising “x-output terminals arranged on a surface of a second opposite side [yellow] of the interconnection module in a second pattern [red] configured to align with the power input terminals of the semiconductor device, the second pattern having a second spacing between x-output terminals [orange].”

#	Limitation	Practice Evidence
	device, the second pattern having a second spacing between x-output terminals,	Ex. 36C at 6. Ex. 36C at 10.

#	Limitation	Practice Evidence
		 Ex. 36C at 4.
1.g	the second spacing being different than the first spacing, the x-input terminals being electrically connected to the x-output terminals;	The Flex VPD Module practices a method comprising “the second spacing [orange] being different than the first spacing [yellow], the x-input terminals being electrically connected to the x-output terminals.”

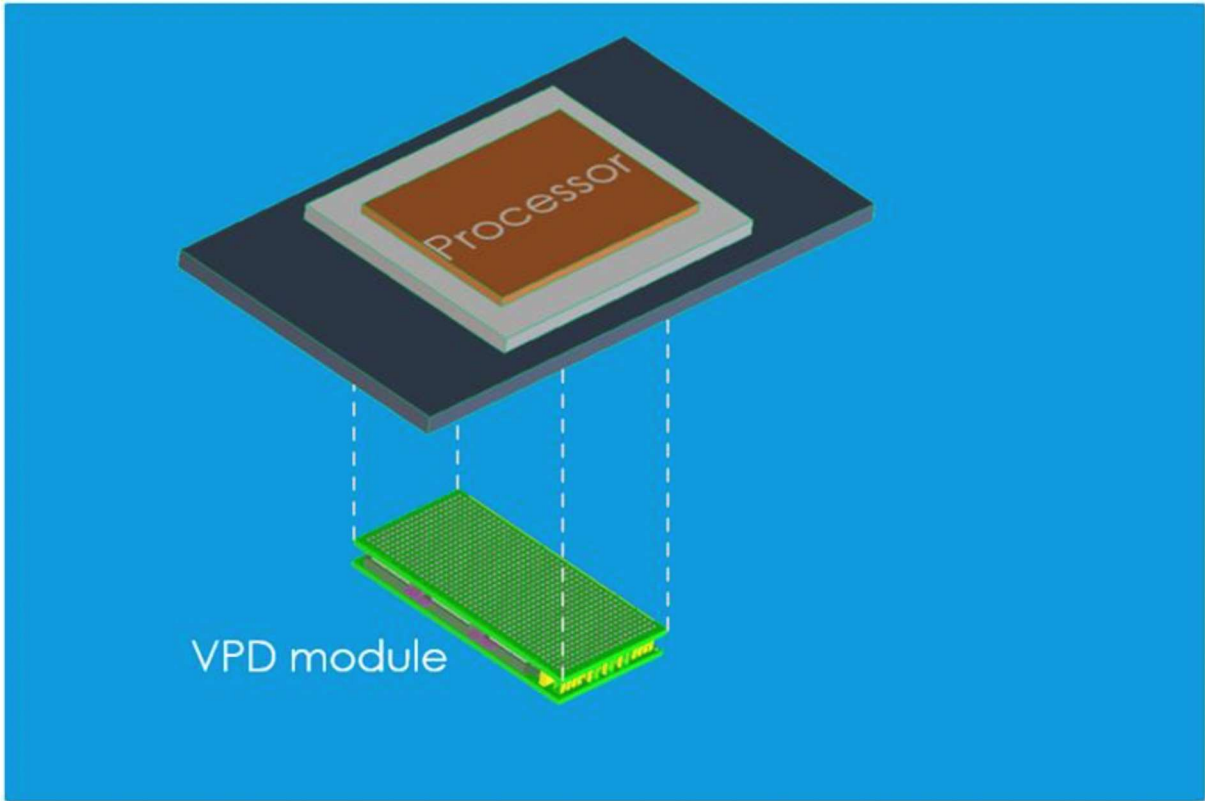
#	Limitation	Practice Evidence
		Ex. 36C at 10. Ex. 36C at 6.


#	Limitation	Practice Evidence
		 Ex. 36C at 10.
1.h	assembling the power conversion module to the first side of the interconnection module with each converter output terminal mated with and electrically connected to a respective x-input terminal;	The Flex VPD Module practices a method comprising “assembling the power conversion module [red] to the first side [orange] of the interconnection module [purple] with each converter output terminal [blue] mated with and electrically connected to a respective x-input terminal [green].”  Ex. 36C at 6.

#	Limitation	Practice Evidence
		Ex. 36C at 10.
1.i	wherein the interconnection module is configured to provide electrical and mechanical translation between the converter output terminals arranged in the first pattern and the power input terminals of the semiconductor device arranged in the second pattern;	The Flex VPD Module practices a method comprising “wherein the interconnection module is configured to provide electrical and mechanical translation between the converter output terminals arranged in the first pattern [blue] and the power input terminals of the semiconductor device arranged in the second pattern.”

#	Limitation	Practice Evidence
		Ex. 36C at 10.

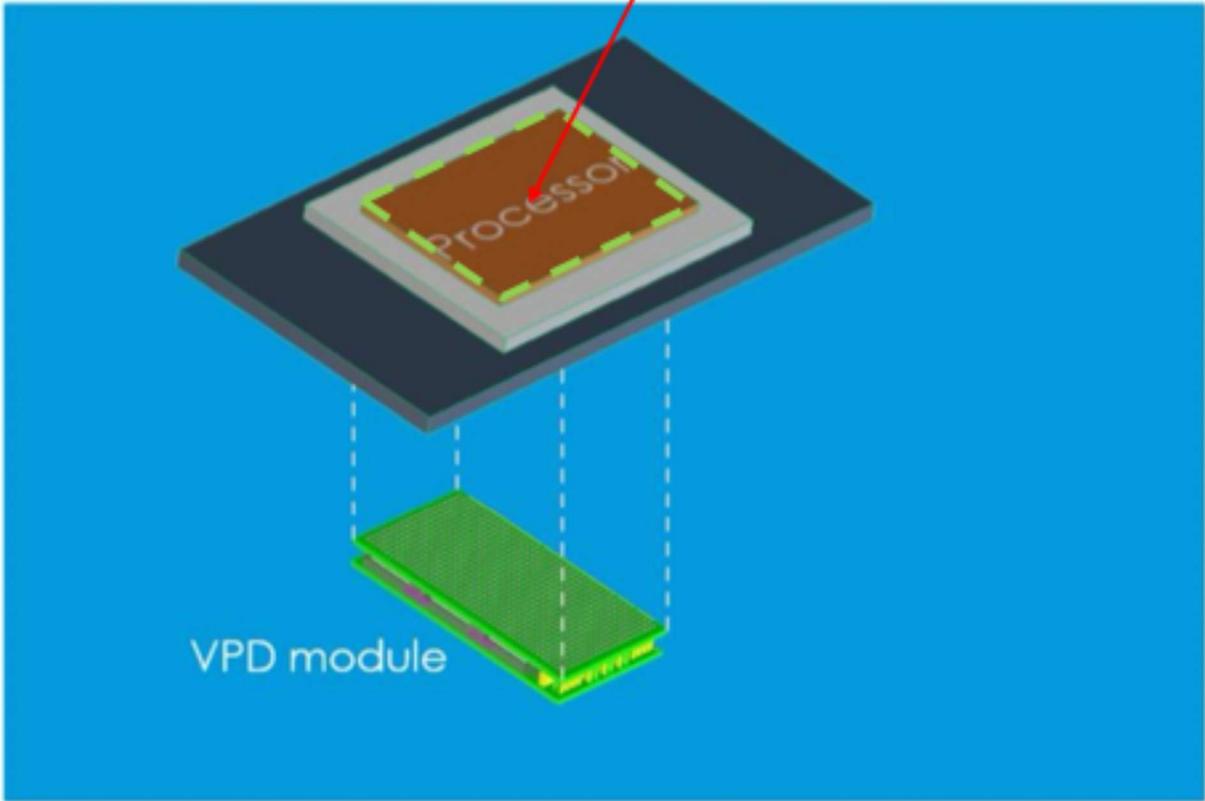
#	Limitation	Practice Evidence
		Ex. 36C at 10. Ex. 36C at 6. Ex. 36C at 10.

#	Limitation	Practice Evidence
		 Ex. 36C at 4.
1.j	wherein the power conversion module and the interconnection module are stacked to form a module sandwich including the power conversion module in a	The Flex VPD Module practices a method comprising “wherein the power conversion module [red] and the interconnection module [purple] are stacked to form a module sandwich including the power conversion module [red] in a first layer, electrical connections between the converter output terminals

#	Limitation	Practice Evidence
	first layer, electrical connections between the converter output terminals and the x-input terminals in a second layer, and the interconnection module in a third layer.	and the x-input terminals [green] in a second layer, and the interconnection module [purple] in a third layer.”  Ex. 36C at 6.

Claim 2

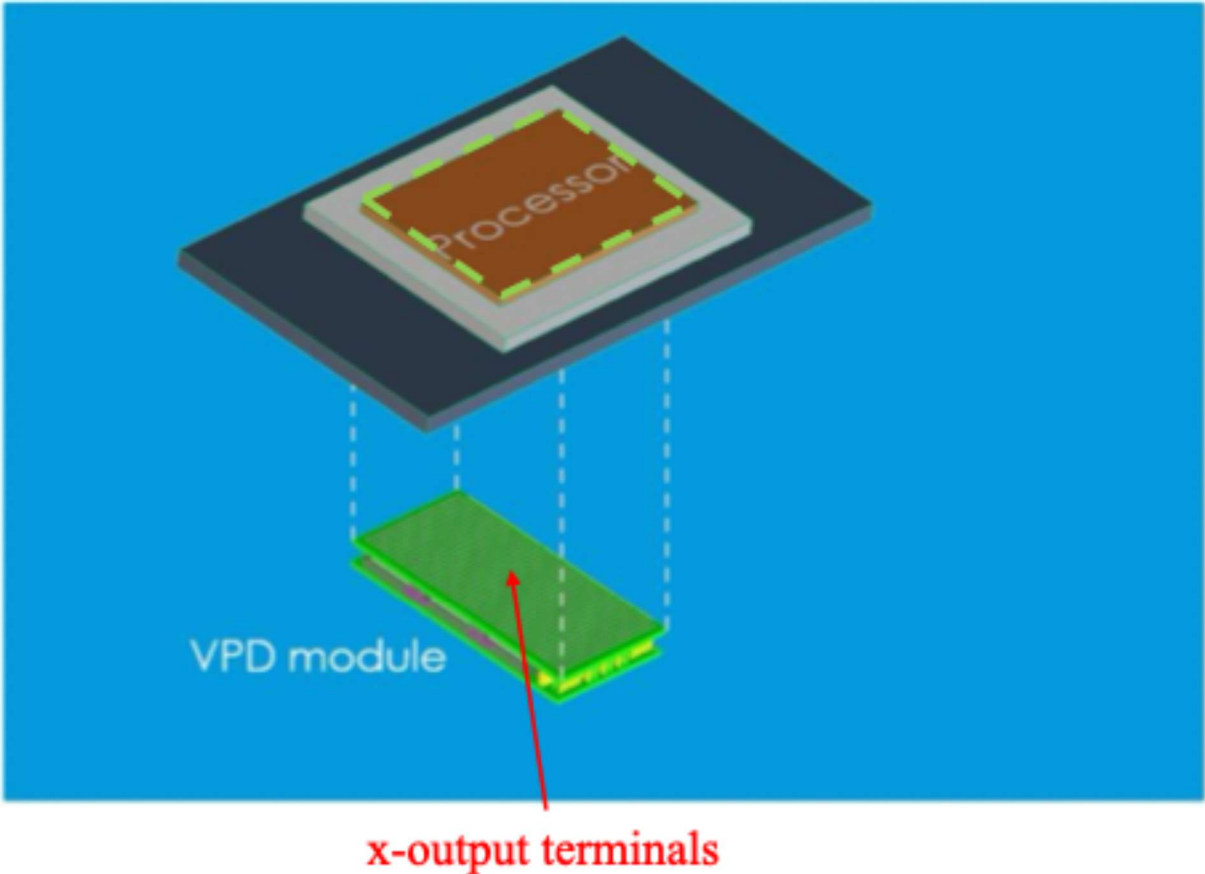
#	Limitation	Practice Evidence
2.pre	A method of powering a semiconductor device, including at least one semiconductor die having a plurality of die power input terminals arranged on a surface of the die and having edges of the semiconductor die	The Flex VPD Module practices a method comprising “[a] method of powering a semiconductor device, including at least one semiconductor die having a plurality of die power input terminals [red] arranged on a surface of the die and having edges of the semiconductor die defining a die footprint [green], the semiconductor device having power input terminals arranged within the footprint of the die, the method comprising:”

#	Limitation	Practice Evidence
	defining a die footprint, the semiconductor device having power input terminals arranged within the footprint of the die, the method comprising:	Semiconductor Die  VPD module Ex. 36C at 4. <i>See also 1.pre.</i>

PUBLIC VERSION

#	Limitation	Practice Evidence
2.a	providing a power conversion module having conversion circuitry arranged in a multi-cell structure having a plurality of conversion cells,	The Flex VPD Module practices a method comprising “providing a power conversion module having conversion circuitry arranged in a multi-cell structure having a plurality of conversion cells.” <i>See 1.a.</i>
2.b	each conversion cell including one or more converter output terminals,	The Flex VPD Module practices a method comprising “each conversion cell including one or more converter output terminals.” <i>See 1.b.</i>
2.c	the conversion circuitry being configured to convert power received at a first voltage for delivery via the converter output terminals of the plurality of conversion cells at a second lower voltage,	The Flex VPD Module practices a method comprising “the conversion circuitry being configured to convert power received at a first voltage for delivery via the converter output terminals of the plurality of conversion cells at a second lower voltage.” <i>See 1.c.</i>
2.d	the converter output terminals being arranged in a first pattern having a first spacing between the converter output terminals;	The Flex VPD Module practices a method comprising “the converter output terminals being arranged in a first pattern having a first spacing between the converter output terminals.” <i>See 1.d.</i>
2.e	providing an interconnection module having x-input terminals arranged on a first side of the interconnection module in a pattern configured to align with the first pattern of converter output terminals, and	The Flex VPD Module practices a method comprising “providing an interconnection module having x-input terminals arranged on a first side of the interconnection module in a pattern configured to align with the first pattern of converter output terminals.” <i>See 1.e.</i>

#	Limitation	Practice Evidence
2.f	x-output terminals arranged on a surface of a second opposite side of the interconnection module in a second pattern arranged within the die footprint and configured to align with the power input terminals of the semiconductor device, the second pattern having a second spacing between x-output terminals,	The Flex VPD Module practices a method comprising “x-output terminals [red] arranged on a surface of a second opposite side of the interconnection module in a second pattern arranged within the die footprint [green] and configured to align with the power input terminals of the semiconductor device, the second pattern having a second spacing between x-output terminals.” <i>See 1.f.</i> The Flex VPD Module practices a method comprising “x-output terminals [red] . . . arranged within the die footprint [green].”

#	Limitation	Practice Evidence
		 The diagram illustrates a processor (labeled 'processor' on a brown square) mounted on a dark blue base. Below the base is a green rectangular VPD module. A red arrow points to the bottom edge of the VPD module, which is labeled 'x-output terminals' in red text. Dashed lines connect the processor to the VPD module, indicating electrical connections. Ex. 36C at 4.
2.g	the second spacing being different than the first spacing, the x-input terminals being	The Flex VPD Module practices a method comprising “the second spacing being different than the first spacing, the x-input terminals being electrically connected to the x-output terminals.”

#	Limitation	Practice Evidence
	electrically connected to the x-output terminals;	<i>See 1.g.</i>
2.h	assembling the power conversion module to the first side of the interconnection module with each converter output terminal mated with and electrically connected to a respective x-input terminal;	The Flex VPD Module practices a method comprising “assembling the power conversion module to the first side of the interconnection module with each converter output terminal mated with and electrically connected to a respective x-input terminal.” <i>See 1.h.</i>
2.i	wherein the interconnection module is configured to provide electrical and mechanical translation between the converter output terminals arranged in the first pattern and the power input terminals of the semiconductor device arranged in the second pattern;	The Flex VPD Module practices a method comprising “wherein the interconnection module is configured to provide electrical and mechanical translation between the converter output terminals arranged in the first pattern and the power input terminals of the semiconductor device arranged in the second pattern.” <i>See 1.i.</i>
2.j	wherein the power conversion module and the interconnection module are stacked to form a module sandwich including the power conversion module in a first layer, electrical connections between the converter output terminals and the x-input terminals in a second layer, and the interconnection module in a third layer.	The Flex VPD Module practices a method comprising “wherein the power conversion module and the interconnection module are stacked to form a module sandwich including the power conversion module in a first layer, electrical connections between the converter output terminals and the x-input terminals in a second layer, and the interconnection module in a third layer.” <i>See 1.j.</i>

#	Limitation	Practice Evidence

Claim 40

#	Limitation	Practice Evidence
40.pre	An apparatus comprising:	Flex VPD Module is is part of “[a]n apparatus.” <i>See 1.pre.</i>
40.a	a semiconductor device having power input terminals;	Flex VPD Module is part of an apparatus comprising “a semiconductor device having power input terminals.” <i>See 2.pre.</i>
40.b	a power conversion module having conversion circuitry arranged in a multi-cell structure having a plurality of conversion cells,	Flex VPD Module is part of an apparatus comprising “a power conversion module having conversion circuitry arranged in a multi-cell structure having a plurality of conversion cells.” <i>See 1.a.</i>
40.c	each conversion cell including one or more converter output terminals,	Flex VPD Module is part of an apparatus comprising “each conversion cell including one or more converter output terminals.” <i>See 1.b.</i>
40.d	the conversion circuitry being configured to convert power received at a first voltage for delivery via the converter output terminals of the plurality of conversion cells at a second lower voltage,	Flex VPD Module is part of an apparatus comprising “the conversion circuitry being configured to convert power received at a first voltage for delivery via the converter output terminals of the plurality of conversion cells at a second lower voltage.” <i>See 1.c.</i>

#	Limitation	Practice Evidence
40.e	the converter output terminals being arranged in a first pattern having a first spacing between the converter output terminals; and	Flex VPD Module is part of an apparatus comprising “the converter output terminals being arranged in a first pattern having a first spacing between the converter output terminals.” <i>See 1.d.</i>
40.f	an interconnection module having x-input terminals arranged on a first surface of the interconnection module in a pattern configured to align with the first pattern of converter output terminals, and	Flex VPD Module is part of an apparatus comprising “an interconnection module having x-input terminals arranged on a first surface of the interconnection module in a pattern configured to align with the first pattern of converter output terminals.” <i>See 1.e.</i>
40.g	x-output terminals arranged on a second surface in a second pattern configured to align with the power input terminals of the semiconductor device, the second pattern having a second spacing between x-output terminals,	Flex VPD Module is part of an apparatus comprising “x-output terminals arranged on a second surface in a second pattern configured to align with the power input terminals of the semiconductor device, the second pattern having a second spacing between x-output terminals.” <i>See 1.f.</i>
40.h	the second spacing being different than the first spacing, the x-input terminals being electrically connected to the x-output terminals;	Flex VPD Module is part of an apparatus comprising “the second spacing being different than the first spacing, the x-input terminals being electrically connected to the x-output terminals.” <i>See 1.g.</i>
40.i	the converter output terminals of the power conversion module being mated with and electrically connected to respective x-input terminals of the interconnection module;	Flex VPD Module is part of an apparatus comprising “the converter output terminals of the power conversion module being mated with and electrically connected to respective x-input terminals of the interconnection module.” <i>See 1.h.</i>
40.j	wherein the interconnection module is configured to provide	Flex VPD Module is part of an apparatus “wherein the interconnection module is configured to provide electrical and mechanical translation between the converter output terminals arranged in the

#	Limitation	Practice Evidence
	electrical and mechanical translation between the converter output terminals arranged in the first pattern and the power input terminals of the semiconductor device arranged in the second pattern;	first pattern and the power input terminals of the semiconductor device arranged in the second pattern.” <i>See 1.i.</i>
40.k	wherein the power conversion module and the interconnection module are stacked with the power conversion module located at a first level, electrical connections between the converter output terminals and the x-input terminals at a second level, and the interconnection module at a third level.	Flex VPD Module is part of an apparatus “wherein the power conversion module and the interconnection module are stacked with the power conversion module located at a first level, electrical connections between the converter output terminals and the x-input terminals at a second level, and the interconnection module at a third level.” <i>See 1.j.</i>

Claim 45

#	Limitation	Practice Evidence
45.pre	A method of powering a semiconductor device having power input terminals, the method comprising:	Flex VPD Module practices “[a] method of powering a semiconductor device having power input terminals.” <i>See 2.pre.</i>
45.a	providing a power conversion module having conversion circuitry arranged in a multi-cell	Flex VPD Module practices a method comprising “providing a power conversion module having conversion circuitry arranged in a multi-cell structure having a plurality of conversion cells.”


PUBLIC VERSION

#	Limitation	Practice Evidence
	structure having a plurality of conversion cells,	<i>See 1.a.</i>
45.b	each conversion cell including one or more converter output terminals,	Flex VPD Module practices a method comprising “each conversion cell including one or more converter output terminals.” <i>See 1.b.</i>
45.c	the conversion circuitry being configured to convert power received at a first voltage for delivery via the converter output terminals of the plurality of conversion cells at a second lower voltage,	Flex VPD Module practices a method comprising “the conversion circuitry being configured to convert power received at a first voltage for delivery via the converter output terminals of the plurality of conversion cells at a second lower voltage.” <i>See 1.c.</i>
45.d	the converter output terminals being arranged in a first pattern having a first spacing between the converter output terminals;	Flex VPD Module practices a method comprising “the converter output terminals being arranged in a first pattern having a first spacing between the converter output terminals.” <i>See 1.d.</i>
45.e	providing an interconnection module having x-input terminals arranged on a first surface of the interconnection module in a pattern configured to align with the first pattern of converter output terminals, and	Flex VPD Module practices a method comprising “providing an interconnection module having x-input terminals arranged on a first surface of the interconnection module in a pattern configured to align with the first pattern of converter output terminals, and” <i>See 1.e.</i>
45.f	x-output terminals arranged on a second surface in a second pattern configured to align with the power input terminals of the semiconductor device, the second	Flex VPD Module practices a method comprising “x-output terminals arranged on a second surface in a second pattern configured to align with the power input terminals of the semiconductor device, the second pattern having a second spacing between x-output terminals.” <i>See 1.f.</i>

PUBLIC VERSION


#	Limitation	Practice Evidence
	pattern having a second spacing between x-output terminals,	
45.g	the second spacing being different than the first spacing, the x-input terminals being electrically connected to the x-output terminals;	Flex VPD Module practices a method comprising “the second spacing being different than the first spacing, the x-input terminals being electrically connected to the x-output terminals.” <i>See</i> 1.g.
45.h	providing a plurality of conductive pillars for electrically connecting the converter output terminals with respective x-input terminals;	Flex VPD Module practices a method comprising “providing a plurality of conductive pillars [orange] for electrically connecting the converter output terminals [blue] with respective x-input terminals [green].”  Ex. 36C at 10.

#	Limitation	Practice Evidence
		Ex. 36C at 6.

#	Limitation	Practice Evidence
		 Ex. 36C at 10.
45.i	assembling the power conversion module to the interconnection module with each converter output terminal aligned with and electrically connected to a respective x-input terminal by a respective one of the conductive pillars;	Flex VPD Module practices a method comprising “assembling the power conversion module to the interconnection module with each converter output terminal aligned with and electrically connected to a respective x-input terminal by a respective one of the conductive pillars [orange].” <i>See</i> 1.h.

#	Limitation	Practice Evidence
		Ex. 36C at 6.

#	Limitation	Practice Evidence
		 Ex. 36C at 10.
45.j	wherein the interconnection module is configured to provide electrical and mechanical translation between the converter output terminals arranged in the first pattern and the power input terminals of the semiconductor device arranged in the second pattern;	Flex VPD Module practices a method “wherein the interconnection module is configured to provide electrical and mechanical translation between the converter output terminals arranged in the first pattern and the power input terminals of the semiconductor device arranged in the second pattern.” <i>See 1.i.</i>
45.k	wherein the power conversion module and the interconnection module are stacked to form a module sandwich including the power conversion module in a first layer, the conductive pillars connecting the converter output	Flex VPD Module practices a method “wherein the power conversion module and the interconnection module are stacked to form a module sandwich including the power conversion module in a first layer, the conductive pillars connecting the converter output terminals and the x-input terminals in a second layer, and the interconnection module in a third layer.” <i>See 1.j.</i>

#	Limitation	Practice Evidence
	terminals and the x-input terminals in a second layer, and the interconnection module in a third layer; and	
45.1	wherein the x-output terminals are arranged with alternating polarities to reduce interconnection inductance.	Flex VPD Module practices a method “wherein the x-output terminals [red] are arranged with alternating polarities to reduce interconnection inductance.”  Ex. 36C at 11.

Claim 49

#	Limitation	Practice Evidence
49.pre	An apparatus comprising:	Flex VPD Module is is part of “[a]n apparatus.” <i>See 1.pre.</i>
49.a	a semiconductor device, including at least one semiconductor die having a plurality of die power input terminals arranged on a surface of the die and having edges of the semiconductor die defining a die footprint, the semiconductor device having power input terminals arranged within the footprint of the die;	Flex VPD Module is part of an apparatus comprising “a semiconductor device, including at least one semiconductor die having a plurality of die power input terminals arranged on a surface of the die and having edges of the semiconductor die defining a die footprint, the semiconductor device having power input terminals arranged within the footprint of the die.” <i>See 2.pre.</i>
49.b	a power conversion module having switching power conversion circuitry arranged in a multi-cell structure having a plurality of conversion cells,	Flex VPD Module is part of an apparatus comprising “a power conversion module having switching power conversion circuitry arranged in a multi-cell structure having a plurality of conversion cells.” <i>See 1.a.</i>

--	--	-------------

#	Limitation	Practice Evidence
		Ex. 36C at 9.
49.c	each conversion cell including one or more converter output terminals,	Flex VPD Module is part of an apparatus comprising “each conversion cell including one or more converter output terminals.” <i>See</i> 1.b.
49.d	the conversion circuitry being configured to convert power received at a first voltage for delivery via the converter output terminals of the plurality of conversion cells at a second lower voltage,	Flex VPD Module is part of an apparatus comprising “the conversion circuitry being configured to convert power received at a first voltage for delivery via the converter output terminals of the plurality of conversion cells at a second lower voltage.” <i>See</i> 1.c.
49.e	the converter output terminals being arranged in a first pattern having a first spacing between the converter output terminals; and	Flex VPD Module is part of an apparatus comprising “the converter output terminals being arranged in a first pattern having a first spacing between the converter output terminals.” <i>See</i> 1.d.
49.f	an interconnection module having x-input terminals arranged on a first surface of the interconnection module in a pattern configured to align with the first pattern of converter output terminals, and	Flex VPD Module is part of an apparatus comprising “an interconnection module having x-input terminals arranged on a first surface of the interconnection module in a pattern configured to align with the first pattern of converter output terminals.” <i>See</i> 1.e.
49.g	x-output terminals arranged on a second surface in a second pattern with alternating polarities configured to align with the power input terminals of the semiconductor device, the second	Flex VPD Module is part of an apparatus comprising “x-output terminals arranged on a second surface in a second pattern with alternating polarities configured to align with the power input terminals of the semiconductor device, the second pattern having a second spacing between x-output terminals.”

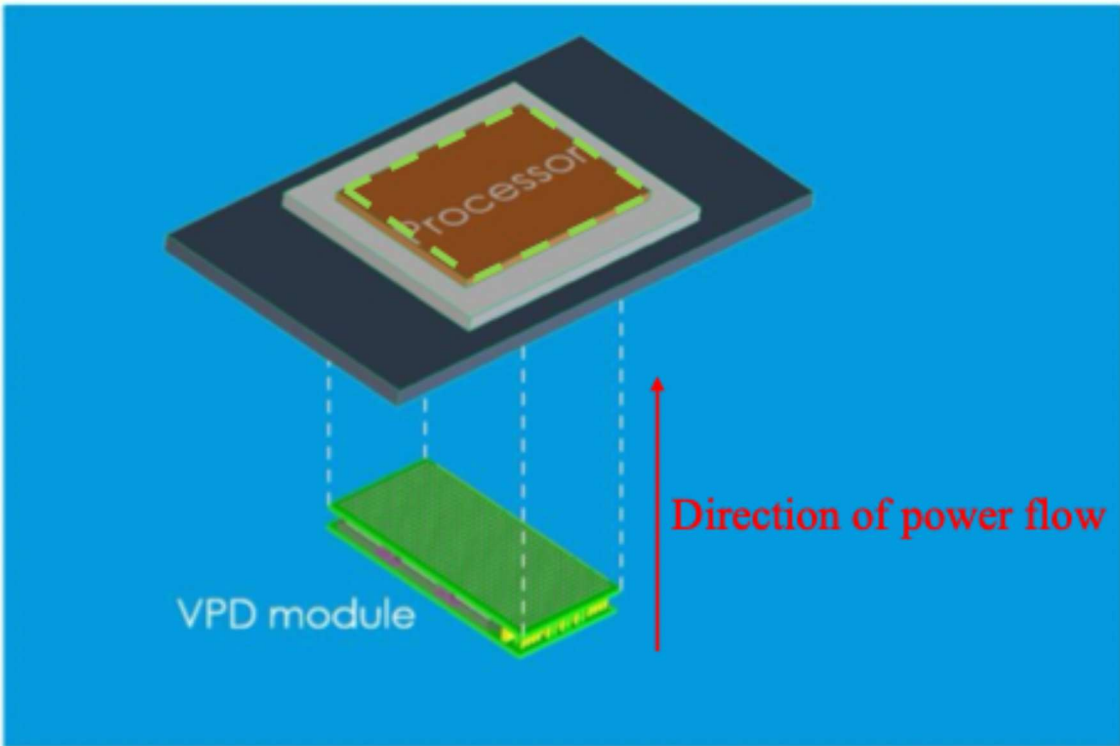
PUBLIC VERSION

#	Limitation	Practice Evidence
	pattern having a second spacing between x-output terminals,	<i>See</i> 1.f; 45.l.
49.h	the second spacing being different than the first spacing, the x-input terminals being electrically connected to the x-output terminals;	Flex VPD Module is part of an apparatus comprising “the second spacing being different than the first spacing, the x-input terminals being electrically connected to the x-output terminals.” <i>See</i> 1.g.
49.i	the converter output terminals of the power conversion module being mated with and electrically connected to respective x-input terminals of the interconnection module;	Flex VPD Module is part of an apparatus comprising “the converter output terminals of the power conversion module being mated with and electrically connected to respective x-input terminals of the interconnection module.” <i>See</i> 1.h.
49.j	wherein the interconnection module is configured to provide electrical and mechanical translation between the converter output terminals arranged in the first pattern and the power input terminals of the semiconductor device arranged in the second pattern;	Flex VPD Module is part of an apparatus “wherein the interconnection module is configured to provide electrical and mechanical translation between the converter output terminals arranged in the first pattern and the power input terminals of the semiconductor device arranged in the second pattern.” <i>See</i> 1.i.
49.k	wherein the power conversion module and the interconnection module are stacked with the power conversion module located at a first level, electrical connections between the converter output terminals and the x-input terminals at a second	Flex VPD Module is part of an apparatus “wherein the power conversion module and the interconnection module are stacked with the power conversion module located at a first level, electrical connections between the converter output terminals and the x-input terminals at a second level, and the interconnection module at a third level.” <i>See</i> 1.j.


#	Limitation	Practice Evidence
	level, and the interconnection module at a third level.	


Claim 53

#	Limitation	Practice Evidence
53.pre	An apparatus for delivering power vertically to a semiconductor die, the die having a plurality of semiconductor power input terminals arranged on a surface of the semiconductor die and having edges of the semiconductor die defining a die footprint, the apparatus comprising:	Flex VPD Module is “[a]n apparatus for delivering power vertically to a semiconductor die, the die having a plurality of semiconductor power input terminals arranged on a surface of the semiconductor die and having edges of the semiconductor die defining a die footprint.” <i>See 2.pre.</i> Flex VPD Module is “[a]n apparatus for delivering power vertically to a semiconductor die.”

#	Limitation	Practice Evidence
		 Ex. 36C at 4.
53.a	switching power conversion circuitry arranged on a first substrate having a plurality of switching power conversion cells and a plurality of converter output terminals,	Flex VPD Module is an apparatus comprising “switching power conversion circuitry arranged on a first substrate having a plurality of switching power conversion cells and a plurality of converter output terminals.” See 49.b, 1.a, 1.b.

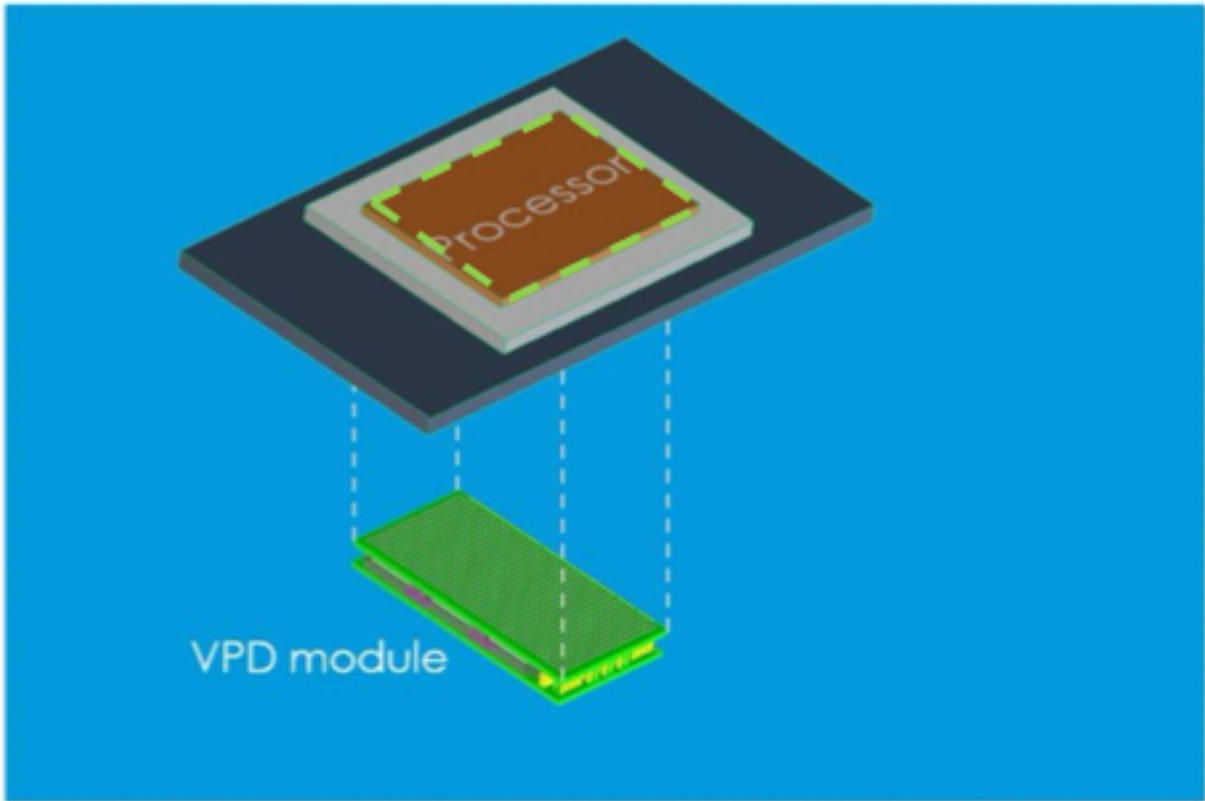
#	Limitation	Practice Evidence
		Flex VPD Module is an apparatus comprising “switching power conversion circuitry arranged on a first substrate [blue].”  Ex. 36C at 6.
53.b	the switching power conversion circuitry being configured to convert power received at a first voltage for delivery via the converter output terminals at a second lower voltage;	Flex VPD Module is an apparatus comprising “the switching power conversion circuitry being configured to convert power received at a first voltage for delivery via the converter output terminals at a second lower voltage.” <i>See</i> 1.c.
53.c	translation interconnections including X-input terminals configured and arranged to align	Flex VPD Module is an apparatus comprising “translation interconnections including X-input terminals configured and arranged to align with and electrically connect to the converter output terminals.”


#	Limitation	Practice Evidence
	with and electrically connect to the converter output terminals,	<i>See</i> 1.e.
53.d	a plurality of X-output terminals configured and arranged with alternating polarities to align with respective power input terminals of the semiconductor die, and	Flex VPD Module is an apparatus comprising “a plurality of X-output terminals configured and arranged with alternating polarities to align with respective power input terminals of the semiconductor die.” <i>See</i> 1.f, 45.l.
53.e	a plurality of vertical conductors to make electrical connections to the X-output terminals;	Flex VPD Module is an apparatus comprising “a plurality of vertical conductors to make electrical connections to the X-output terminals.” 

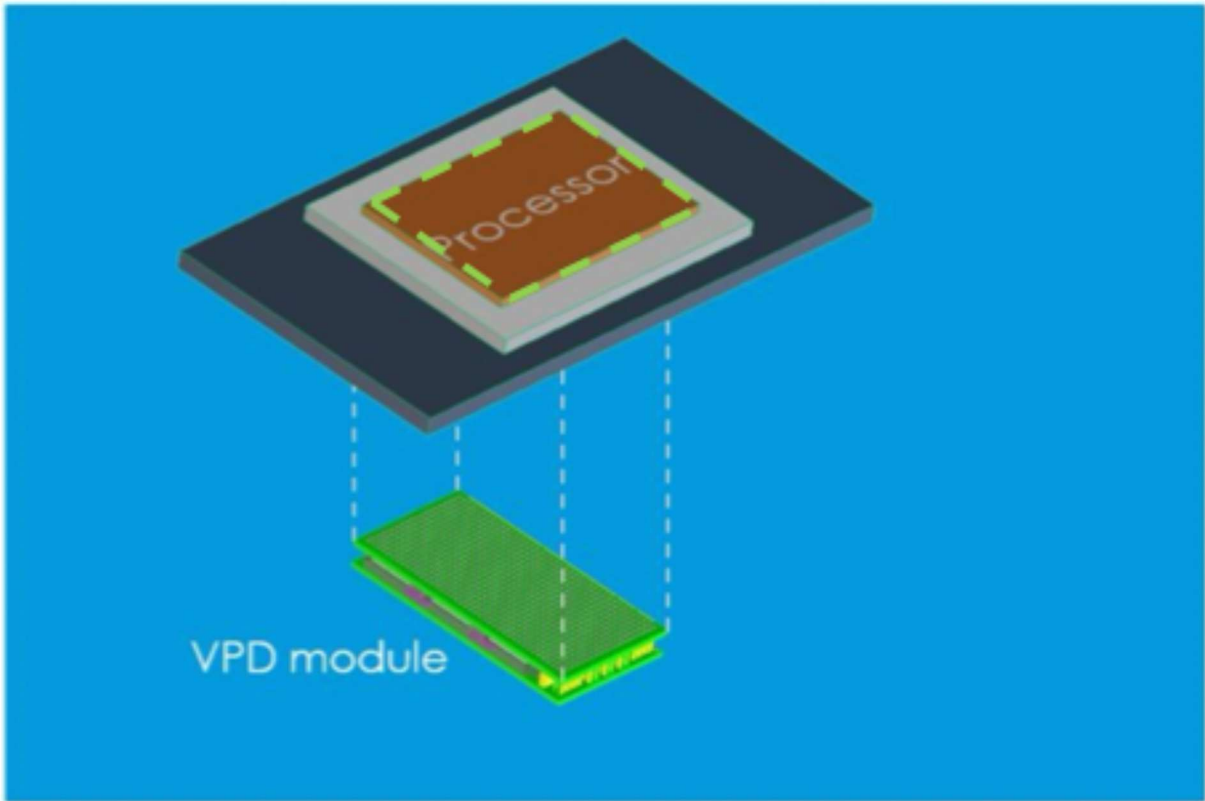
#	Limitation	Practice Evidence
		Ex. 36C at 6.  Ex. 36C at 10.
53.f	a capacitive array arranged between the power conversion circuitry and the semiconductor die and electrically connected to the translation interconnections to provide energy storage;	Flex VPD Module is an apparatus comprising “a capacitive array [blue] arranged between the power conversion circuitry [red] and the semiconductor die [green] and electrically connected to the translation interconnections [purple] to provide energy storage.”

#	Limitation	Practice Evidence
		Ex. 36C at 6.

#	Limitation	Practice Evidence
		Ex/ 36C at 6.

#	Limitation	Practice Evidence
		 The diagram shows a 3D perspective view of a processor assembly. At the top is a dark grey square substrate. On top of this is a light grey square pad. Centered on the pad is a brown square die labeled "Processor". The die is surrounded by a dashed yellow border. Below the substrate, a green rectangular flex module is shown, connected to the underside of the substrate by four vertical dashed lines. The flex module is labeled "VPD module". The entire assembly is set against a solid blue background. Ex. 36C at 4.
53.g	wherein the translation interconnections are configured to provide electrical and mechanical translation between the converter output terminals	Flex VPD Module is an apparatus “wherein the translation interconnections are configured to provide electrical and mechanical translation between the converter output terminals and the power input terminals of the semiconductor die.” <i>See 1.i.</i>

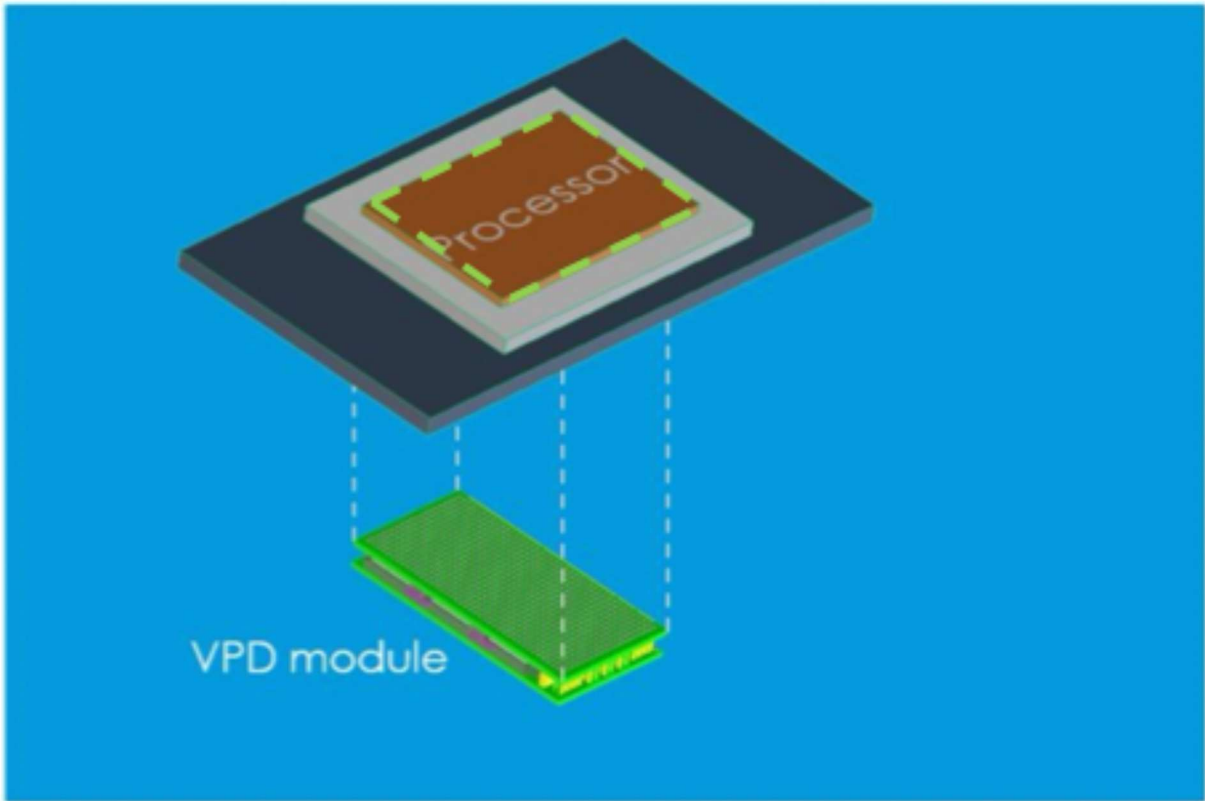
#	Limitation	Practice Evidence
	and the power input terminals of the semiconductor die;	
53.h	wherein the switching power conversion circuitry, the translation interconnections, and the capacitive array, are each configured and arranged within a respective footprint configured to occupy substantially all of the die footprint, and are together configured and arranged to form a vertical stack configured to occupy substantially all of the die footprint.	Flex VPD Module is an apparatus “wherein the switching power conversion circuitry [red], the translation interconnections [purple], and the capacitive array [blue], are each configured and arranged within a respective footprint configured to occupy substantially all of the die footprint [green], and are together configured and arranged to form a vertical stack configured to occupy substantially all of the die footprint [green].”  Ex. 36C at 6.


#	Limitation	Practice Evidence
		 Ex. 36C at 4.


Claim 67

PUBLIC VERSION

#	Limitation	Practice Evidence
67.pre	A vertical power delivery apparatus for a semiconductor die, the semiconductor die having a plurality of semiconductor power input terminals arranged on a surface of the semiconductor die and having edges of the semiconductor die defining a die footprint;	Flex VPD Module is “[a] vertical power delivery apparatus for a semiconductor die, the semiconductor die having a plurality of semiconductor power input terminals arranged on a surface of the semiconductor die and having edges of the semiconductor die defining a die footprint.” <i>See 53.pre.</i>
67.a	the vertical power delivery apparatus comprising in a vertical stack configured to occupy, in whole or in part, the die footprint, the vertical stack comprising:	Flex VPD Module is “the vertical power delivery apparatus comprising in a vertical stack configured to occupy, in whole or in part, the die footprint [green].”

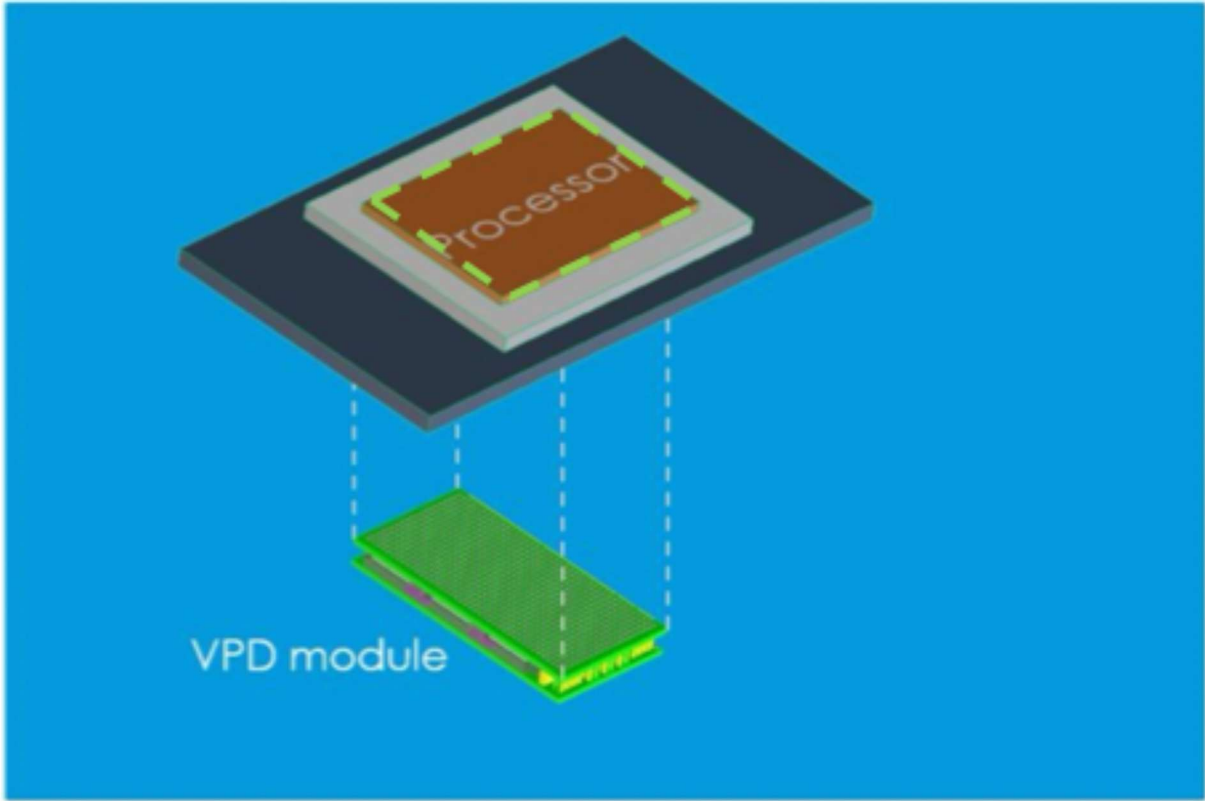
#	Limitation	Practice Evidence
		 The diagram shows a 3D perspective view of a processor assembly. At the top is a dark grey square substrate. On top of this substrate is a smaller, light grey square chip. Inside this chip is a brown square area labeled 'Processor'. Below the substrate, a green rectangular module labeled 'VPD module' is shown. Dashed lines connect the bottom of the substrate to the top of the VPD module, indicating a connection or alignment. Ex. 36C at 4.
67.b	(a) point-of-load (“POL”) switching power conversion circuitry (i) arranged on a substrate within a conversion footprint, (ii) including a plurality of switching power conversion	Flex VPD Module is an apparatus comprising “(a) point-of-load (“POL”) switching power conversion circuitry (i) arranged on a substrate within a conversion footprint [purple], (ii) including a plurality of switching power conversion cells [blue] connected in parallel to convert power from an input at an input voltage for delivery to the semiconductor power input terminals at a die voltage.”

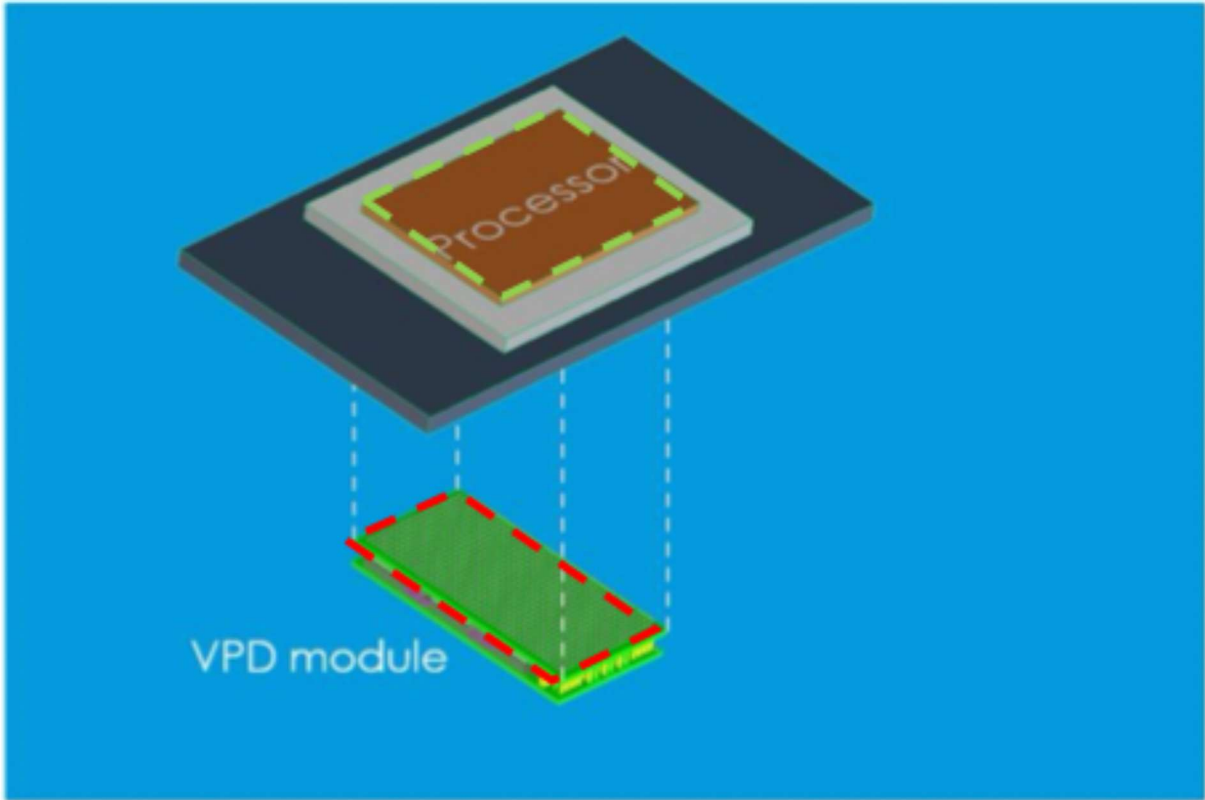
#	Limitation	Practice Evidence
	cells connected in parallel to convert power from an input at an input voltage for delivery to the semiconductor power input terminals at a die voltage,	 Ex. 36C at 6.


#	Limitation	Practice Evidence
		 Ex. 36C at 10. <i>See also</i> 1.c, 49.b.
67.c	(iii) the input voltage being at least five times higher than the die voltage, and (iv) the conversion footprint being configured to occupy, in whole or in part, the die footprint;	Flex VPD Module is an apparatus comprising “(iii) the input voltage being at least five times higher than the die voltage, and (iv) the conversion footprint [purple] being configured to occupy, in whole or in part, the die footprint [green].”

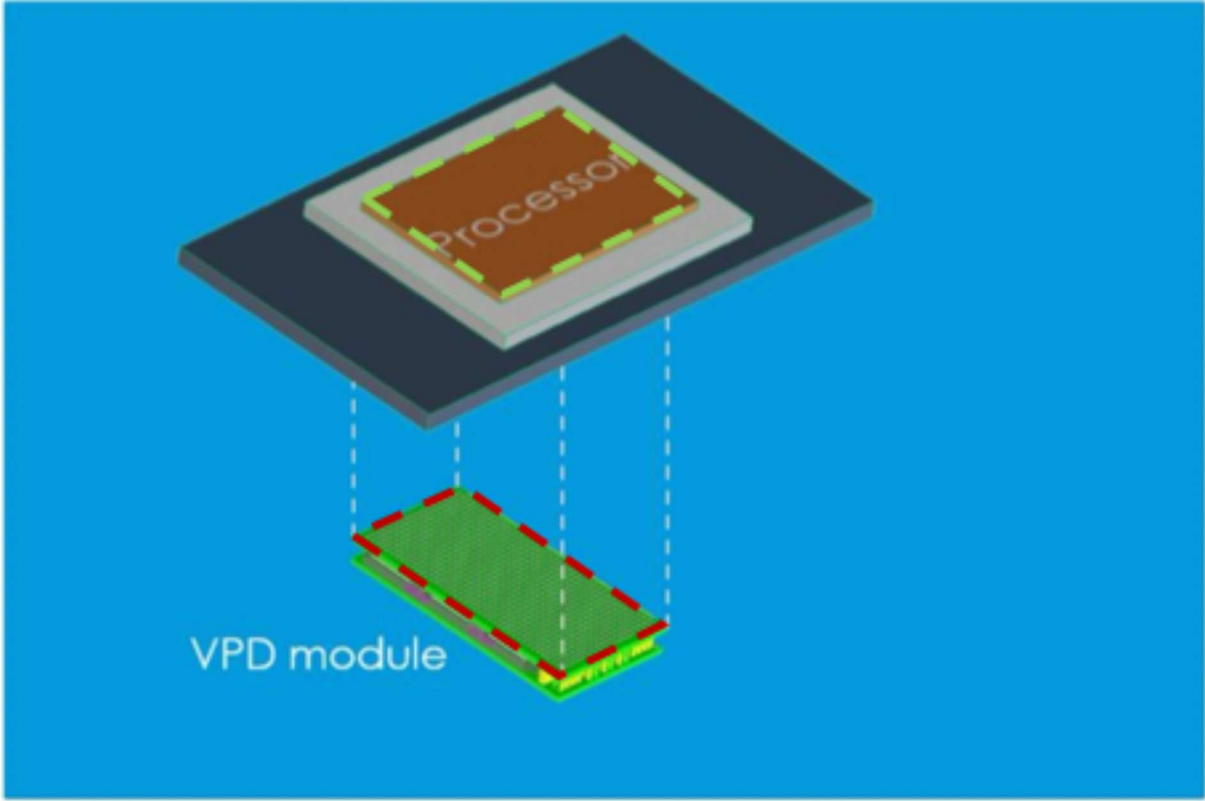
#	Limitation	Practice Evidence
		Ex. 36C at 6.

#	Limitation	Practice Evidence
		Ex. 36C at 6.

#	Limitation	Practice Evidence
		 The diagram illustrates a processor chip (labeled 'Processor') mounted on a dark substrate. Below the chip, a green rectangular VPD module is shown. Dashed lines connect the processor to the VPD module, indicating electrical connections. The VPD module is labeled 'VPD module'. Ex. 36C at 4.
67.d	(b) interdigitated output terminals (i) electrically connected to receive power from the switching power conversion cells, (ii) configured within a terminal footprint to match the plurality of semiconductor power input terminals	Flex VPD Module is an apparatus comprising “(b) interdigitated output terminals (i) electrically connected to receive power from the switching power conversion cells, (ii) configured within a terminal footprint to match the plurality of semiconductor power input terminals, (iii) the terminal footprint being configured to occupy, in whole or in part, the die footprint.” See 1.i, 45.1.

#	Limitation	Practice Evidence
	semiconductor power input terminals, (iii) the terminal footprint being configured to occupy, in whole or in part, the die footprint; and	Flex VPD Module is an apparatus comprising “(b) interdigitated output terminals . . . configured within a terminal footprint [red] . . . (iii) the terminal footprint being configured to occupy, in whole or in part, the die footprint [green].”  The diagram illustrates a Flex VPD Module. It features a dark blue rectangular substrate. On top of this substrate is a square processor die with a brown surface and the word "Processor" written on it. The die is surrounded by a yellow dashed rectangular outline. Below the substrate, a green rectangular VPD module is shown, aligned with the die's footprint. Dashed lines connect the corners of the die's footprint to the corners of the VPD module. The VPD module has a green top surface and a yellow bottom surface, with red dashed lines along its edges. The text "VPD module" is written in white at the bottom left of the module. Ex. 36C at 4.
67.e	(c) a capacitive array (i) arranged between the power conversion circuitry and the semiconductor	Flex VPD Module is an apparatus comprising “(c) a capacitive array [blue] (i) arranged between the power conversion circuitry [red] and the semiconductor die, (ii) within a filter footprint [dark red]

#	Limitation	Practice Evidence
	die, (ii) within a filter footprint configured to occupy, in whole or in part, the die footprint and (iii) electrically connected to the interdigitated output terminals.	configured to occupy, in whole or in part, the die footprint [green] and (iii) electrically connected to the interdigitated output terminals.”  Ex. 36C at 6.

#	Limitation	Practice Evidence
		 The diagram illustrates a system architecture. At the top, a brown square component labeled "processor" is mounted on a light gray square base, which is itself on a dark blue square platform. Below this platform, a green rectangular component labeled "VPD module" is shown. Four vertical dashed lines connect the corners of the processor's base to the corners of the VPD module, indicating a connection or data flow between the two components. The entire scene is set against a solid blue background. <i>See 45.1, 53.f, 53.g.</i>

Claim 68

#	Limitation	Practice Evidence
68.pre	A vertical power delivery apparatus for a semiconductor die, the semiconductor die having a plurality of semiconductor power input terminals arranged on a surface of the semiconductor die and having edges of the semiconductor die defining a die footprint;	Flex VPD Module comprises “[a] vertical power delivery apparatus for a semiconductor die, the semiconductor die having a plurality of semiconductor power input terminals arranged on a surface of the semiconductor die and having edges of the semiconductor die defining a die footprint.” <i>See 67.pre.</i>
68.a	the vertical power delivery apparatus comprising in a vertical stack configured to occupy, in whole or in part, the die footprint, the vertical stack comprising:	Flex VPD Module comprises “the vertical power delivery apparatus comprising in a vertical stack configured to occupy, in whole or in part, the die footprint.” <i>See 67.a.</i>
68.b	(a) point-of-load (“POL”) switching power conversion circuitry (i) arranged on a substrate within a conversion footprint, (ii) including a plurality of switching power conversion cells connected in parallel to convert power from an input at an input voltage to the semiconductor power input terminals at a die voltage,	Flex VPD Module is an apparatus comprising “(a) point-of-load (“POL”) switching power conversion circuitry (i) arranged on a substrate within a conversion footprint, (ii) including a plurality of switching power conversion cells connected in parallel to convert power from an input at an input voltage to the semiconductor power input terminals at a die voltage.” <i>See 67.b.</i>
68.c	(iii) the input voltage being at least five times higher than the die voltage, (iv) the conversion footprint being configured to occupy, in whole or in part, the die footprint;	Flex VPD Module is an apparatus comprising “(iii) the input voltage being at least five times higher than the die voltage, (iv) the conversion footprint being configured to occupy, in whole or in part, the die footprint.” <i>See 67.c.</i>

#	Limitation	Practice Evidence
68.d	(b) interdigitated output terminals (i) electrically connected to receive power from the switching power conversion cells, (ii) configured within a terminal footprint to match the plurality of semiconductor power input terminals, (iii) the terminal footprint being configured to occupy, in whole or in part, the die footprint;	Flex VPD Module is an apparatus comprising “(b) interdigitated output terminals (i) electrically connected to receive power from the switching power conversion cells, (ii) configured within a terminal footprint to match the plurality of semiconductor power input terminals, (iii) the terminal footprint being configured to occupy, in whole or in part, the die footprint.” <i>See 67.d.</i>
68.e	(c) a capacitive array (i) arranged between the power conversion circuitry and the semiconductor die, (ii) within a filter footprint configured to occupy, in whole or in part, the die footprint, and (iii) electrically connected to the interdigitated output terminals; and	Flex VPD Module is an apparatus comprising “(c) a capacitive array (i) arranged between the power conversion circuitry and the semiconductor die, (ii) within a filter footprint configured to occupy, in whole or in part, the die footprint, and (iii) electrically connected to the interdigitated output terminals.” <i>See 68.e.</i>
68.f	(d) a plurality of vertical conductors arranged within the die footprint to connect the interdigitated output terminals to the switching power conversion cells.	Flex VPD Module is an apparatus comprising “(d) a plurality of vertical conductors arranged within the die footprint to connect the interdigitated output terminals to the switching power conversion cells.” <i>See 45.l, 53.c, 53.e, 53.h</i>