

LINXYS



G050-L

PURE ELECTRIC VAN



Compact, lightweight, and fully equipped

- The compact body allows you to move unobstructed through all kinds of streets.
- 162km range and fast charging ,it eliminates all your concerns about transportation.
- Max Gradient 27%, IP67 Waterproof: Conquer Challenging Terrains.



Compact body, massive capacity


- With a 2.5m³ super-large space, it easily accommodates more cargo, making your trips more efficient



30 kW Peak Power Motor: Quick Acceleration, Powerful Performance.



Powered by CATL batteries: delivering high quality, safety, and stability.


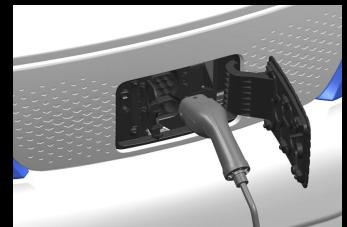


Built-in multiple safety protection mechanisms with real-time monitoring of temperature, voltage, and current



COZY COCKPIT

Compact and intelligent cockpit design for a more user-friendly experience. Pure electric driving with simple and enjoyable operation.

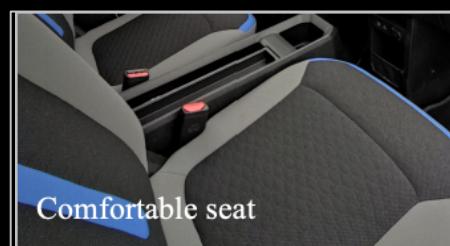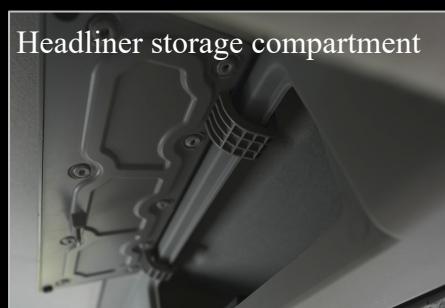



Comprehensive Safety Design

- Certified by UN ECE, compliant with UN collision safety regulations, ensuring safety and security.

System reduces impact and enhances safety by automatically engaging brakes in potential front or rear collisions.



Utilize the camera-based Lane Departure Warning to receive alerts when your vehicle unintentionally drifts out of the lane.




Obstacle detection sensors emit audible alerts with variable intervals, indicating the distance between the vehicle and obstacles. To prevent driver misoperation, firm pressing of the accelerator pedal is required to start the vehicle.




When parking, an audible warning will sound if the distance from the vehicle in front exceeds 4 meters after it starts moving.





During hill start, the vehicle prevents backward movement for approximately 5 seconds upon reapplication of the pedal, even if the brake is released.

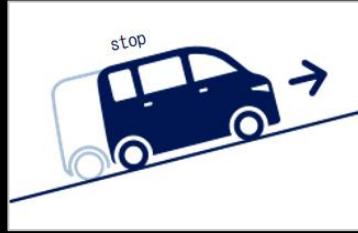

When the driver exits the vehicle in "D" or "R" gear, the system automatically switches to "P" gear to prevent unintended movement. Developed by ASF, this system prevents self-moving accidents.

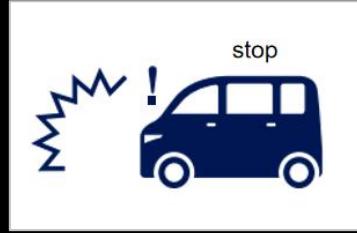

Model		G050-L
Dimensions	Overall dim. (mm)	3395×1475×1950
	Cago box dimensions (mm)	1623×1346×1215
	Container Volume(mm)	2.5
	Wheelbase (mm)	2430
Capability	GVW (kg)	1668
	Curb weight (kg)	1160
	carrying capacity (kg)	358
Power parameter	Driving range (km)	162
	Maximum speed (km/h)	90
Battery	Battery type	LFP (CATL)
	Battery energy (kWh)	29.67
	Fast charging time	30Min (SOC30%-80%,25°C)
	Battery heating	●
Driving Motor	Max. power (KW)	30
	Max. torque (N·m)	120
Passability	Tread front/rear (mm)	1300/1290
	Minimum ground clearance (mm)	130
	Maximum gradability (%)	27
	Minimum turing radius (m)	4.4m
Chassis and braking system	Tire specifications	145R12 LT 8PR
	Front suspension	Macpherson independent suspension
	Rear suspension	Multi-link non-independent suspension
	Drive form	Rear-wheel drive
	Brake system	Front disc and rear drum hydraulic brakes
Safety Configuration	Main driver airbag	●
	Seat Belt Reminder	●
	ESC	●
	Lane departure warning	●
	Forward vehicle start noticing	●
	Self walking prevention function	●
	Anti sliding slope function	●
other	Rudder	LHD
	Seating capacity	2
	AC/PTC	●
	Left and right exterior mirrors	Electric folding type
	Large center control screen	●
	Backup camera/Car backing radar	●
	Basic hand tool	●
	Reading light	●
	Safety frame	●
	Remote key	●
	Auto LightSystem	●
	Charging standard	CHAdeMO (AC+DC) / CCS2 (AC+DC)

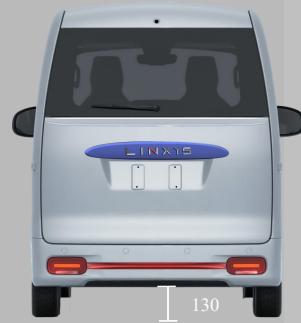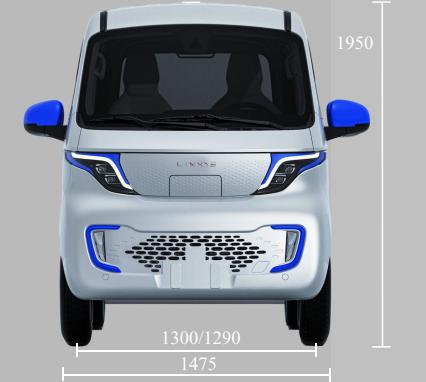

Body color:



Sky silver: ●

Candy white: ○

Trim color:



Sapphire blue: ●

Onyx black: ○

LINXYS

G050-L EV VAN MAXIMIZE YOUR BUSINESS

