

## **REVISION HISTORY:**

A: Initial design


B: Changed RS485 RX connection to ESP32 from GPIO21 to GPIO27 (RTC IO) Removed solder bridge pads to control RS485\_RX\_EN. Confirmed working as intended

Overhaul PCB outline and layout


Id: 1/5

KiCad E.D.A. 8.0.4

2

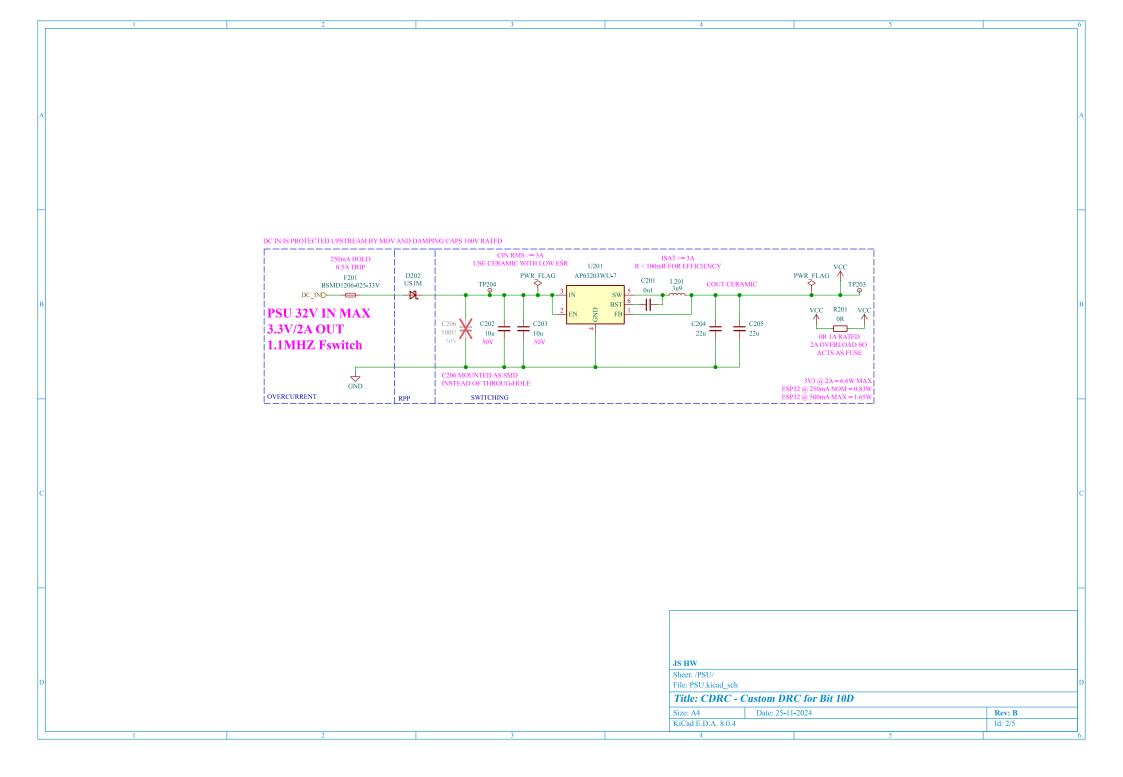

## MCU: ESP32-WROOM-32UE-R2

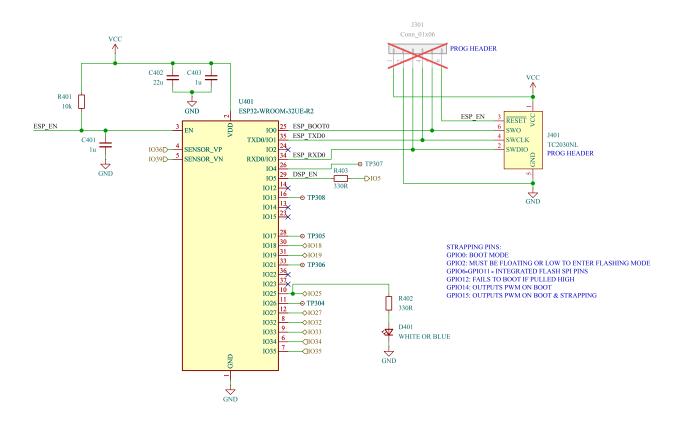

JS HW			
Sheet: /MCU/ File: MCU.kicad_sch			I
Title: CDR	C - Custom DRC for Bit 10D		
Size: A4	Date: 25-11-2024	Rev: B	
KiCad E.D.A. 8.0.4		Id: 3/5	
4	5	<u>'</u>	6

