Shweta Solar

MODULE DATASHEETS · 2026

Utility & ground-mount

Solar farms, ground-mount arrays and tracker-based plants, where modules are machine-placed and cost per watt decides the design.

FAMILY	POWER RANGE	BINS	DIMENSIONS	PLATFORM
SS132GTG-725	685–725 W	9	2383 × 1303 mm	132 cells · G12
SS120GTG-685	620–685 W	14	2170 × 1303 mm	120 cells · G12
SS132GTG-650	615–650 W	8	2383 × 1134 mm	132 cells · G12R

SHWETA SOLAR SYSTEM PRIVATE LIMITED
www.shwetasolar.in · sales@shwetasolar.in · 1800 120 477 120

Shweta Solar

SS132GTG-685 … 725

G12 platform · 132 half-cut cells · 2383 × 1303 mm
Utility & ground-mount · G12 wide format

Family 01 of 03


n-Type TOPCon bifacial | Glass–glass dual glass | Up to 23.37% efficiency | 1500 V DC | BIS R-93049670 | ALMM List-I | 12-yr product · 30-yr performance

Electrical data — STC & BNPI


Rated power P_{max} (W)	725	720	715	710	705	700	695	690	685
Voltage at P_{max} V_{mp} (V)	41.68	41.46	41.22	41.01	40.75	40.59	40.47	40.35	40.23
Current at P_{max} I_{mp} (A)	17.41	17.37	17.35	17.33	17.31	17.25	17.18	17.12	17.04
Open-circuit voltage V_{oc} (V)	47.85	47.78	47.65	47.52	47.45	47.39	47.34	47.31	47.26
Short-circuit current I_{sc} (A)	18.28	18.26	18.25	18.22	18.20	18.19	18.16	18.12	18.09
Module efficiency (%)	23.37	23.19	23.03	22.89	22.72	22.55	22.39	22.25	22.08
P_{max} at BNPI (W)	**798**	**792**	**787**	**782**	**776**	**770**	**765**	**759**	**754**

STC: 1000 W/m², cell temperature 25 °C, AM 1.5 · Power tolerance 0 / +5 W · V_{oc} and I_{sc} tolerance ±5% · BNPI: front 1000 W/m² + rear 135 W/m² · Efficiency per BIS-declared nameplate.

I-V curves

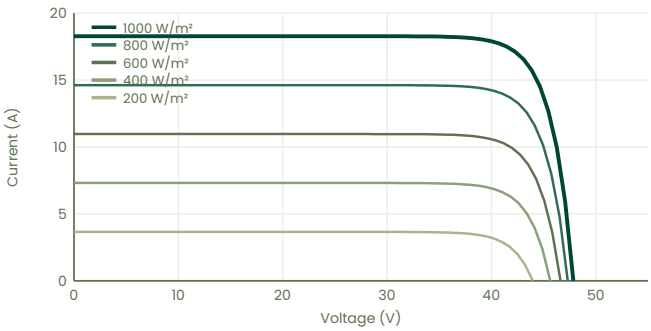

P-V curves

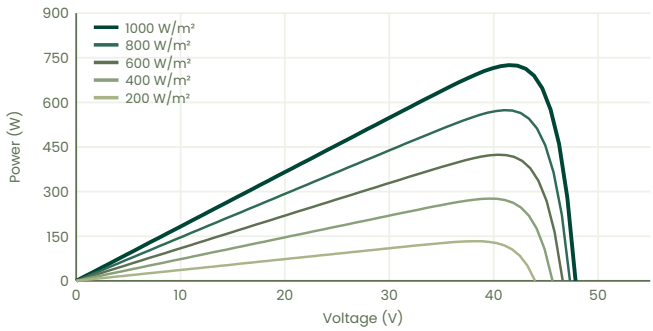

Bifacial output & packaging

725 W front +5% 761 · +10% 798 · +15% 834 · +25% 906 W — 33 pcs/pallet

Shweta Solar

SS132GTG-685 … 725

Mechanical, ratings and engineering drawings

Family 01 of 03

Mechanical characteristics


Cell type	n-Type TOPCon bifacial · G12 210 × 105 mm half-cut · 18BB
Cells / arrangement	132 half-cut cells · (11×6)×2
Dimensions (L × W × H)	2383 × 1303 × 35 mm
Weight	39.0 kg
Front / rear glass	2.0 mm AR-coated tempered / 2.0 mm tempered
Frame	Anodised aluminium alloy
Junction box	IP68 · 3 bypass diodes
Connectors	MC4-compatible · IP68
Cable	4 mm² PV cable

Ratings & temperature characteristics

Temp. coefficient of P_{max}	-0.327 %/°C
Temp. coefficient of V_{oc}	-0.269 %/°C
Temp. coefficient of I_{sc}	+0.045 %/°C
Power bifaciality	70% ± 10%
Operating temperature	-40 °C to +85 °C
Max. system voltage	1500 V DC
Max. series fuse	35 A
Static load, front / rear	5400 Pa / 2400 Pa
Class ratings	Safety Class II · Fire Class C
Warranty	12-yr product · 30-yr linear performance

Engineering drawings

mm · not to scale · 12 × 9×14 mm mounting slots, 6 per long rail

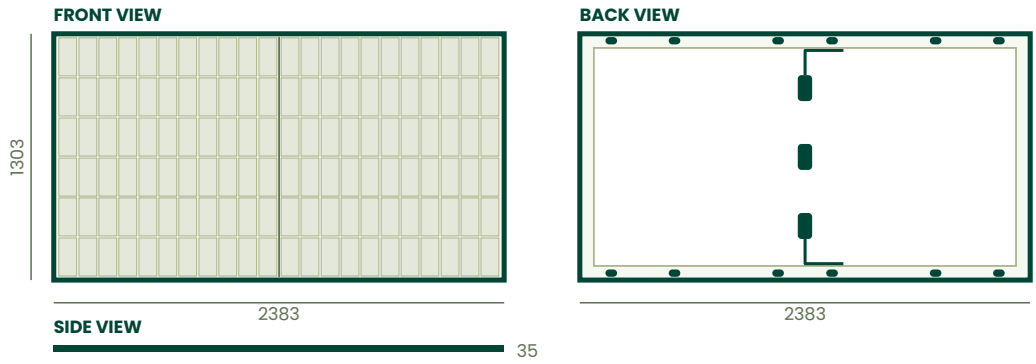

Certification · IS 14286 (Part 1/Sec 1) : 2023 · IEC 61215-1-1 : 2021 · IS/IEC 61730-1 : 2023 · IS/IEC 61730-2 : 2023 · BIS licence R-93049670, valid to 13 September 2031 · ALMM List-I · Tested at NABL-accredited laboratory

Warranty · 12-year product warranty · 30-year linear performance warranty: ≤1% first-year degradation, ≤0.4% per year thereafter, ≥87.4% of nominal at year 30

Quality · 100% electroluminescence inspection pre- and post-lamination · Individual flash-test report shipped with every module · Serialised modules with per-unit test data

Specifications subject to change without notice. All electrical data at STC per BIS-declared nameplate values; refer to the individual module flash report for measured values. I-V and P-V curves are representative, modelled from nameplate parameters. Packaging figures are for standard export packing and may vary with order configuration.

Shweta Solar

SS120GTG-620 … 685

G12 platform · 120 half-cut cells · 2170 × 1303 mm
Utility & ground-mount · G12 wide format

Family 02 of 03


n-Type TOPCon bifacial | Glass–glass dual glass | Up to 24.23% efficiency | 1500 V DC | BIS R-93049670 | ALMM List-I | 12-yr product · 30-yr performance

Electrical data — STC & BNPI


Rated power P_{max} (W)	685	680	675	670	665	660	655	650	645	640	635	630	625	620
Voltage at P_{max} V_{mp} (V)	39.24	39.01	38.76	38.53	38.32	38.14	37.87	37.67	37.20	36.96	36.88	36.78	36.63	36.48
Current at P_{max} I_{mp} (A)	17.46	17.44	17.42	17.40	17.37	17.32	17.30	17.27	17.35	17.33	17.24	17.15	17.07	17.01
Open-circuit voltage V_{oc} (V)	43.92	43.86	43.80	43.68	43.60	43.56	43.44	43.32	43.20	43.14	43.12	43.09	43.07	43.03
Short-circuit current I_{sc} (A)	18.39	18.35	18.83	18.32	18.30	18.28	18.26	18.25	18.22	18.20	18.18	18.15	18.11	18.07
Module efficiency (%)	24.23	24.06	23.88	23.71	23.54	23.36	23.17	23.01	22.83	22.65	22.49	22.31	22.11	21.95
P_{max} at BNPI (W)	**754**	**748**	**743**	**737**	**732**	**727**	**721**	**716**	**710**	**705**	**699**	**694**	**688**	**683**

STC: 1000 W/m², cell temperature 25 °C, AM 1.5 · Power tolerance 0 / +5 W · V_{oc} and I_{sc} tolerance ±5% · BNPI: front 1000 W/m² + rear 135 W/m² · Efficiency per BIS-declared nameplate.

I-V curves

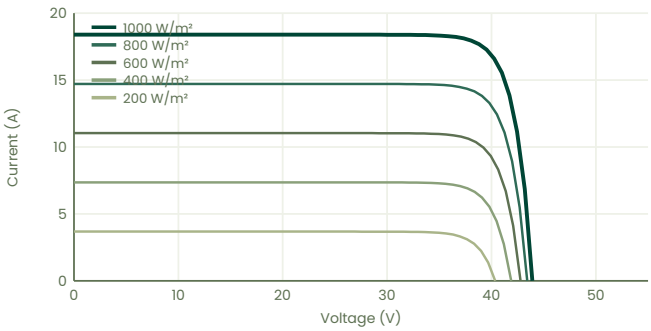

P-V curves

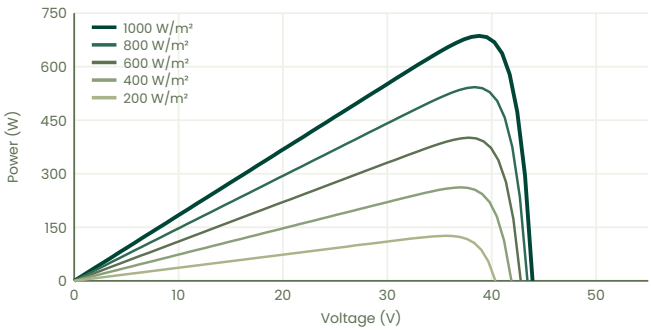

Bifacial output & packaging

685 W front +5% 719 · +10% 754 · +15% 788 · +25% 856 W — 33 pcs/pallet

Shweta Solar

SS120GTG-620 … 685

Mechanical, ratings and engineering drawings

Family 02 of 03

Mechanical characteristics


Cell type	n-Type TOPCon bifacial · G12 210 × 105 mm half-cut · 18BB
Cells / arrangement	120 half-cut cells · (10×6)×2
Dimensions (L × W × H)	2170 × 1303 × 35 mm
Weight	35.2 kg
Front / rear glass	2.0 mm AR-coated tempered / 2.0 mm tempered
Frame	Anodised aluminium alloy
Junction box	IP68 · 3 bypass diodes
Connectors	MC4-compatible · IP68
Cable	4 mm² PV cable

Ratings & temperature characteristics

Temp. coefficient of P_{max}	-0.327 %/°C
Temp. coefficient of V_{oc}	-0.269 %/°C
Temp. coefficient of I_{sc}	+0.045 %/°C
Power bifaciality	70% ± 10%
Operating temperature	-40 °C to +85 °C
Max. system voltage	1500 V DC
Max. series fuse	35 A
Static load, front / rear	5400 Pa / 2400 Pa
Class ratings	Safety Class II · Fire Class C
Warranty	12-yr product · 30-yr linear performance

Engineering drawings

mm · not to scale · 12 × 9×14 mm mounting slots, 6 per long rail

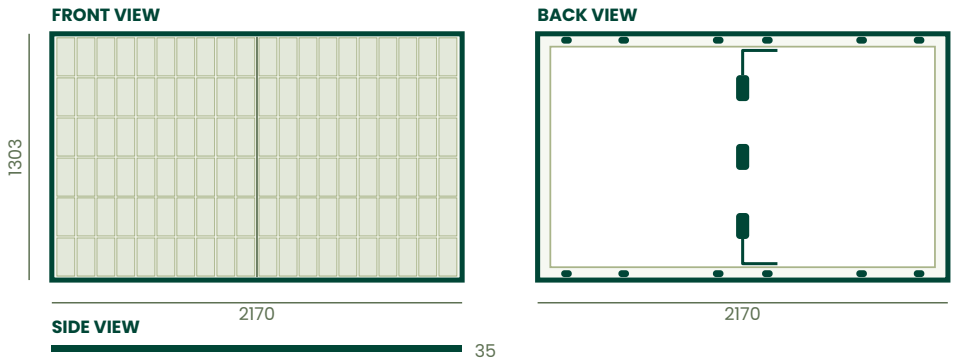

Certification · IS 14286 (Part 1/Sec 1) : 2023 · IEC 61215-1-1 : 2021 · IS/IEC 61730-1 : 2023 · IS/IEC 61730-2 : 2023 · BIS licence R-93049670, valid to 13 September 2031 · ALMM List-I · Tested at NABL-accredited laboratory

Warranty · 12-year product warranty · 30-year linear performance warranty: ≤1% first-year degradation, ≤0.4% per year thereafter, ≥87.4% of nominal at year 30

Quality · 100% electroluminescence inspection pre- and post-lamination · Individual flash-test report shipped with every module · Serialised modules with per-unit test data

Specifications subject to change without notice. All electrical data at STC per BIS-declared nameplate values; refer to the individual module flash report for measured values. I-V and P-V curves are representative, modelled from nameplate parameters. Packaging figures are for standard export packing and may vary with order configuration.

Shweta Solar

SS132GTG-615 … 650

G12R platform · 132 half-cut cells · 2383 × 1134 mm
Utility & ground-mount · G12R standard format

Family 03 of 03


n-Type TOPCon bifacial | Glass–glass dual glass | Up to 24.07% efficiency | 1500 V DC | BIS R-93049670 | ALMM List-I | 12-yr product · 30-yr performance

Electrical data — STC & BNPI


Rated power P_{max} (W)	650	645	640	635	630	625	620	615
Voltage at P_{max} V_{mp} (V)	41.58	41.45	41.32	41.18	41.05	40.92	40.85	40.71
Current at P_{max} I_{mp} (A)	15.64	15.57	15.49	15.42	15.36	15.27	15.20	15.12
Open-circuit voltage V_{oc} (V)	48.31	48.18	48.05	47.92	47.78	47.65	47.60	47.56
Short-circuit current I_{sc} (A)	16.09	16.05	16.00	15.96	15.92	15.89	15.83	15.80
Module efficiency (%)	24.07	23.88	23.70	23.51	23.33	23.14	22.96	22.77
P_{max} at BNPI (W)	**715**	**710**	**704**	**699**	**693**	**688**	**683**	**677**

STC: 1000 W/m², cell temperature 25 °C, AM 1.5 · Power tolerance 0 / +5 W · V_{oc} and I_{sc} tolerance ±5% · BNPI: front 1000 W/m² + rear 135 W/m² · Efficiency per BIS-declared nameplate.

I-V curves

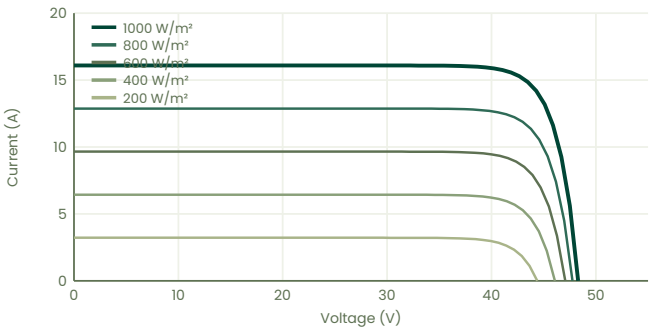

P-V curves

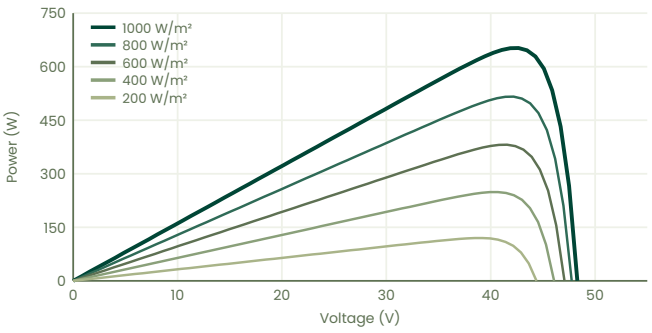

Bifacial output & packaging

650 W front +5% 682 · +10% 715 · +15% 747 · +25% 812 W — 36 pcs/pallet

Shweta Solar

SS132GTG-615 … 650

Mechanical, ratings and engineering drawings

Family 03 of 03

Mechanical characteristics


Cell type	n-Type TOPCon bifacial · G12R 182 × 105 mm half-cut · 16BB
Cells / arrangement	132 half-cut cells · (11×6)×2
Dimensions (L × W × H)	2383 × 1134 × 30 mm
Weight	33.5 kg
Front / rear glass	2.0 mm AR-coated tempered / 2.0 mm tempered
Frame	Anodised aluminium alloy
Junction box	IP68 · 3 bypass diodes
Connectors	MC4-compatible · IP68
Cable	4 mm² PV cable

Ratings & temperature characteristics

Temp. coefficient of P_{max}	-0.300 %/°C
Temp. coefficient of V_{oc}	-0.255 %/°C
Temp. coefficient of I_{sc}	+0.044 %/°C
Power bifaciality	70% ± 10%
Operating temperature	-40 °C to +85 °C
Max. system voltage	1500 V DC
Max. series fuse	35 A
Static load, front / rear	5400 Pa / 2400 Pa
Class ratings	Safety Class II · Fire Class C
Warranty	12-yr product · 30-yr linear performance

Engineering drawings

mm · not to scale · 12 × 9×14 mm mounting slots, 6 per long rail

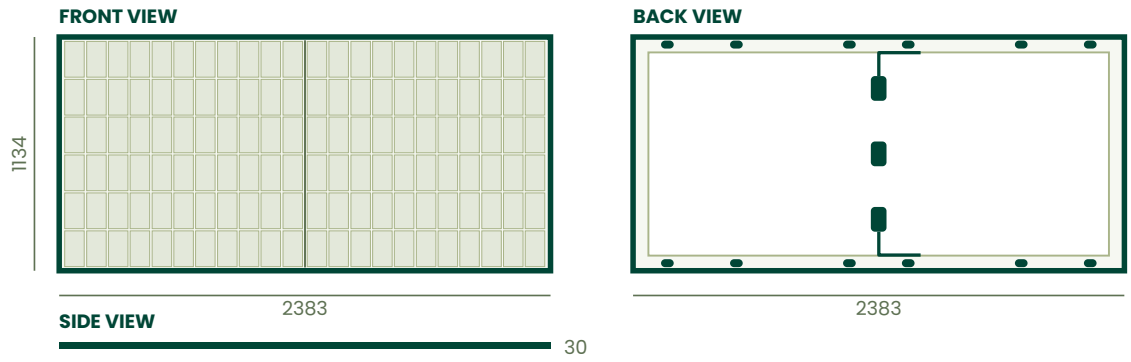

Certification · IS 14286 (Part 1/Sec 1) : 2023 · IEC 61215-1-1 : 2021 · IS/IEC 61730-1 : 2023 · IS/IEC 61730-2 : 2023 · BIS licence R-93049670, valid to 13 September 2031 · ALMM List-I · Tested at NABL-accredited laboratory

Warranty · 12-year product warranty · 30-year linear performance warranty: ≤1% first-year degradation, ≤0.4% per year thereafter, ≥87.4% of nominal at year 30

Quality · 100% electroluminescence inspection pre- and post-lamination · Individual flash-test report shipped with every module · Serialised modules with per-unit test data

Specifications subject to change without notice. All electrical data at STC per BIS-declared nameplate values; refer to the individual module flash report for measured values. I-V and P-V curves are representative, modelled from nameplate parameters. Packaging figures are for standard export packing and may vary with order configuration.