Shweta Solar

MODULE DATASHEETS · 2026

Commercial & industrial rooftop

Factories, warehouses, institutions and large residential buildings — high power in a module two people can carry onto a roof.

FAMILY	POWER RANGE	BINS	DIMENSIONS	PLATFORM
SS108GTG-615	560–615 W	12	1965 × 1303 mm	108 cells · G12
SS120GTG-600	550–600 W	11	2170 × 1134 mm	120 cells · G12R
SS96GTG-550	510–550 W	9	1762 × 1303 mm	96 cells · G12
SS108GTG-540	500–540 W	9	1965 × 1134 mm	108 cells · G12R

500–615 W · 4 families · 41 power bins · n-type TOPCon bifacial glass–glass
BIS licence R-93049670 · ALMM List-I · IS 14286 : 2023 · IS/IEC 61730 : 2023

SHWETA SOLAR SYSTEM PRIVATE LIMITED
www.shwetasolar.in · sales@shwetasolar.in · 1800 120 477 120

Shweta Solar

SS108GTG-560 … 615

G12 platform · 108 half-cut cells · 1965 × 1303 mm
Commercial & industrial rooftop · G12 wide format

Family 01 of 04


n-Type TOPCon bifacial | Glass–glass dual glass | Up to 24.04% efficiency | 1500 V DC | BIS R-93049670 | ALMM List-I | 12-yr product · 30-yr performance

Electrical data — STC & BNPI


Rated power P_{max} (W)	615	610	605	600	595	590	585	580	575	570	565	560
Voltage at P_{max} V_{mp} (V)	35.28	35.02	34.81	34.55	34.33	34.09	33.80	33.58	33.33	33.21	33.04	32.94
Current at P_{max} I_{mp} (A)	17.45	17.43	17.40	17.37	17.35	17.33	17.31	17.28	17.26	17.19	17.11	17.03
Open-circuit voltage V_{oc} (V)	39.53	39.42	39.37	39.31	39.20	39.17	38.99	38.88	38.83	38.78	38.72	38.68
Short-circuit current I_{sc} (A)	18.39	18.34	18.32	18.30	18.28	18.26	18.24	18.22	18.20	18.17	18.14	18.11
Module efficiency (%)	24.04	23.84	23.66	23.44	23.26	23.07	22.85	22.66	22.47	22.30	22.08	21.91
P_{max} at BNPI (W)	**677**	**671**	**666**	**660**	**655**	**650**	**644**	**638**	**633**	**628**	**622**	**617**

STC: 1000 W/m², cell temperature 25 °C, AM 1.5 · Power tolerance 0 / +5 W · V_{oc} and I_{sc} tolerance ±5% · BNPI: front 1000 W/m² + rear 135 W/m² · Efficiency per BIS-declared nameplate.

I-V curves

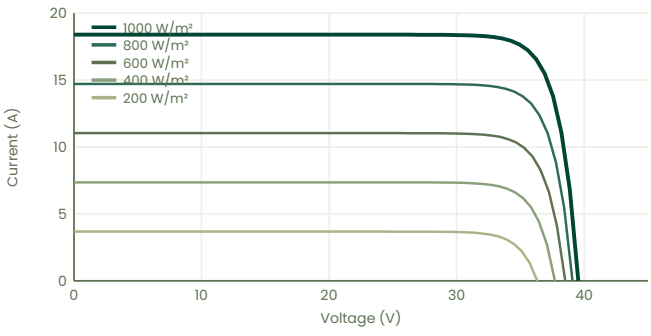

P-V curves

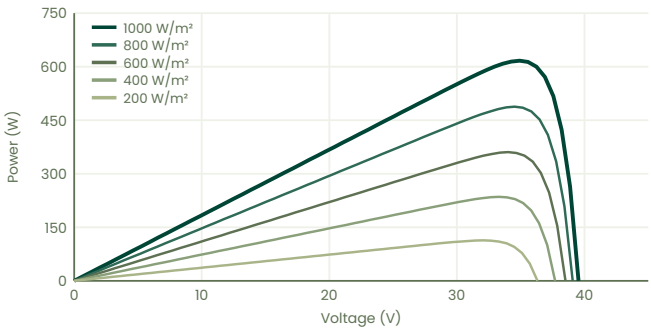

Bifacial output & packaging

615 W front +5% 646 · +10% 676 · +15% 707 · +25% 769 W — 33 pcs/pallet

Shweta Solar

SS108GTG-560 … 615

Mechanical, ratings and engineering drawings

Family 01 of 04

Mechanical characteristics


Cell type	n-Type TOPCon bifacial · G12 210 × 105 mm half-cut · 18BB
Cells / arrangement	108 half-cut cells · (9×6)×2
Dimensions (L × W × H)	1965 × 1303 × 35 mm
Weight	31.9 kg
Front / rear glass	2.0 mm AR-coated tempered / 2.0 mm tempered
Frame	Anodised aluminium alloy
Junction box	IP68 · 3 bypass diodes
Connectors	MC4-compatible · IP68
Cable	4 mm² PV cable

Ratings & temperature characteristics

Temp. coefficient of P_{max}	-0.327 %/°C
Temp. coefficient of V_{oc}	-0.269 %/°C
Temp. coefficient of I_{sc}	+0.045 %/°C
Power bifaciality	70% ± 10%
Operating temperature	-40 °C to +85 °C
Max. system voltage	1500 V DC
Max. series fuse	35 A
Static load, front / rear	5400 Pa / 2400 Pa
Class ratings	Safety Class II · Fire Class C
Warranty	12-yr product · 30-yr linear performance

Engineering drawings

mm · not to scale · 12 × 9×14 mm mounting slots, 6 per long rail

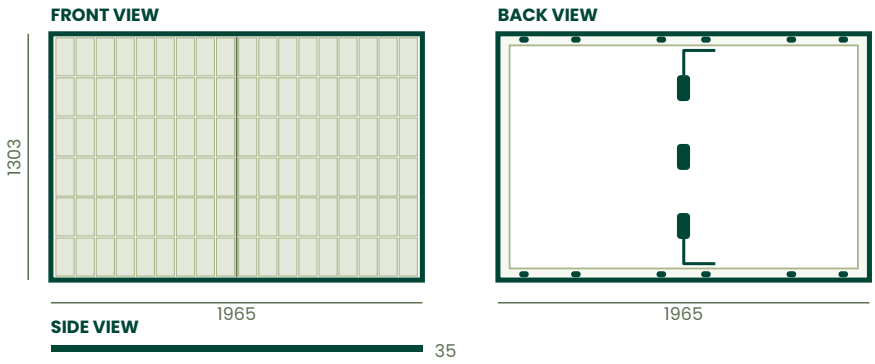

Certification · IS 14286 (Part 1/Sec 1) : 2023 · IEC 61215-1-1 : 2021 · IS/IEC 61730-1 : 2023 · IS/IEC 61730-2 : 2023 · BIS licence R-93049670, valid to 13 September 2031 · ALMM List-I · Tested at NABL-accredited laboratory

Warranty · 12-year product warranty · 30-year linear performance warranty: ≤1% first-year degradation, ≤0.4% per year thereafter, ≥87.4% of nominal at year 30

Quality · 100% electroluminescence inspection pre- and post-lamination · Individual flash-test report shipped with every module · Serialised modules with per-unit test data

Specifications subject to change without notice. All electrical data at STC per BIS-declared nameplate values; refer to the individual module flash report for measured values. I-V and P-V curves are representative, modelled from nameplate parameters. Packaging figures are for standard export packing and may vary with order configuration.

Shweta Solar

SS120GTG-550 ... 600

G12R platform · 120 half-cut cells · 2170 × 1134 mm
Commercial & industrial rooftop · G12R standard format

Family 02 of 04


n-Type TOPCon bifacial | Glass–glass dual glass | Up to 24.39% efficiency | 1500 V DC | BIS R-93049670 | ALMM List-I | 12-yr product · 30-yr performance

Electrical data — STC & BNPI


Rated power P_{max} (W)	600	595	590	585	580	575	570	565	560	555	550
Voltage at P_{max} V_{mp} (V)	38.04	37.92	37.77	37.62	37.54	37.38	37.26	37.08	36.97	36.81	36.68
Current at P_{max} I_{mp} (A)	15.78	15.71	15.64	15.57	15.46	15.38	15.31	15.25	15.17	15.08	15.01
Open-circuit voltage V_{oc} (V)	44.16	44.04	43.92	43.80	43.62	43.50	43.38	43.32	43.28	43.24	43.20
Short-circuit current I_{sc} (A)	16.15	16.11	16.09	16.05	15.98	15.95	15.90	15.89	15.85	15.81	15.77
Module efficiency (%)	24.39	24.18	23.98	23.78	23.57	23.37	23.17	22.96	22.76	22.56	22.35
P_{max} at BNPI (W)	**660**	**655**	**650**	**644**	**638**	**633**	**627**	**622**	**617**	**611**	**606**

STC: 1000 W/m², cell temperature 25 °C, AM 1.5 · Power tolerance 0 / +5 W · V_{oc} and I_{sc} tolerance ±5% · BNPI: front 1000 W/m² + rear 135 W/m² · Efficiency per BIS-declared nameplate.

I-V curves

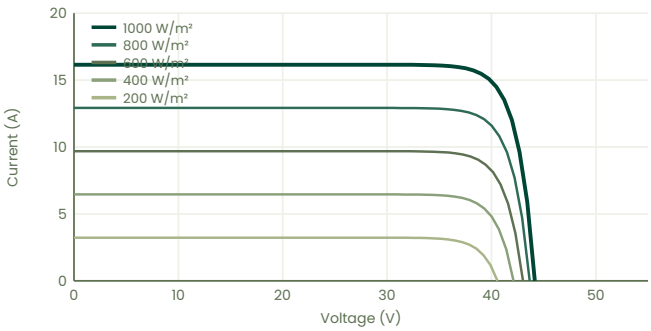

P-V curves

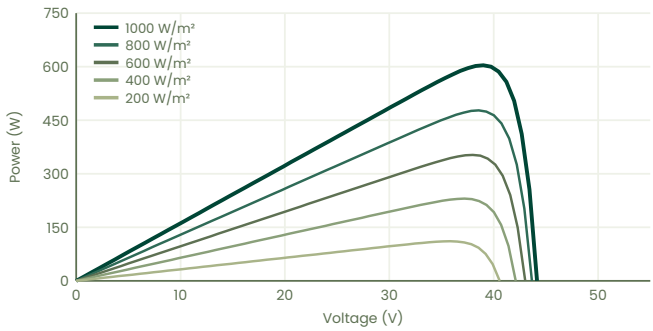

Bifacial output & packaging

600 W front +5% 630 · +10% 660 · +15% 690 · +25% 750 W — 36 pcs/pallet

Shweta Solar

SS120GTG-550 ... 600

Mechanical, ratings and engineering drawings

Family 02 of 04

Mechanical characteristics


Cell type	n-Type TOPCon bifacial · G12R 182 × 105 mm half-cut · 16BB
Cells / arrangement	120 half-cut cells · (10×6)×2
Dimensions (L × W × H)	2170 × 1134 × 30 mm
Weight	30.5 kg
Front / rear glass	2.0 mm AR-coated tempered / 2.0 mm tempered
Frame	Anodised aluminium alloy
Junction box	IP68 · 3 bypass diodes
Connectors	MC4-compatible · IP68
Cable	4 mm² PV cable

Ratings & temperature characteristics

Temp. coefficient of P_{max}	-0.300 %/°C
Temp. coefficient of V_{oc}	-0.255 %/°C
Temp. coefficient of I_{sc}	+0.044 %/°C
Power bifaciality	70% ± 10%
Operating temperature	-40 °C to +85 °C
Max. system voltage	1500 V DC
Max. series fuse	35 A
Static load, front / rear	5400 Pa / 2400 Pa
Class ratings	Safety Class II · Fire Class C
Warranty	12-yr product · 30-yr linear performance

Engineering drawings

mm · not to scale · 12 × 9×14 mm mounting slots, 6 per long rail

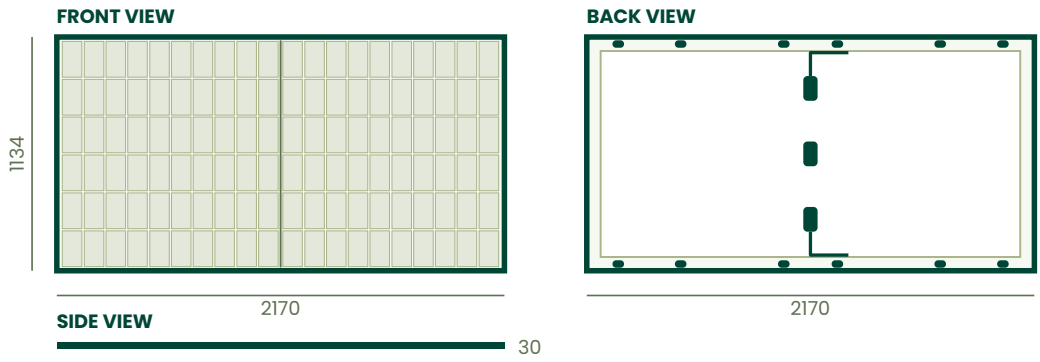

Certification · IS 14286 (Part 1/Sec 1) : 2023 · IEC 61215-1-1 : 2021 · IS/IEC 61730-1 : 2023 · IS/IEC 61730-2 : 2023 · BIS licence R-93049670, valid to 13 September 2031 · ALMM List-I · Tested at NABL-accredited laboratory

Warranty · 12-year product warranty · 30-year linear performance warranty: ≤1% first-year degradation, ≤0.4% per year thereafter, ≥87.4% of nominal at year 30

Quality · 100% electroluminescence inspection pre- and post-lamination · Individual flash-test report shipped with every module · Serialised modules with per-unit test data

Specifications subject to change without notice. All electrical data at STC per BIS-declared nameplate values; refer to the individual module flash report for measured values. I-V and P-V curves are representative, modelled from nameplate parameters. Packaging figures are for standard export packing and may vary with order configuration.

Shweta Solar

SS96GTG-510 … 550

G12 platform · 96 half-cut cells · 1762 × 1303 mm
Commercial & industrial rooftop · G12 wide format

Family 03 of 04


n-Type TOPCon bifacial | Glass–glass dual glass | Up to 23.96% efficiency | 1500 V DC | BIS R-93049670 | ALMM List-I | 12-yr product · 30-yr performance

Electrical data — STC & BNPI


Rated power P_{max} (W)	550	545	540	535	530	525	520	515	510
Voltage at P_{max} V_{mp} (V)	31.49	31.30	31.08	30.81	30.56	30.31	30.06	29.78	29.52
Current at P_{max} I_{mp} (A)	17.47	17.43	17.40	17.38	17.36	17.34	17.32	17.30	17.29
Open-circuit voltage V_{oc} (V)	35.14	35.09	35.04	34.94	34.85	34.75	34.66	34.56	34.46
Short-circuit current I_{sc} (A)	18.44	18.37	18.33	18.32	18.30	18.26	18.25	18.22	18.19
Module efficiency (%)	23.96	23.76	23.55	23.32	23.11	22.89	22.68	22.44	22.23
P_{max} at BNPI (W)	**605**	**600**	**595**	**589**	**584**	**578**	**573**	**567**	**561**

STC: 1000 W/m², cell temperature 25 °C, AM 1.5 · Power tolerance 0 / +5 W · V_{oc} and I_{sc} tolerance ±5% · BNPI: front 1000 W/m² + rear 135 W/m² · Efficiency per BIS-declared nameplate.

I-V curves

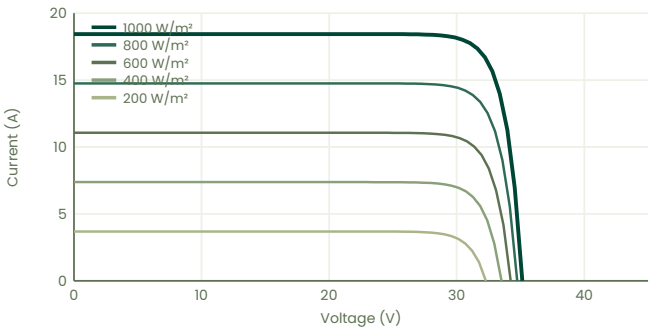

P-V curves

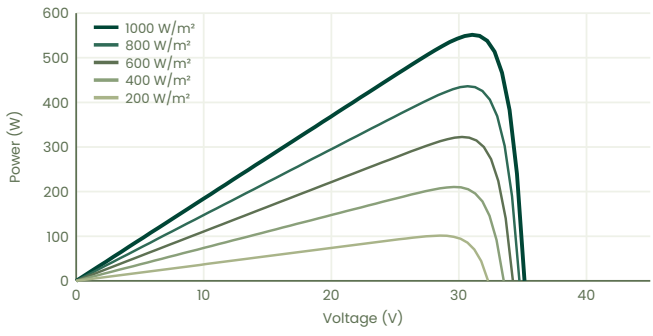

Bifacial output & packaging

550 W front +5% 578 · +10% 605 · +15% 632 · +25% 688 W — 33 pcs/pallet

Shweta Solar

SS96GTG-510 … 550

Mechanical, ratings and engineering drawings

Family 03 of 04

Mechanical characteristics


Cell type	n-Type TOPCon bifacial · G12 210 × 105 mm half-cut · 18BB
Cells / arrangement	96 half-cut cells · (8×6)×2
Dimensions (L × W × H)	1762 × 1303 × 35 mm
Weight	28.6 kg
Front / rear glass	2.0 mm AR-coated tempered / 2.0 mm tempered
Frame	Anodised aluminium alloy
Junction box	IP68 · 3 bypass diodes
Connectors	MC4-compatible · IP68
Cable	4 mm² PV cable

Ratings & temperature characteristics

Temp. coefficient of P_{max}	-0.327 %/°C
Temp. coefficient of V_{oc}	-0.269 %/°C
Temp. coefficient of I_{sc}	+0.045 %/°C
Power bifaciality	70% ± 10%
Operating temperature	-40 °C to +85 °C
Max. system voltage	1500 V DC
Max. series fuse	35 A
Static load, front / rear	5400 Pa / 2400 Pa
Class ratings	Safety Class II · Fire Class C
Warranty	12-yr product · 30-yr linear performance

Engineering drawings

mm · not to scale · 12 × 9×14 mm mounting slots, 6 per long rail

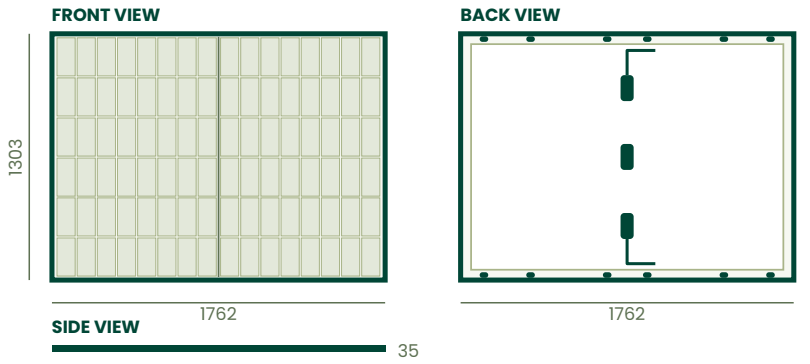

Certification · IS 14286 (Part 1/Sec 1) : 2023 · IEC 61215-1-1 : 2021 · IS/IEC 61730-1 : 2023 · IS/IEC 61730-2 : 2023 · BIS licence R-93049670, valid to 13 September 2031 · ALMM List-I · Tested at NABL-accredited laboratory

Warranty · 12-year product warranty · 30-year linear performance warranty: ≤1% first-year degradation, ≤0.4% per year thereafter, ≥87.4% of nominal at year 30

Quality · 100% electroluminescence inspection pre- and post-lamination · Individual flash-test report shipped with every module · Serialised modules with per-unit test data

Specifications subject to change without notice. All electrical data at STC per BIS-declared nameplate values; refer to the individual module flash report for measured values. I-V and P-V curves are representative, modelled from nameplate parameters. Packaging figures are for standard export packing and may vary with order configuration.

Shweta Solar

SS108GTG-500 … 540

G12R platform · 108 half-cut cells · 1965 × 1134 mm
Commercial & industrial rooftop · G12R standard format

Family 04 of 04


n-Type TOPCon bifacial | Glass–glass dual glass | Up to 24.32% efficiency | 1500 V DC | BIS R-93049670 | ALMM List-I | 12-yr product · 30-yr performance

Electrical data — STC & BNPI


Rated power P_{max} (W)	540	535	530	525	520	515	510	505	500
Voltage at P_{max} V_{mp} (V)	34.24	34.10	34.00	33.86	33.68	33.59	33.41	33.31	33.20
Current at P_{max} I_{mp} (A)	15.78	15.71	15.60	15.53	15.46	15.35	15.27	15.18	15.07
Open-circuit voltage V_{oc} (V)	39.74	39.64	39.47	39.37	39.26	39.10	38.99	38.90	38.84
Short-circuit current I_{sc} (A)	16.15	16.11	16.07	16.02	15.98	15.92	15.89	15.83	15.78
Module efficiency (%)	24.32	24.09	23.87	23.64	23.42	23.19	22.97	22.74	22.52
P_{max} at BNPI (W)	**594**	**589**	**583**	**578**	**573**	**567**	**561**	**556**	**550**

STC: 1000 W/m², cell temperature 25 °C, AM 1.5 · Power tolerance 0 / +5 W · V_{oc} and I_{sc} tolerance ±5% · BNPI: front 1000 W/m² + rear 135 W/m² · Efficiency per BIS-declared nameplate.

I-V curves

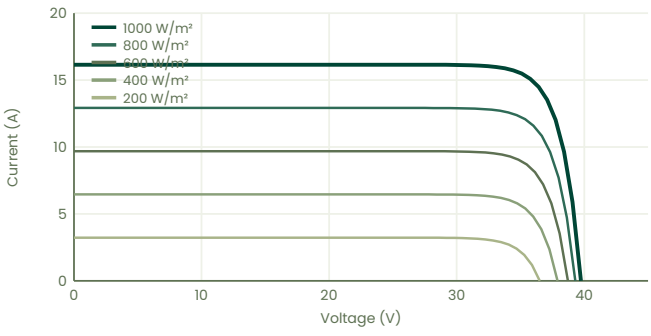

P-V curves

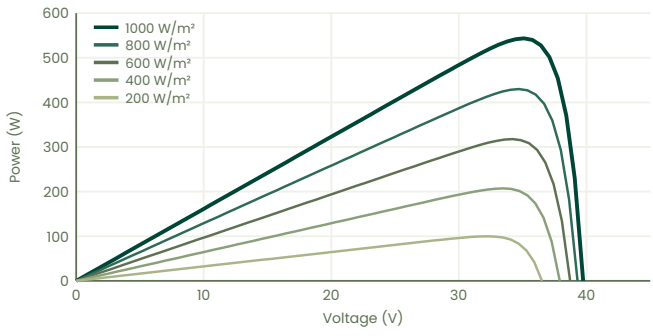

Bifacial output & packaging

540 W front +5% 567 · +10% 594 · +15% 621 · +25% 675 W — 36 pcs/pallet

Shweta Solar

SS108GTG-500 … 540

Mechanical, ratings and engineering drawings

Family 04 of 04

Mechanical characteristics


Cell type	n-Type TOPCon bifacial · G12R 182 × 105 mm half-cut · 16BB
Cells / arrangement	108 half-cut cells · (9×6)×2
Dimensions (L × W × H)	1965 × 1134 × 30 mm
Weight	27.5 kg
Front / rear glass	2.0 mm AR-coated tempered / 2.0 mm tempered
Frame	Anodised aluminium alloy
Junction box	IP68 · 3 bypass diodes
Connectors	MC4-compatible · IP68
Cable	4 mm² PV cable

Ratings & temperature characteristics

Temp. coefficient of P_{max}	-0.300 %/°C
Temp. coefficient of V_{oc}	-0.255 %/°C
Temp. coefficient of I_{sc}	+0.044 %/°C
Power bifaciality	70% ± 10%
Operating temperature	-40 °C to +85 °C
Max. system voltage	1500 V DC
Max. series fuse	35 A
Static load, front / rear	5400 Pa / 2400 Pa
Class ratings	Safety Class II · Fire Class C
Warranty	12-yr product · 30-yr linear performance

Engineering drawings

mm · not to scale · 12 × 9×14 mm mounting slots, 6 per long rail

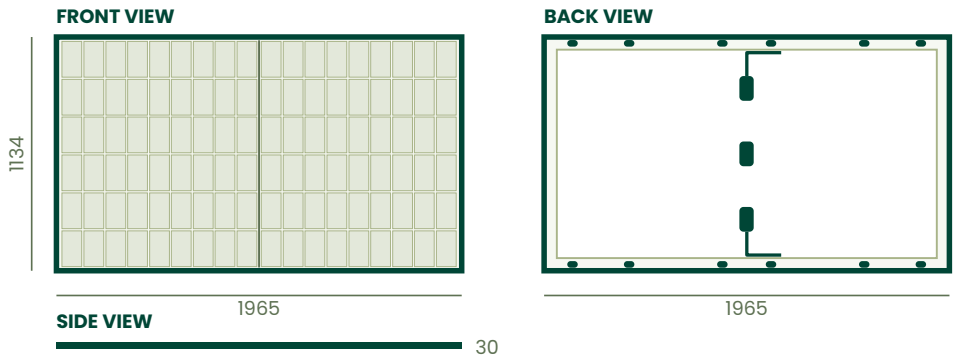

Certification · IS 14286 (Part 1/Sec 1) : 2023 · IEC 61215-1-1 : 2021 · IS/IEC 61730-1 : 2023 · IS/IEC 61730-2 : 2023 · BIS licence R-93049670, valid to 13 September 2031 · ALMM List-I · Tested at NABL-accredited laboratory

Warranty · 12-year product warranty · 30-year linear performance warranty: ≤1% first-year degradation, ≤0.4% per year thereafter, ≥87.4% of nominal at year 30

Quality · 100% electroluminescence inspection pre- and post-lamination · Individual flash-test report shipped with every module · Serialised modules with per-unit test data

Specifications subject to change without notice. All electrical data at STC per BIS-declared nameplate values; refer to the individual module flash report for measured values. I-V and P-V curves are representative, modelled from nameplate parameters. Packaging figures are for standard export packing and may vary with order configuration.