


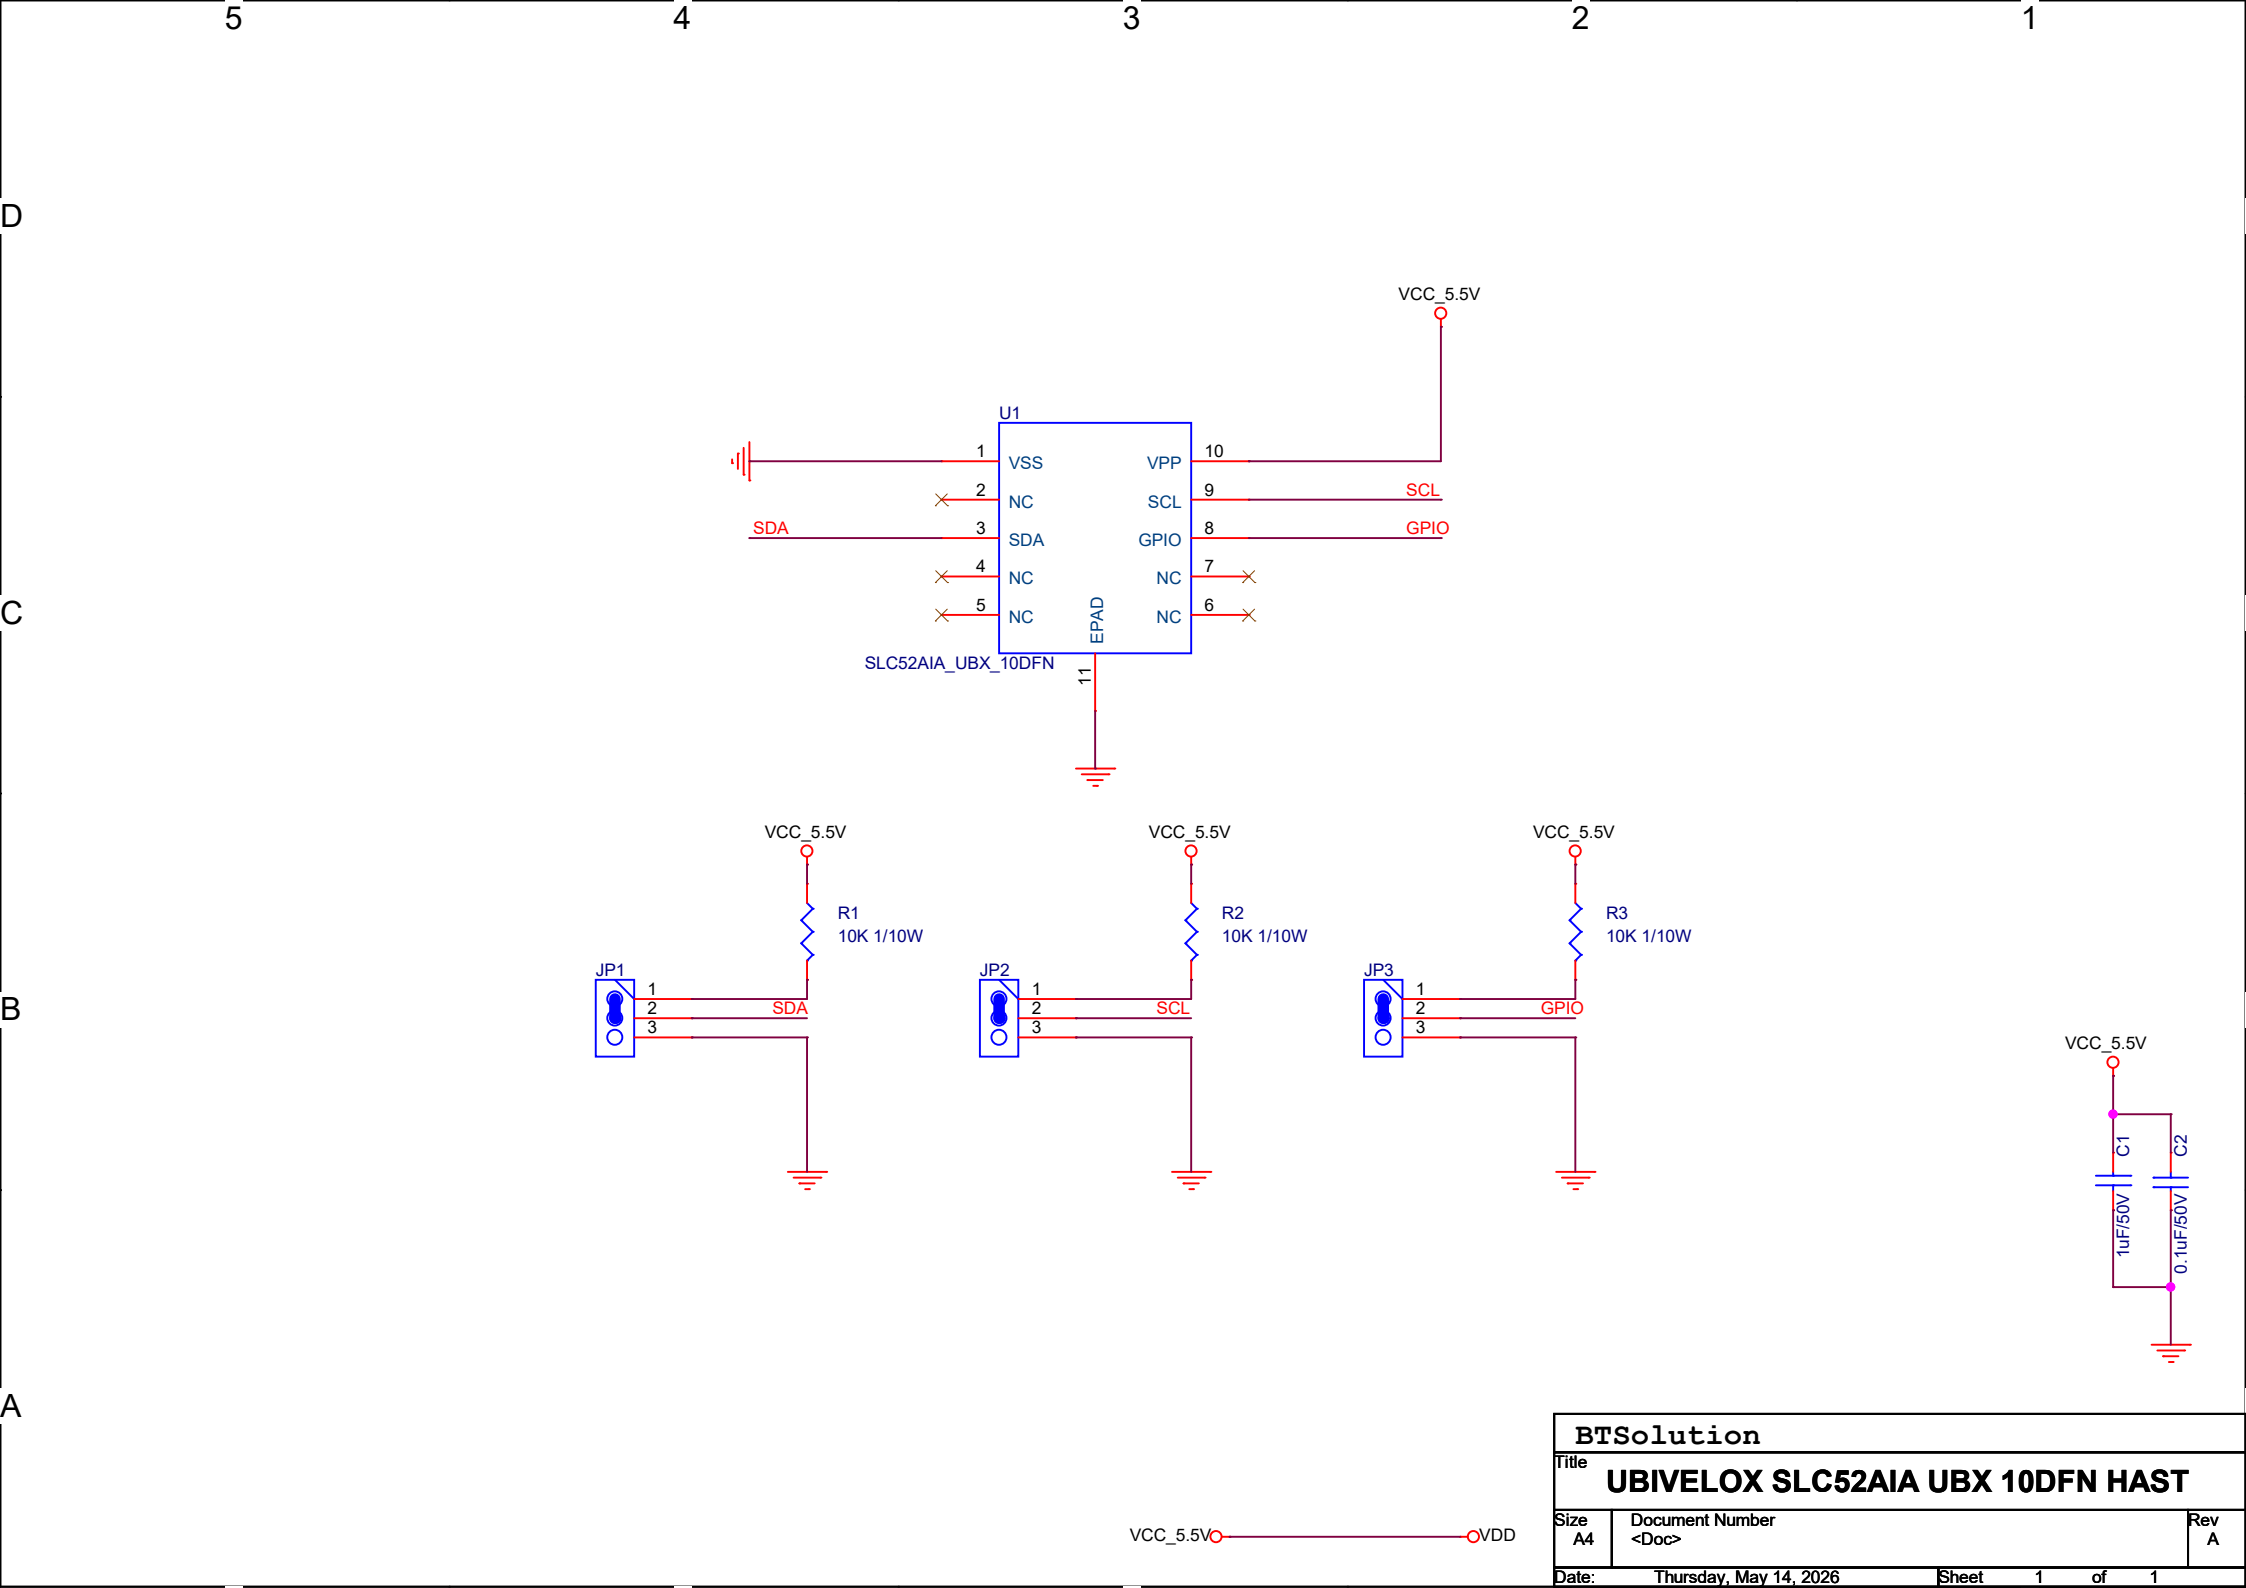






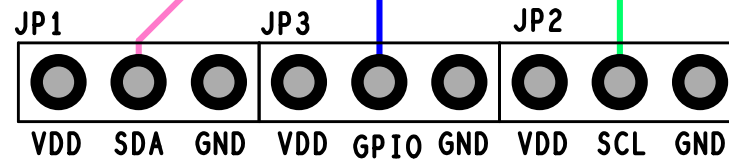


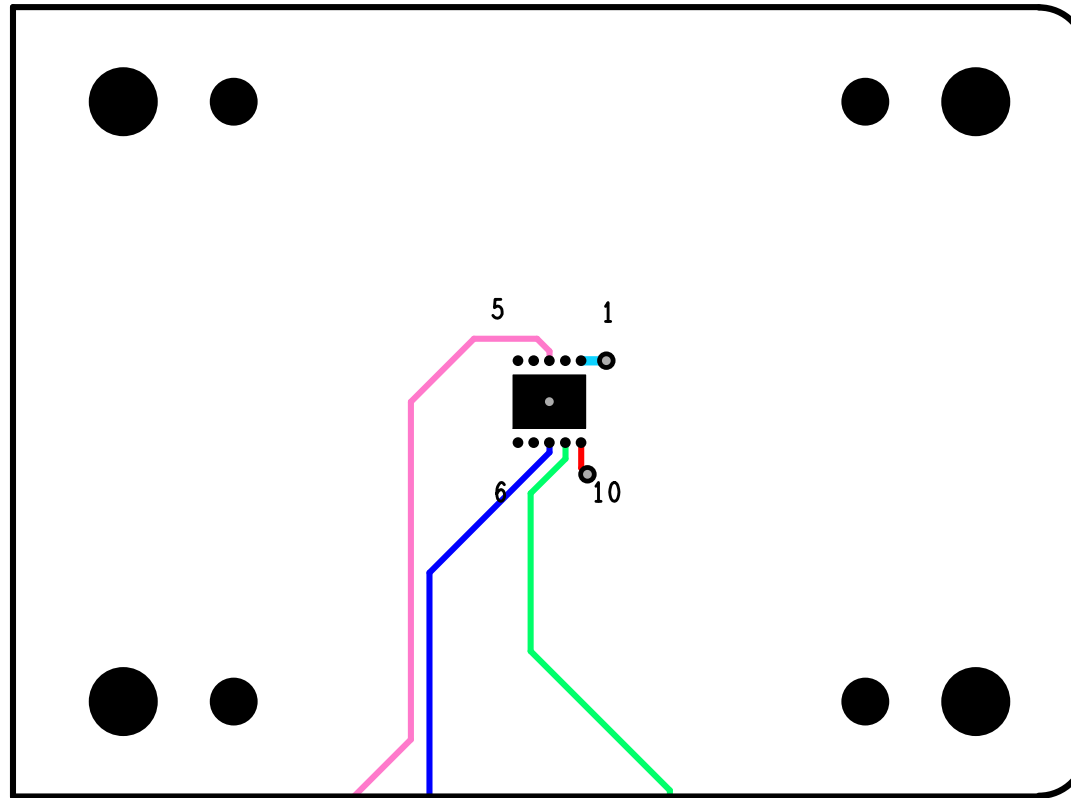







UBIVELOX SLC52AIA UBX HAST (10DFN 3X3 P0.5)





BTSolution BKXXXX
BT26089A3 BSXXXX



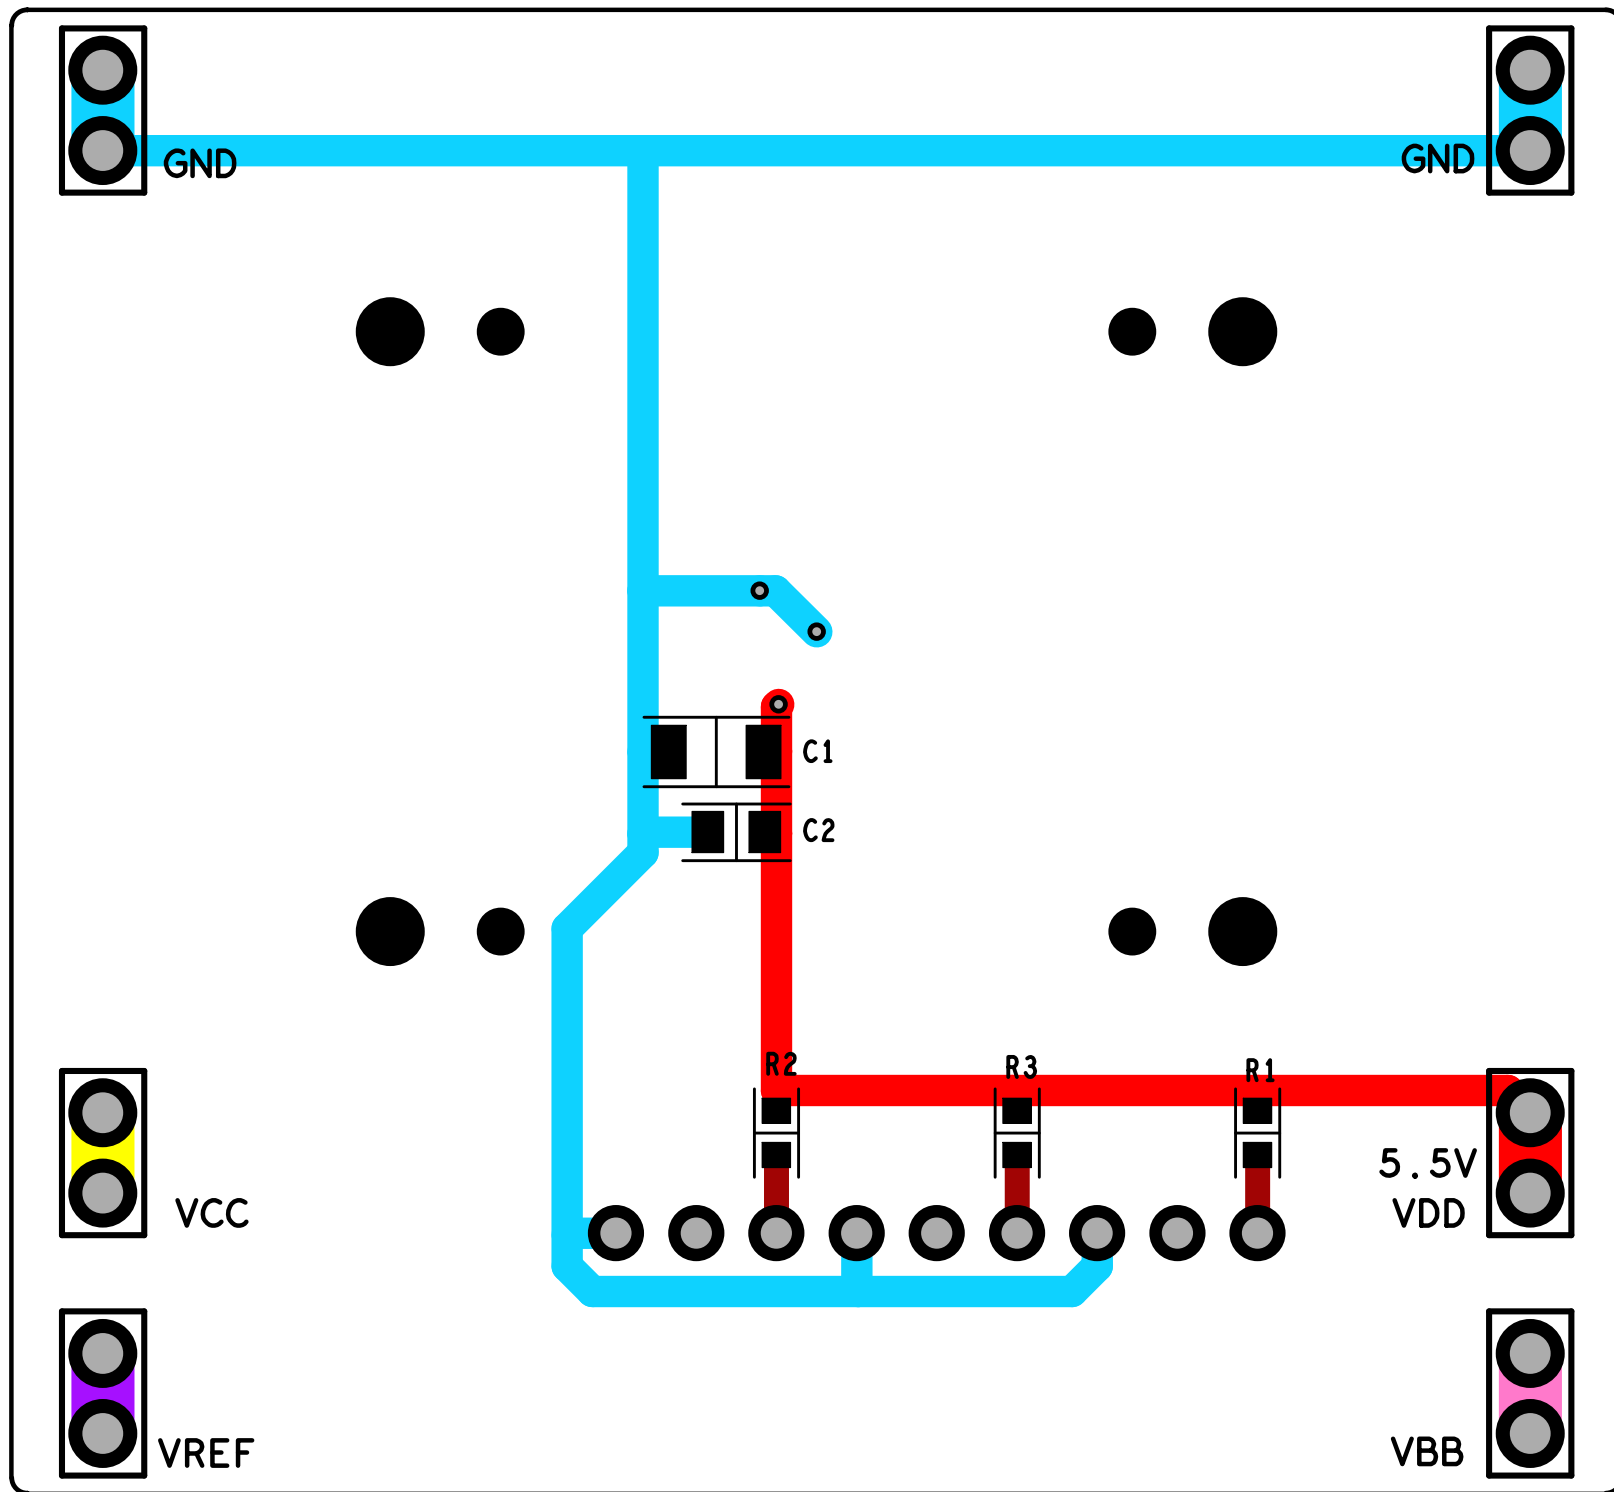

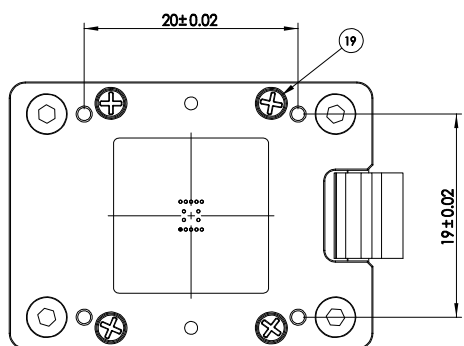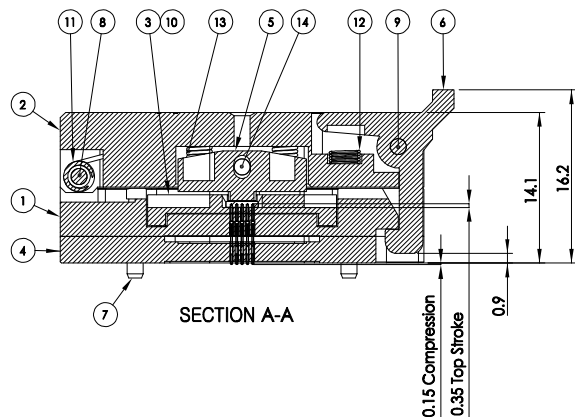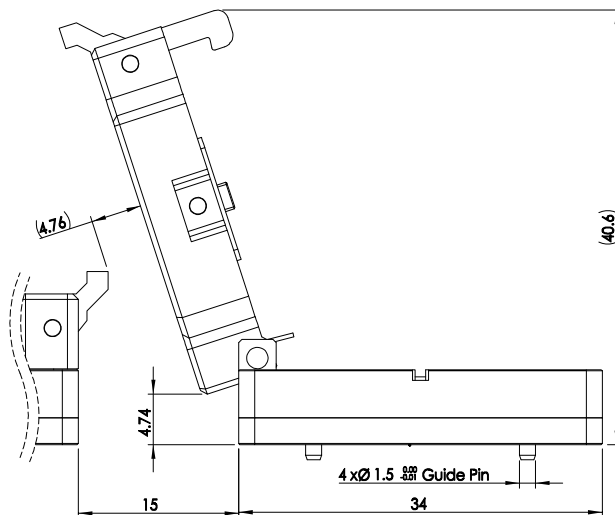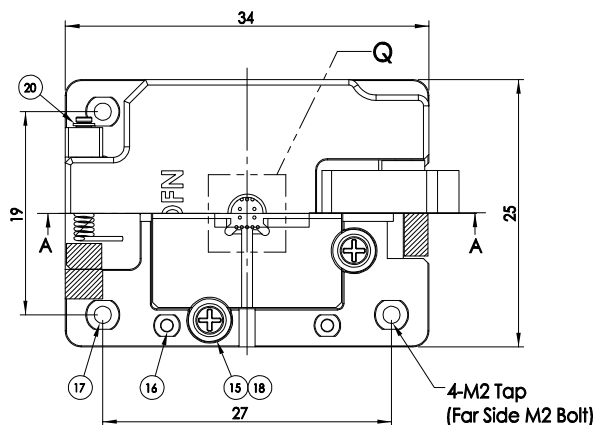

PCB LAYOUT TOP VIEW

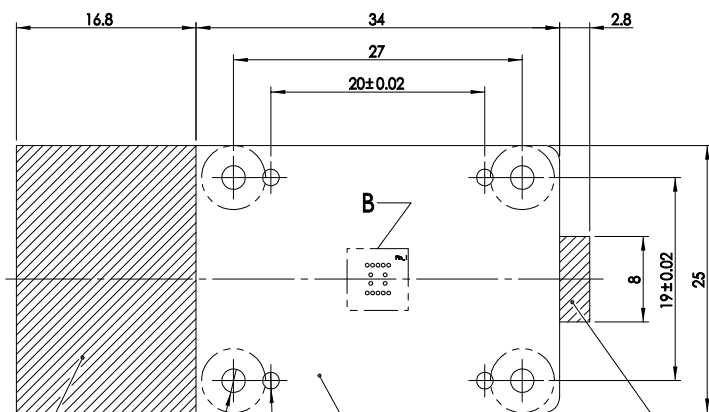


No solder no silk screen in socket area

PCB Top side 0.8mm max component height allowed

Pad : Ni 3um, hard Au 0.5um or ENIG : Immersion Gold thickness should be 0.04um to 0.1um over 3um to 6um of Electroless Nickel

Socket PCB Mounting Screw
M2-8mm Hexa Head



Recommended
Screw Mounting Torque:
2.5~3.0Kg/Cm(2.2~2.6lb/in)


REV.	CHANGE DESCRIPTION	BY	DATE
1	Initial Drawing	PAUL	2026-05-08
2	CHANGE DESCRIPTION	BY	DATE
SCALE 1:1		UNIT mm	

BY	DATE
DRAWN PAUL	2026-05-08
VERIFIED PETER	2026-05-08
APPROVED ANDY	2026-05-08
GENERAL TOLERANCES	
X± 0.1	X± 1°
.X± 0.05	.X± .5°
.XX± 0.02	.XX± .25°

No	Project	MATERIAL	Q'TY	PartNo
1	Top Plate	PEI	1	TLC-0014-CSB-TP
2	Cover	PEI	1	TLC-0014-CSB-CO
3	IC Guide Plate	PEEK	1	TLC-0014-CSB-IG
4	Bottom Plate	PEI	1	TLC-0014-CSB-BP
5	Pusher	PEI	1	TLC-0014-CSB-PU
6	Latch	PEI	1	LA2534
7	Guide Pin	SUS	4	GP1533
8	Pin Hinge	SUS	1	HP15180 (D1.5X18L)
9	Pin Latch	SUS	1	LP15220 (D1.5X22L)
10	Spring IC Guide	SUS	4	GS1540
11	Spring Hinge	SUS	1	CS2940A (D2.9X4.0L)
12	Spring Latch	SUS	1	PS2955 (D2.9X5.5L)
13	Spring Pusher	SUS	4	PS2460
14	Pin Pusher	SUS	2	PP1570 (D1.5X18L)
15	Washer Stopper	SUS	4	WA4014 (D4.0X1.4T)
16	PEM Nut	SUS	4	PN1423B (M1.4X2.3L)
17	PEM Nut	SUS	4	PN2035B (M2.0X3.5L)
18	Screw IC Guide	SUS	4	FH1430 (M1.4X3.0L)
19	Screw Btm Plate	SUS	4	FH1460 (M1.4X6.0L)
20	E-Ring Hinge	SUS	1	ER0802 (D2.0X0.2T)
21	Contact Pin	BeCu	14	PL0310570-C13A
22	Wrench Bolt	SUS	4	HB20800 (M2xL8)


< Device Package >

Scale 2.5 : 1

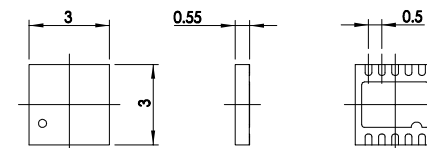

< Contact Pin >

Scale 2.5 : 1

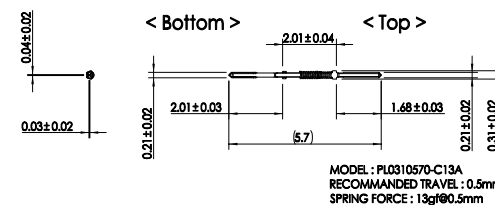

MODEL : PL0310570-C13A
RECOMMENDED TRAVEL : 0.5mm
SPRING FORCE : 13gf@0.5mm

LST

TITLE
Clamshell Test socket
10DFN-3x3-0.5P 14Pin

DWG NO
TLC-0014-CSB

REV.
0

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS SOLE PROPERTY OF LST.
ANY REPRODUCTION IN PART
OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF LST IS PROHIBITED.

UBIVELOX SLC52AIA UBX 10DFN HAST Socket Board BOM									작성	검토	승인	
									정아영			
								DUT	1			2026-05-14
Customer : UBIVELOX								제작수량	80		Board Code : BT26089A3	
No.	Part	Part Size	온도 특성	Part Description	Reference	Part Name	Vendor	Qty	Total Qty	비고		
1	Chip Capacitor	2012	X8R	0.1uF / 50V / ±10%(K)	C2	GCM21BR91H104KA37L	Murata	1	80			
2	Chip Capacitor	3216	X8R	1uF / 50V / ±10%(K)	C1	CGA5L3X8R1H105K106AB	TDK	1	80			
3	Chip Resistor	1608	-	10KΩ, 1/10W	R1;R2;R3	WR06X1002FTL	WALSIN	3	240			
4	Header 3PIN	2.54mm	-	Pin Header 1X3 / Male / 2.54mm	JP1;JP2;JP3	-	-	3	240			
5												
6												
7												
No.	Part	Part Size	온도 특성	Part Description	Reference	Part Name	Vendor	Qty	Total Qty	비고		
1	-	-	-	-	-	-	-	-	-			
2	-	-	-	-	-	-	-	-	-			
3	-	-	-	-	-	-	-	-	-			