

SETUP REPORT



219, Gyeongchung-daero, Bubal-eub, Icheon-si, Gyeonggi-do, KOREA
(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

QRT Inc.

HAST Set-up Report

This report is protected by copyright and may not be copied, scanned or reproduced in any form without express written permission from QRT

COMPANY	:	UBIVELOX
PRODUCT	:	SLC52AIA_UBX
PACKAGE	:	10DFN
PURPOSE	:	Set-up
ISSUED DATE	:	2026-07-29

Prepared by : Keyoungmo Kim

Approved by : Kwangsun Jung

SETUP REPORT



219, Gyeongchung-daero, Bubal-eub, Icheon-si, Gyeonggi-do, KOREA
(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

Revision History

Revision No.	Date	Contents
1	26.07.29	1 ST SETUP

SETUP REPORT



219, Gyeongchung-daero, Bubal-eub, Icheon-si, Gyeonggi-do, KOREA
(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

1. Test Setup Details

(1) HAST Test Configuration

Test Item : HAST	Test condition : 130 °C, 85 % R.H.
Power Name	VDD_VCC_5.5V : 5.5V
Bias Mode	Continuous Bias
Power up sequence	VDD_5.5V
Note	
- Jumper pin setting - SDA, SCL Pull up - GPIO floating The diagram illustrates the HAST test configuration for the SLC52A1A_UBX_10DFN microcontroller. It shows the internal pin connections and the external jumper settings. The microcontroller has pins 1 through 11. Pin 1 is VSS, pin 2 is NC, pin 3 is SDA, pin 4 is NC, pin 5 is NC, pin 6 is NC, pin 7 is NC, pin 8 is GPIO, pin 9 is SCL, pin 10 is VPP, and pin 11 is EPAD. The diagram also shows three jumpers: JP1 (SDA pull-up), JP2 (SCL pull-up), and JP3 (GPIO floating). JP1 and JP2 are connected to VCC_5.5V through 10K 1/10W resistors R1 and R2. JP3 is shown as an open jumper, indicating the GPIO pin is floating. The word 'OPEN' is written in red next to JP3.	

SETUP REPORT




219, Gyeongchung-daero, Bubal-eub, Icheon-si, Gyeonggi-do, KOREA
(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

(2) HAST Test Board

Test Board	Board Information
	Product : SLC52A1A_UBX
	Package Type : 10 DFN
	Board Type : HAST Socket Board
	Board S/N : BT26089A3
	Material Code : BS4407
	Quantity : 80 EA

(3) HAST Schematic

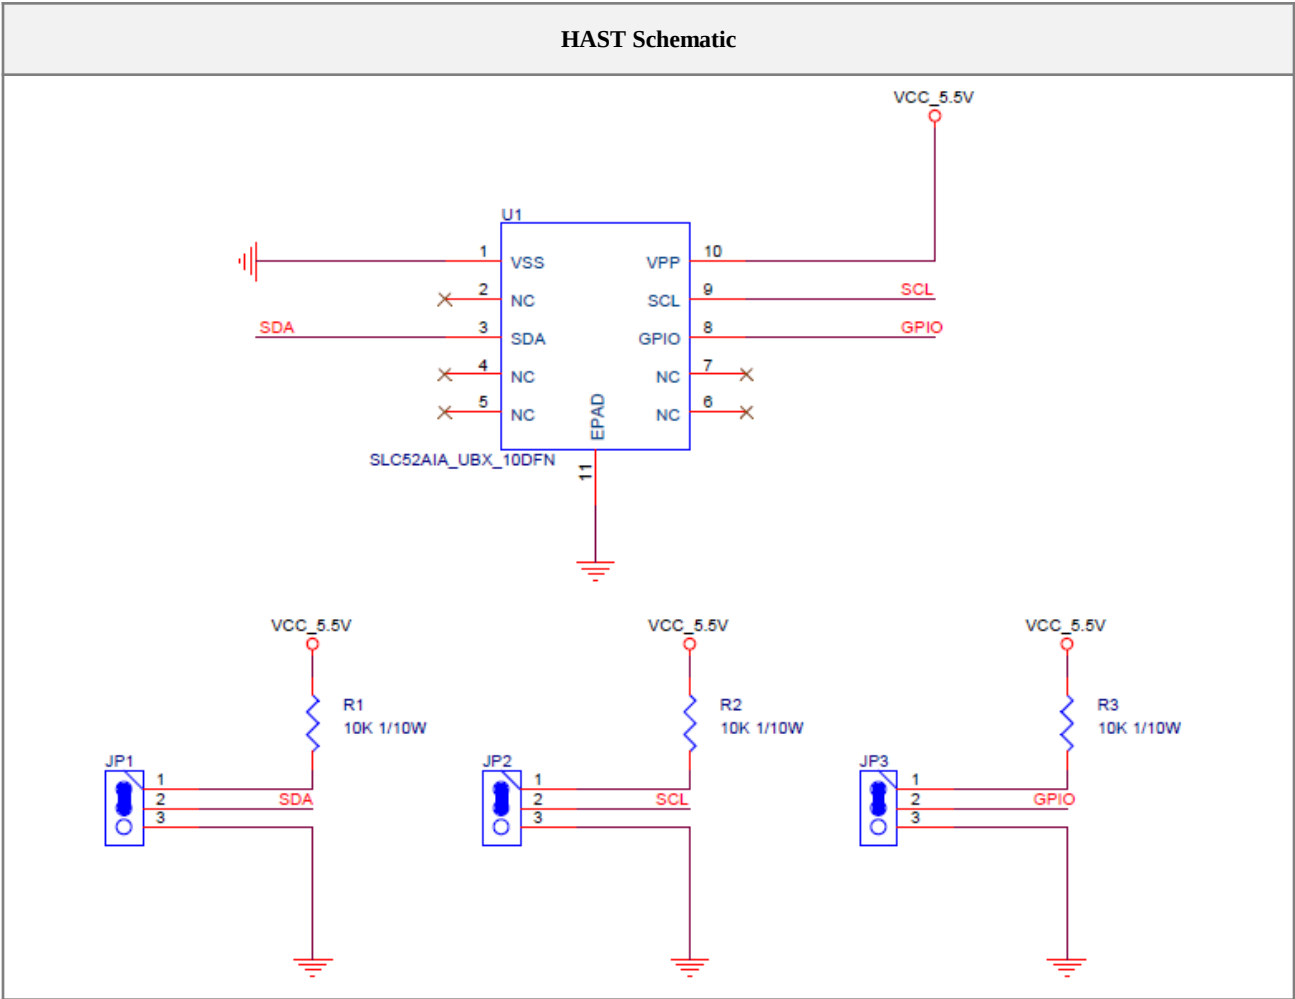

SETUP REPORT



219, Gyeongchung-daero, Bubal-eub, Icheon-si, Gyeonggi-do, KOREA

(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

(4) Operation Check



SETUP REPORT




219, Gyeongchung-daero, Bubal-eub, Icheon-si, Gyeonggi-do, KOREA

(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)


(4) Operation Check

Power	Power Supply Level	Measure Current (0ea, Room)	Measure Current (80ea, Room)	Measure Current (80ea, 130°C/85 %)
VDD	5.5 V	0.01 A	0.01 A	0.02 A
VBB	-	-	-	-
VCC	-	-	-	-
VREF	-	-	-	-

0ea, Room condition

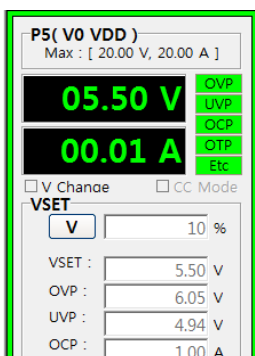

80ea, Room condition

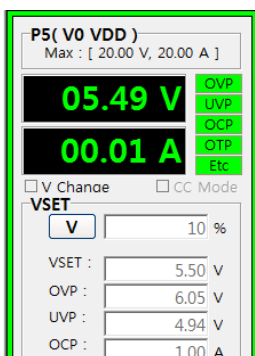

80ea, Room condition

