

SETUP REPORT



219, Gyeongchung-daero, Bubal-eub, Icheon-si, Gyeonggi-do, KOREA
(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

QRT Inc.

PTC Set-up Report

This report is protected by copyright and may not be copied, scanned or reproduced in any form without express written permission from QRT

COMPANY	:	유비벨록스
PRODUCT	:	SLC52AIA_UBX
PACKAGE	:	10DFN
PURPOSE	:	SET-UP
ISSUED DATE	:	2026. 07. 22

Prepared by : Byunghoon Lee

Approved by : Changjoon Lee

SETUP REPORT



219, Gyeongchung-daero, Bubal-eub, Icheon-si, Gyeonggi-do, KOREA
(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

Revision History

Revision No.	Date	Contents
1	26.07.22	SET-UP

SETUP REPORT



219, Gyeongchung-daero, Bubal-eub, Icheon-si, Gyeonggi-do, KOREA
(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

1. APPENDIX A: PTC Setup Details

1.1 PTC Test Configuration


Test Item : PTC	Test condition : -40 ~ 105 °C
Power Name	VDD : 5.5 V
Bias Mode	Power on : 5 min Power off : 5 min
Power up sequence	VDD_5.5 V
Note	
- Room temp / Hot · Cold temp. current 표기 (1.1.3 Operation Check 참조) - Power down sequence는 Power up sequence의 역순	

SETUP REPORT




219, Gyeongchung-daero, Bubal-eub, Icheon-si, Gyeonggi-do, KOREA
(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

1.1.1 PTC Test Board

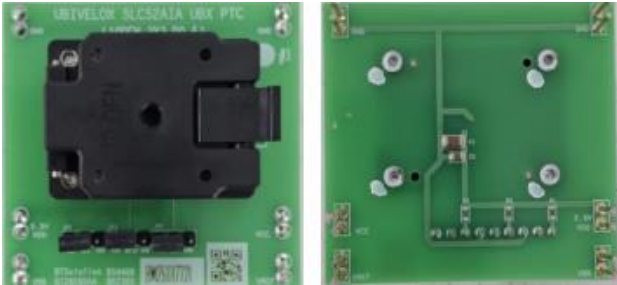Test Board	Board Information
	Product : SLC52A1A
	Package Type : 10 DFN
	Board Type : PTC Socket Board
	Board S/N : BT26090A4
	Material Code : BS4408
	Quantity : 50 EA

1.1.2 PTC Schematic

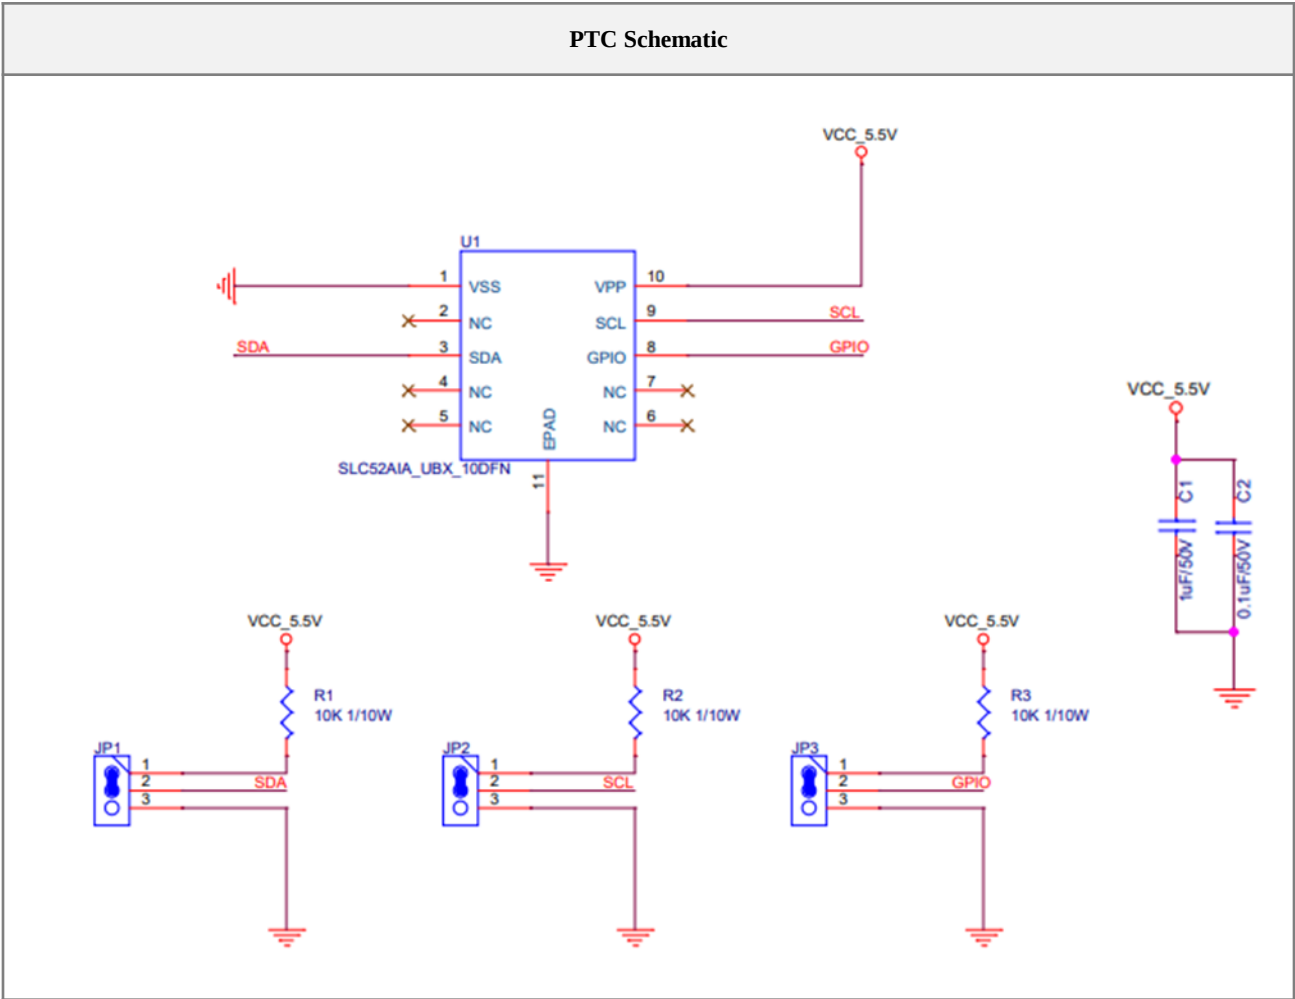


SETUP REPORT



219, Gyeongchung-daero, Bubal-eub, Icheon-si, Gyeonggi-do, KOREA
(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

1.1.3 Operation Check

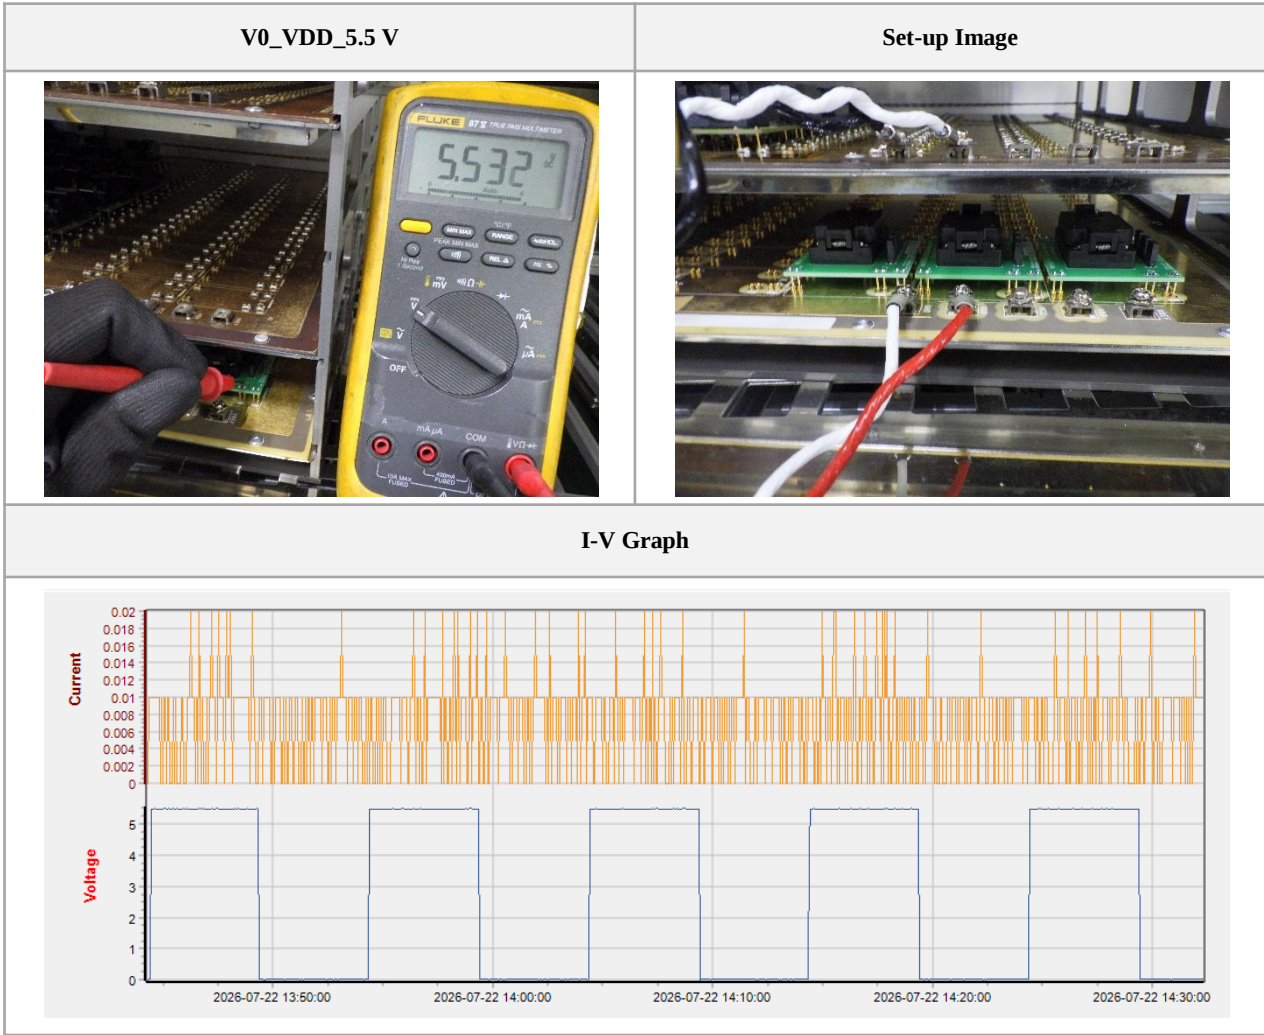

(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

Ambient	Qty	Power Name	Bias Set	Measured Current	Remark
Room	3	V0_VDD	5.5 V	0.01 A	
-40 °C		V0_VDD	5.5 V	0.01 A	
105 °C		V0_VDD	5.5 V	0.01 A	

Room Condition

P5(V0 VDD)

Max : [20.00 V, 20.00 A]

05.51 V

00.01 A

OVP

UVP

OCP

OTP

Etc

☐ V Chanae
 ☐ CC Mode

VSET

V

10 %

VSET :

5.50 V

OVP :

6.05 V

UVP :

4.94 V

OCP :

1.00 A

(Tel: + 82 031-8094-8224 Fax +82 031-8094-8240)

Ambient	Qty	Power Name	Bias Set	Measured Current	Remark
Room	3	V0_VDD	5.5 V	0.01 A	
-40 °C		V0_VDD	5.5 V	0.01 A	
105 °C		V0_VDD	5.5 V	0.01 A	

The screenshot shows the 'P5 (V0 VDD)' control interface. It displays two large digital readouts: '05.51 V' for voltage and '00.01 A' for current. To the right of these readouts are five green buttons labeled 'OVP', 'UVP', 'OCP', 'OTP', and 'Etc'. Below the readouts are two checkboxes: 'V Change' and 'CC Mode'. Under the 'VSET' section, there is a dropdown menu set to 'V' and a percentage field set to '10 %'. At the bottom, there are five rows of settings, each with a label and a value in a box: VSET (5.50 V), OVP (6.05 V), UVP (4.94 V), and OCP (1.00 A). The fifth row is partially visible and appears to be for another parameter.

The screenshot shows the 'P5 (V0 VDD)' control interface. It displays a maximum rating of 'Max : [20.00 V, 20.00 A]'. The current voltage is 05.53 V and the current is 00.01 A. Protection status indicators for OVP, UVP, OCP, OTP, and Etc are shown in green. Below these are checkboxes for 'V Change' and 'CC Mode'. The 'VSET' section includes a dropdown set to 'V' and a percentage set to '10 %'. At the bottom, there are input fields for VSET (5.50 V), OVP (6.05 V), UVP (4.94 V), and OCP (1.00 A).

Parameter	Value	Unit
Max Rating	20.00	V, A
Current Voltage	05.53	V
Current	00.01	A
OVP	6.05	V
UVP	4.94	V
OCP	1.00	A
VSET	5.50	V