


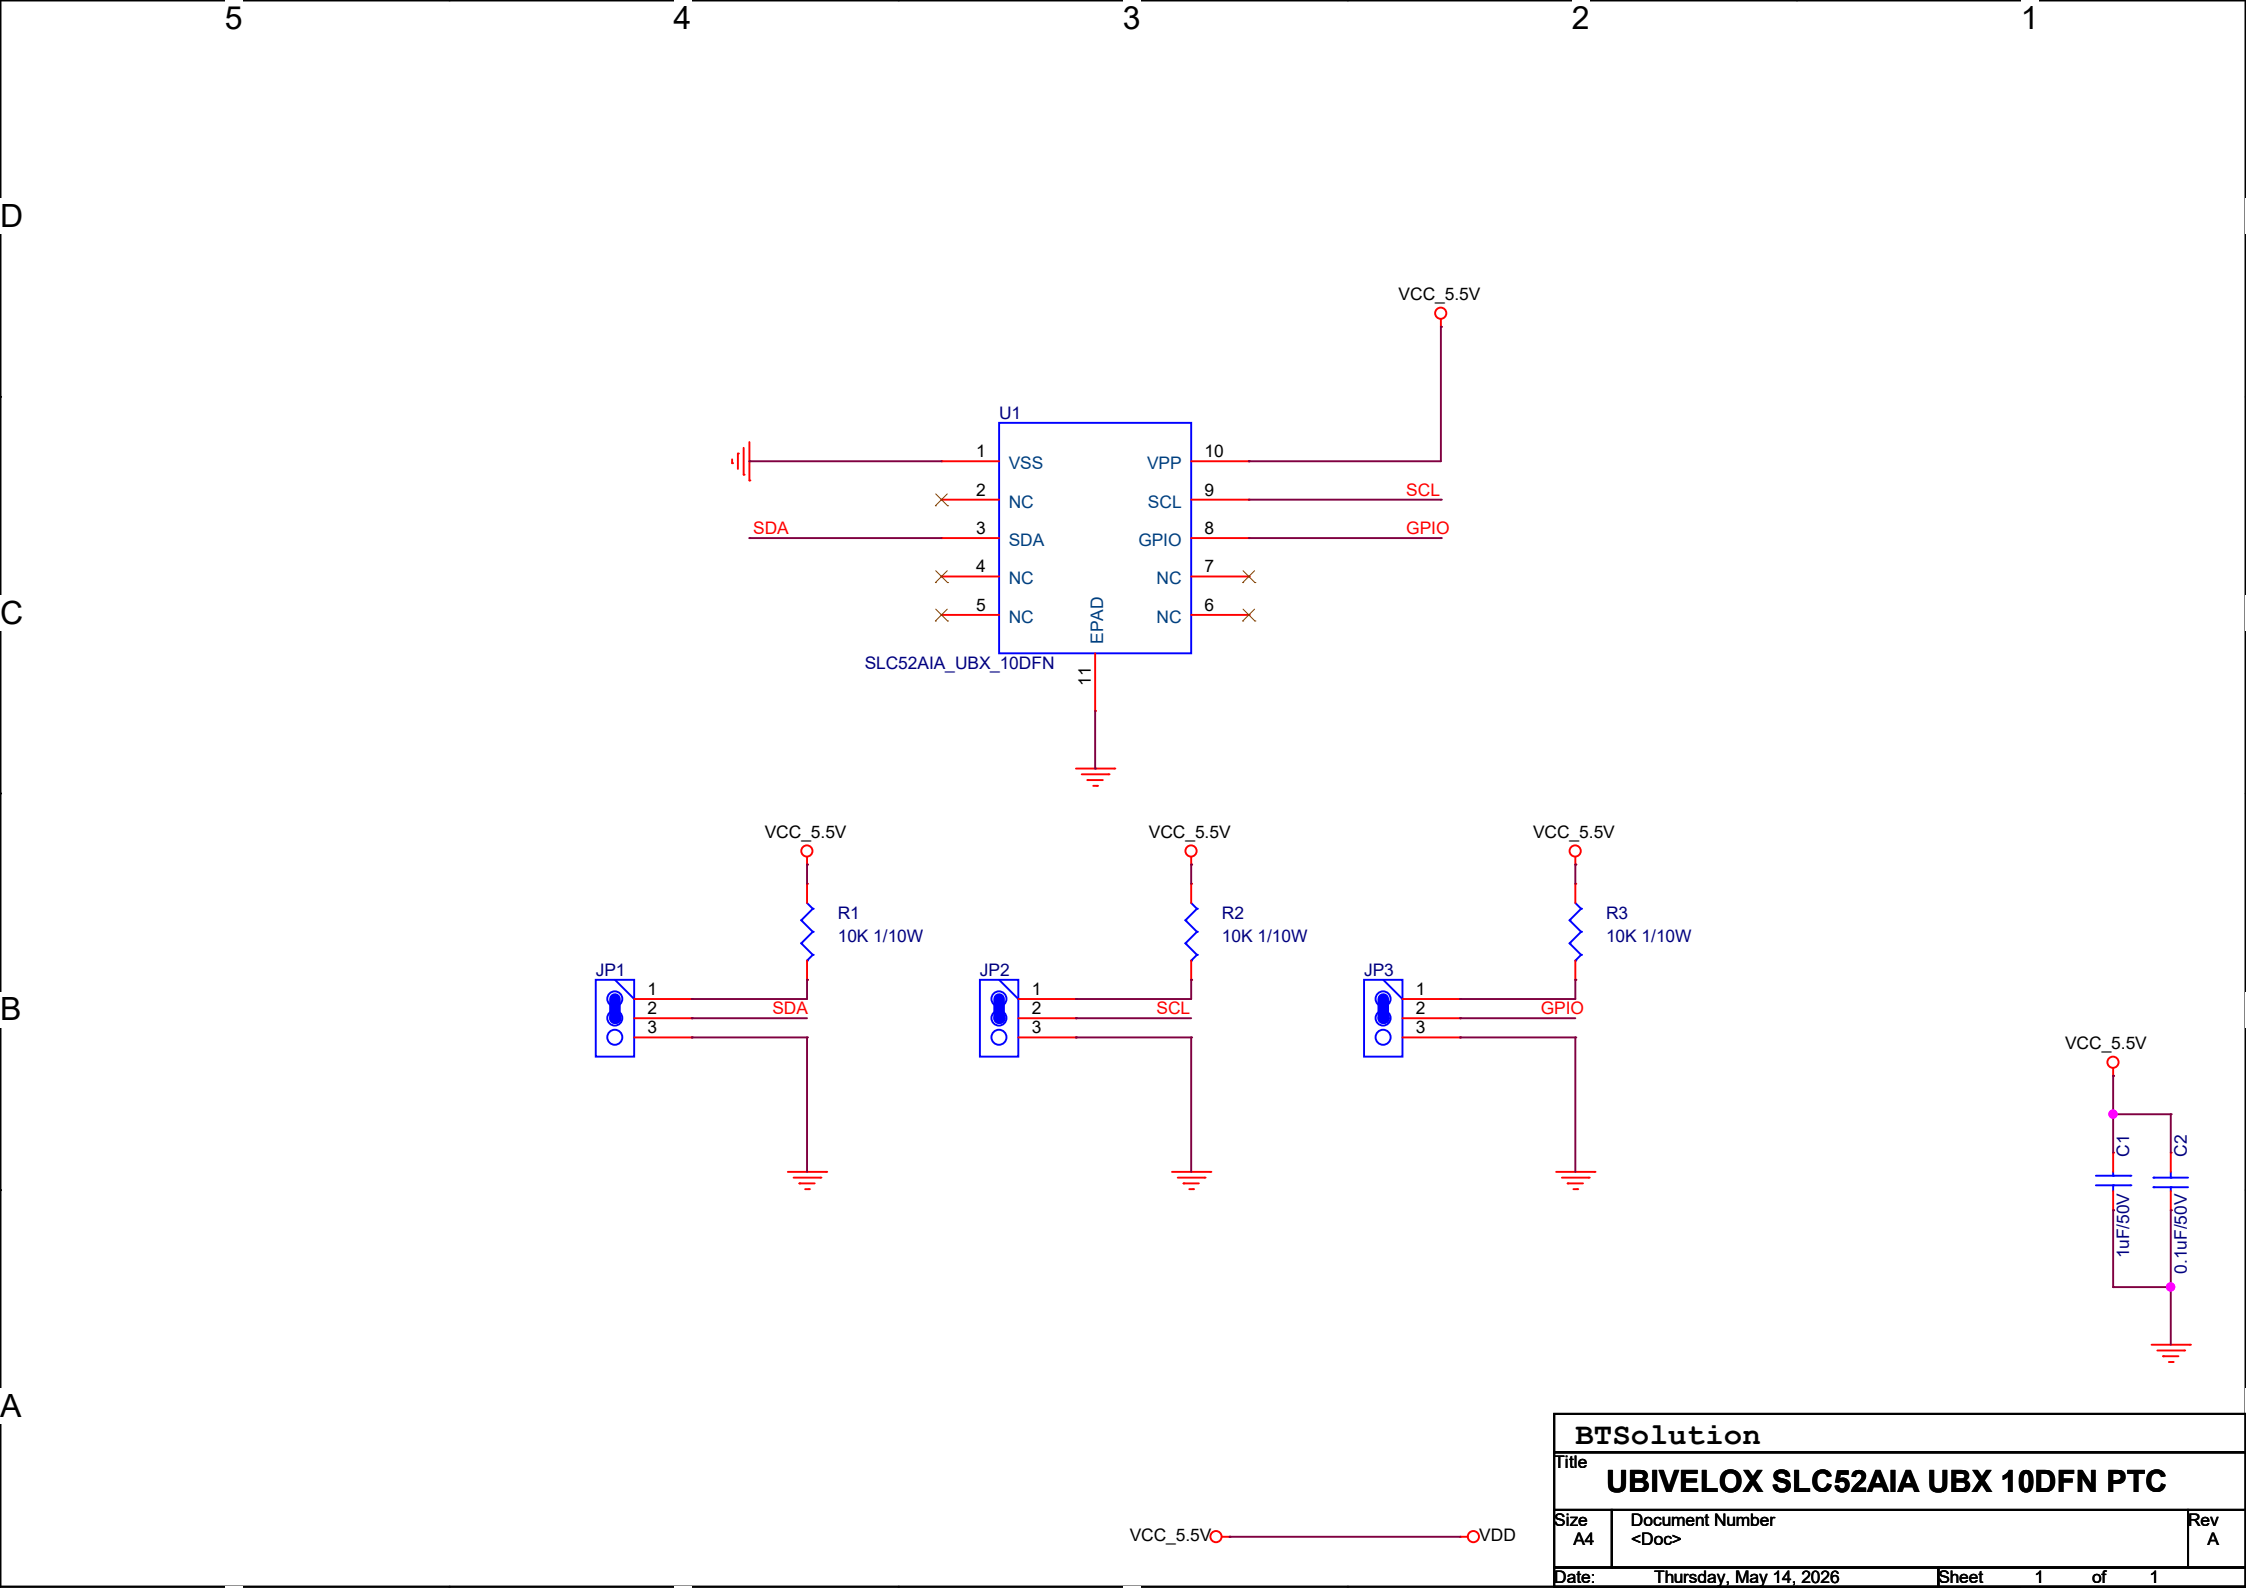
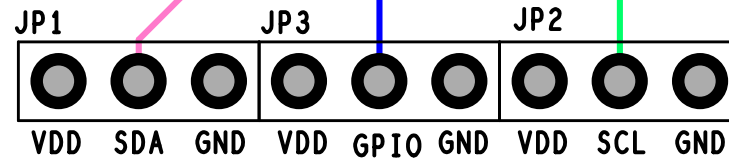





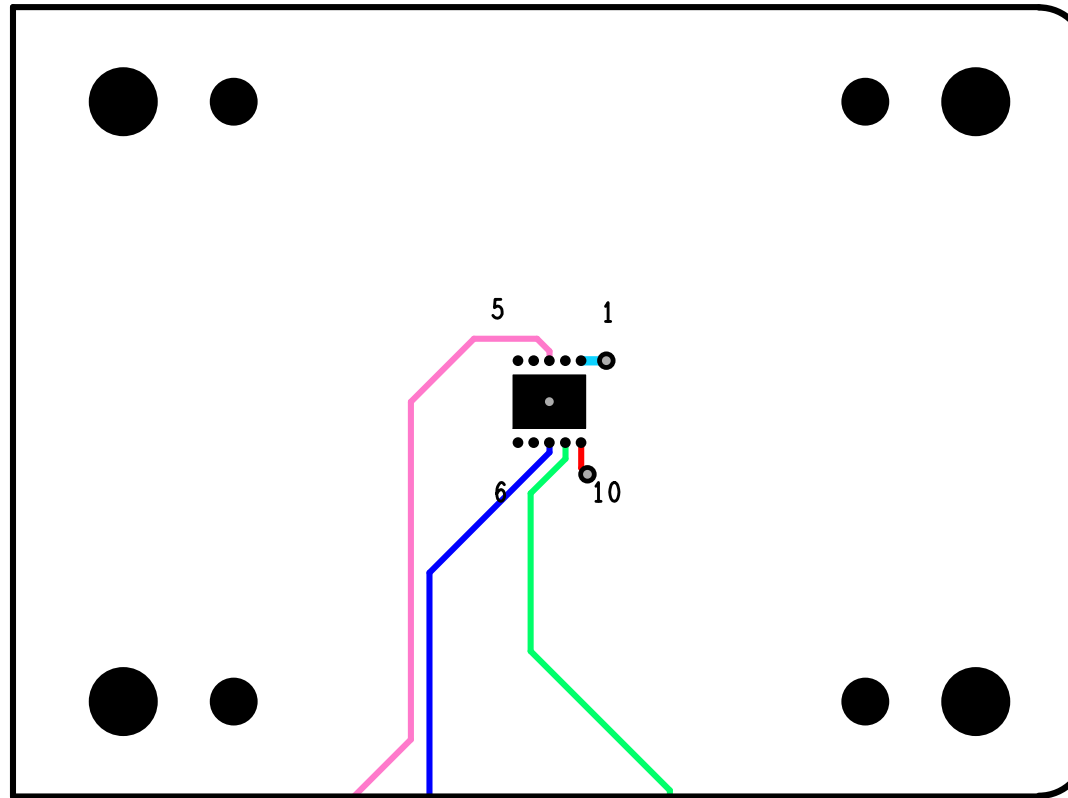







UBIVELOX SLC52AIA UBX PTC (10DFN 3X3 P0.5)





BTSolution BKXXXX
BT26090A4 BSXXXX



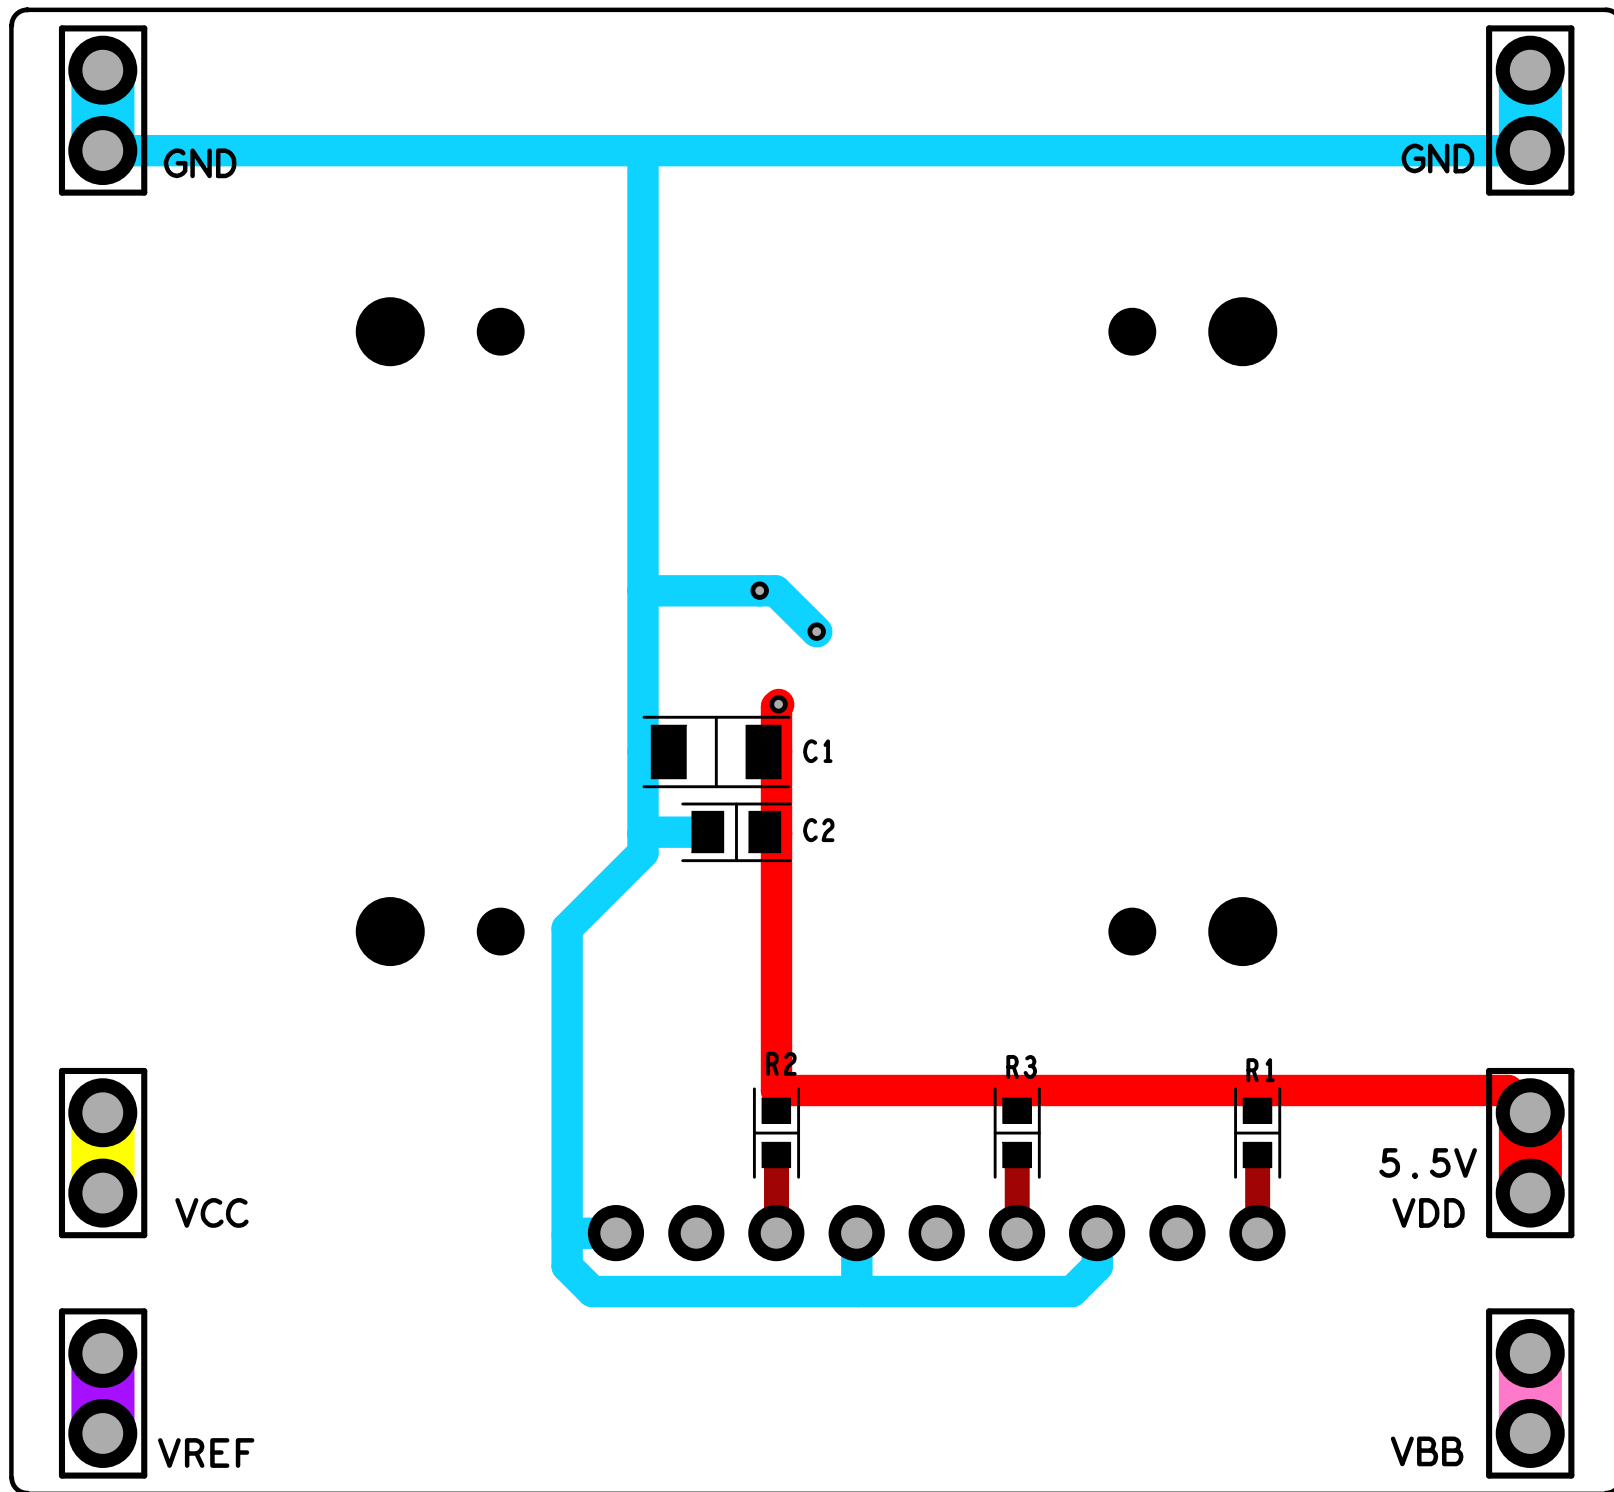

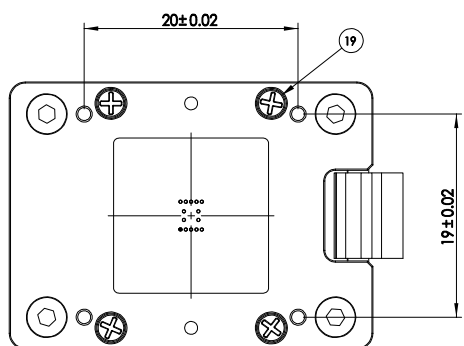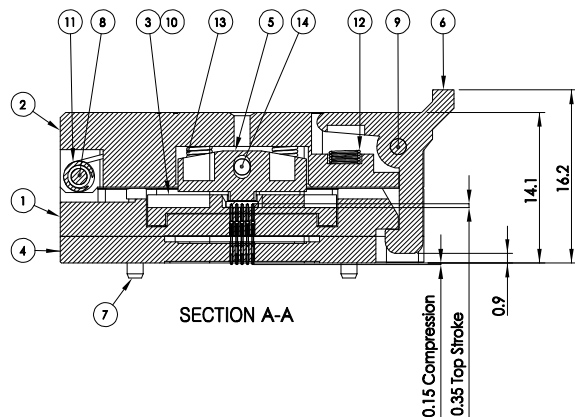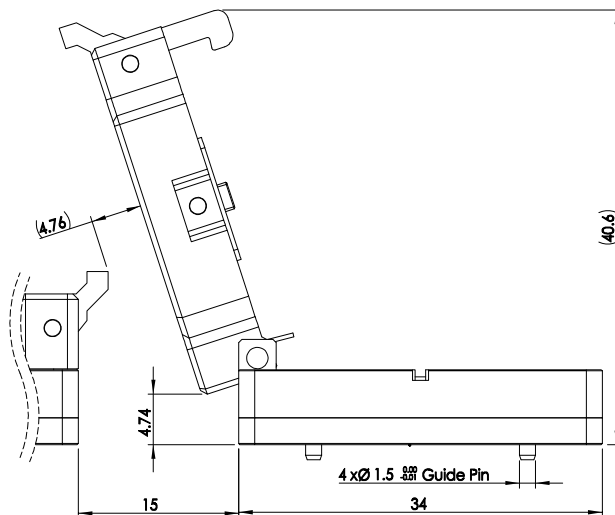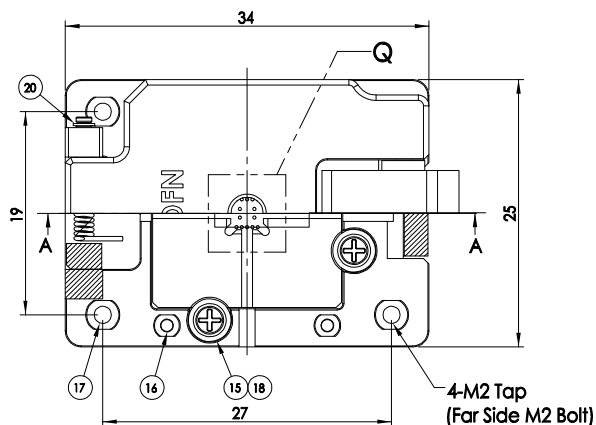

PCB LAYOUT TOP VIEW

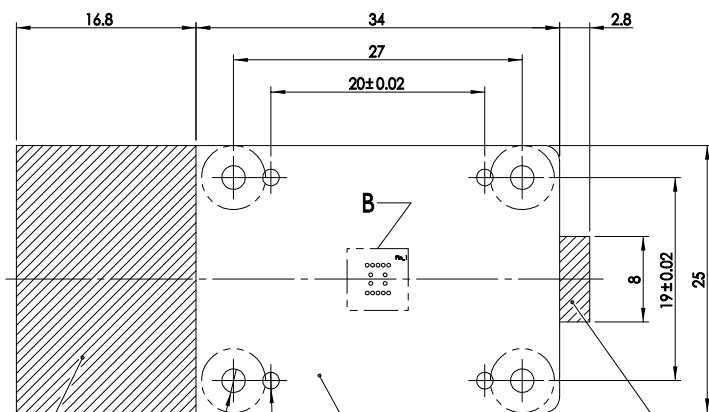

PCB Top side 4.5mm max component height allowed

PCB Top side 0.8mm max component height allowed


Pad : Ni 3um, hard Au 0.5um or ENIG : Immersion Gold thickness should be 0.04um to 0.1um over 3um to 6um of Electroless Nickel

4-Ø 1.55±0.01 Thru (Ø 1.5 Guide Pin Hole)

No	Project	MATERIAL	Q'TY	PartNo
1	Top Plate	PEI	1	TLC-0014-CSB-TP
2	Cover	PEI	1	TLC-0014-CSB-CO
3	IC Guide Plate	PEEK	1	TLC-0014-CSB-IG
4	Bottom Plate	PEI	1	TLC-0014-CSB-BP
5	Pusher	PEI	1	TLC-0014-CSB-PU
6	Latch	PEI	1	LA2534
7	Guide Pin	SUS	4	GP1533
8	Pin Hinge	SUS	1	HP15180 (D1.5X18L)
9	Pin Latch	SUS	1	LP15220 (D1.5X22L)
10	Spring IC Guide	SUS	4	GS1540
11	Spring Hinge	SUS	1	CS2940A (D2.9X4.0L)
12	Spring Latch	SUS	1	PS2955 (D2.9X5.5L)
13	Spring Pusher	SUS	4	PS2460
14	Pin Pusher	SUS	2	PP1570 (D1.5X18L)
15	Washer Stopper	SUS	4	WA4014 (D4.0X1.4T)
16	PEM Nut	SUS	4	PN1423B (M1.4X2.3L)
17	PEM Nut	SUS	4	PN2035B (M2.0X3.5L)
18	Screw IC Guide	SUS	4	FH1430 (M1.4X3.0L)
19	Screw Btm Plate	SUS	4	FH1460 (M1.4X6.0L)
20	E-Ring Hinge	SUS	1	ER0802 (D2.0X0.2T)
21	Contact Pin	BeCu	14	PL0310570-C13A
22	Wrench Bolt	SUS	4	HB20800 (M2xL8)


< Device Package >

Scale 2.5 : 1

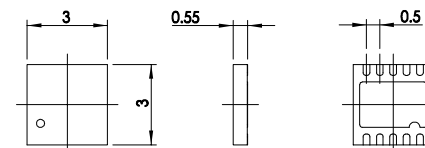


< Contact Pin >

Scale 2.5 : 1

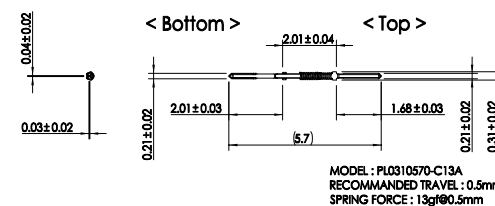

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS SOLE PROPERTY OF LST. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF LST IS PROHIBITED.

Socket PCB Mounting Screw
M2-8mm Hexa Head



Recommended
Screw Mounting Torque:
2.5~3.0Kg/Cm(2.2~2.6lb/in)

△F			
△E			
△D			
△C			
△B			
△A			
REV.	Initial Drawing	PAUL	2026-05-08
	CHANGE DESCRIPTION	BY	DATE
	SCALE 1 : 1	UNIT mm	

	BY	DATE
DRAWN	PAUL	2026-05-08
VERIFIED	PETER	2026-05-08
APPROVED	ANDY	2026-05-08
GENERAL TOLERANCES		
X±	0.1	X± 1°
.X±	0.05	.X± .5°
.XX±	0.02	.XX± .25°

LST		
TITLE		
Clamshell Test socket 10DFN-3x3-0.5P 14Pin		
DWG NO	TLC-0014-CSB	REV. 0

UBIVELOX SLC52AIA UBX 10DFN PTC Socket Board BOM									작성	검토	승인	
									정아영			
								DUT	1			2026-05-14
Customer : UBIVELOX								제작수량	50		Board Code : BT26090A4	
No.	Part	Part Size	온도 특성	Part Description	Reference	Part Name	Vendor	Qty	Total Qty	비고		
1	Chip Capacitor	2012	X8R	0.1uF / 50V / ±10%(K)	C2	GCM21BR91H104KA37L	Murata	1	50			
2	Chip Capacitor	3216	X8R	1uF / 50V / ±10%(K)	C1	CGA5L3X8R1H105K106AB	TDK	1	50			
3	Chip Resistor	1608	-	10KΩ, 1/10W	R1;R2;R3	WR06X1002FTL	WALSIN	3	150			
4	Header 3PIN	2.54mm	-	Pin Header 1X3 / Male / 2.54mm	JP1;JP2;JP3	-	-	3	150			
5												
6												
7												
No.	Part	Part Size	온도 특성	Part Description	Reference	Part Name	Vendor	Qty	Total Qty	비고		
1	-	-	-	-	-	-	-	-	-			
2	-	-	-	-	-	-	-	-	-			
3	-	-	-	-	-	-	-	-	-			