

1. Description


1.1. Project

Project Name	v1000_test
Board Name	v1000_test
Generated with:	STM32CubeMX 4.20.0
Date	03/21/2017

1.2. MCU

MCU Series	STM32L1
MCU Line	STM32L151/152
MCU name	STM32L151RBTx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

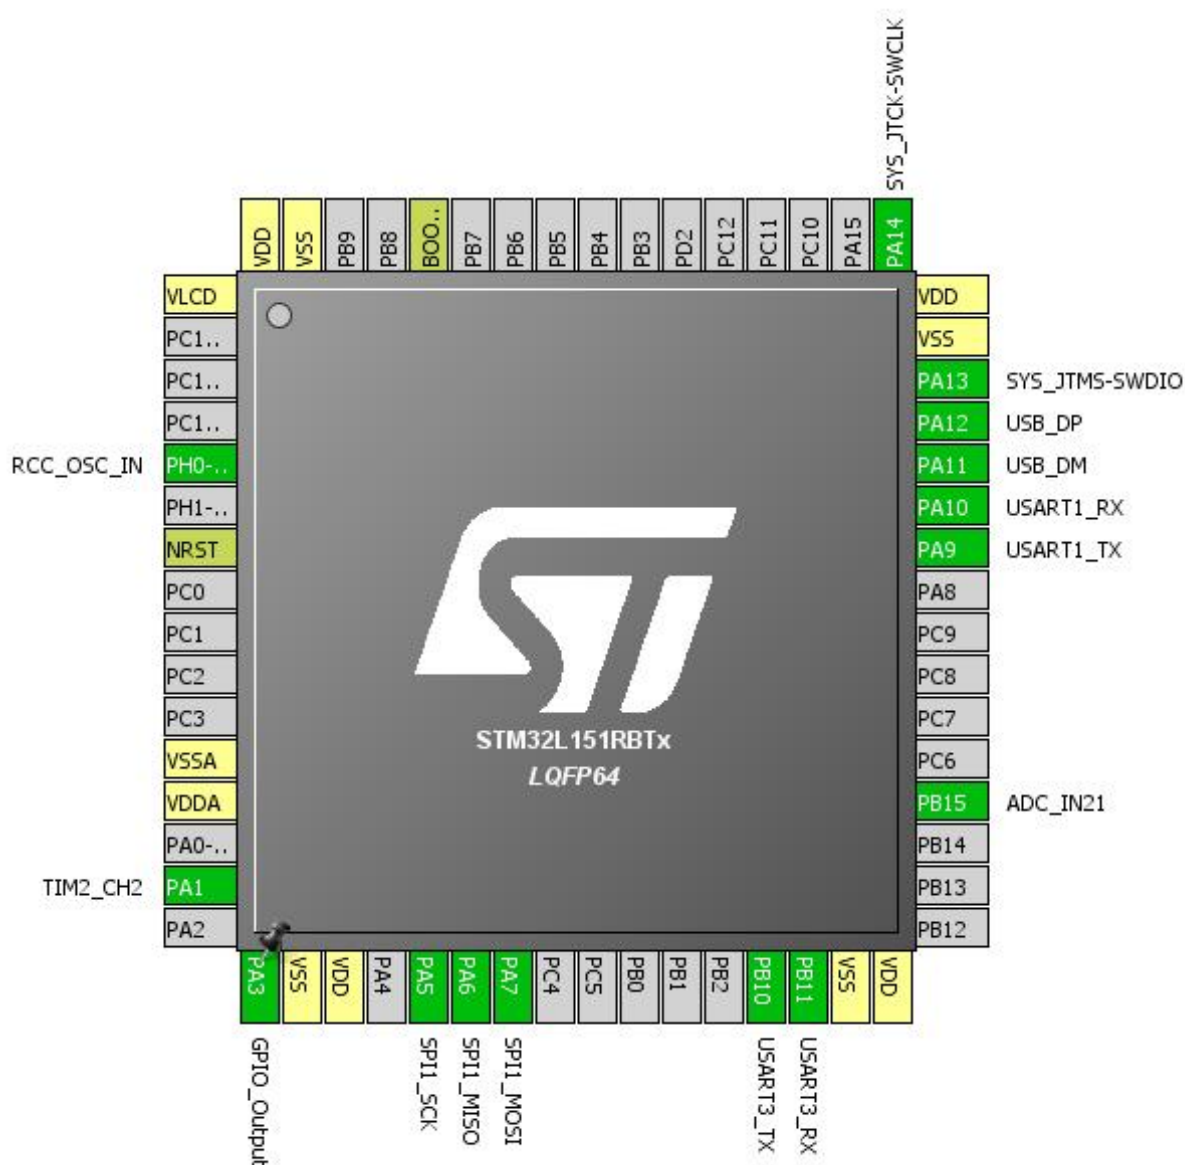


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VLCD	Power		
5	PH0-OSC_IN	I/O	RCC_OSC_IN	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
15	PA1	I/O	TIM2_CH2	
17	PA3 *	I/O	GPIO_Output	
18	VSS	Power		
19	VDD	Power		
21	PA5	I/O	SPI1_SCK	
22	PA6	I/O	SPI1_MISO	
23	PA7	I/O	SPI1_MOSI	
29	PB10	I/O	USART3_TX	
30	PB11	I/O	USART3_RX	
31	VSS	Power		
32	VDD	Power		
36	PB15	I/O	ADC_IN21	
42	PA9	I/O	USART1_TX	
43	PA10	I/O	USART1_RX	
44	PA11	I/O	USB_DM	
45	PA12	I/O	USB_DP	
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

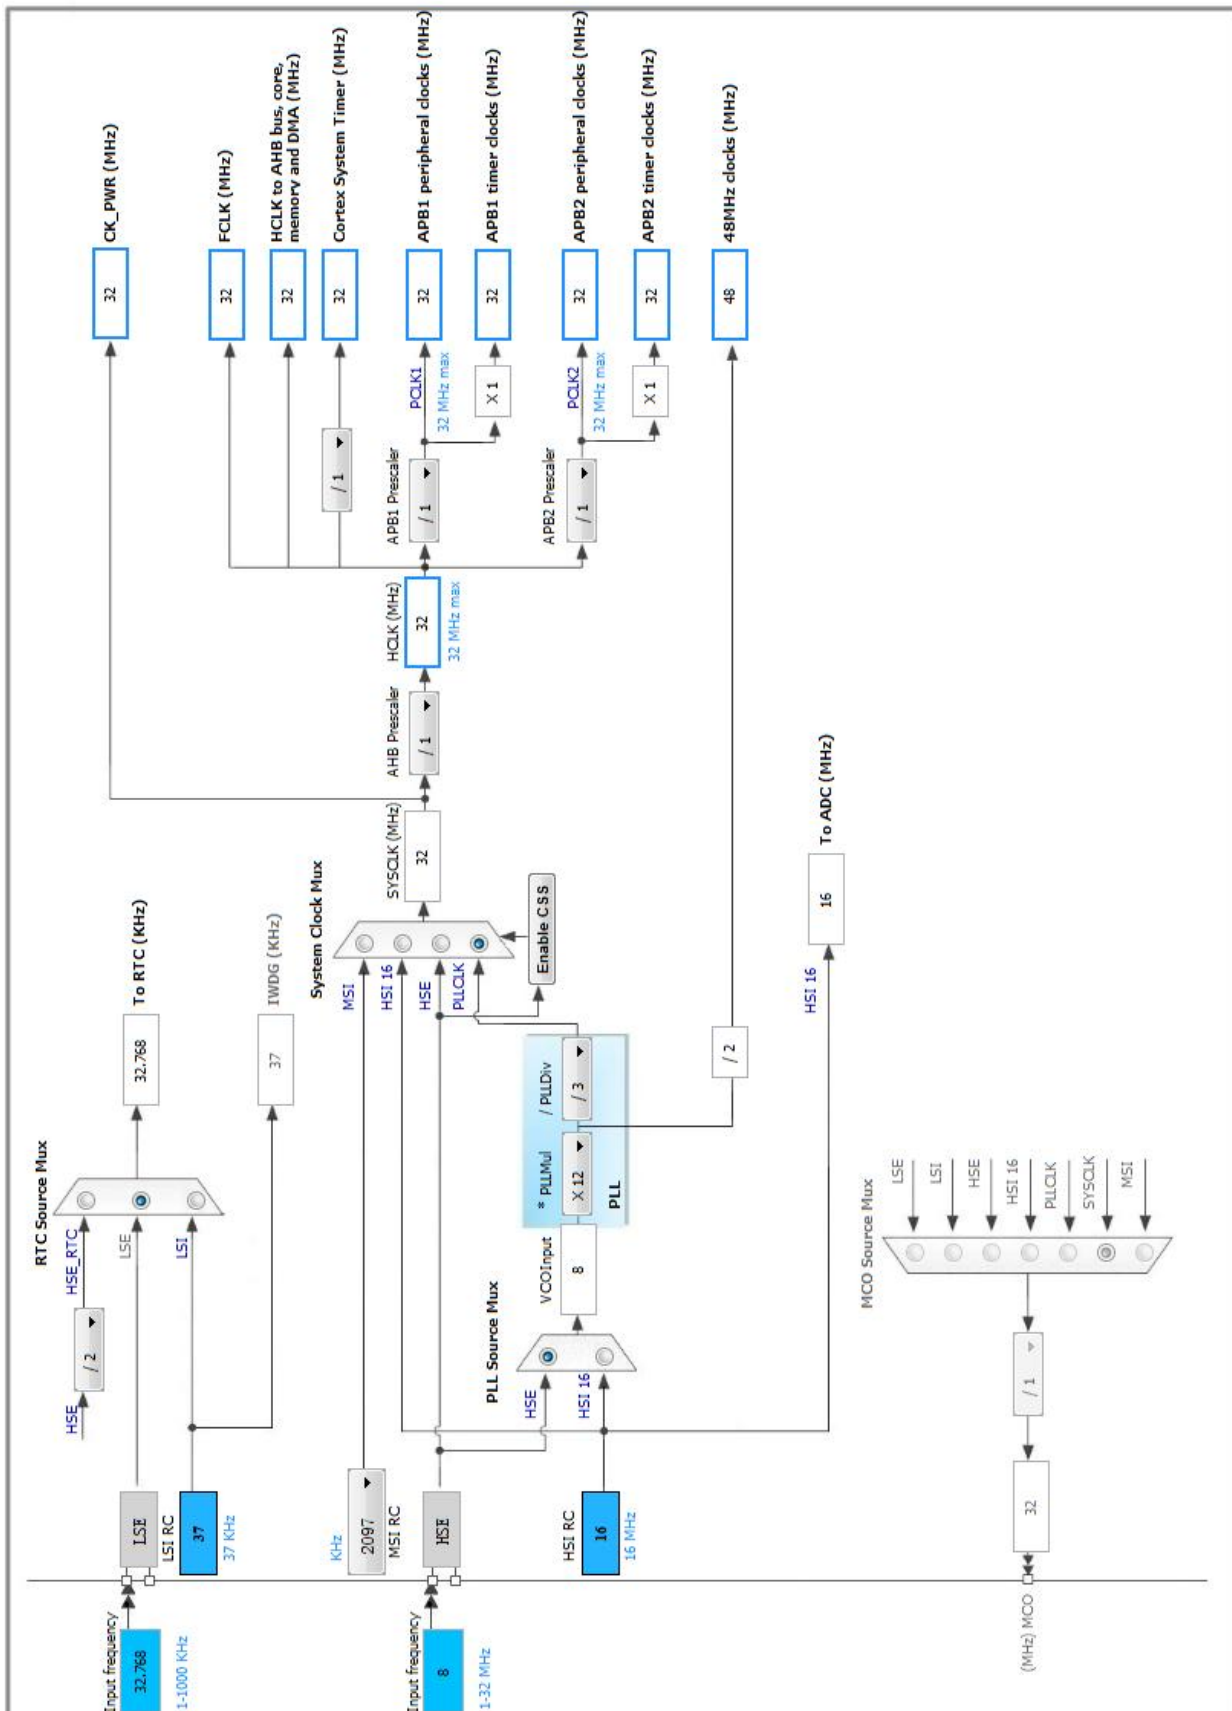

5. IPs and Middleware Configuration

5.1. ADC

mode: IN21

5.1.1. Parameter Settings:

ADC_Settings:

Clock Prescaler	Asynchronous clock mode divided by 1
Resolution	ADC 12-bit resolution
Data Alignment	Right alignment
Scan Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	End of sequence conversion
Low Power Auto Wait	Disabled
Low Power Auto Off	Disabled

ADC_Regular_ConversionMode:

Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
<u>Rank</u>	1
Channel	Channel 21
Sampling Time	4 Cycles

ADC_Injected_ConversionMode:

Number Of Conversions	0
-----------------------	---

WatchDog:

Enable Analog WatchDog Mode	false
-----------------------------	-------

5.2. RCC

High Speed Clock (HSE): BYPASS Clock Source

5.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
-----------------	-----

Instruction Cache	Enabled
Prefetch Buffer	Disabled
Data Cache	Enabled
Flash Latency(WS)	1 WS (2 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

5.3. RTC

mode: Activate Clock Source

mode: Activate Calendar

5.3.1. Parameter Settings:

General:

Hour Format	Hourformat 24
Asynchronous Predivider value	127
Synchronous Predivider value	255

Calendar Time:

Data Format	BCD data format
Hours	0
Minutes	0
Seconds	0
Day Light Saving: value of hour adjustment	Daylightsaving None
Store Operation	Storeoperation Reset

Calendar Date:

Week Day	Monday
Month	January
Date	1
Year	0

5.4. SPI1

Mode: Full-Duplex Master

5.4.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	2
Baud Rate	16.0 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

5.5. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.6. TIM2

Channel2: Output Compare CH2

5.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	40 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	400 *
Internal Clock Division (CKD)	No Division

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

Output Compare Channel 2:

Mode	Frozen (used for Timing base)
Pulse (16 bits value)	0

CH Polarity High

5.7. USART1

Mode: Asynchronous

5.7.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.8. USART3

Mode: Asynchronous

5.8.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.9. USB

mode: Device (FS)

5.9.1. Parameter Settings:

Basic Parameters:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	8 Bytes
Physical interface	Internal Phy

Power Parameters:

Low Power	Disabled
Battery Charging	Disabled

5.10. FATFS

mode: User-defined

5.10.1. Set Defines:

Version:

FATFS version	R0.11
---------------	-------

Function Parameters:

FS_TINY (Tiny mode)	Disabled
FS_READONLY (Read-only mode)	Disabled
FS_MINIMIZE (Minimization level)	Disabled
USE_STRFUNC (String functions)	Enabled with LF -> CRLF conversion
USE_FIND (Find functions)	Disabled
USE_MKFS (Make filesystem function)	Enabled
USE_FORWARD (Forward function)	Disabled
USE_LABEL (Volume label functions)	Disabled
USE_FASTSEEK (Fast seek function)	Enabled

Locale and Namespace Parameters:

CODE_PAGE (Code page on target)	Latin 1 (Windows)
USE_LFN (Use Long Filename)	Disabled
MAX_LFN (Max Long Filename)	255
LFN_UNICODE (Enable Unicode)	ANSI/OEM
STRF_ENCODE (Character encoding)	UTF-8
FS_RPATH (Relative Path)	Disabled

Physical Drive Parameters:

VOLUMES (Logical drives)	1
MAX_SS (Maximum Sector Size)	512
MIN_SS (Minimum Sector Size)	512
MULTI_PARTITION (Volume partitions feature)	Disabled

USE_TRIM (Erase feature)	Disabled
FS_NOFSINFO (Force full FAT scan)	0

System Parameters:

FS_NORTC (Timestamp feature)	Dynamic timestamp
NORTC_YEAR (Year for timestamp)	2015
NORTC_MON (Month for timestamp)	6
NORTC_MDAY (Day for timestamp)	4
WORD_ACCESS (Platform dependent access option)	Byte access
FS_REENTRANT (Re-Entrancy)	Enabled
FS_TIMEOUT (Timeout ticks)	1000
SYNC_t (O/S sync object)	osSemaphoreId
FS_LOCK (Number of files opened simultaneously)	2

5.11. FREERTOS

mode: Enabled

5.11.1. Config parameters:

Versions:

FreeRTOS version	8.2.3
CMSIS-RTOS version	1.02

Kernel settings:

USE_PREEMPTION	Enabled
CPU_CLOCK_HZ	SystemCoreClock
TICK_RATE_HZ	1000
MAX_PRIORITIES	7
MINIMAL_STACK_SIZE	128
MAX_TASK_NAME_LEN	16
USE_16_BIT_TICKS	Disabled
IDLE_SHOULD_YIELD	Enabled
USE_MUTEXES	Enabled
USE_RECURSIVE_MUTEXES	Disabled
USE_COUNTING_SEMAPHORES	Disabled
QUEUE_REGISTRY_SIZE	8
USE_APPLICATION_TASK_TAG	Disabled
USE_ALTERNATIVE_API	Disabled
ENABLE_BACKWARD_COMPATIBILITY	Enabled
USE_PORT_OPTIMISED_TASK_SELECTION	Disabled
USE_TICKLESS_IDLE	Disabled
USE_TASK_NOTIFICATIONS	Enabled

Memory management settings:

TOTAL_HEAP_SIZE	3072
Memory Management scheme	heap_4

Hook function related definitions:

USE_IDLE_HOOK	Disabled
USE_TICK_HOOK	Disabled
USE_MALLOC_FAILED_HOOK	Disabled
CHECK_FOR_STACK_OVERFLOW	Disabled

Run time and task stats gathering related definitions:

USE_TRACE_FACILITY	Enabled
GENERATE_RUN_TIME_STATS	Disabled

Co-routine related definitions:

USE_CO_ROUTINES	Disabled
MAX_CO_ROUTINE_PRIORITIES	2

Software timer definitions:

USE_TIMERS	Disabled
------------	----------

Interrupt nesting behaviour configuration:

LIBRARY_LOWEST_INTERRUPT_PRIORITY	15
LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY	5

5.11.2. Include parameters:

Include definitions:

vTaskPrioritySet	Enabled
uxTaskPriorityGet	Enabled
vTaskDelete	Enabled
vTaskCleanUpResources	Disabled
vTaskSuspend	Enabled
vTaskDelayUntil	Disabled
vTaskDelay	Enabled
xTaskGetSchedulerState	Enabled
xTaskResumeFromISR	Enabled
xQueueGetMutexHolder	Disabled
xSemaphoreGetMutexHolder	Disabled
pcTaskGetTaskName	Disabled
uxTaskGetStackHighWaterMark	Disabled
xTaskGetCurrentTaskHandle	Disabled
eTaskGetState	Disabled
xEventGroupSetBitFromISR	Disabled
xTimerPendFunctionCall	Disabled

5.12. USB_DEVICE

Class For FS IP: Mass Storage Class

5.12.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

Class Parameters:

MSC_MEDIA_PACKET (Media I/O buffer Size)	512
--	-----

5.12.2. Device Descriptor:

Device Descriptor:

VID (Vendor Identifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	TH *

Device Descriptor FS:

PID (Product Identifier)	22314
PRODUCT_STRING (Product Identifier)	V1000 *
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	MSC Config
INTERFACE_STRING (Interface Identifier)	MSC Interface

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC	PB15	ADC_IN21	Analog mode	No pull-up and no pull-down	n/a	
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	High *	
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	High *	
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
TIM2	PA1	TIM2_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Very Low	
USART1	PA9	USART1_TX	Alternate Function Push Pull	Pull-up	High *	
	PA10	USART1_RX	Alternate Function Push Pull	Pull-up	High *	
USART3	PB10	USART3_TX	Alternate Function Push Pull	Pull-up	High *	
	PB11	USART3_RX	Alternate Function Push Pull	Pull-up	High *	
USB	PA11	USB_DM	n/a	n/a	n/a	
	PA12	USB_DP	n/a	n/a	n/a	
GPIO	PA3	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very Low	

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
USB low priority interrupt	true	5	0
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC global interrupt	unused		
USB high priority interrupt	unused		
TIM2 global interrupt	unused		
SPI1 global interrupt	unused		
USART1 global interrupt	unused		
USART3 global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32L1
Line	STM32L151/152
MCU	STM32L151RBTx
Datasheet	17659_Rev12

7.2. Parameter Selection

Temperature	25
Vdd	3.6

7.3. Battery Selection

Battery	Ni-MH(AAA800)
Capacity	800.0 mAh
Self Discharge	30.0 %/month
Nominal Voltage	1.2 V
Max Cont Current	160.0 mA
Max Pulse Current	0.0 mA
Cells in series	1
Cells in parallel	1

8. Software Project

8.1. Project Settings

Name	Value
Project Name	v1000_test
Project Folder	D:\Documents\GitHub\sd_Te
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_L1 V1.6.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No