# Link layer, LANs: outline

5.1 introduction, services

5.2 error detection, correction

5.3 multiple access protocols

5.4 LANs
- addressing, ARP
- Ethernet
- switches
- VLANS

5.5 link virtualization: MPLS

5.6 data center networking

5.7 a day in the life of a web request

# MAC addresses and ARP

- 32-bit IP address:
  - *network-layer* address for interface
  - used for layer 3 (network layer) forwarding
- MAC (or LAN or physical or Ethernet) address:
  - function: *used 'locally" to get frame from one interface to another physically-connected interface (same network, in IP-addressing sense)*
  - 48 bit MAC address (for most LANs) burned in NIC ROM, also sometimes software settable
  - e.g.: 1A-2F-BB-76-09-AD

hexadecimal (base 16) notation
(each "number" represents 4 bits)

# LAN addresses and ARP

each adapter on LAN has unique *LAN* address

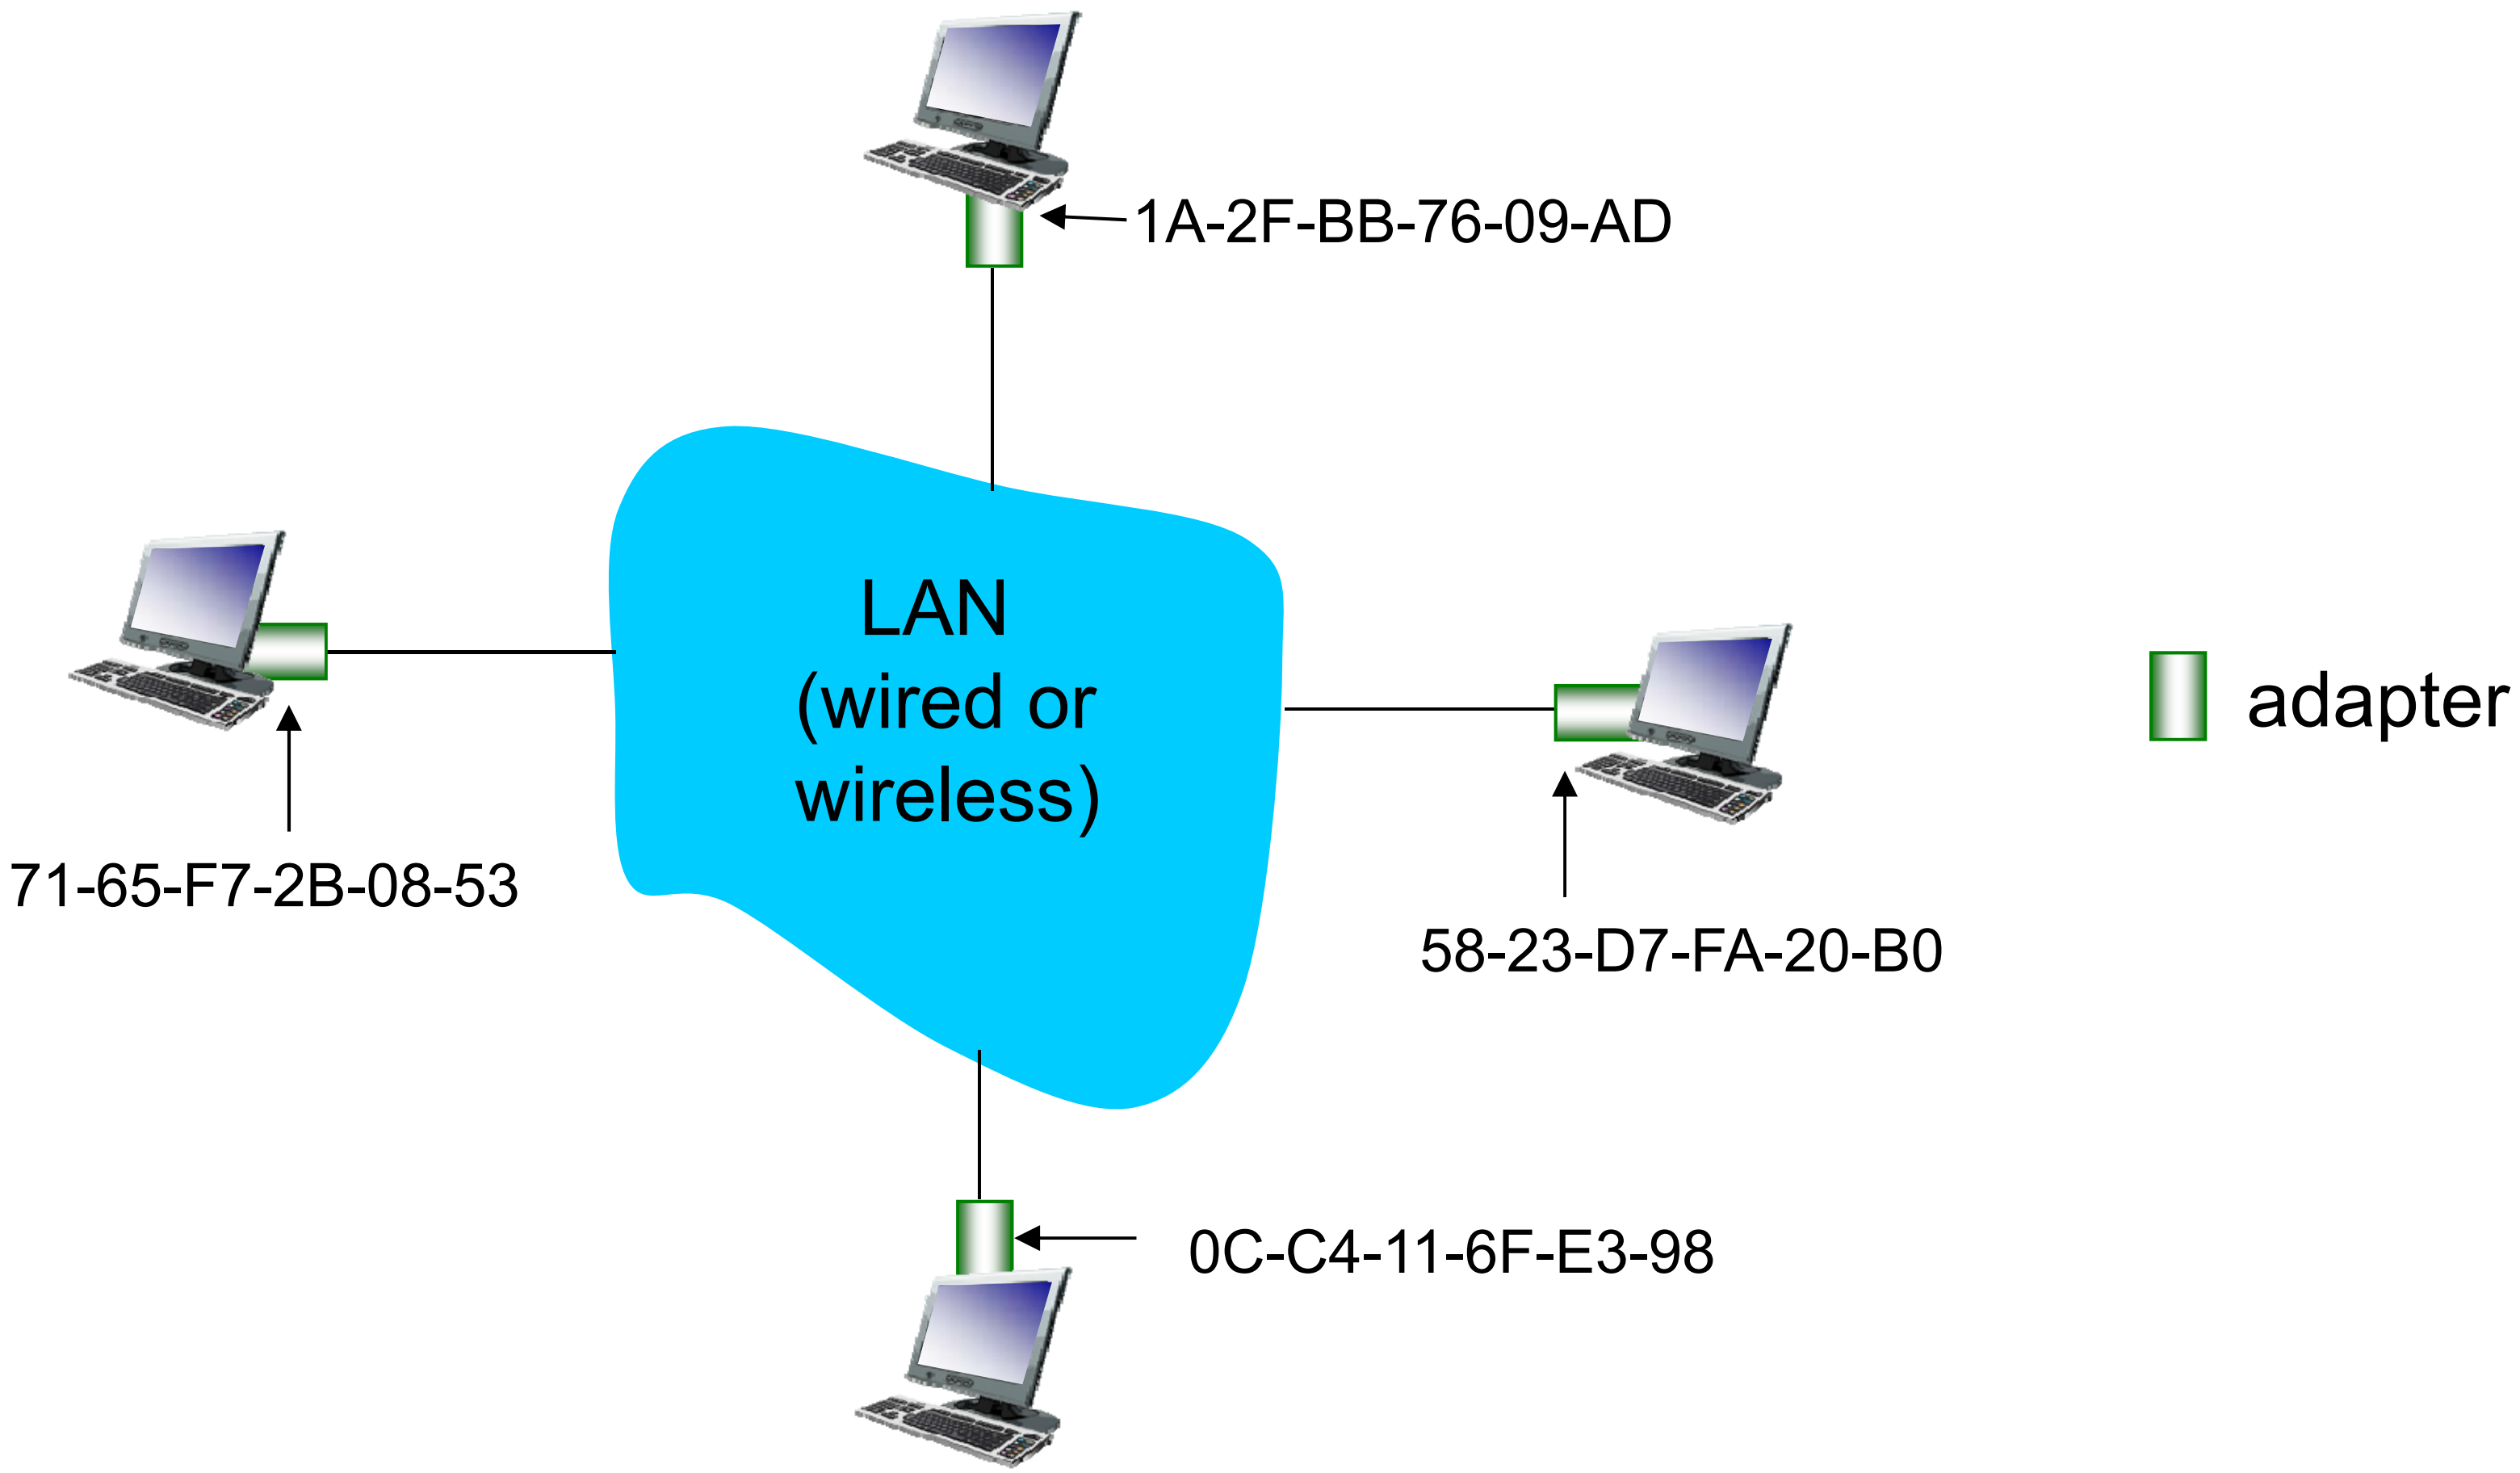

# LAN addresses (more)

- MAC address allocation administered by IEEE
- manufacturer buys portion of MAC address space (to assure uniqueness)
- analogy:
  - MAC address: like Social Security Number
  - IP address: like postal address
- MAC flat address ➜ portability
  - can move LAN card from one LAN to another
- IP hierarchical address *not* portable
  - address depends on IP subnet to which node is attached

# ARP: address resolution protocol

*Question:* how to determine interface's MAC address, knowing its IP address?

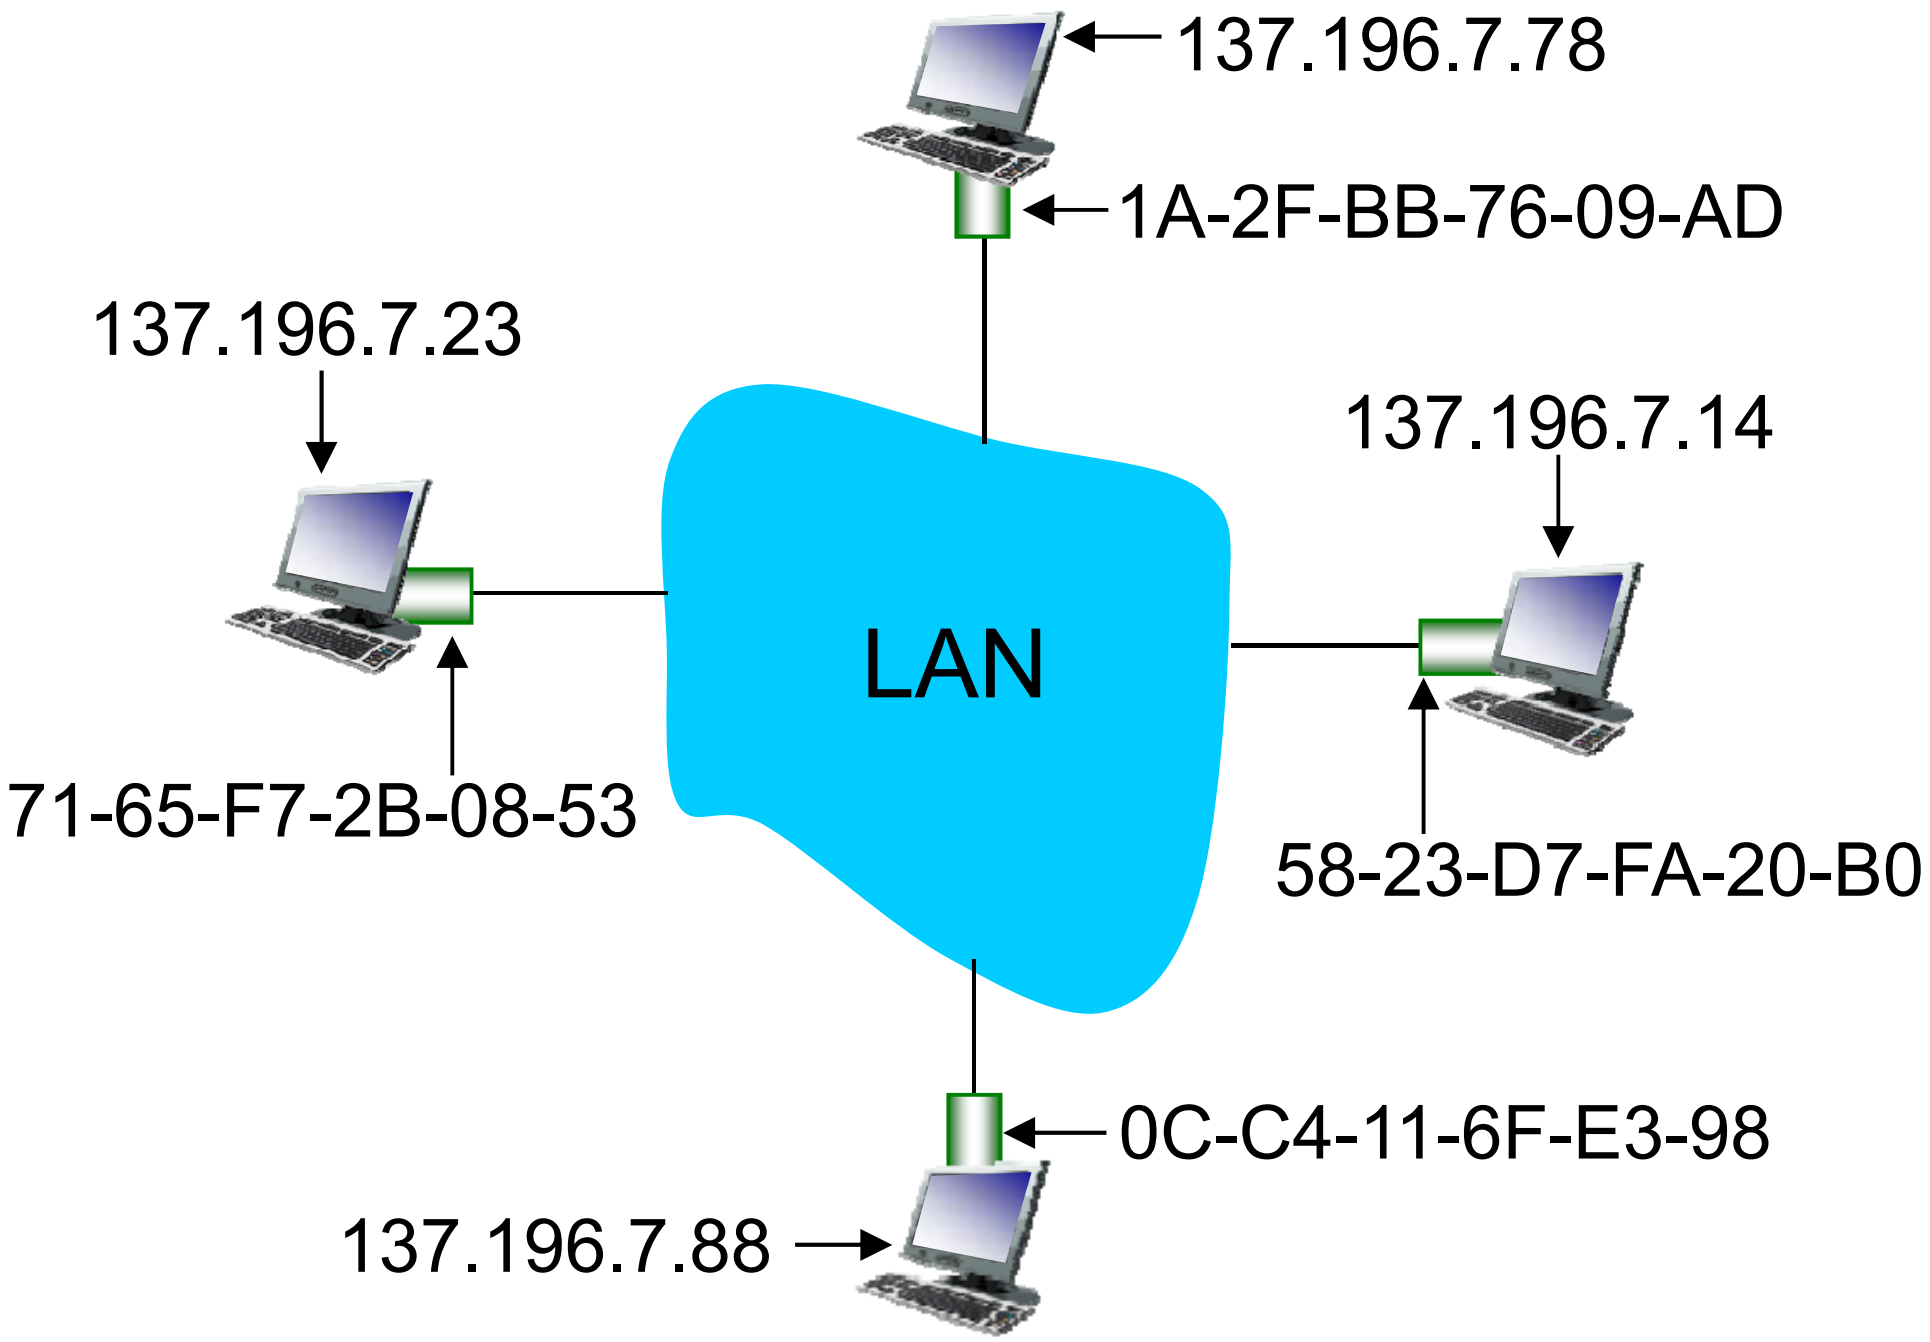


*ARP table:* each IP node (host, router) on LAN has table

- IP/MAC address mappings for some LAN nodes:
  < IP address; MAC address; TTL>
- TTL (Time To Live): time after which address mapping will be forgotten (typically 20 min)

# ARP protocol: same LAN

- A wants to send datagram to B
  - B's MAC address not in A's ARP table.
- A broadcasts ARP query packet, containing B's IP address
  - dest MAC address = FF-FF-FF-FF-FF-FF
  - all nodes on LAN receive ARP query
- B receives ARP packet, replies to A with its (B's) MAC address
  - frame sent to A's MAC address (unicast)
- A caches (saves) IP-to-MAC address pair in its ARP table until information becomes old (times out)
  - soft state: information that times out (goes away) unless refreshed
- ARP is "plug-and-play":
  - nodes create their ARP tables *without intervention from net administrator*

# Addressing: routing to another LAN

walkthrough: send datagram from A to B via R

- focus on addressing – at IP (datagram) and MAC layer (frame)
- assume A knows B's IP address
- assume A knows IP address of first hop router, R (how?)
- assume A knows R's MAC address (how?)

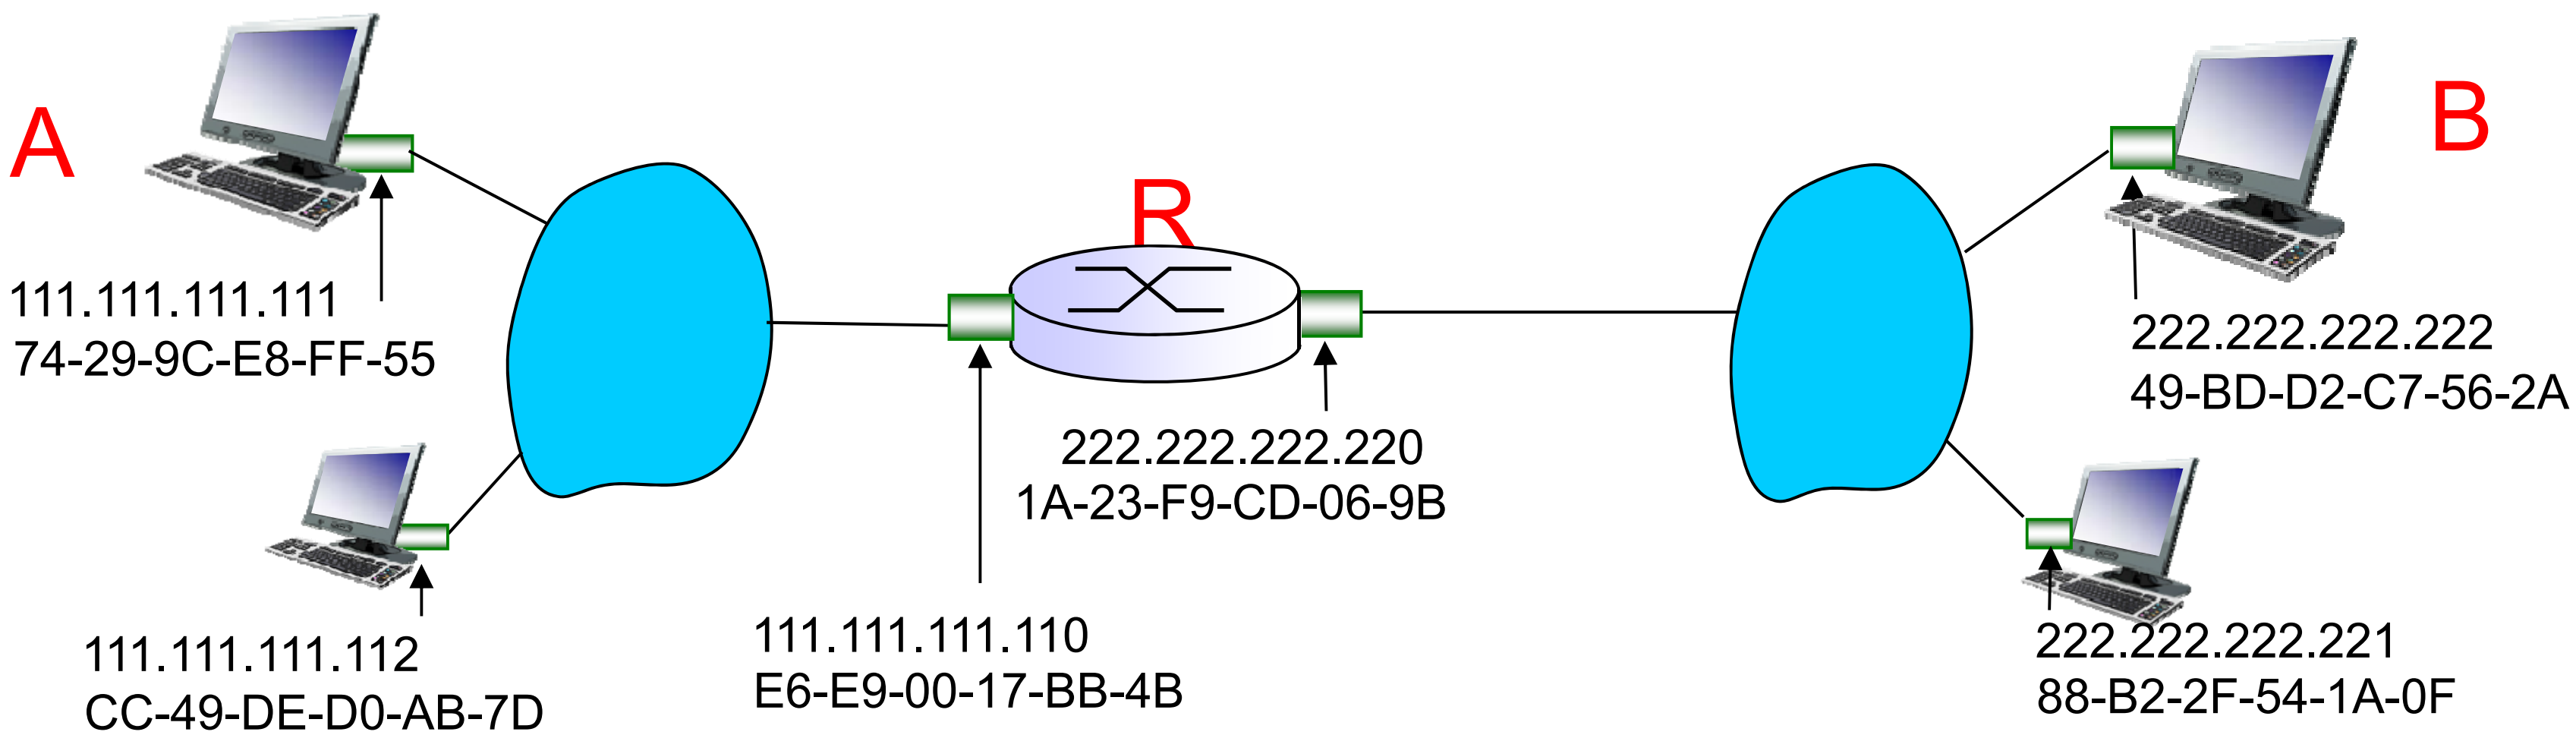

# Addressing: routing to another LAN

- A creates IP datagram with IP source A, destination B
- A creates link-layer frame with R's MAC address as dest, frame contains A-to-B IP datagram

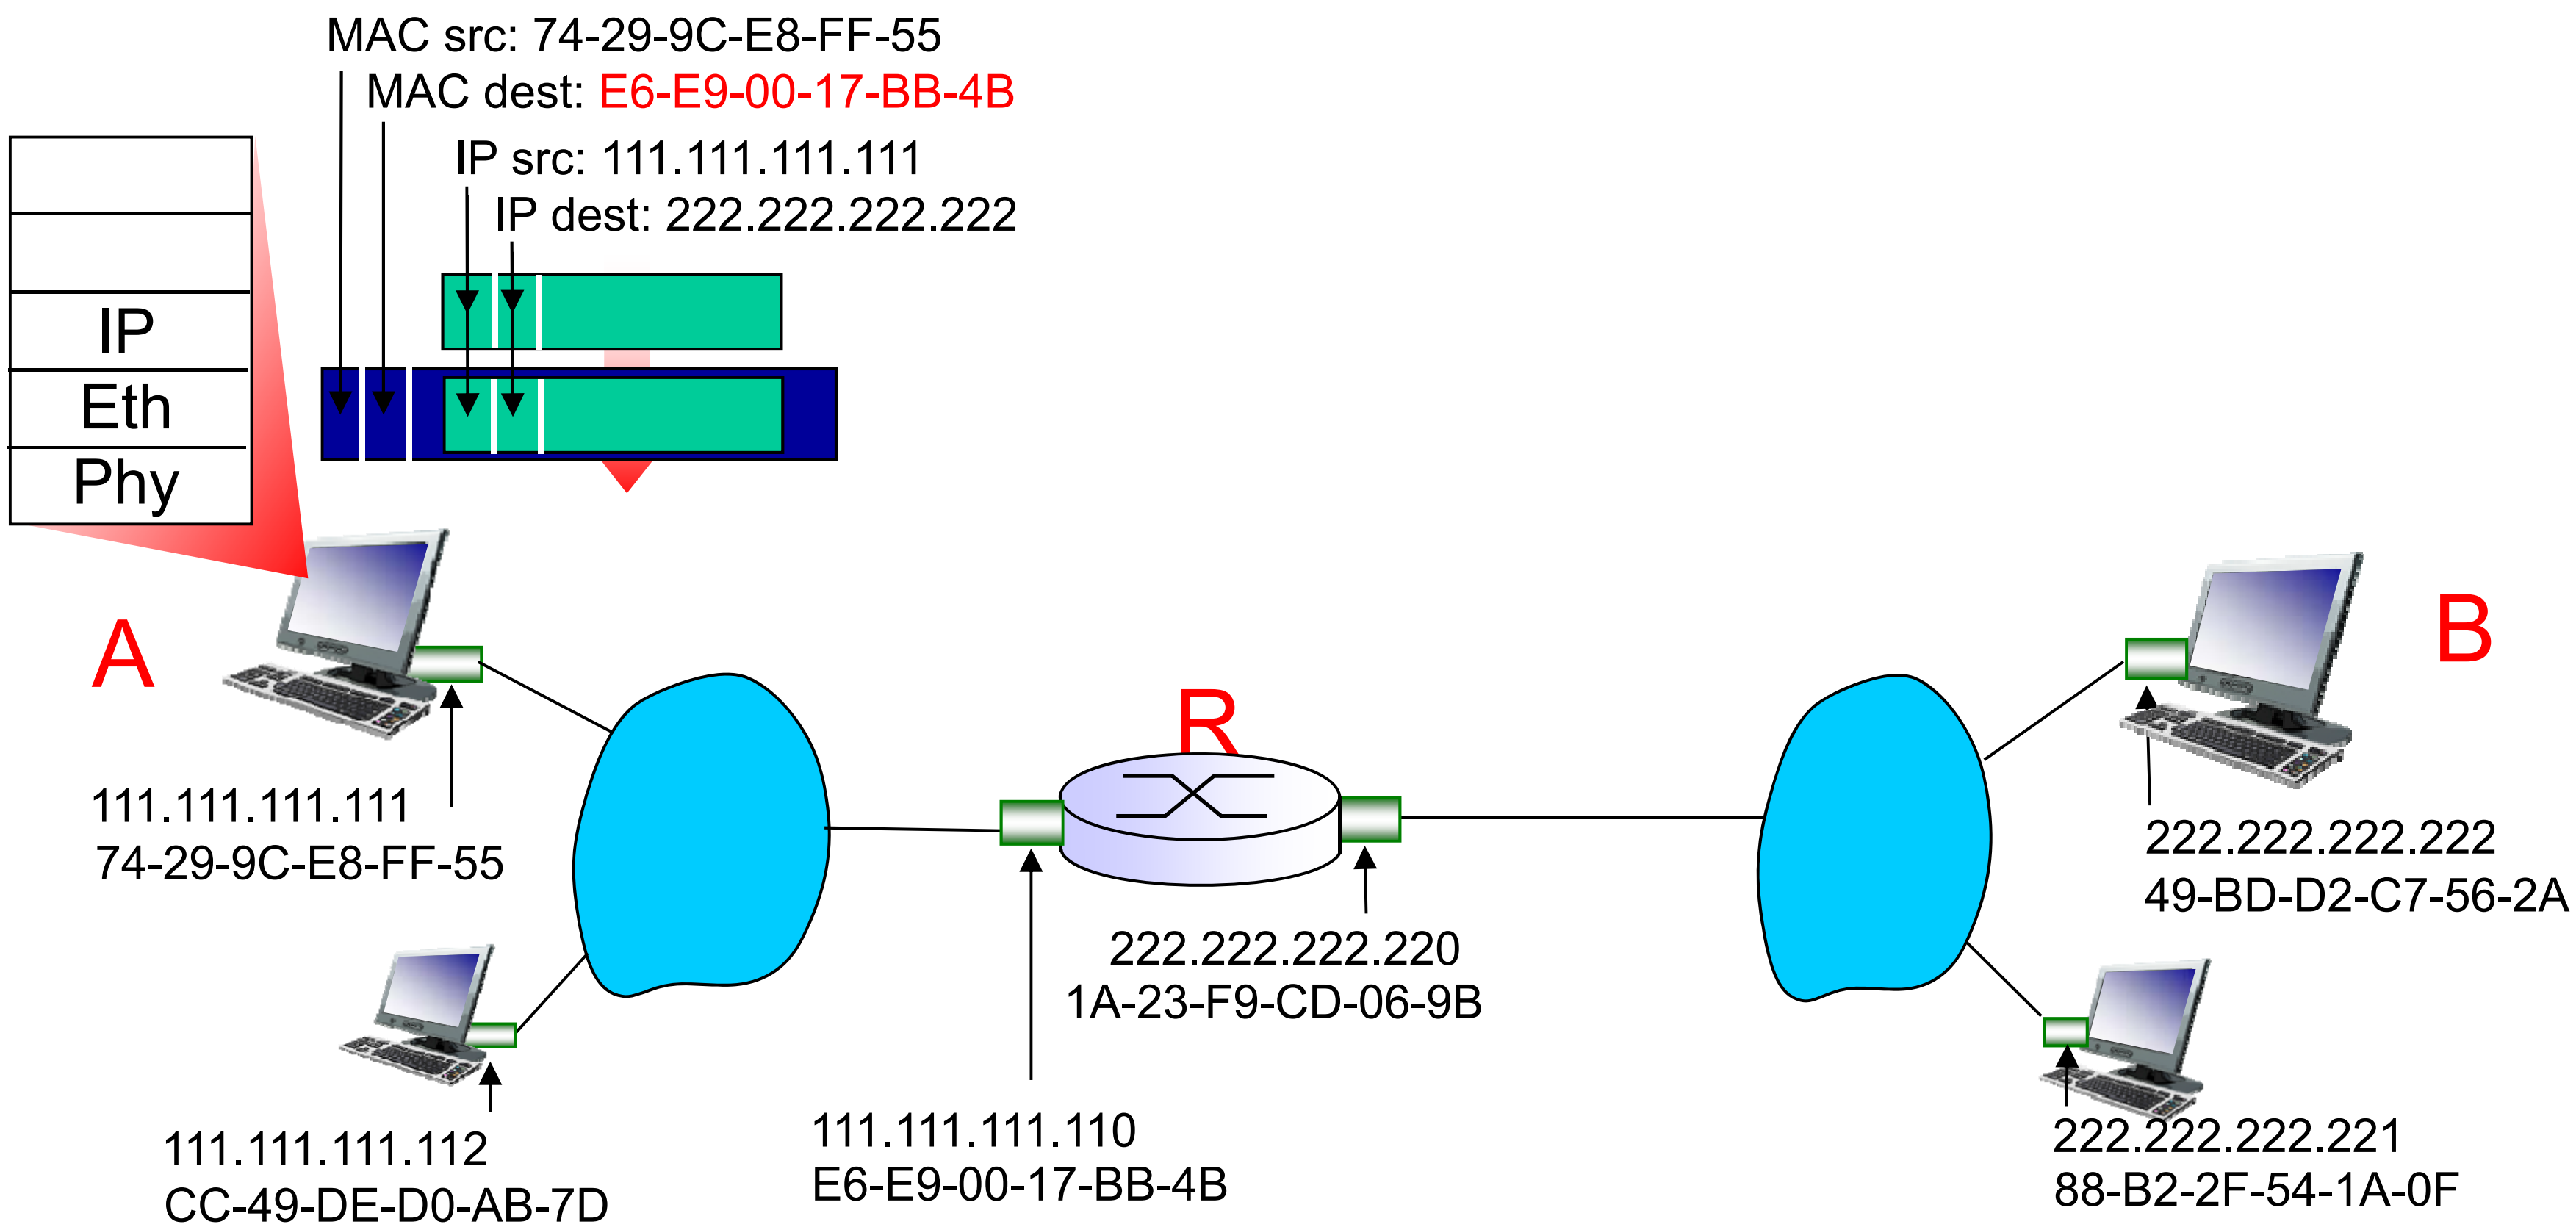

# Addressing: routing to another LAN

- frame sent from A to R
- frame received at R, datagram removed, passed up to IP

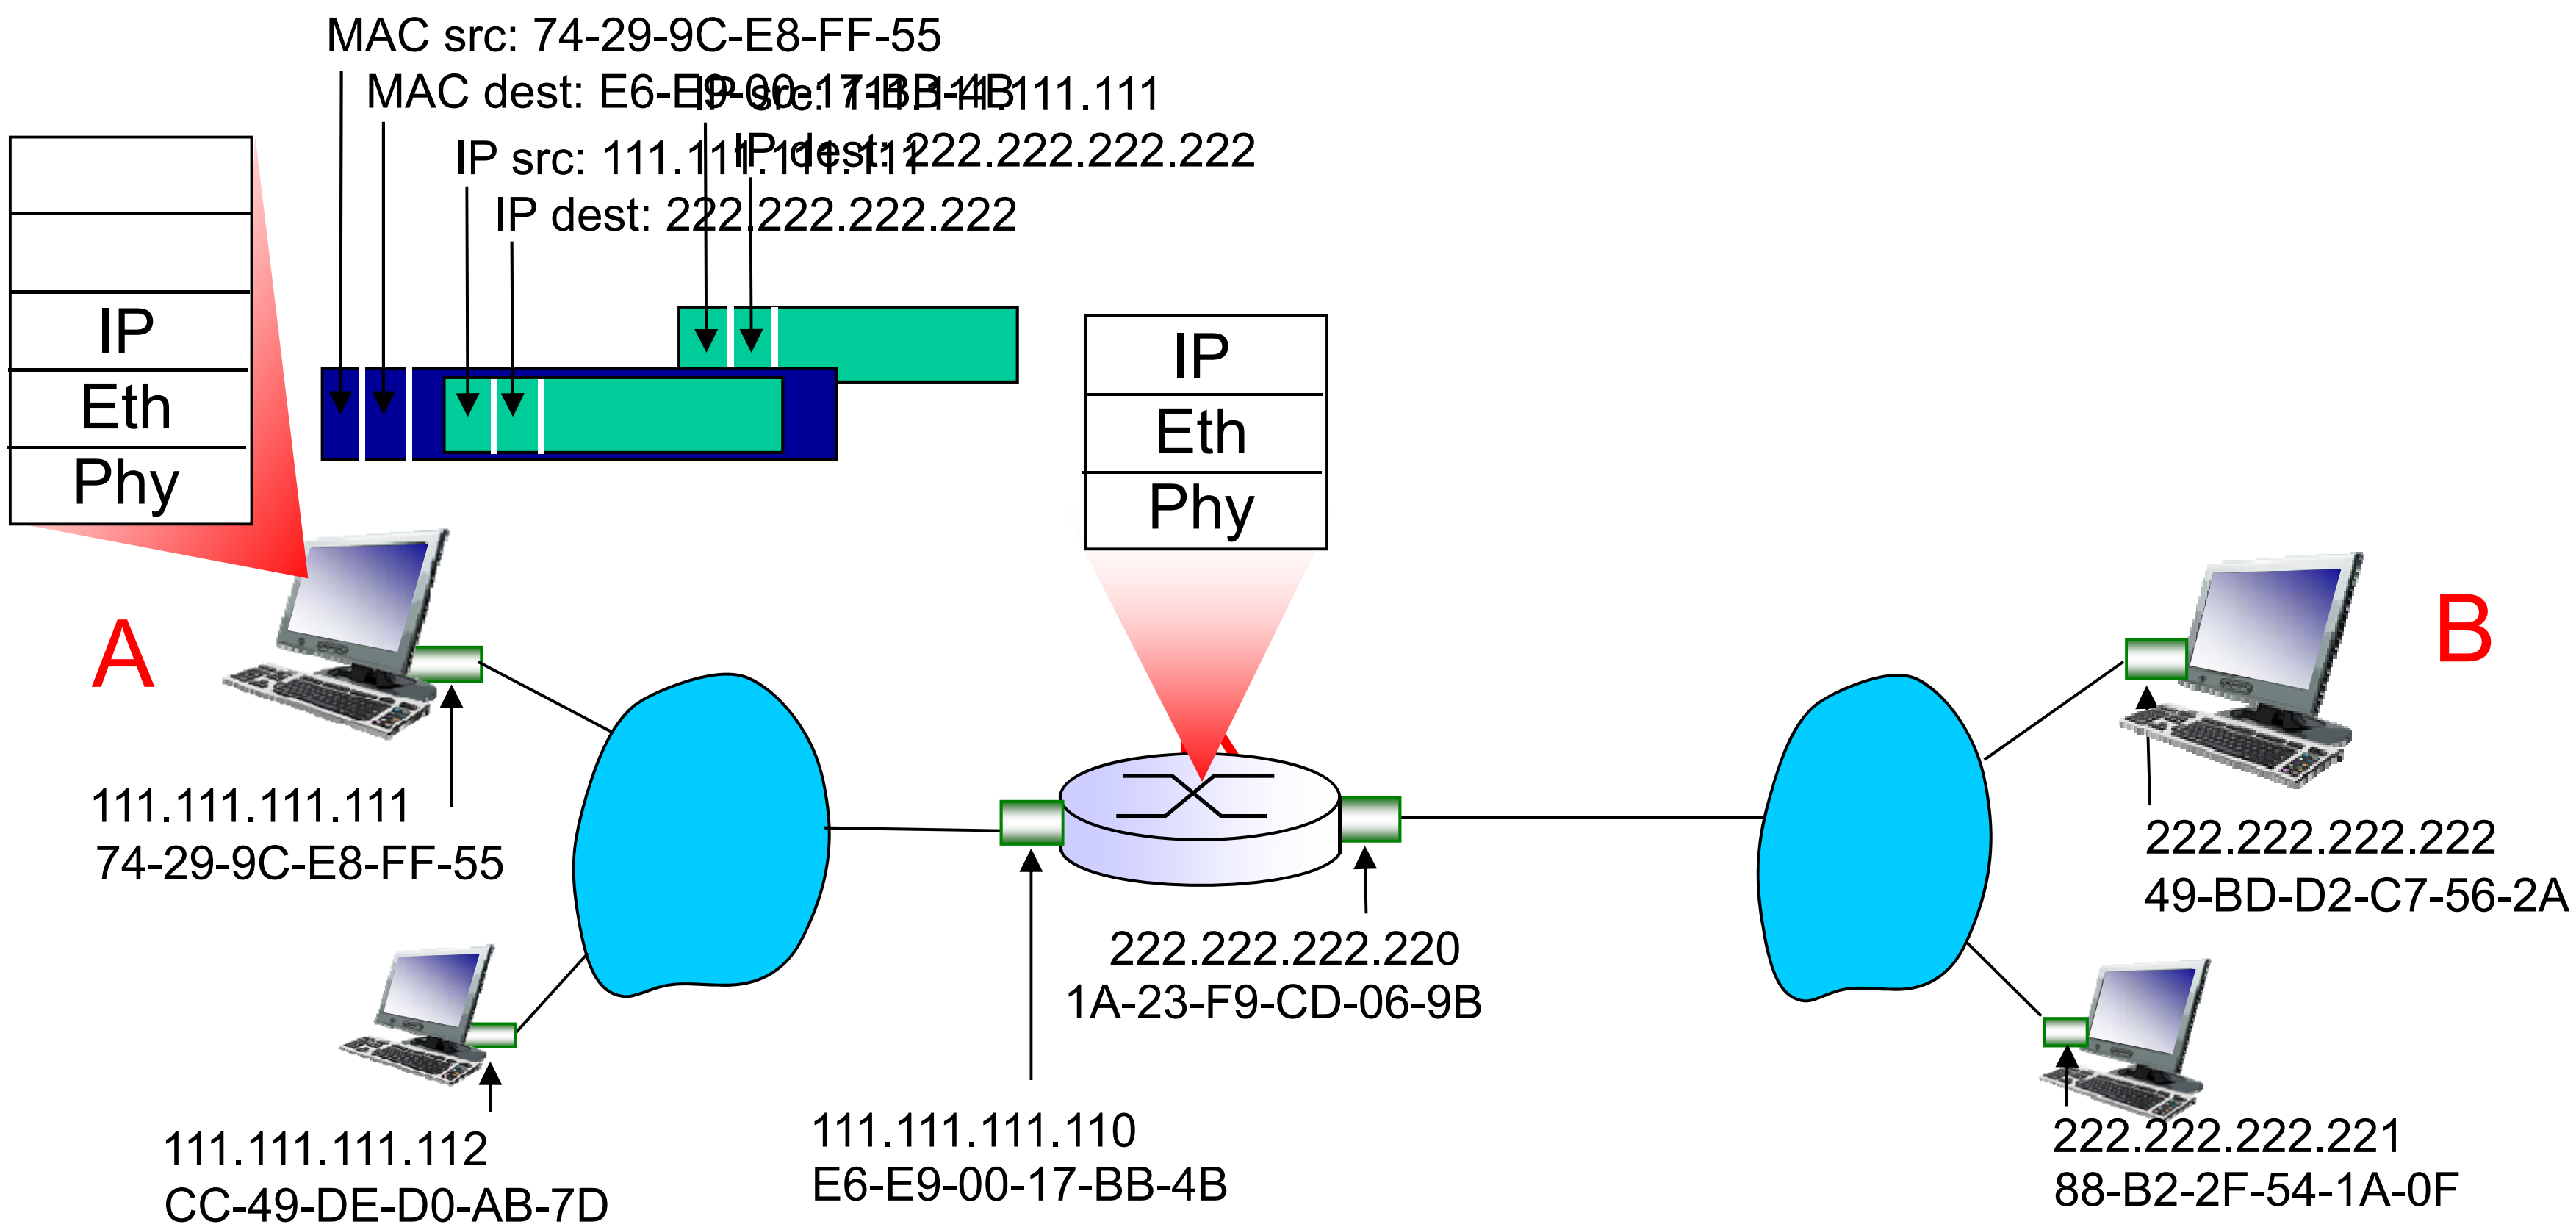

# Addressing: routing to another LAN

- R forwards datagram with IP source A, destination B
- R creates link-layer frame with B's MAC address as dest, frame contains A-to-B IP datagram

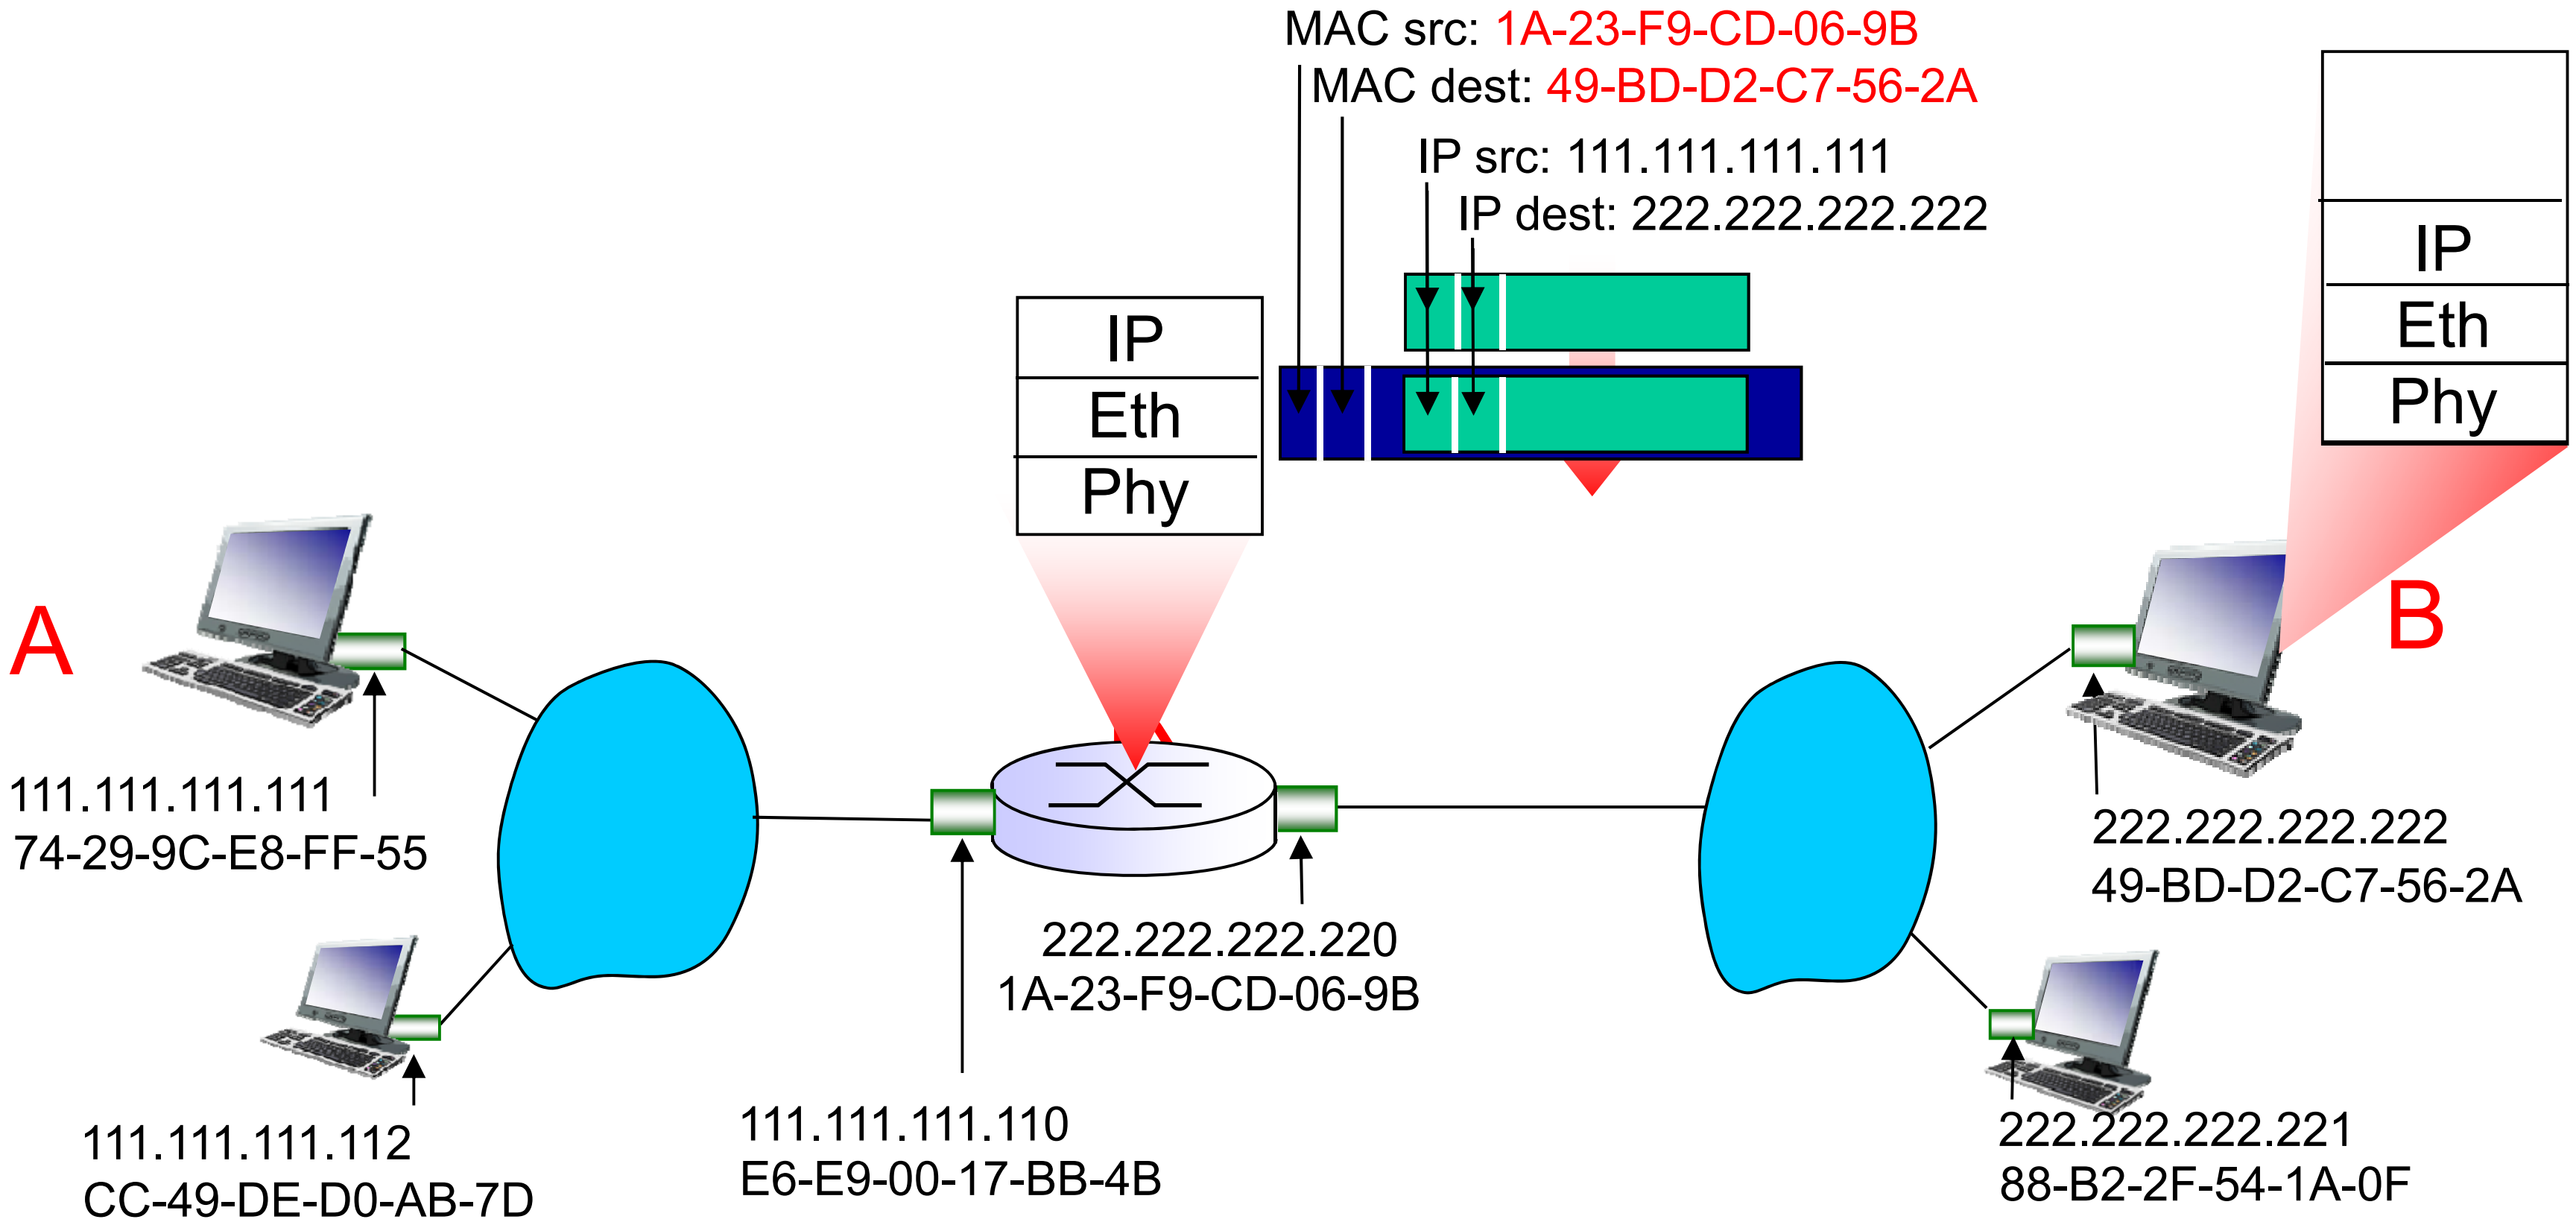

# Addressing: routing to another LAN

- R forwards datagram with IP source A, destination B
- R creates link-layer frame with B's MAC address as dest, frame contains A-to-B IP datagram

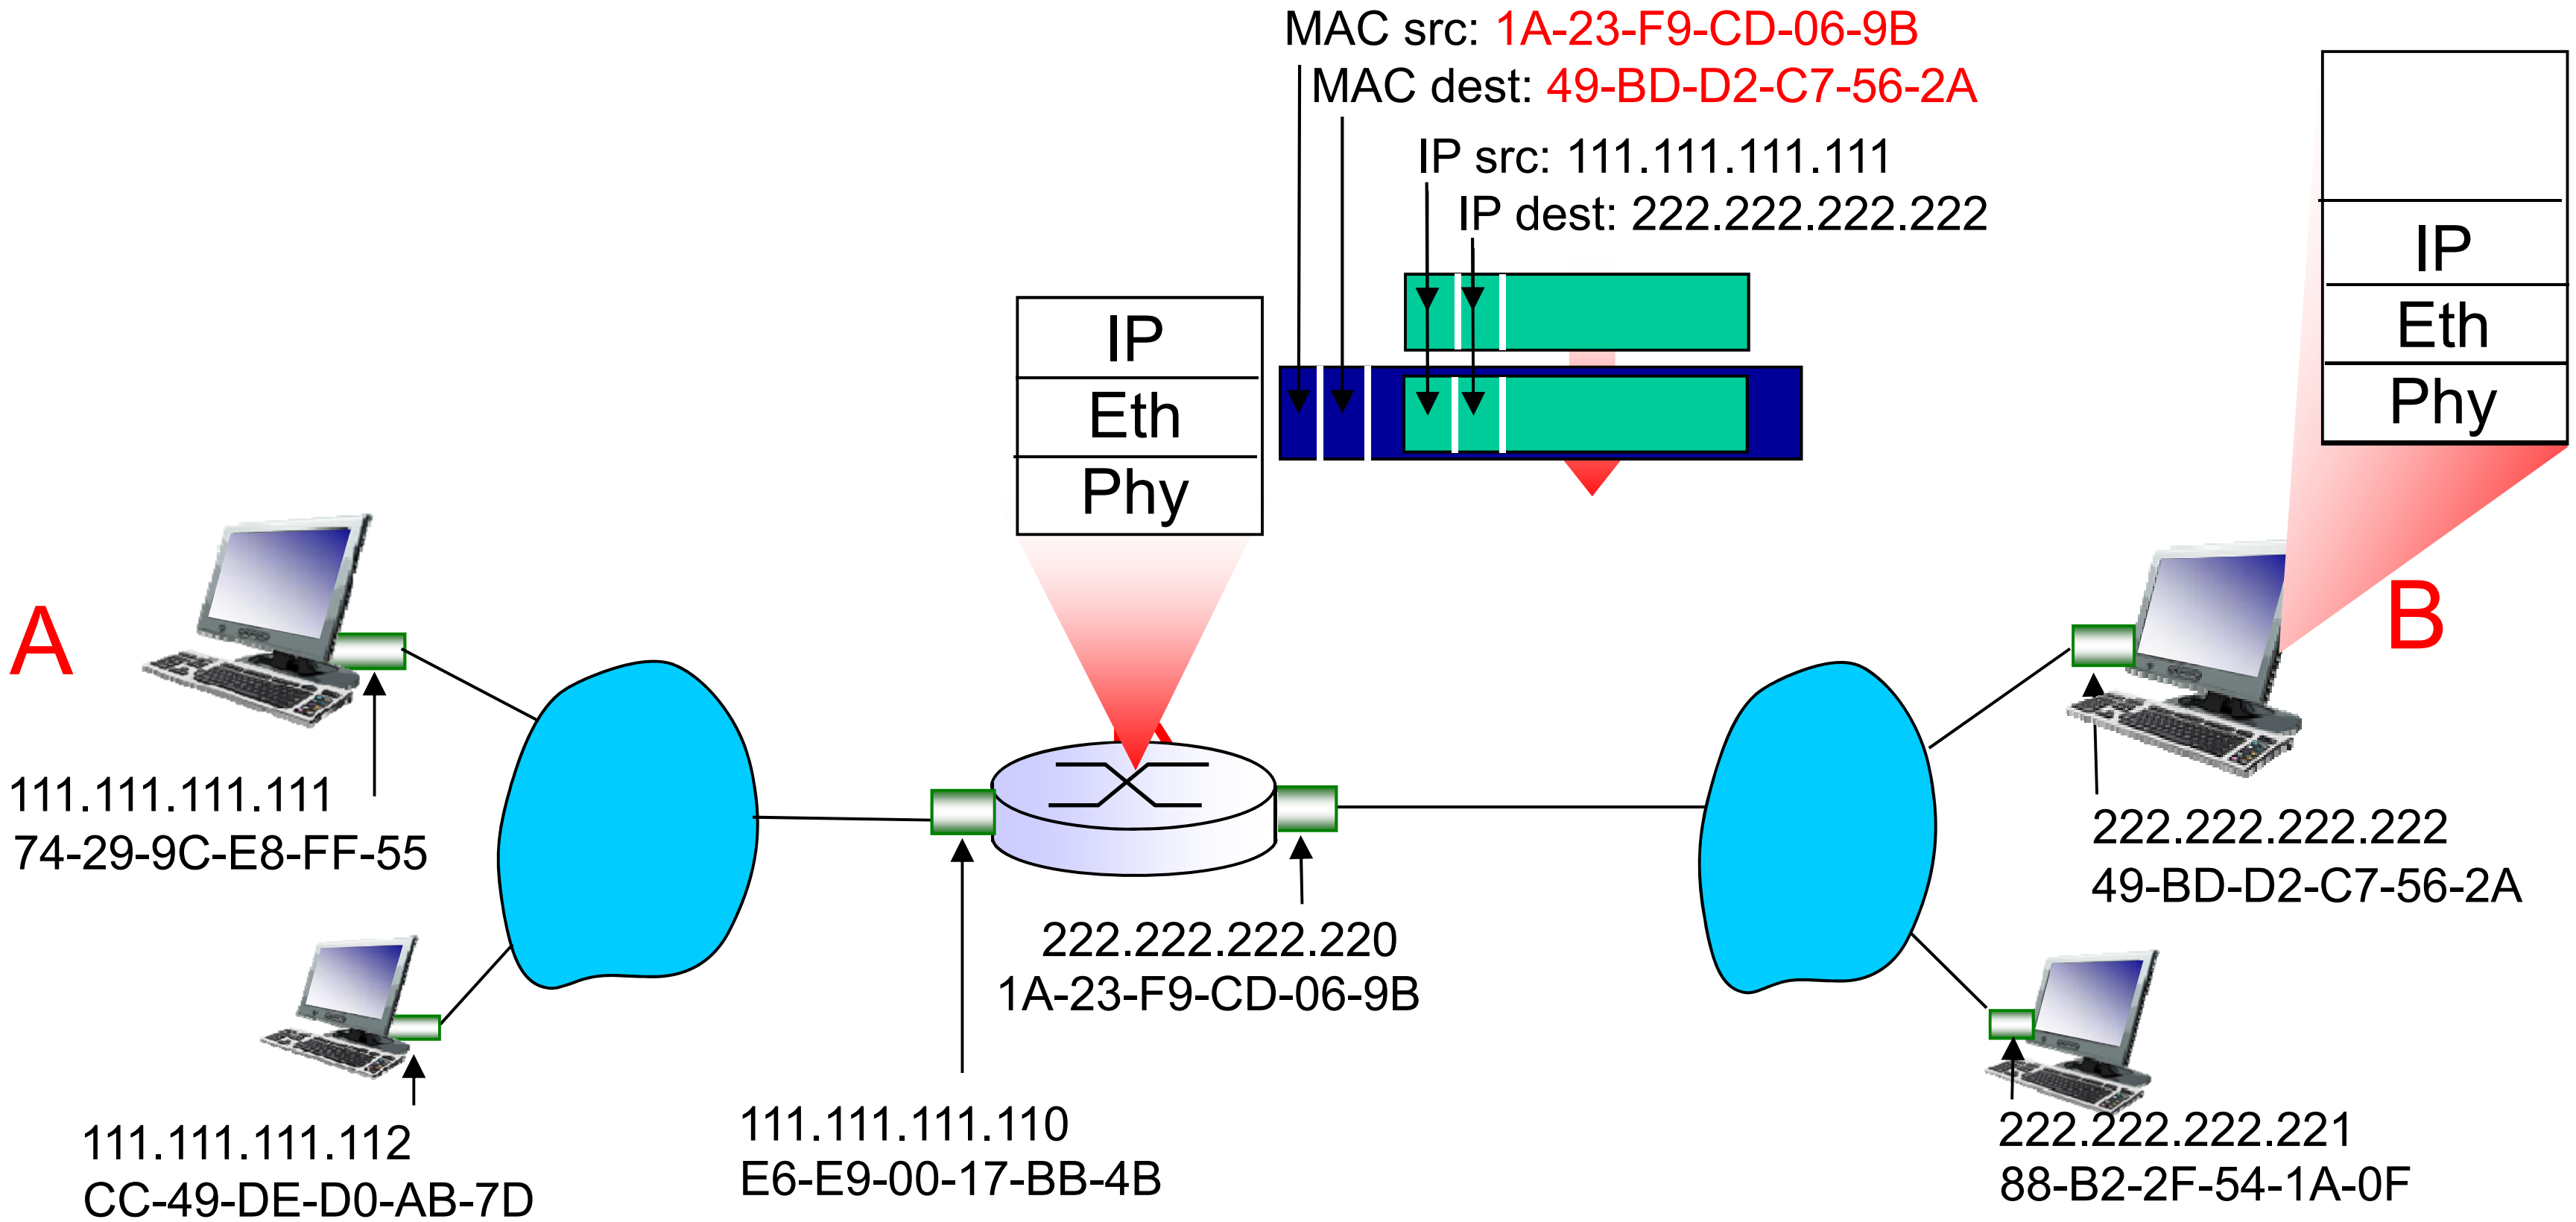

# Addressing: routing to another LAN

- R forwards datagram with IP source A, destination B
- R creates link-layer frame with B's MAC address as dest, frame contains A-to-B IP datagram

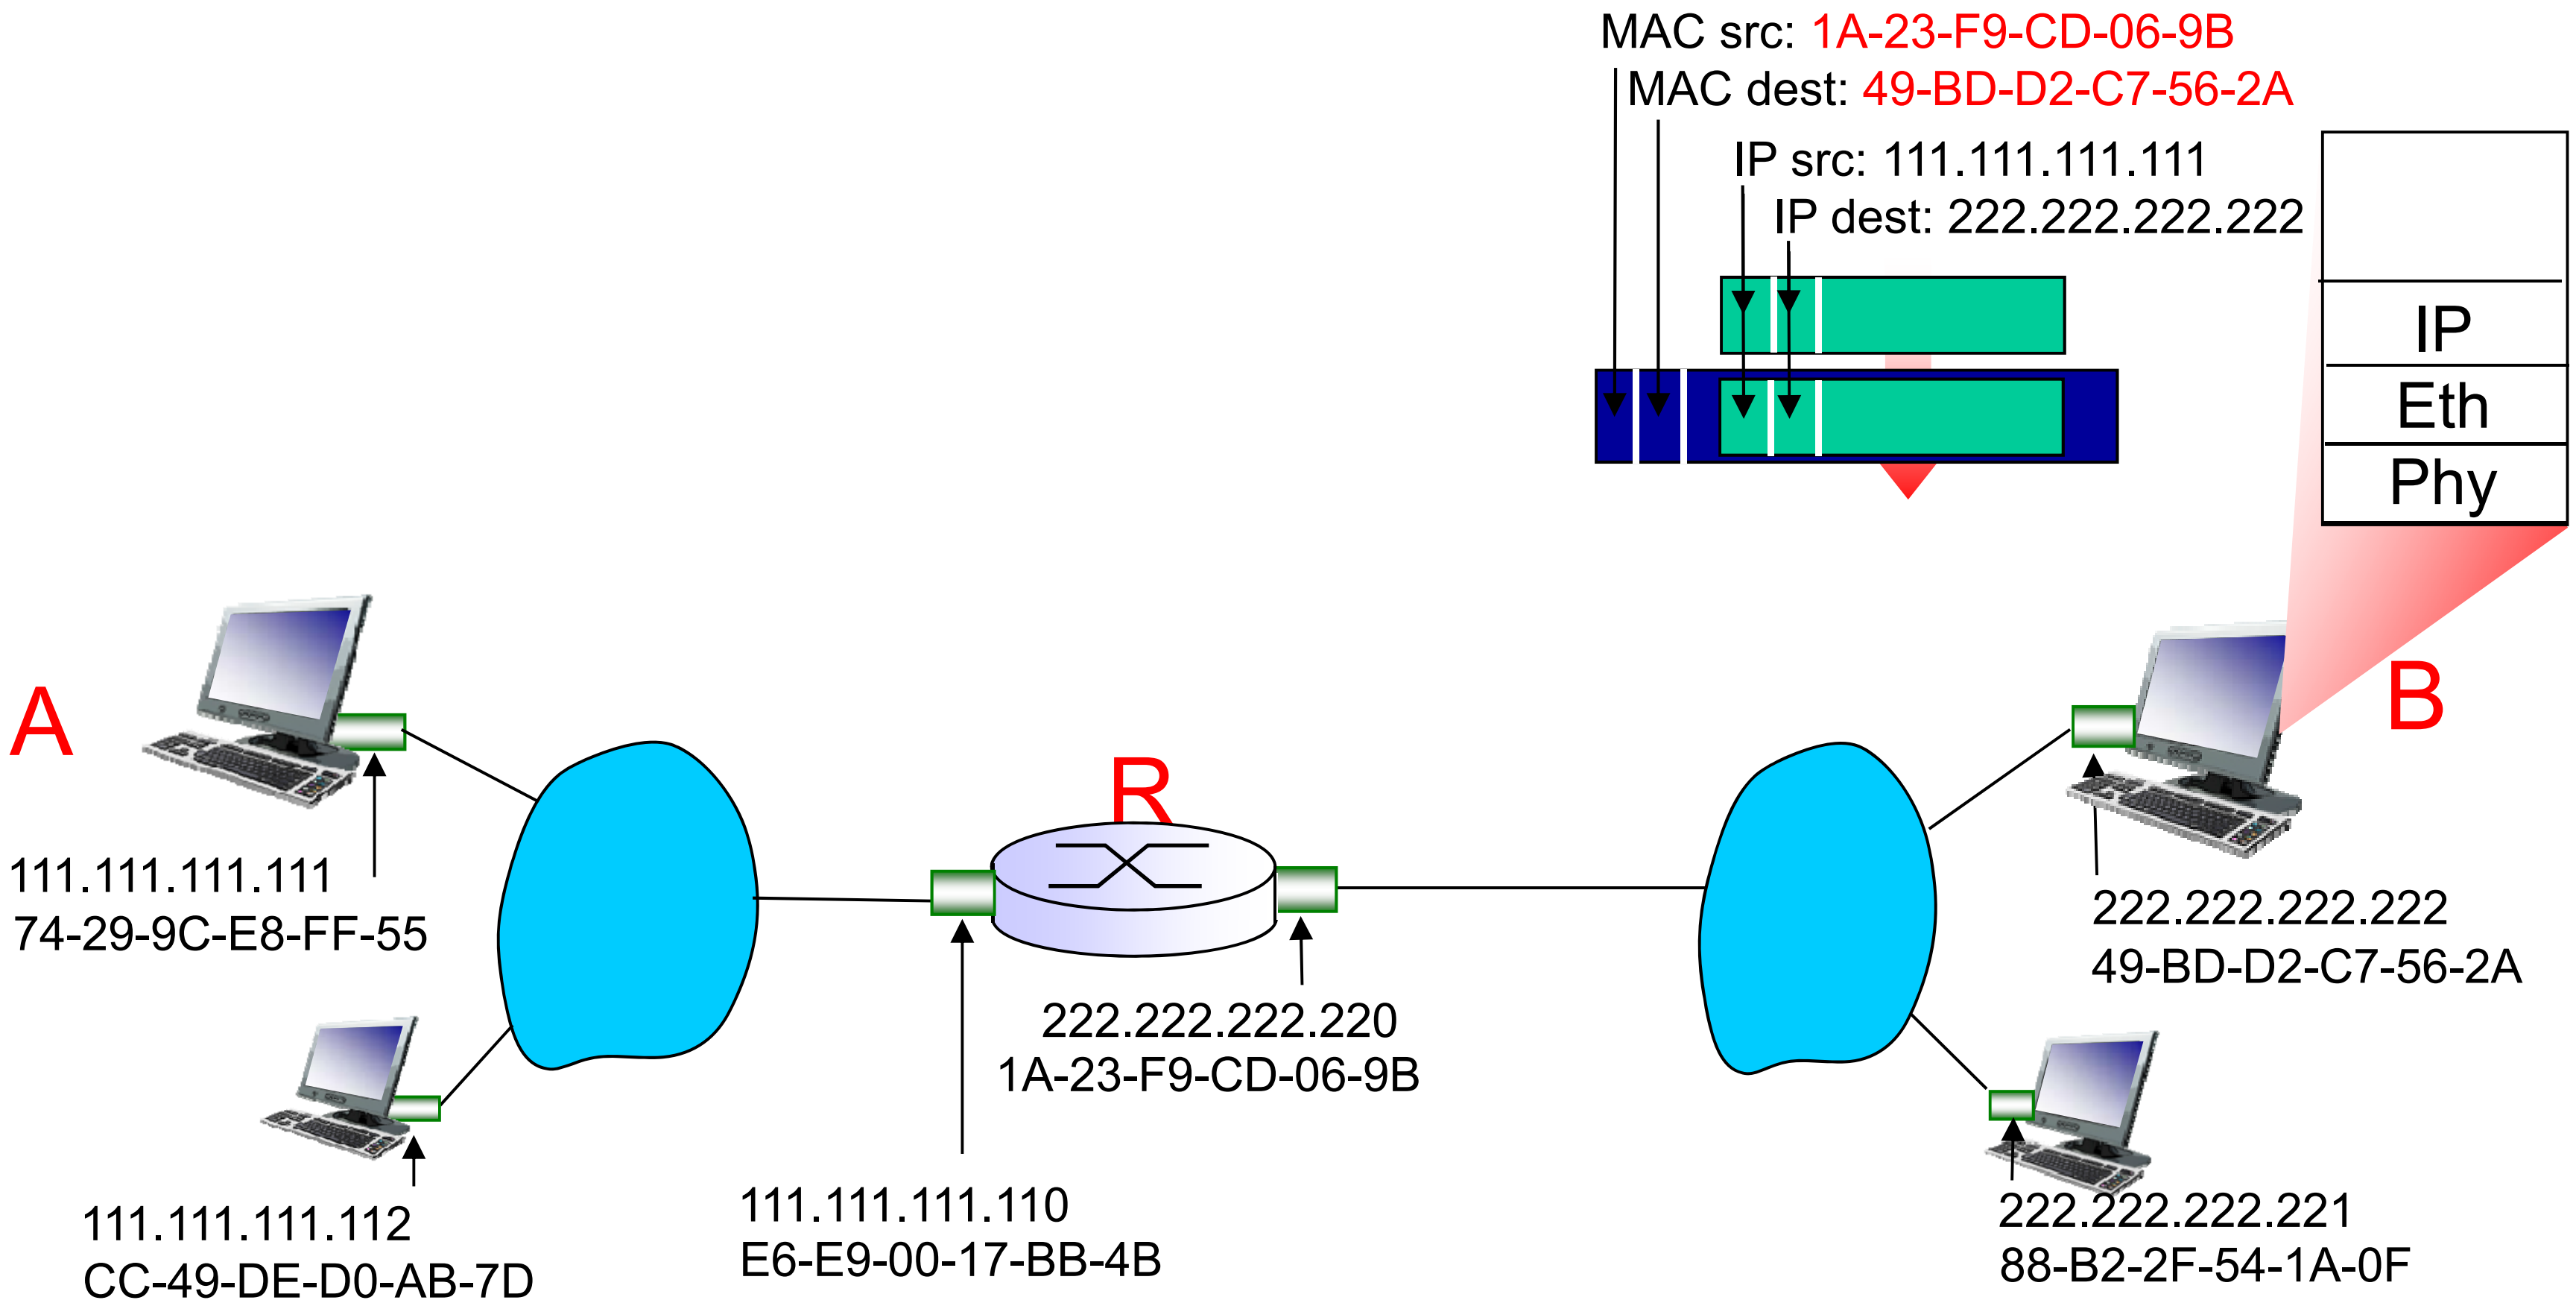

# Link layer, LANs: outline

5.1 introduction, services

5.2 error detection, correction

5.3 multiple access protocols

5.4 LANs
- addressing, ARP
- Ethernet
- switches
- VLANS

5.5 link virtualization: MPLS

5.6 data center networking

5.7 a day in the life of a web request

# Ethernet

"dominant" wired LAN technology:

- cheap $20 for NIC
- first widely used LAN technology
- simpler, cheaper than token LANs and ATM
- kept up with speed race: 10 Mbps – 10 Gbps

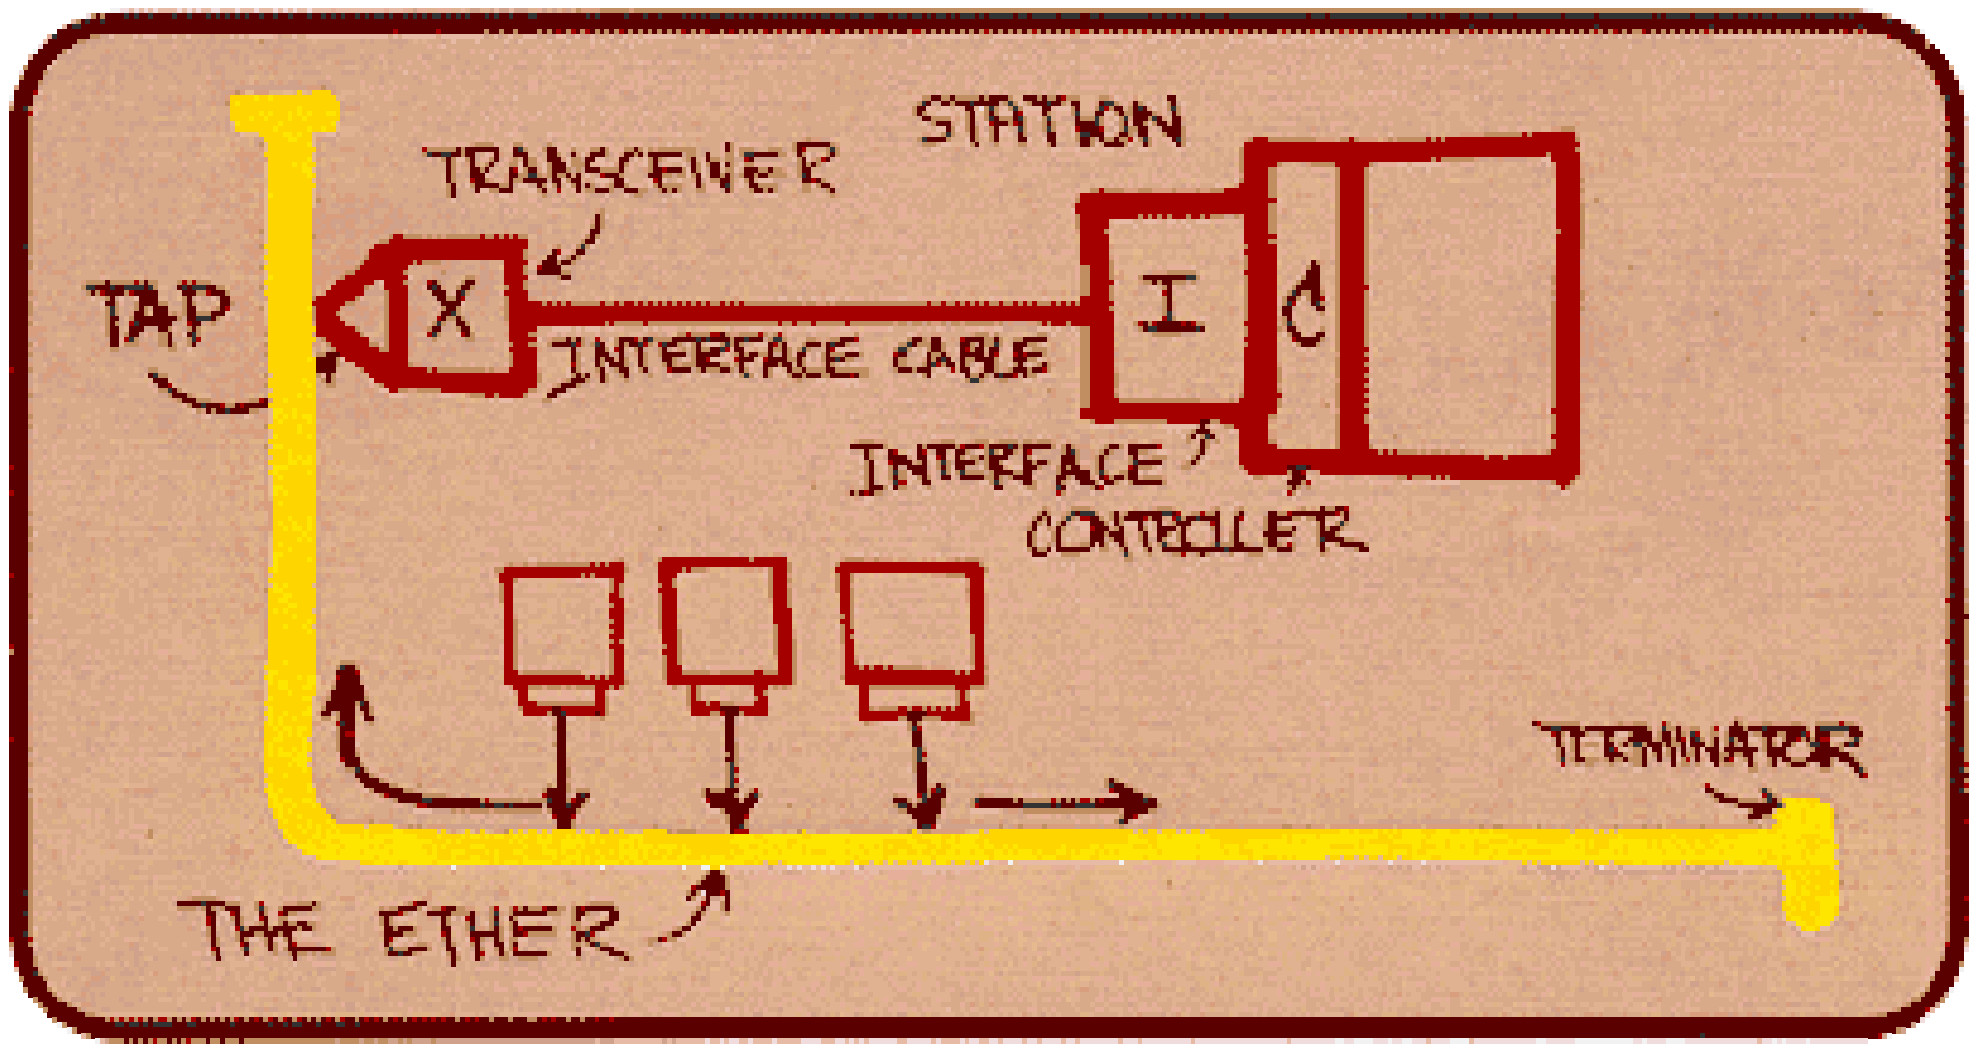


*Metcalfe's Ethernet sketch*

# Ethernet: physical topology

- *bus:* popular through mid 90s
  - all nodes in same collision domain (can collide with each other)
- *star:* prevails today
  - active *switch* in center
  - each "spoke" runs a (separate) Ethernet protocol (nodes do not collide with each other)

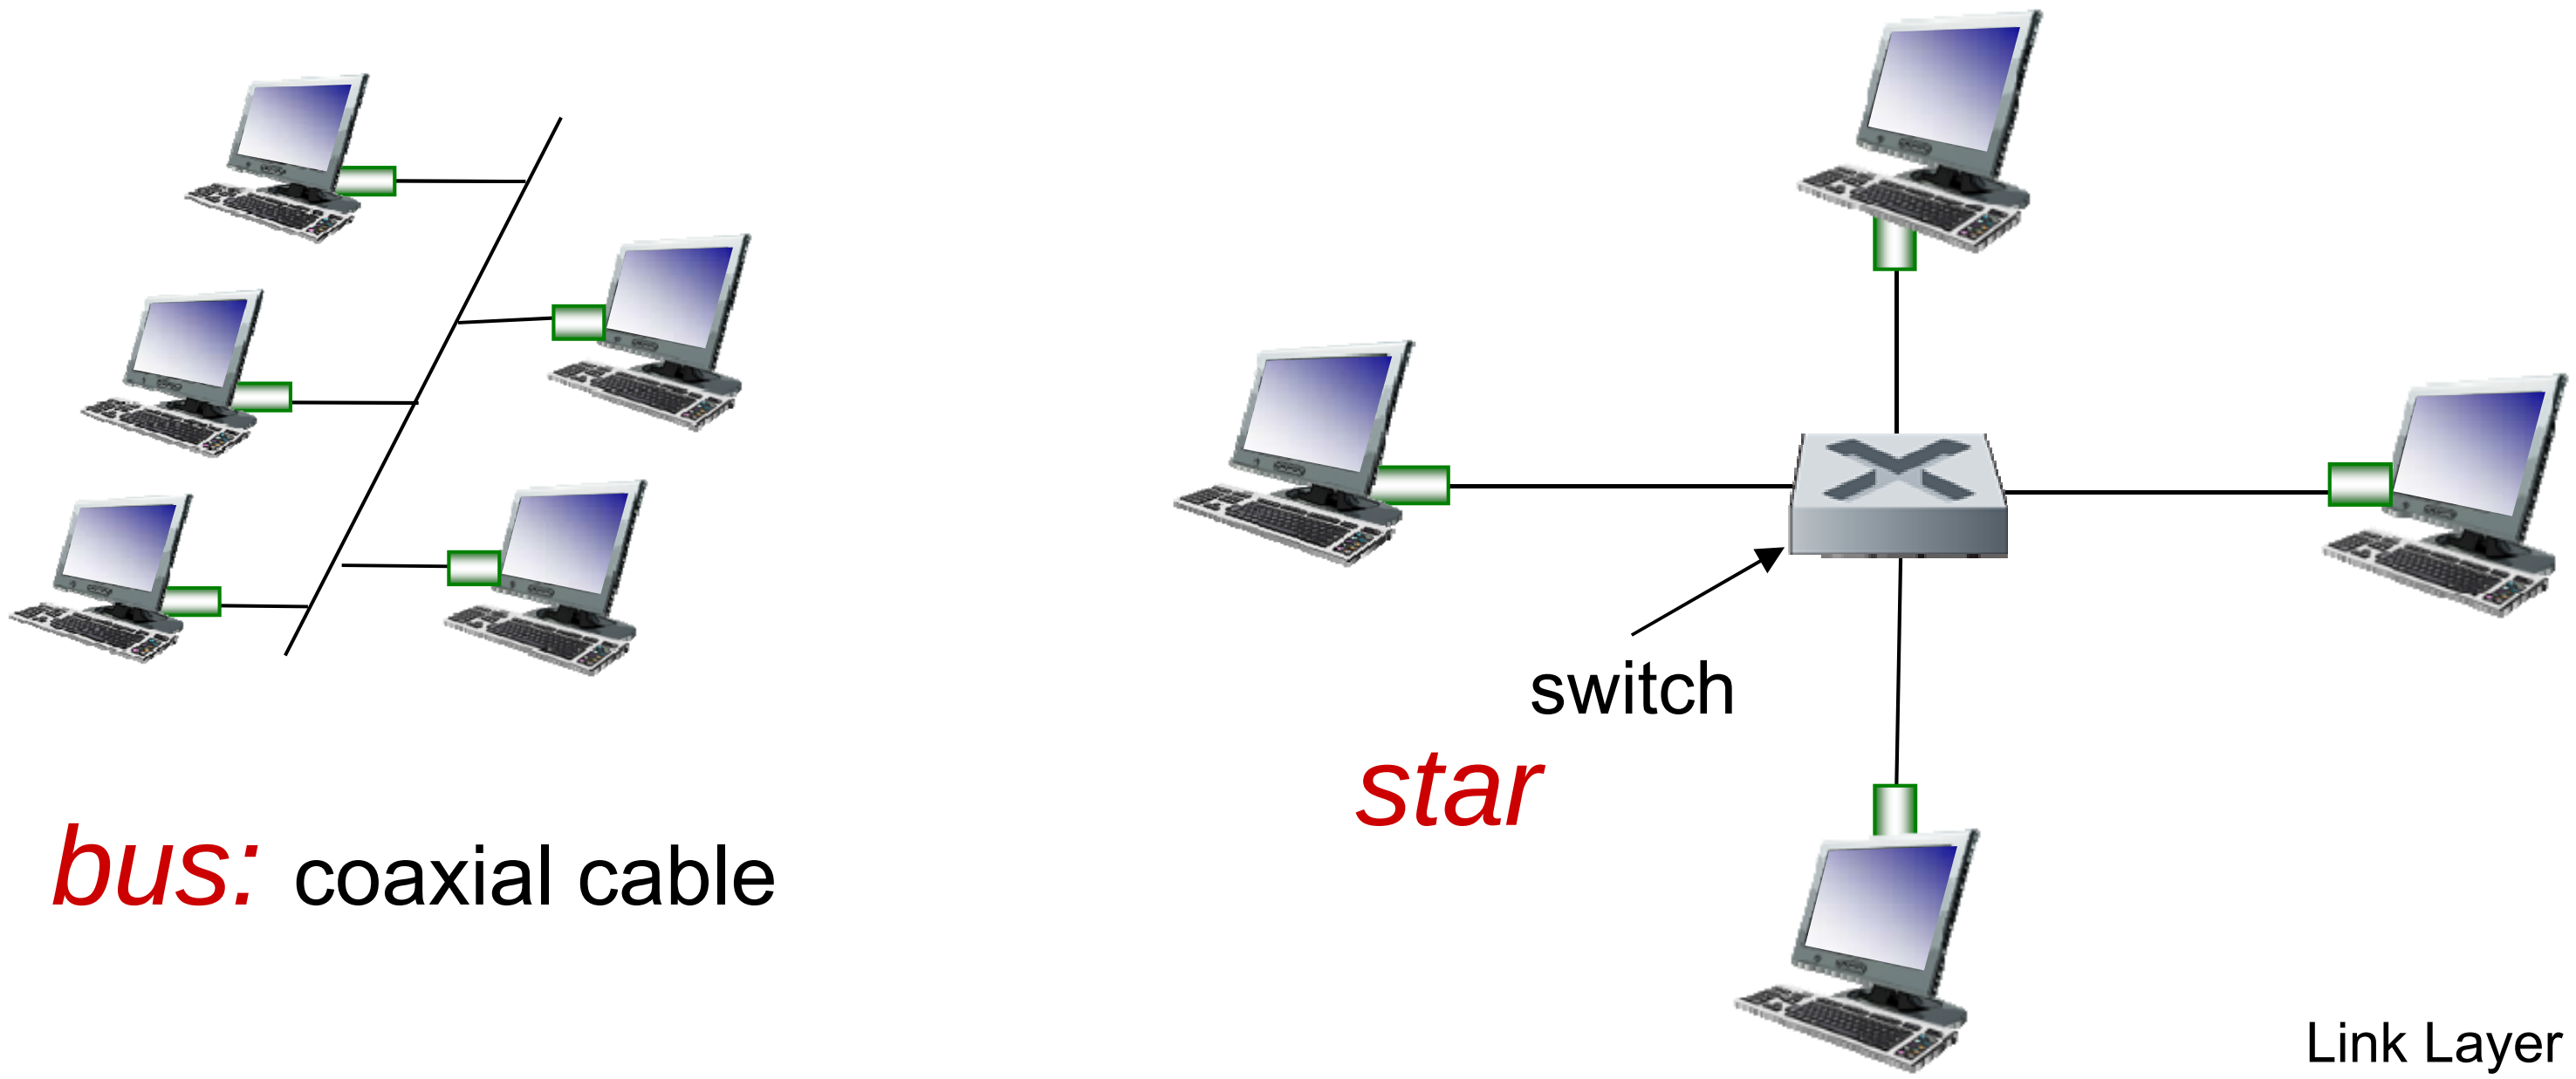


*bus:* coaxial cable

# Ethernet frame structure

sending adapter encapsulates IP datagram (or other network layer protocol packet) in **Ethernet frame**

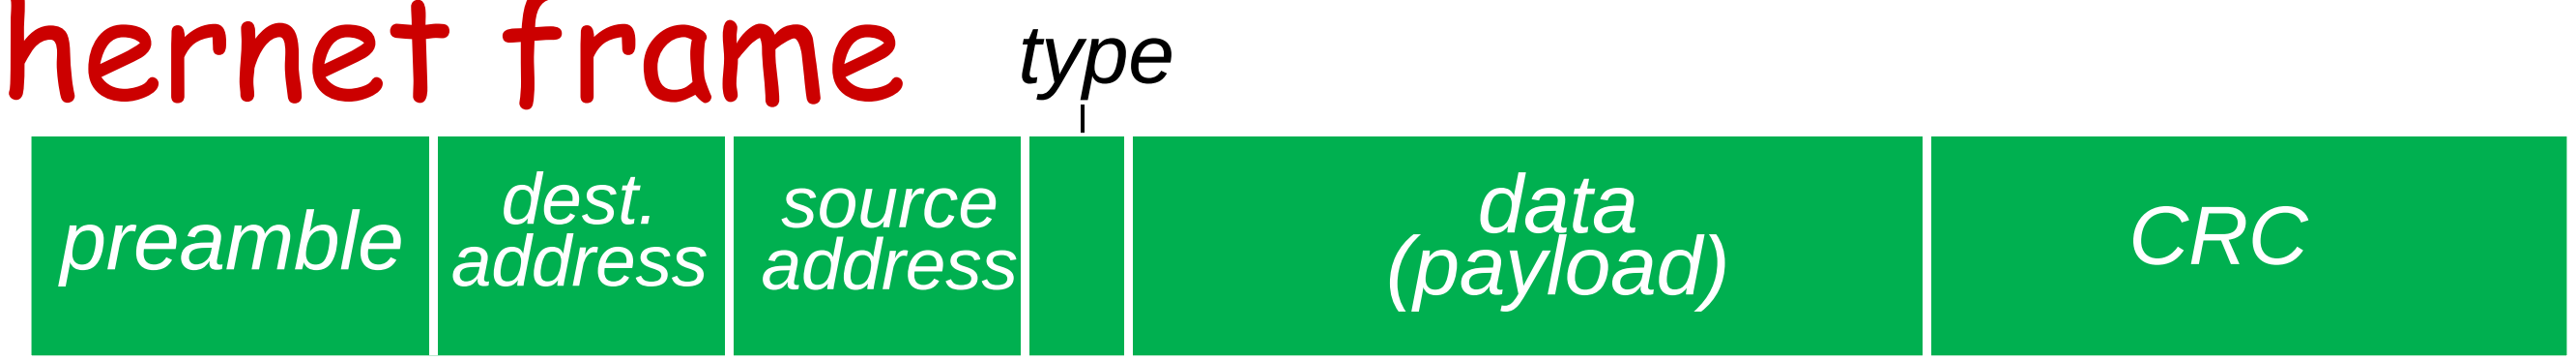


*preamble:*

- 7 bytes with pattern 10101010 followed by one byte with pattern 10101011
- used to synchronize receiver, sender clock rates

# Ethernet frame structure (more)

- *addresses:* 6 byte source, destination MAC addresses
  - if adapter receives frame with matching destination address, or with broadcast address (e.g. ARP packet), it passes data in frame to network layer protocol
  - otherwise, adapter discards frame
- *type:* indicates higher layer protocol (mostly IP but others possible, e.g., Novell IPX, AppleTalk)
- *CRC:* cyclic redundancy check at receiver
  - error detected: frame is dropped

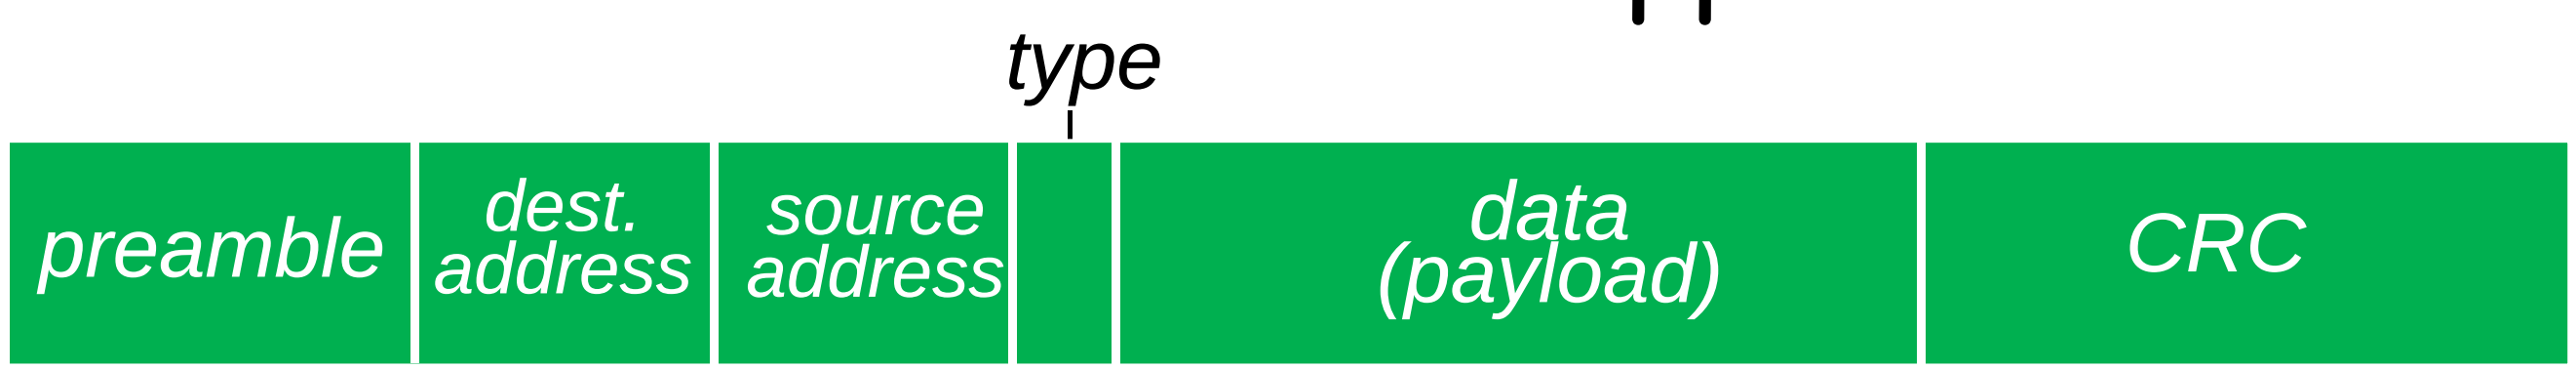

# Ethernet: unreliable, connectionless

- *connectionless:* no handshaking between sending and receiving NICs
- *unreliable:* receiving NIC doesnt send acks or nacks to sending NIC
  - data in dropped frames recovered only if initial sender uses higher layer rdt (e.g., TCP), otherwise dropped data lost
- Ethernet's MAC protocol: unslotted *CSMA/CD wth binary backoff*

# 802.3 Ethernet standards: link & physical layers

- *many* different Ethernet standards
  - common MAC protocol and frame format
  - different speeds: 2 Mbps, 10 Mbps, 100 Mbps, 1Gbps, 10G bps
  - different physical layer media: fiber, cable

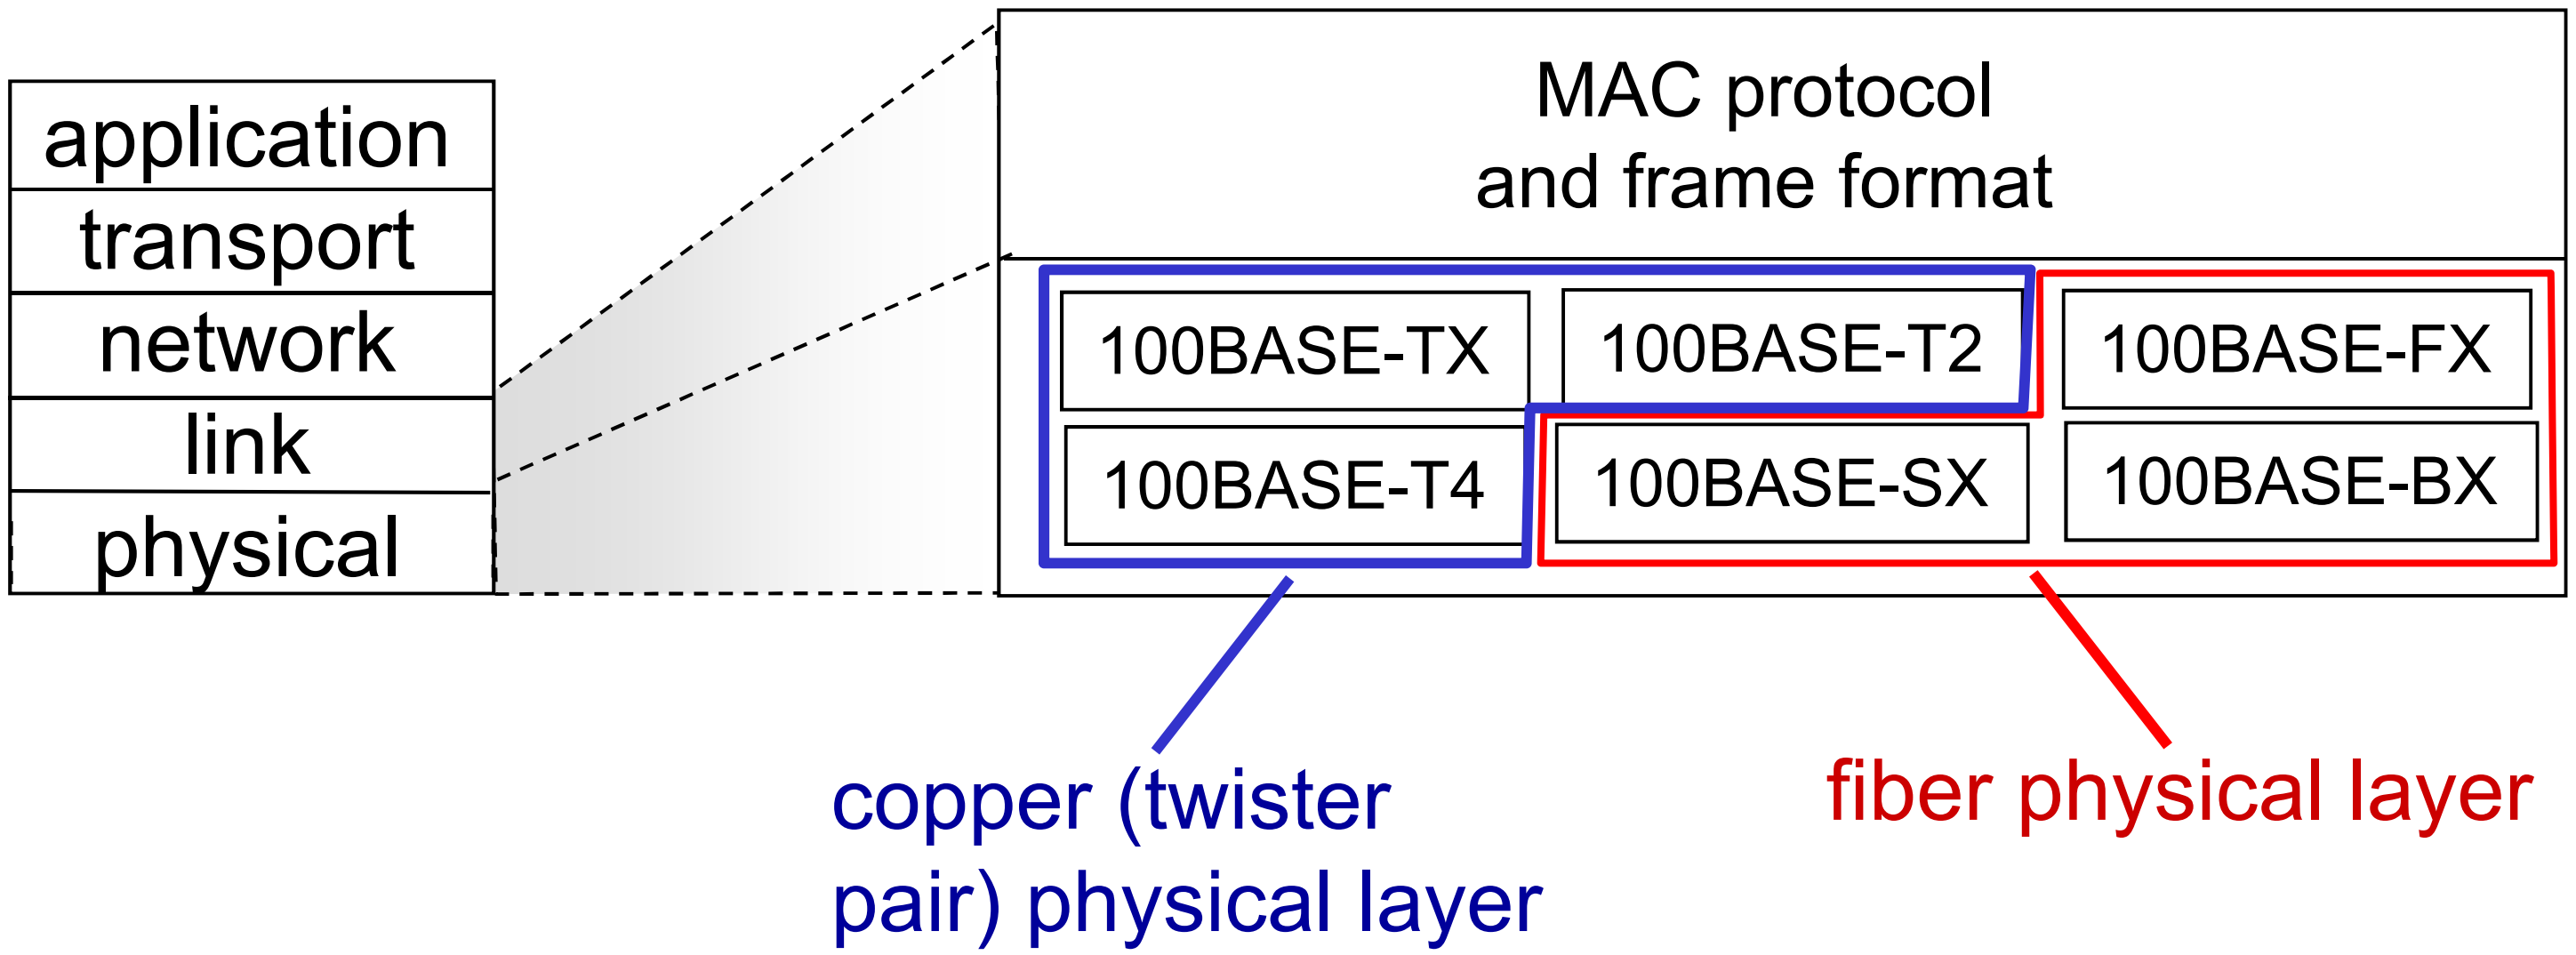

# Link layer, LANs: outline

5.1 introduction, services

5.2 error detection, correction

5.3 multiple access protocols

5.4 LANs
- addressing, ARP
- Ethernet
- switches
- VLANS

5.5 link virtualization: MPLS

5.6 data center networking

5.7 a day in the life of a web request

# Ethernet switch

- link-layer device: takes an *active* role
  - store, forward Ethernet frames
  - examine incoming frame's MAC address, selectively forward frame to one-or-more outgoing links when frame is to be forwarded on segment, uses CSMA/CD to access segment
- *transparent*
  - hosts are unaware of presence of switches
- *plug-and-play, self-learning*
  - switches do not need to be configured

# Switch: *multiple* simultaneous transmissions

- hosts have dedicated, direct connection to switch
- switches buffer packets
- Ethernet protocol used on *each* incoming link, but no collisions; full duplex
  - each link is its own collision domain
- *switching:* A-to-A' and B-to-B' can transmit simultaneously, without collisions

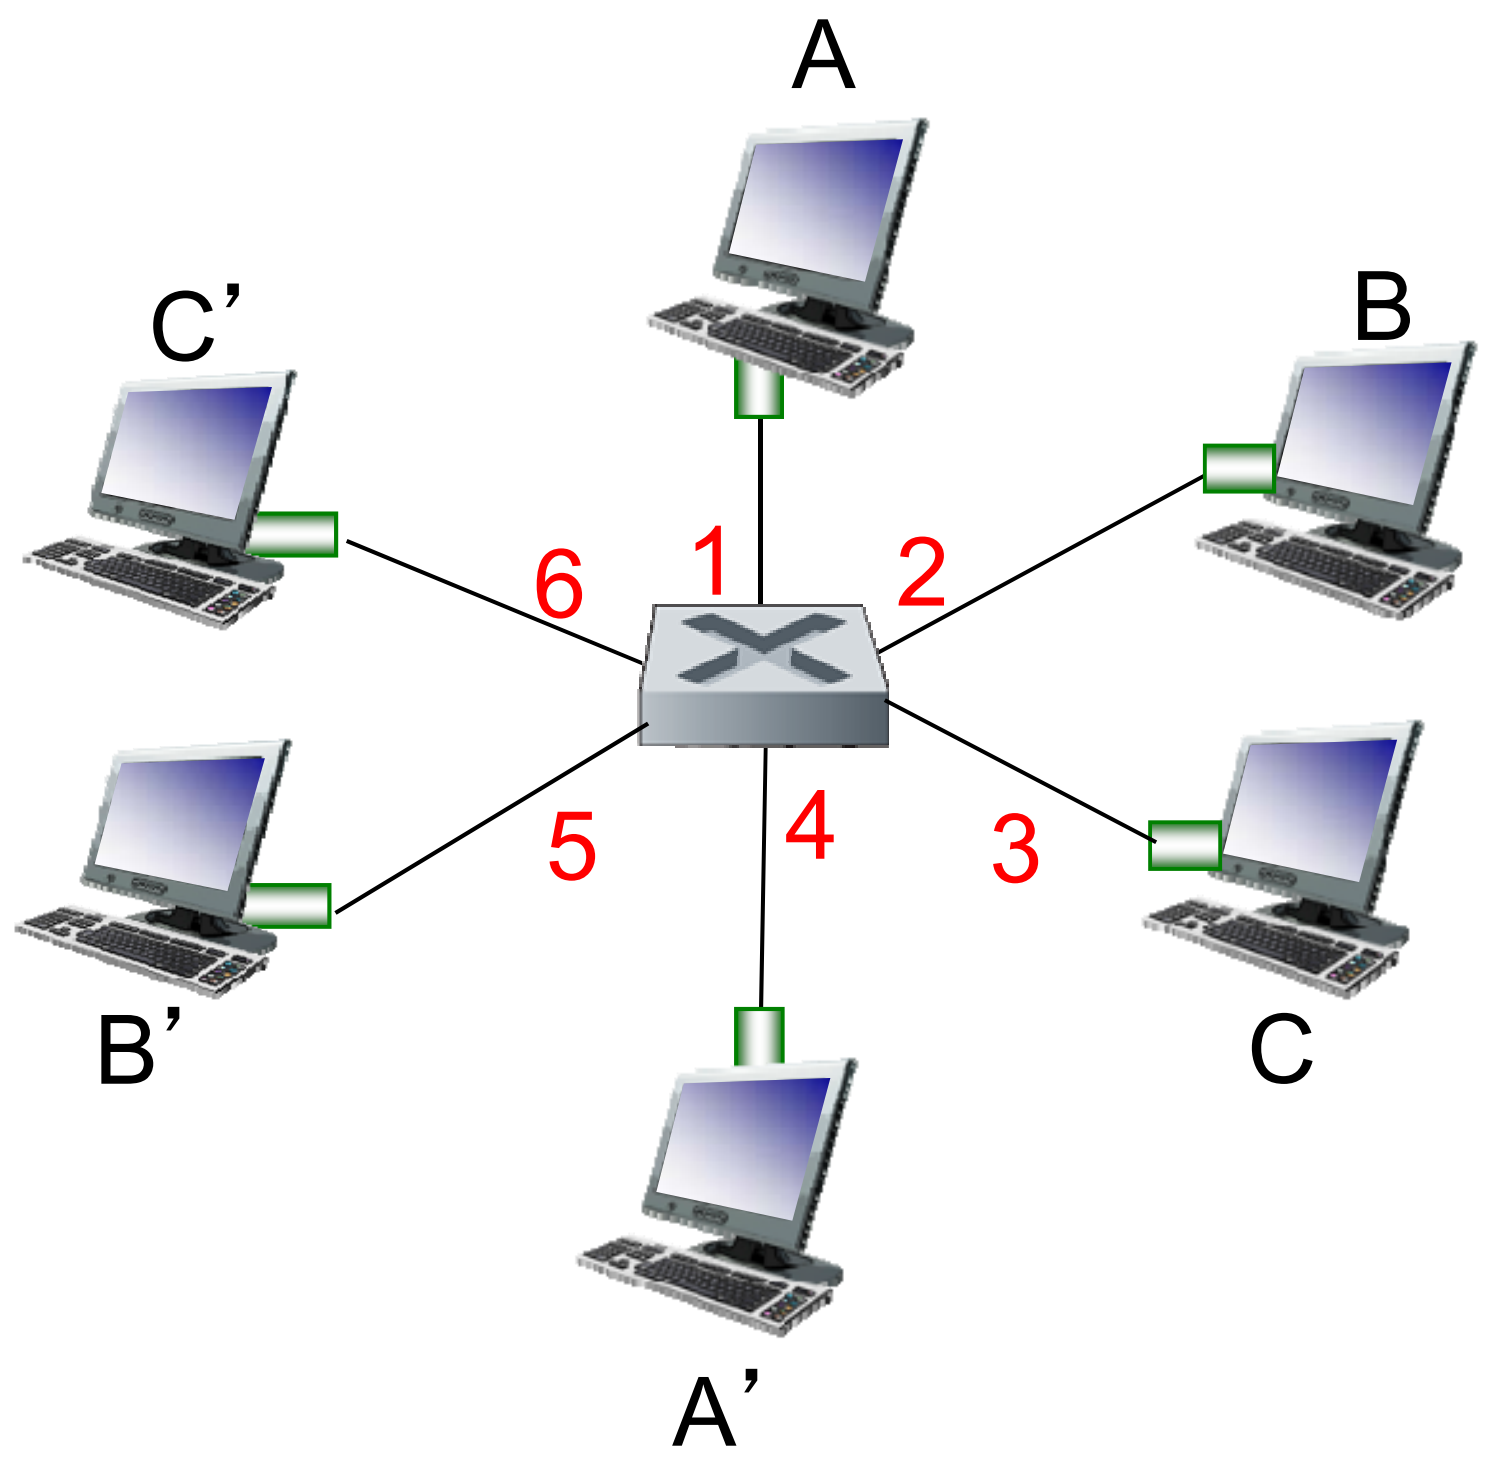


*switch with six interfaces (1,2,3,4,5,6)*

# Switch forwarding table

Q: how does switch know A' reachable via interface 4, B' reachable via interface 5?

- A: each switch has a switch table, each entry:
  - (MAC address of host, interface to reach host, time stamp)
  - looks like a routing table!

Q: how are entries created, maintained in switch table?
  - something like a routing protocol?

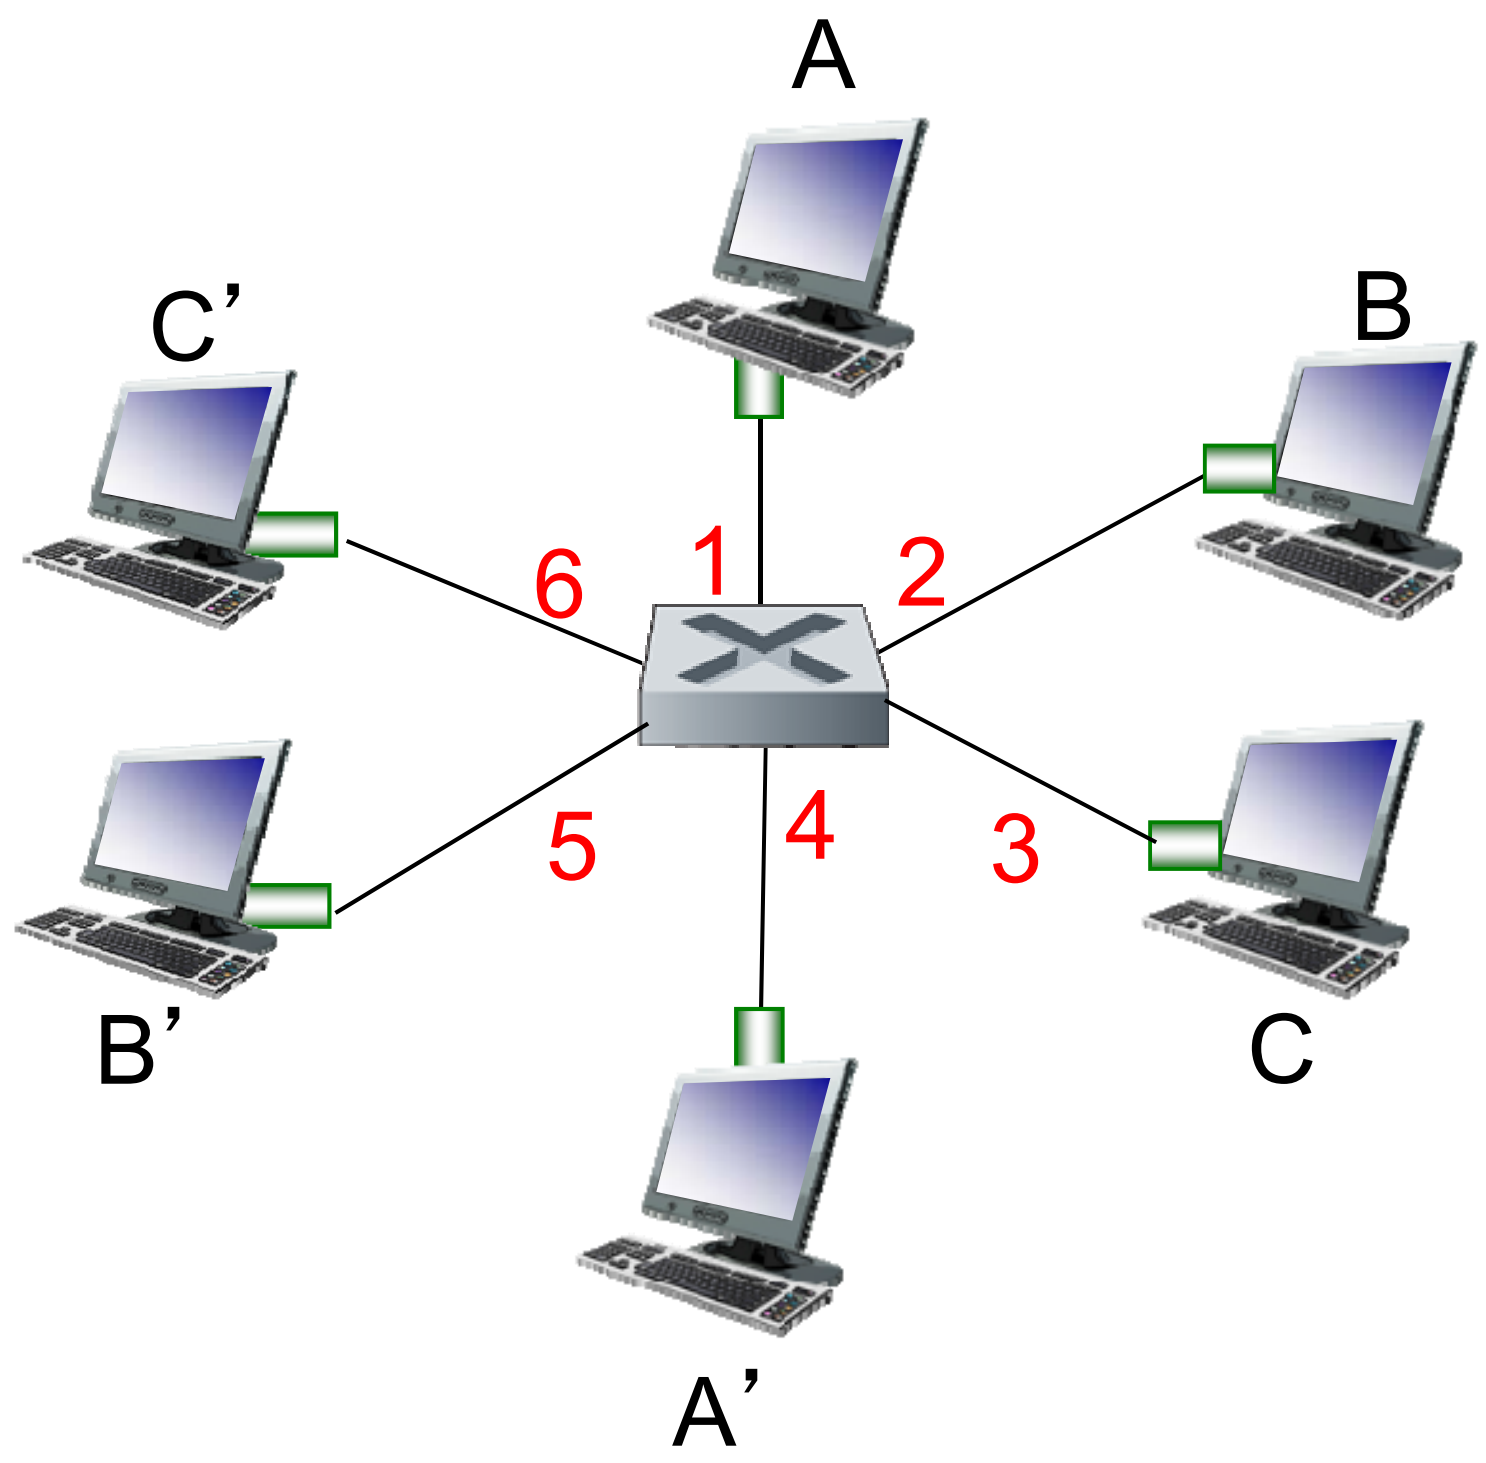


switch with six interfaces (1,2,3,4,5,6)

# Switch: self-learning

- switch *learns* which hosts can be reached through which interfaces
  - when frame received, switch "learns" location of sender: incoming LAN segment
  - records sender/location pair in switch table

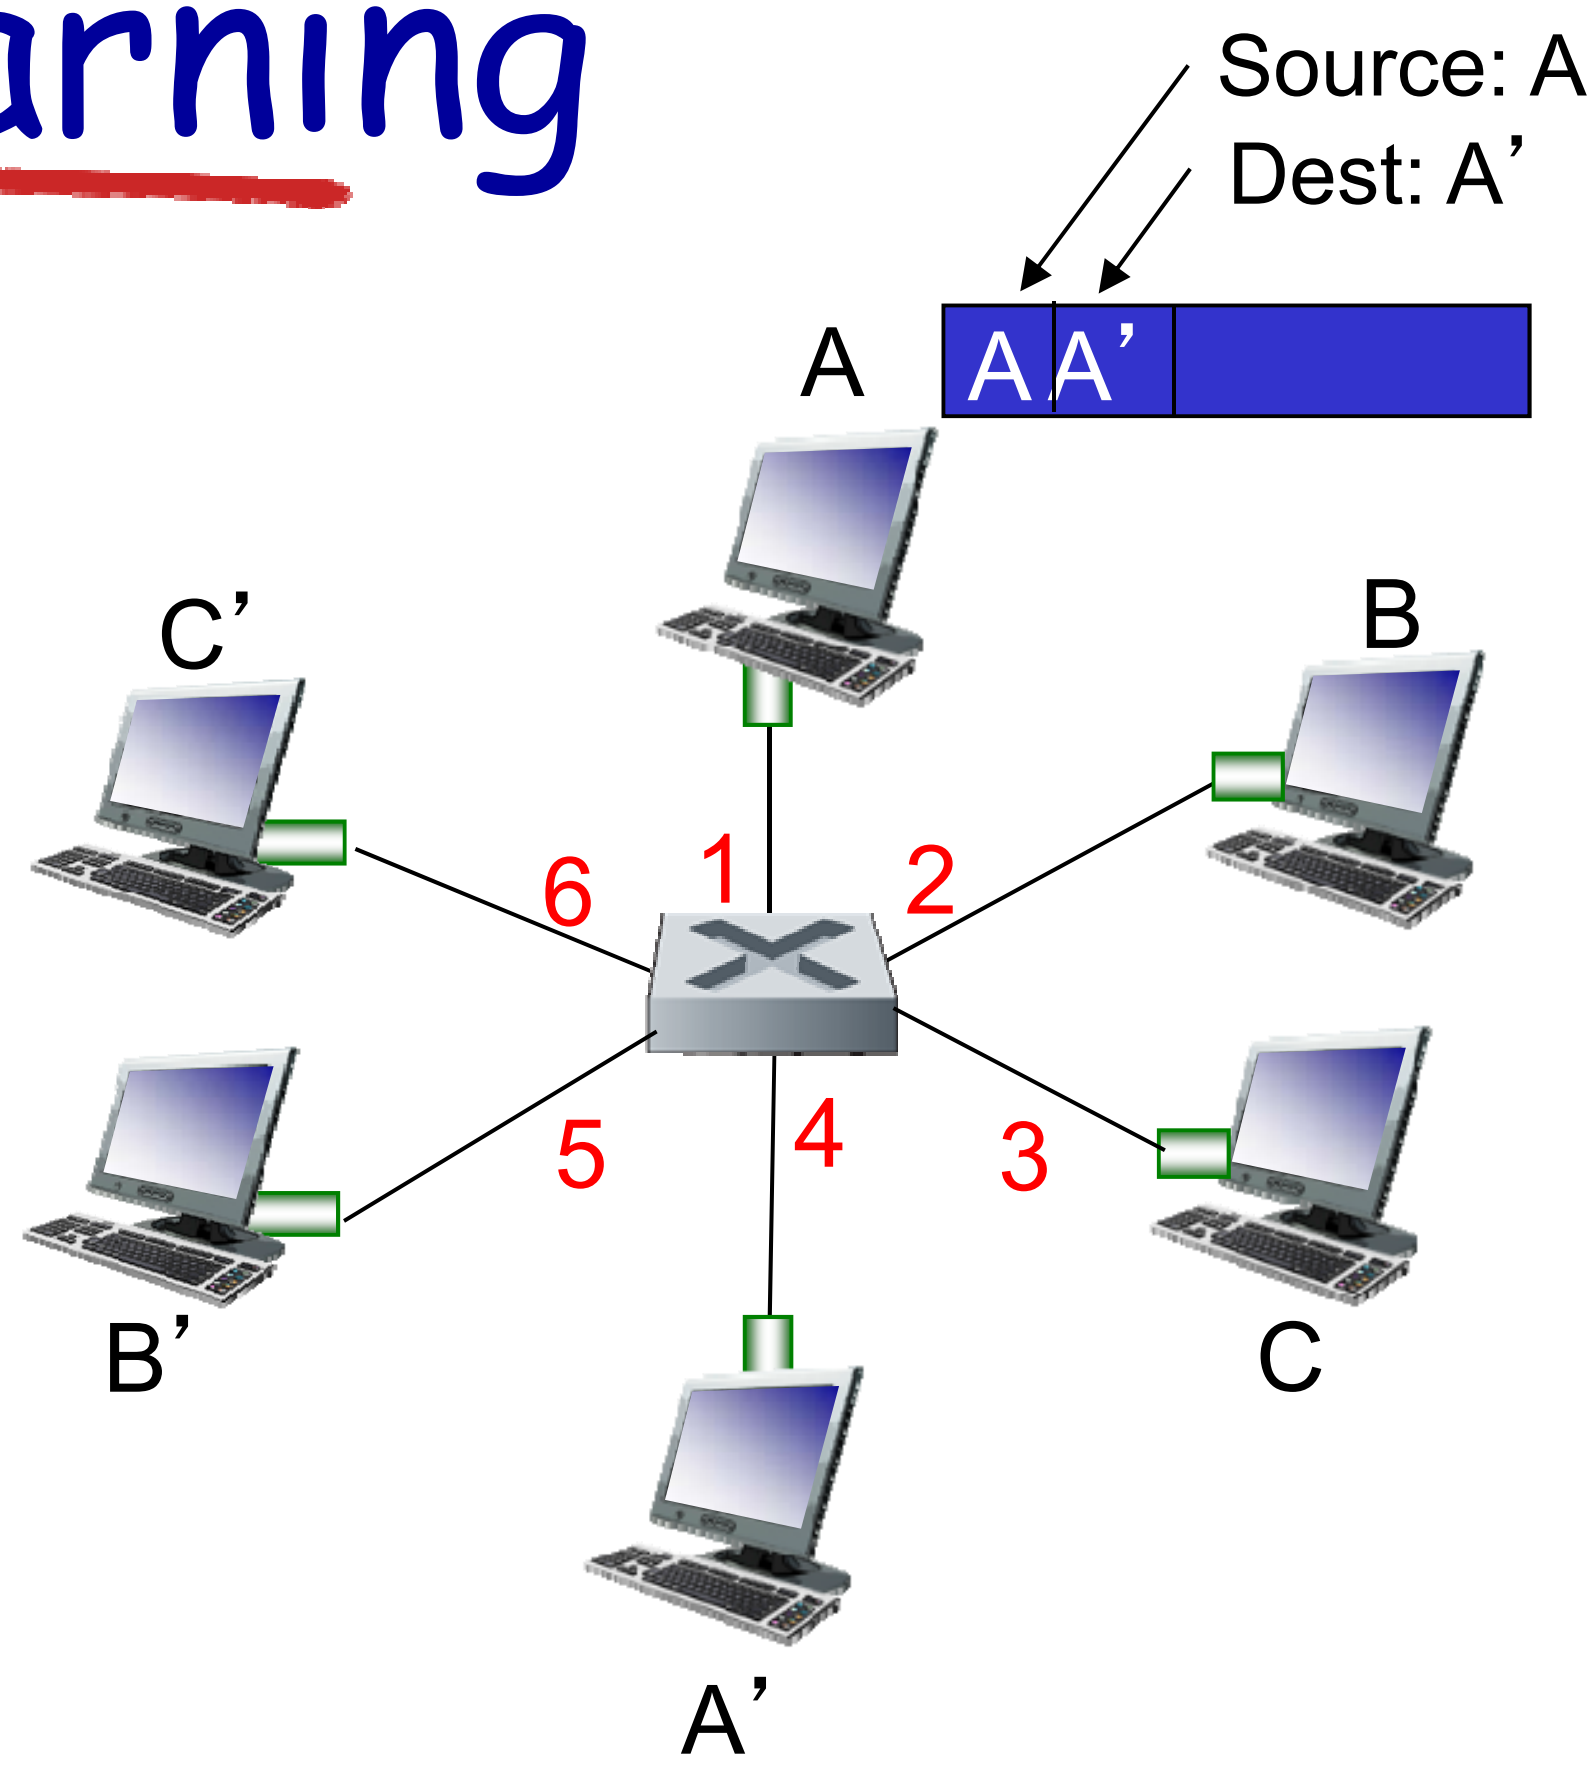


| MAC addr | interface | TTL |
|---|---|---|
| *A* | *1* | *60* |

*Switch table (initially empty)*

# Switch: frame filtering/forwarding

when frame received at switch:

1. record incoming link, MAC address of sending host
2. index switch table using MAC destination address
3. if entry found for destination
   then {
     if destination on segment from which frame arrived
       then drop frame
       else forward frame on interface indicated by entry
   }
   else flood /* forward on all interfaces except arriving interface */

# Self-learning, forwarding: example

- frame destination, A', locaton unknown: *flood*
- destination A location known: *selectively send on just one link*

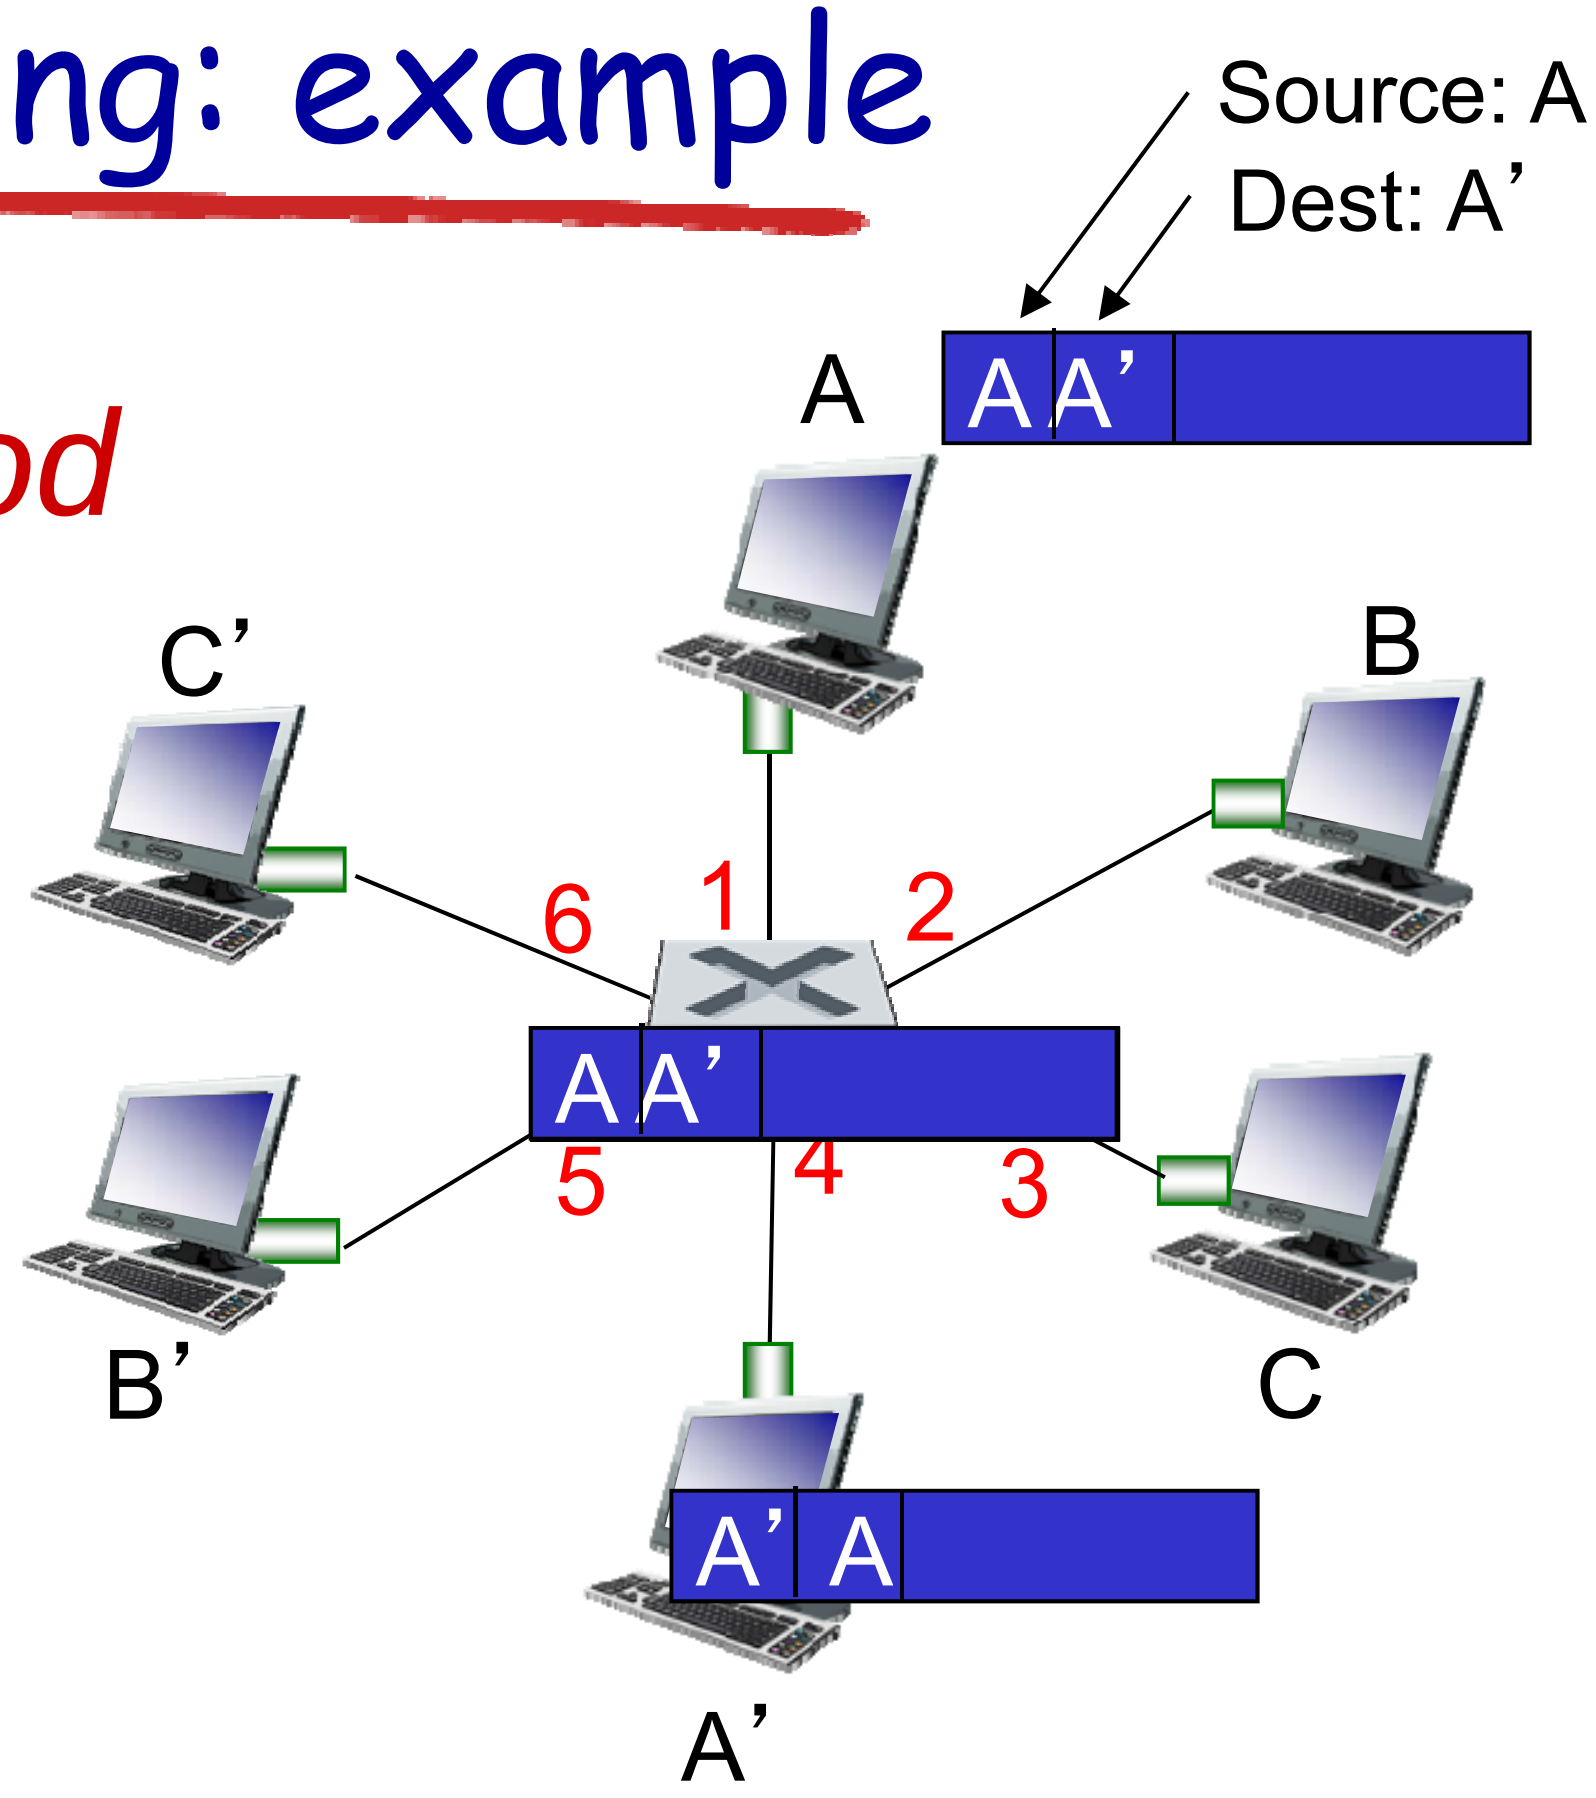


| MAC addr | interface | TTL |
|---|---|---|
| *A* | *1* | *60* |
| *A'* | *4* | *60* |

*switch table (initially empty)*

# Interconnecting switches

- switches can be connected together

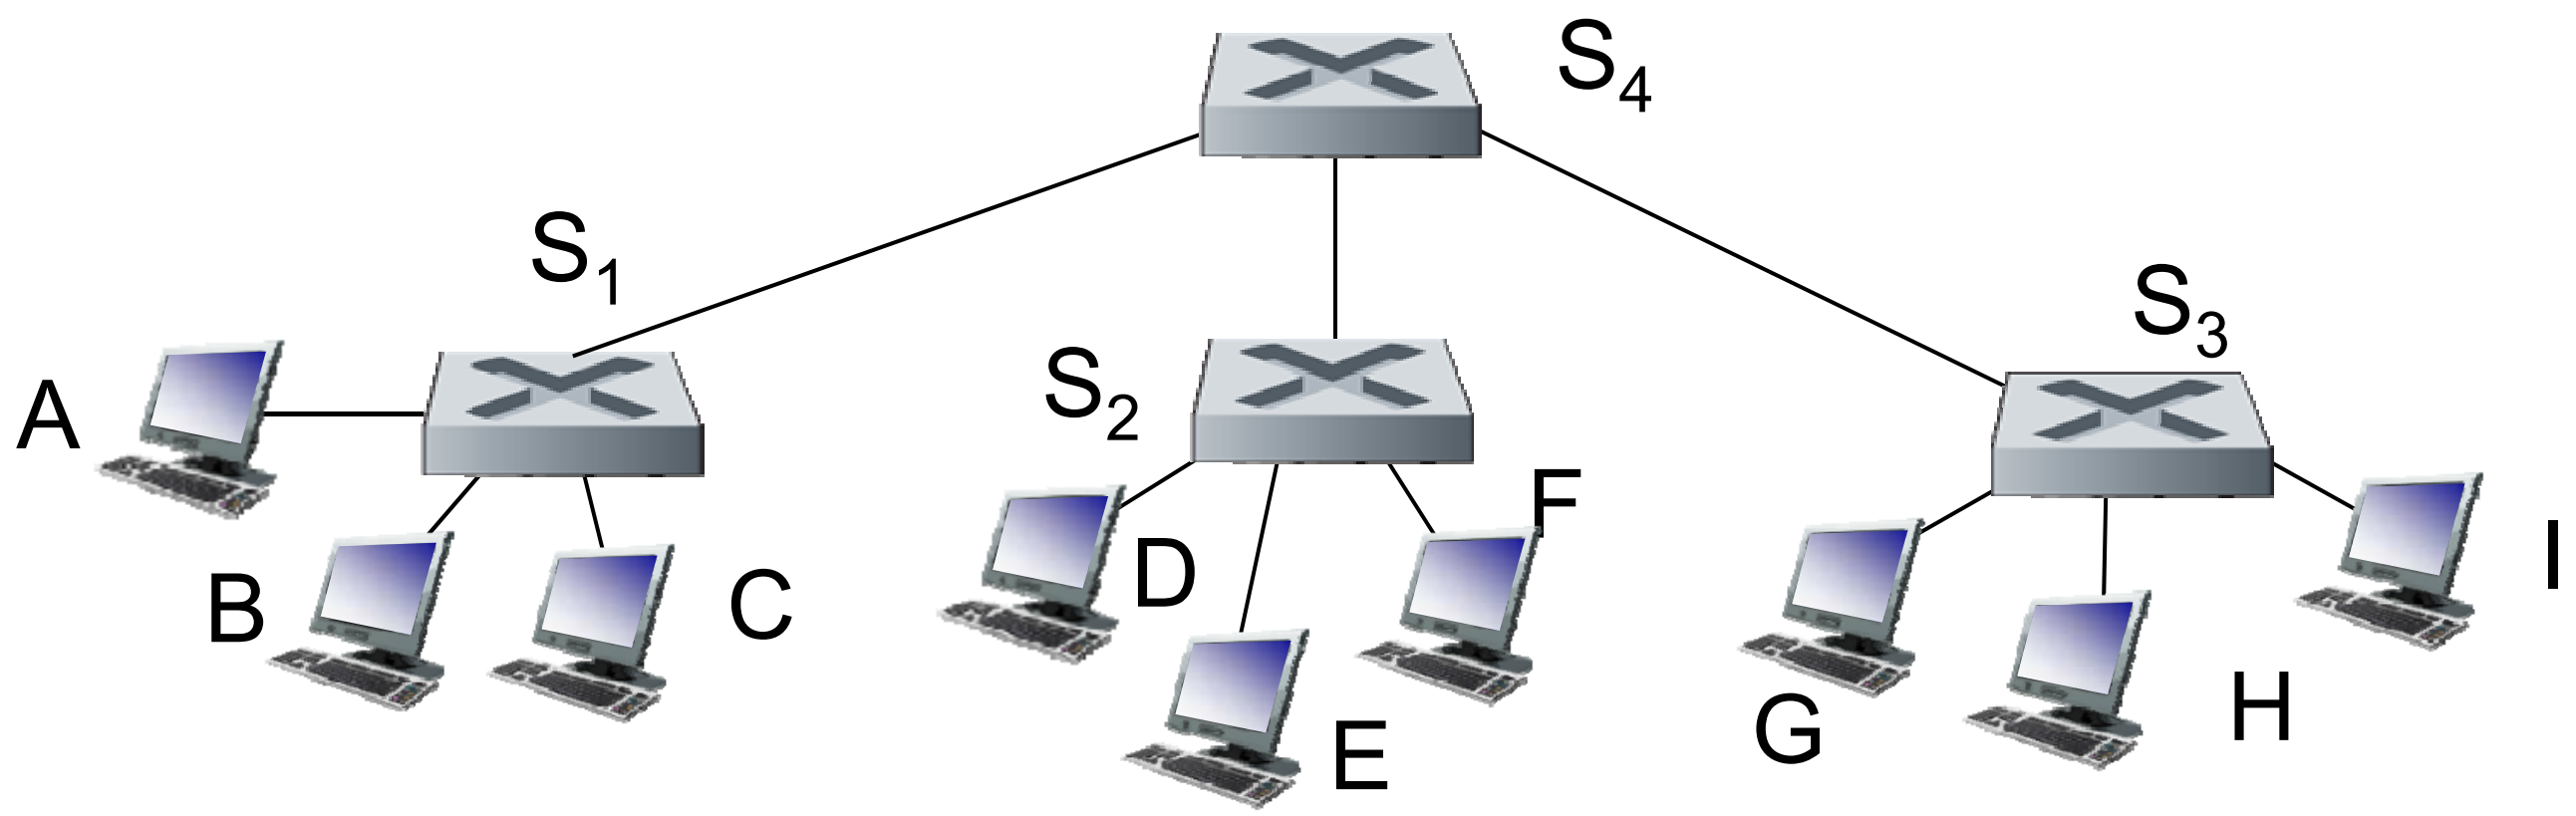


*Q:* sending from A to G - how does $S_1$ know to forward frame destined to F via $S_4$ and $S_3$?

- *A:* self learning! (works *exactly* the same as in single-switch case!)

# Self-learning multi-switch example

Suppose C sends frame to I, I responds to C

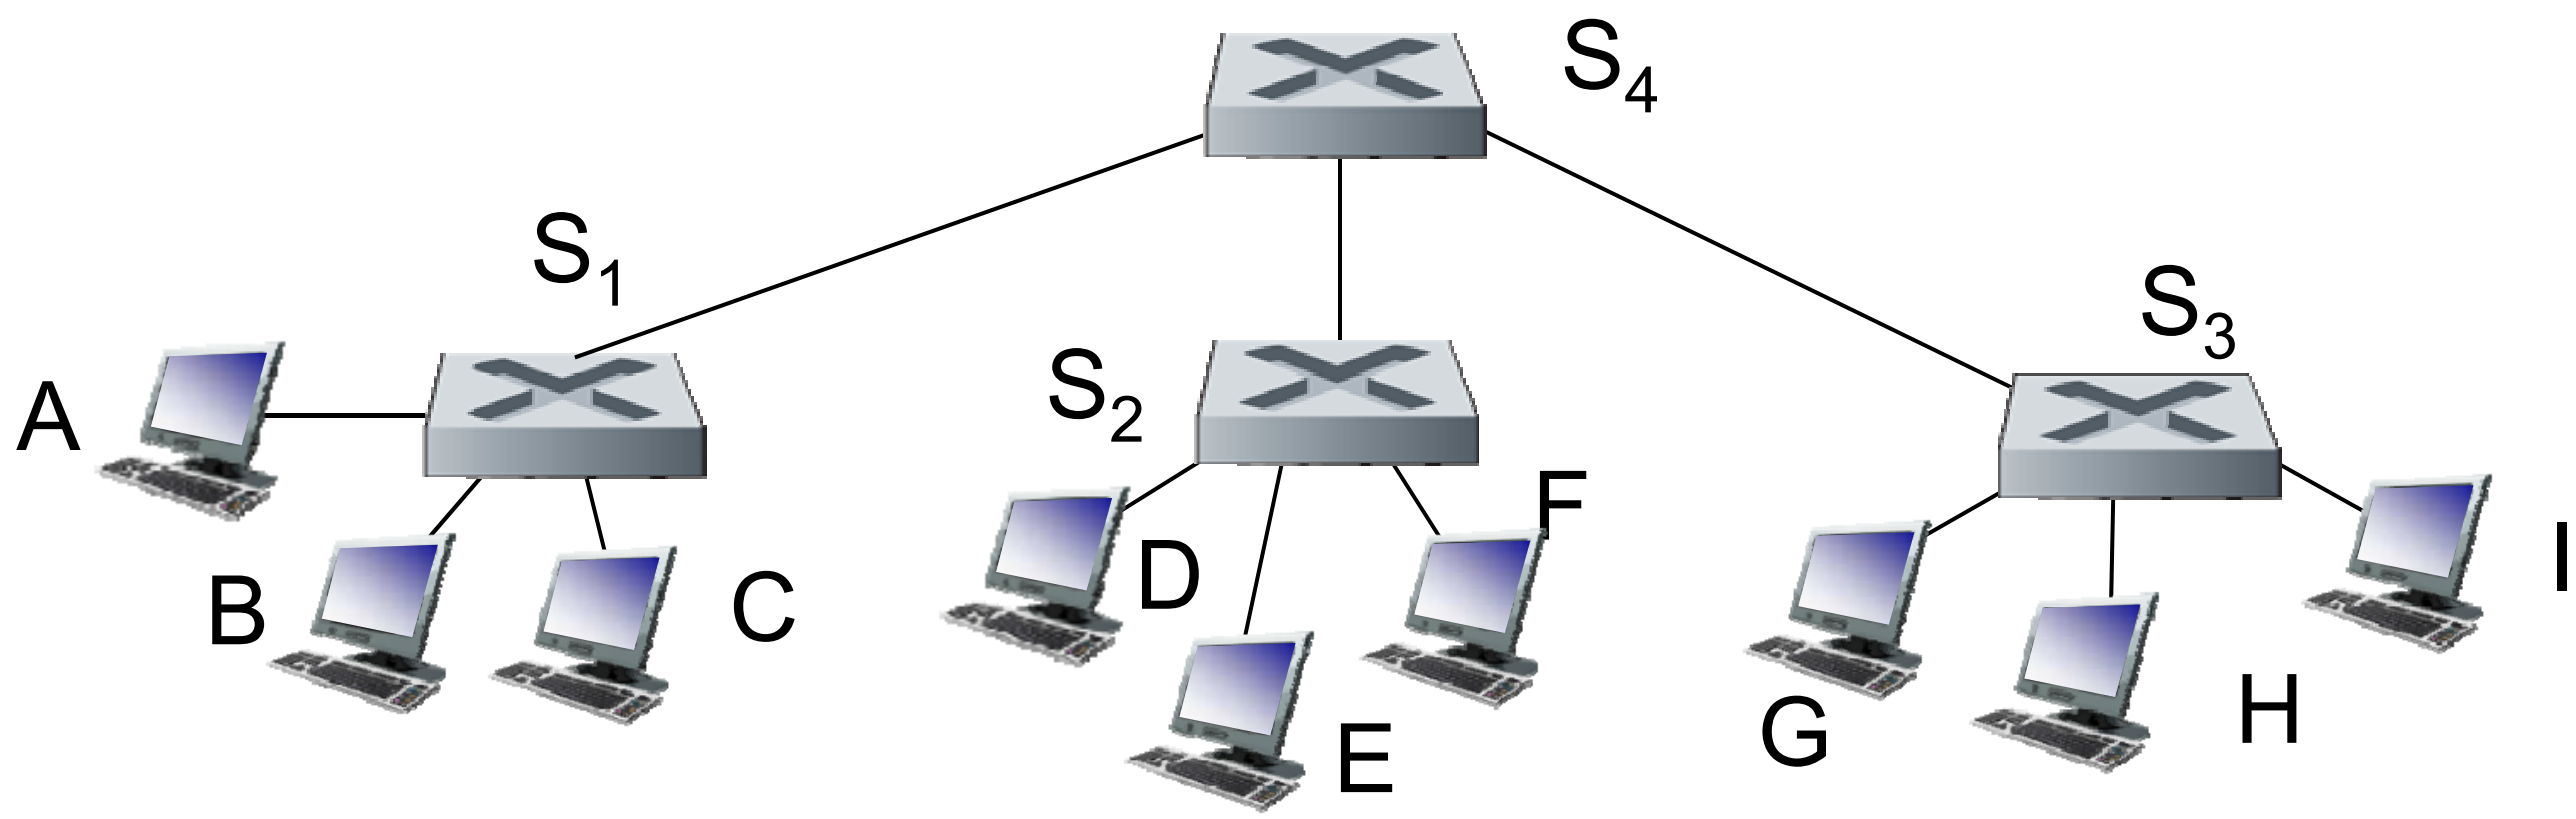


- Q: show switch tables and packet forwarding in $S_1$, $S_2$, $S_3$, $S_4$

# Institutional network

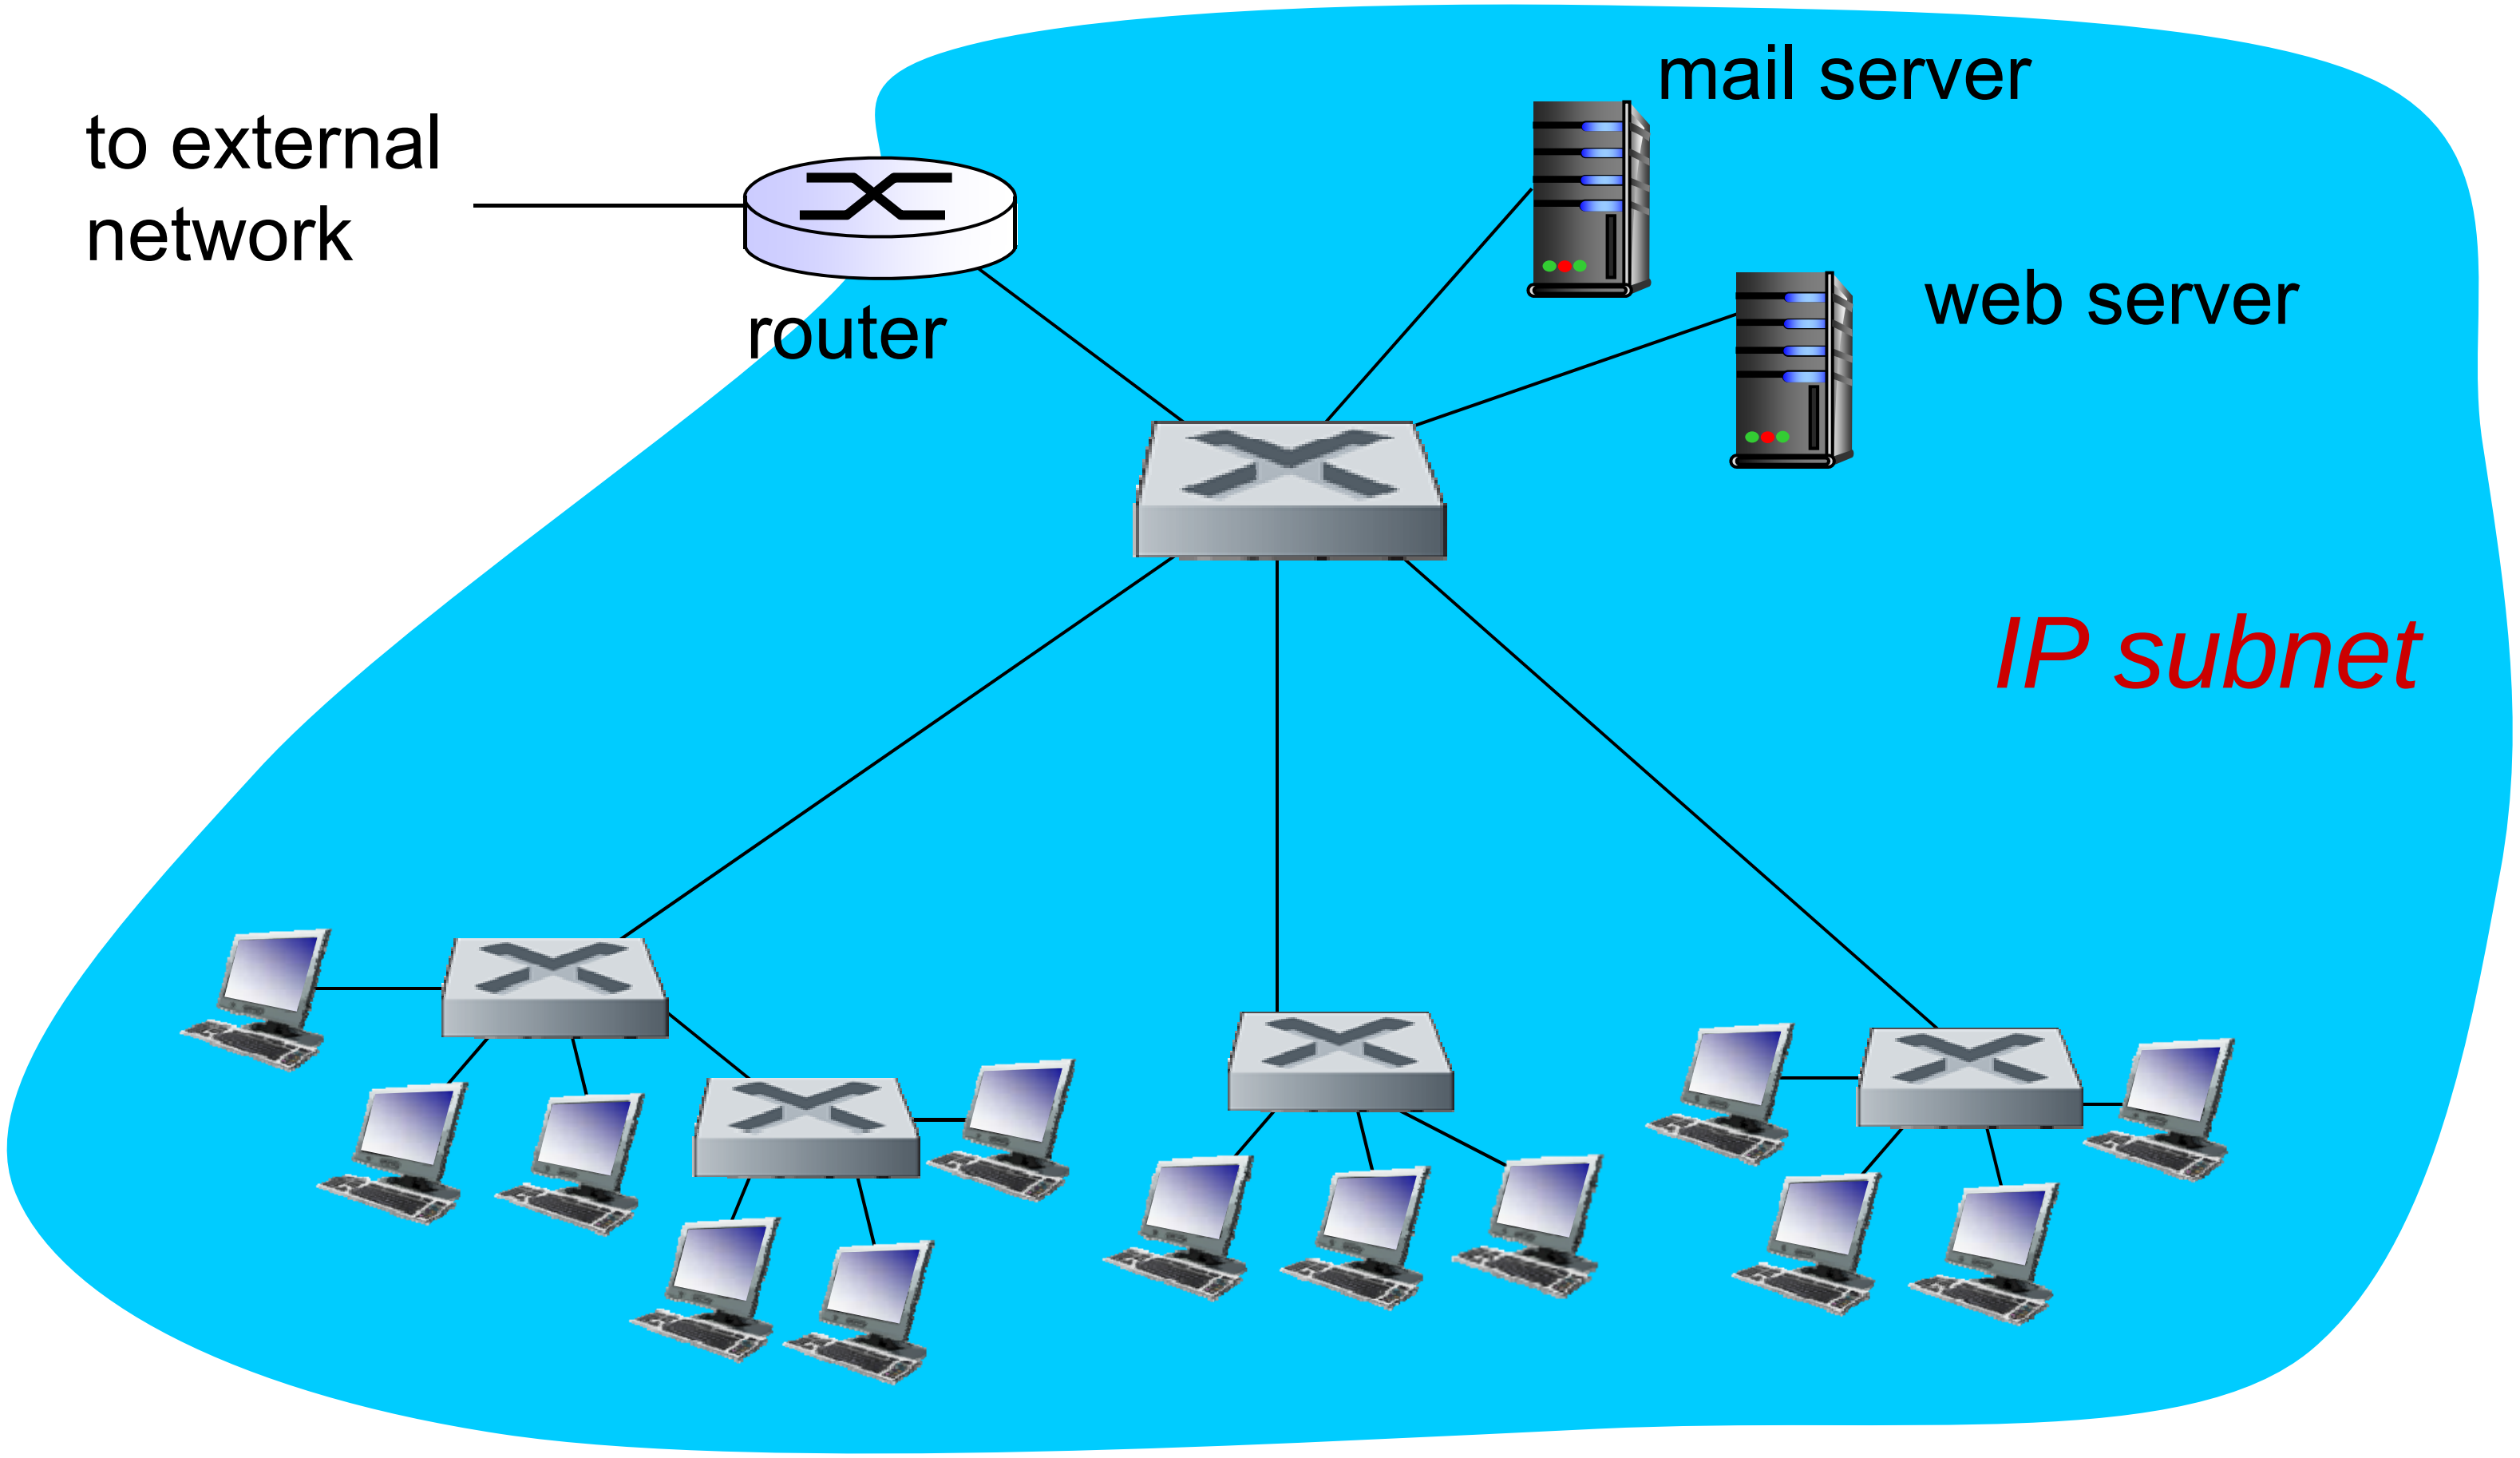

# Switches vs. routers

both are store-and-forward:

- *routers:* network-layer devices (examine network-layer headers)
- *switches*: link-layer devices (examine link-layer headers)

both have forwarding tables:

- *routers:* compute tables using routing algorithms, IP addresses
- *switches:* learn forwarding table using flooding, learning, MAC addresses

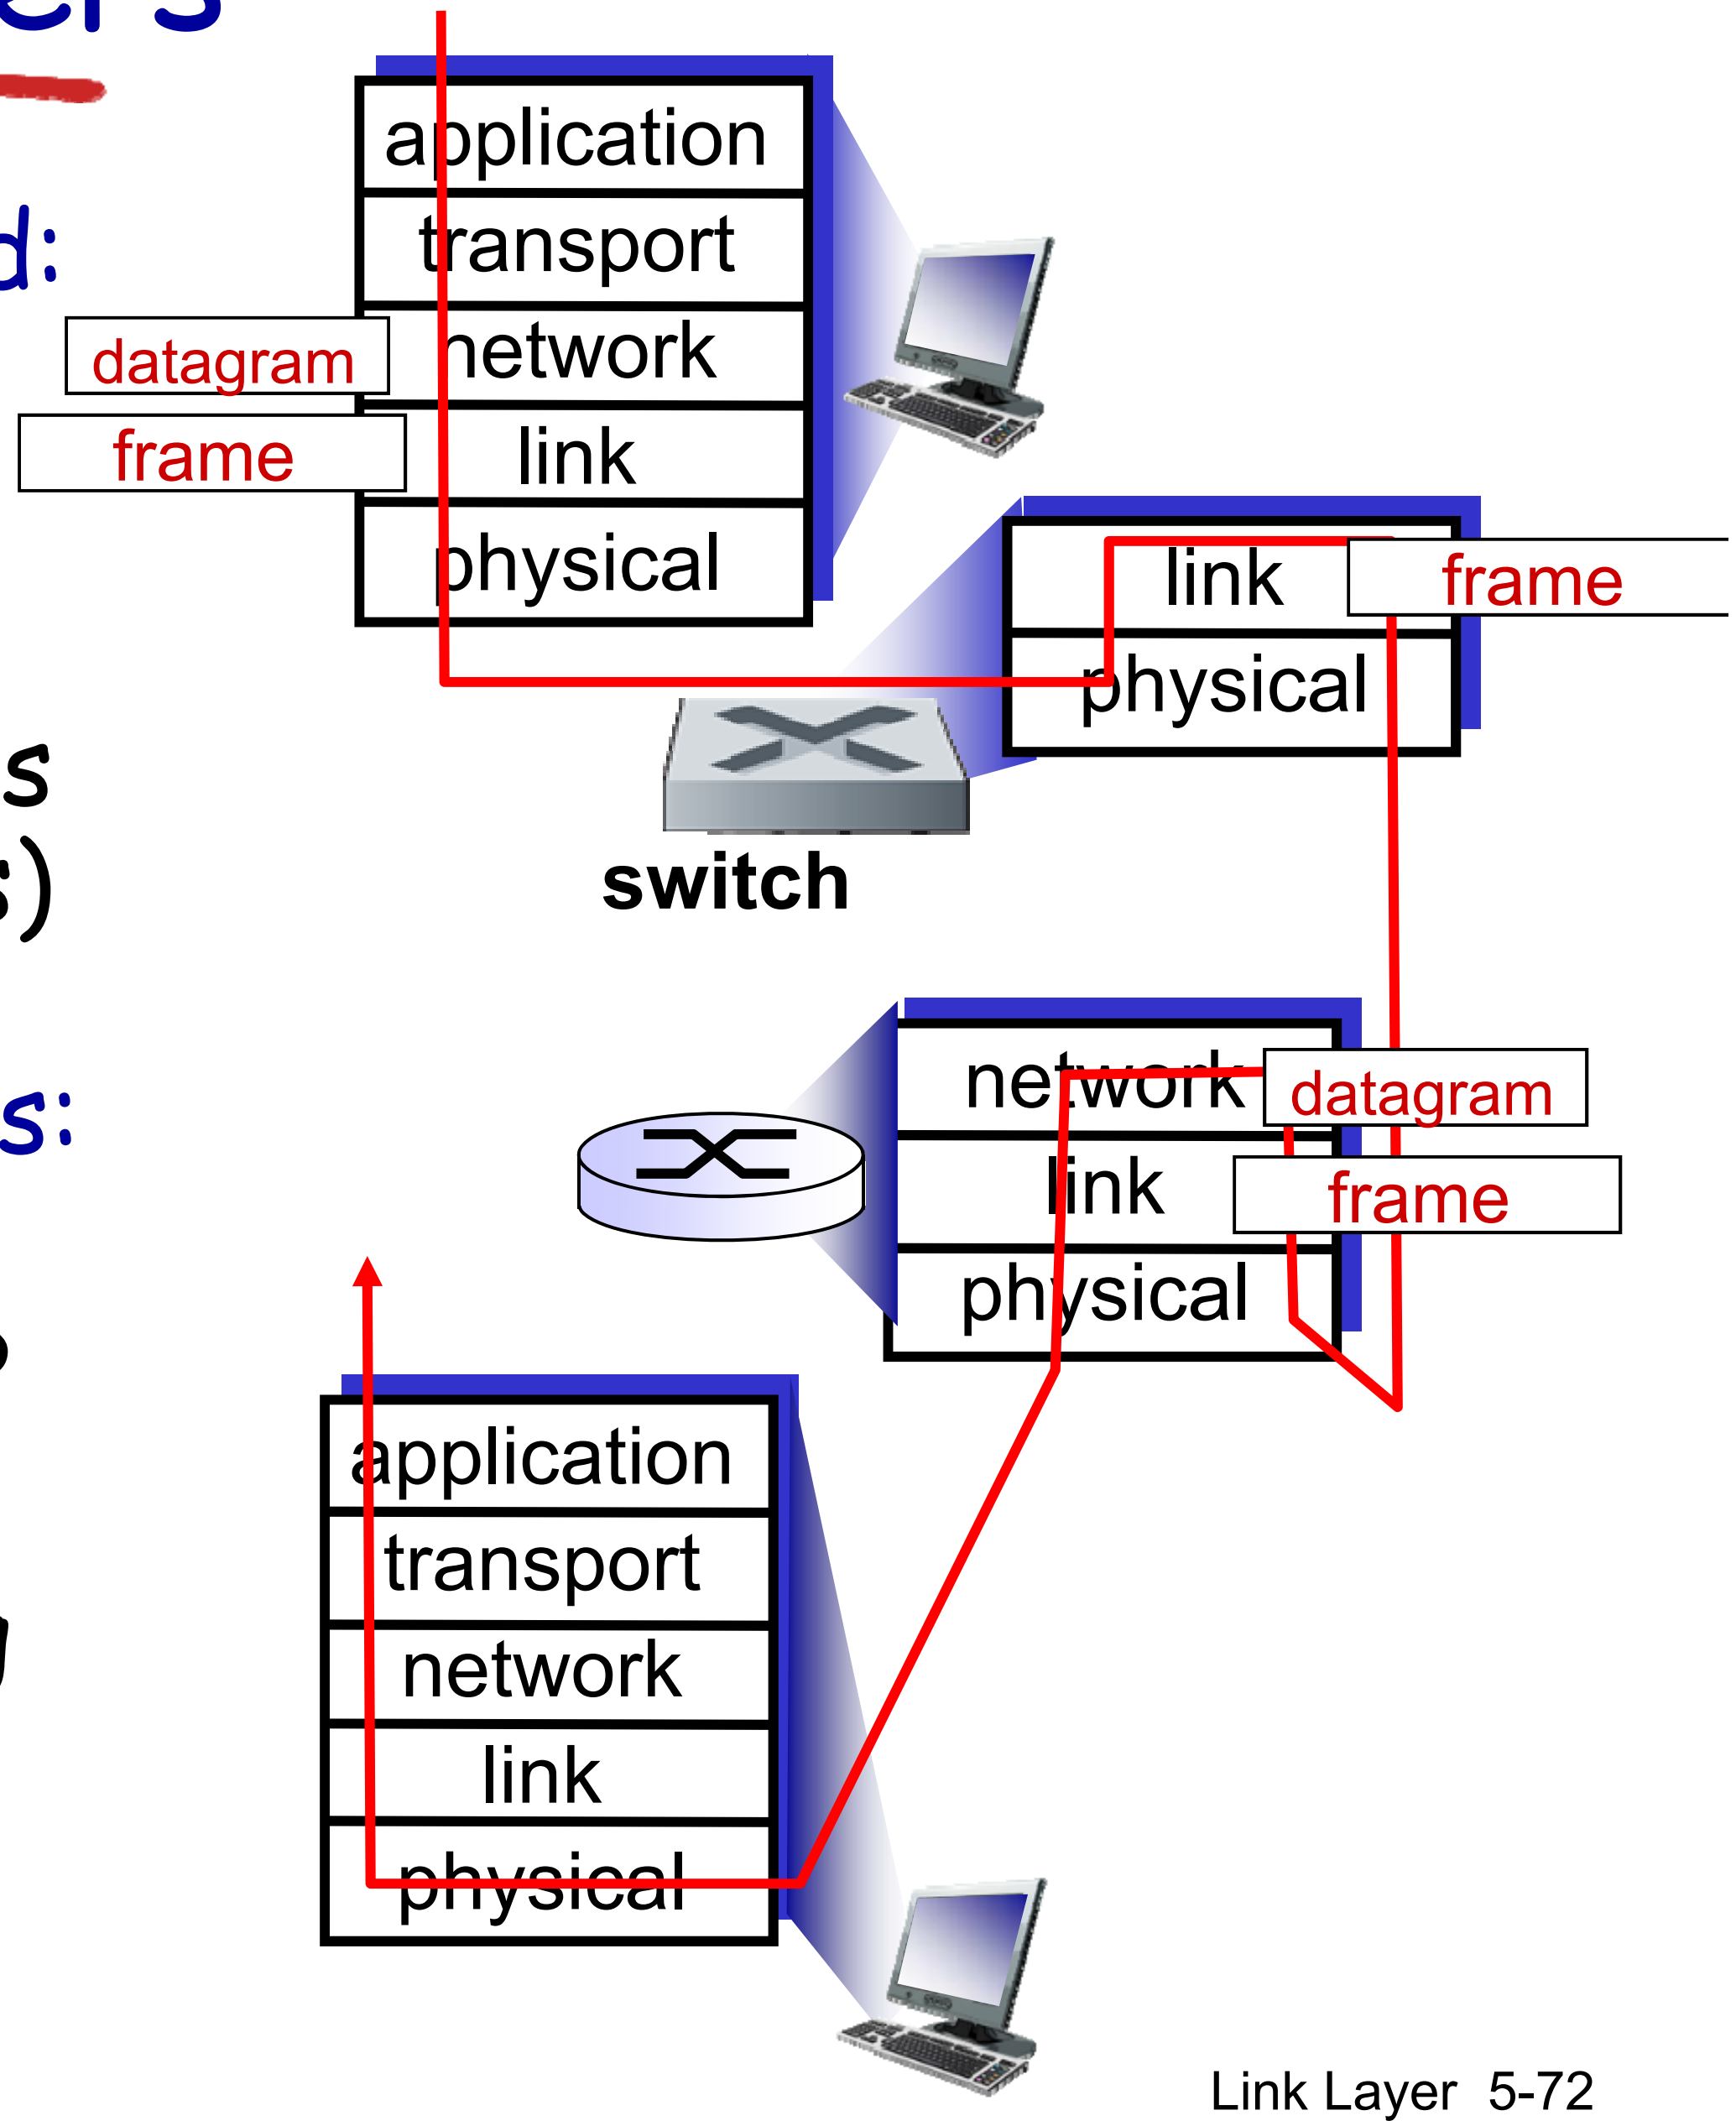

# VLANs: motivation

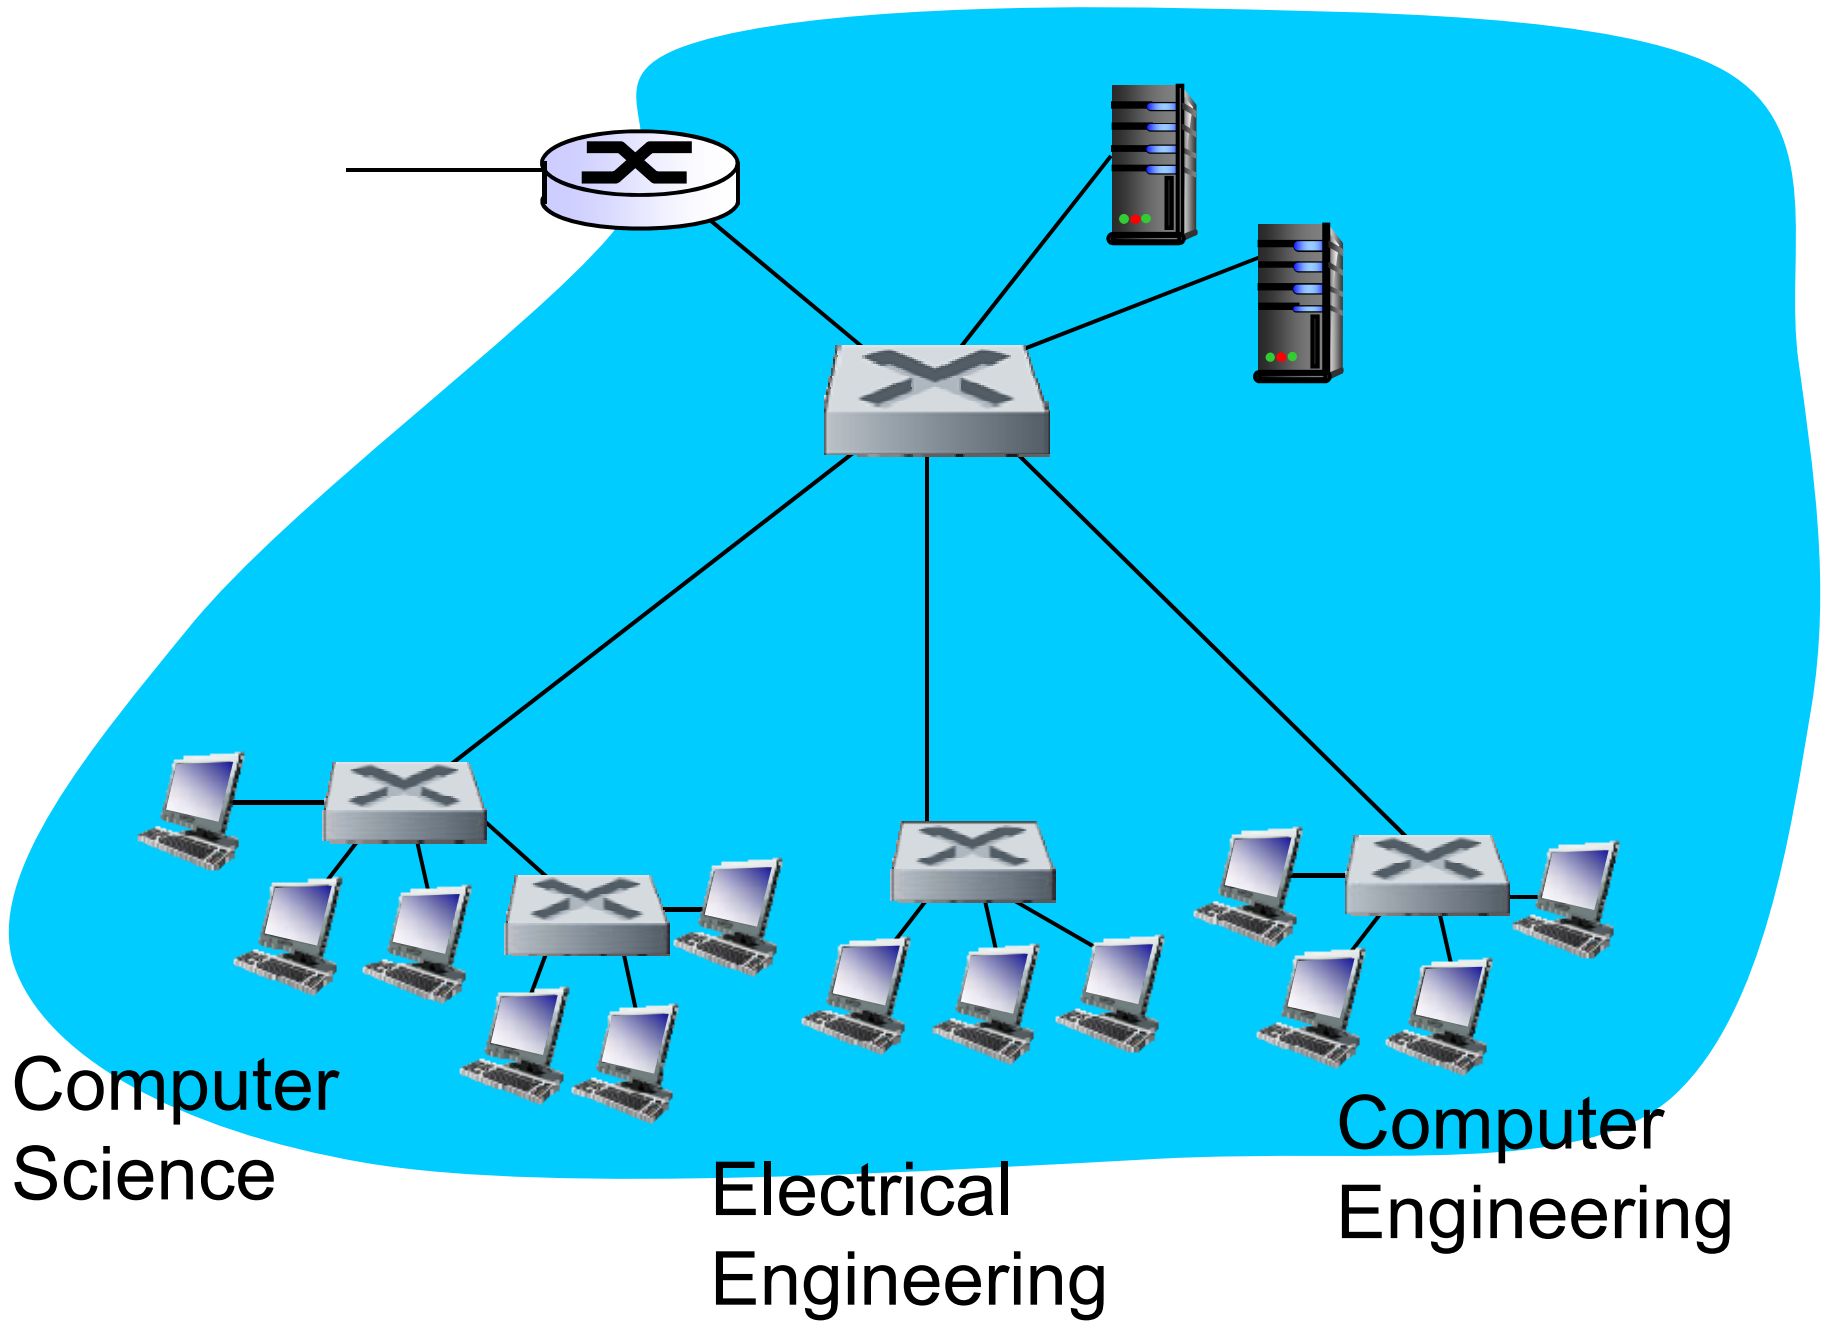


*consider:*

- CS user moves office to EE, but wants connect to CS switch?
- single broadcast domain:
  - all layer-2 broadcast traffic (ARP, DHCP, unknown location of destination MAC address) must cross entire LAN
  - security/privacy, efficiency issues

# VLANs

**Virtual Local Area Network**

switch(es) supporting VLAN capabilities can be configured to define multiple ***virtual*** LANS over single physical LAN infrastructure.

port-based VLAN: switch ports grouped (by switch management software) so that *single* physical switch ……

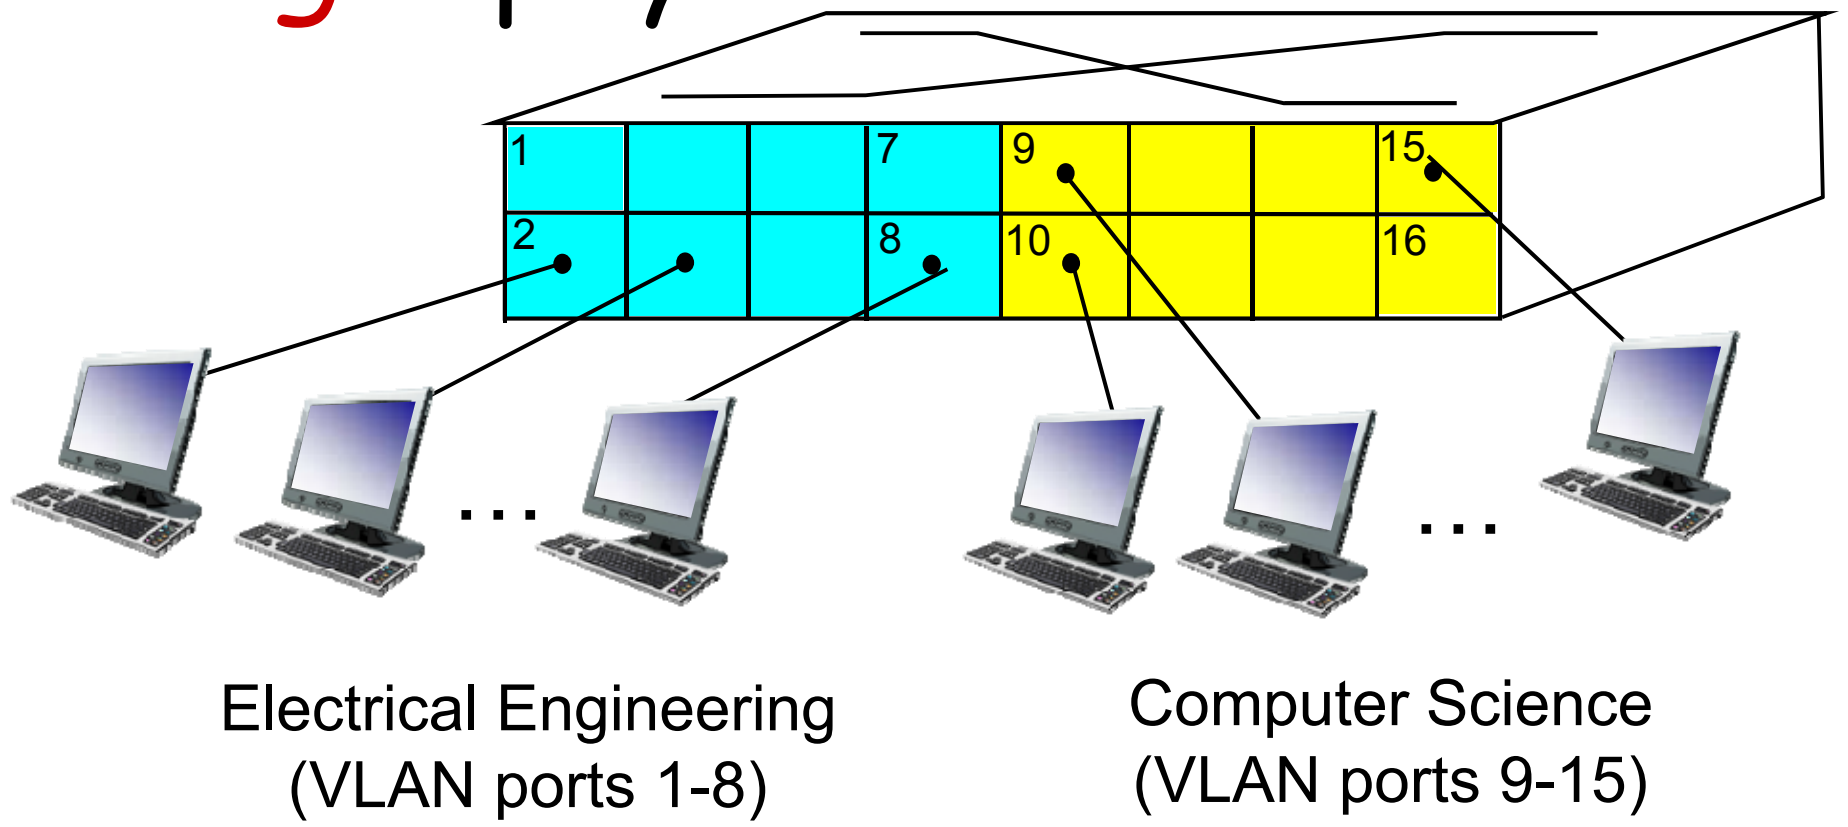


… operates as *multiple* virtual switches

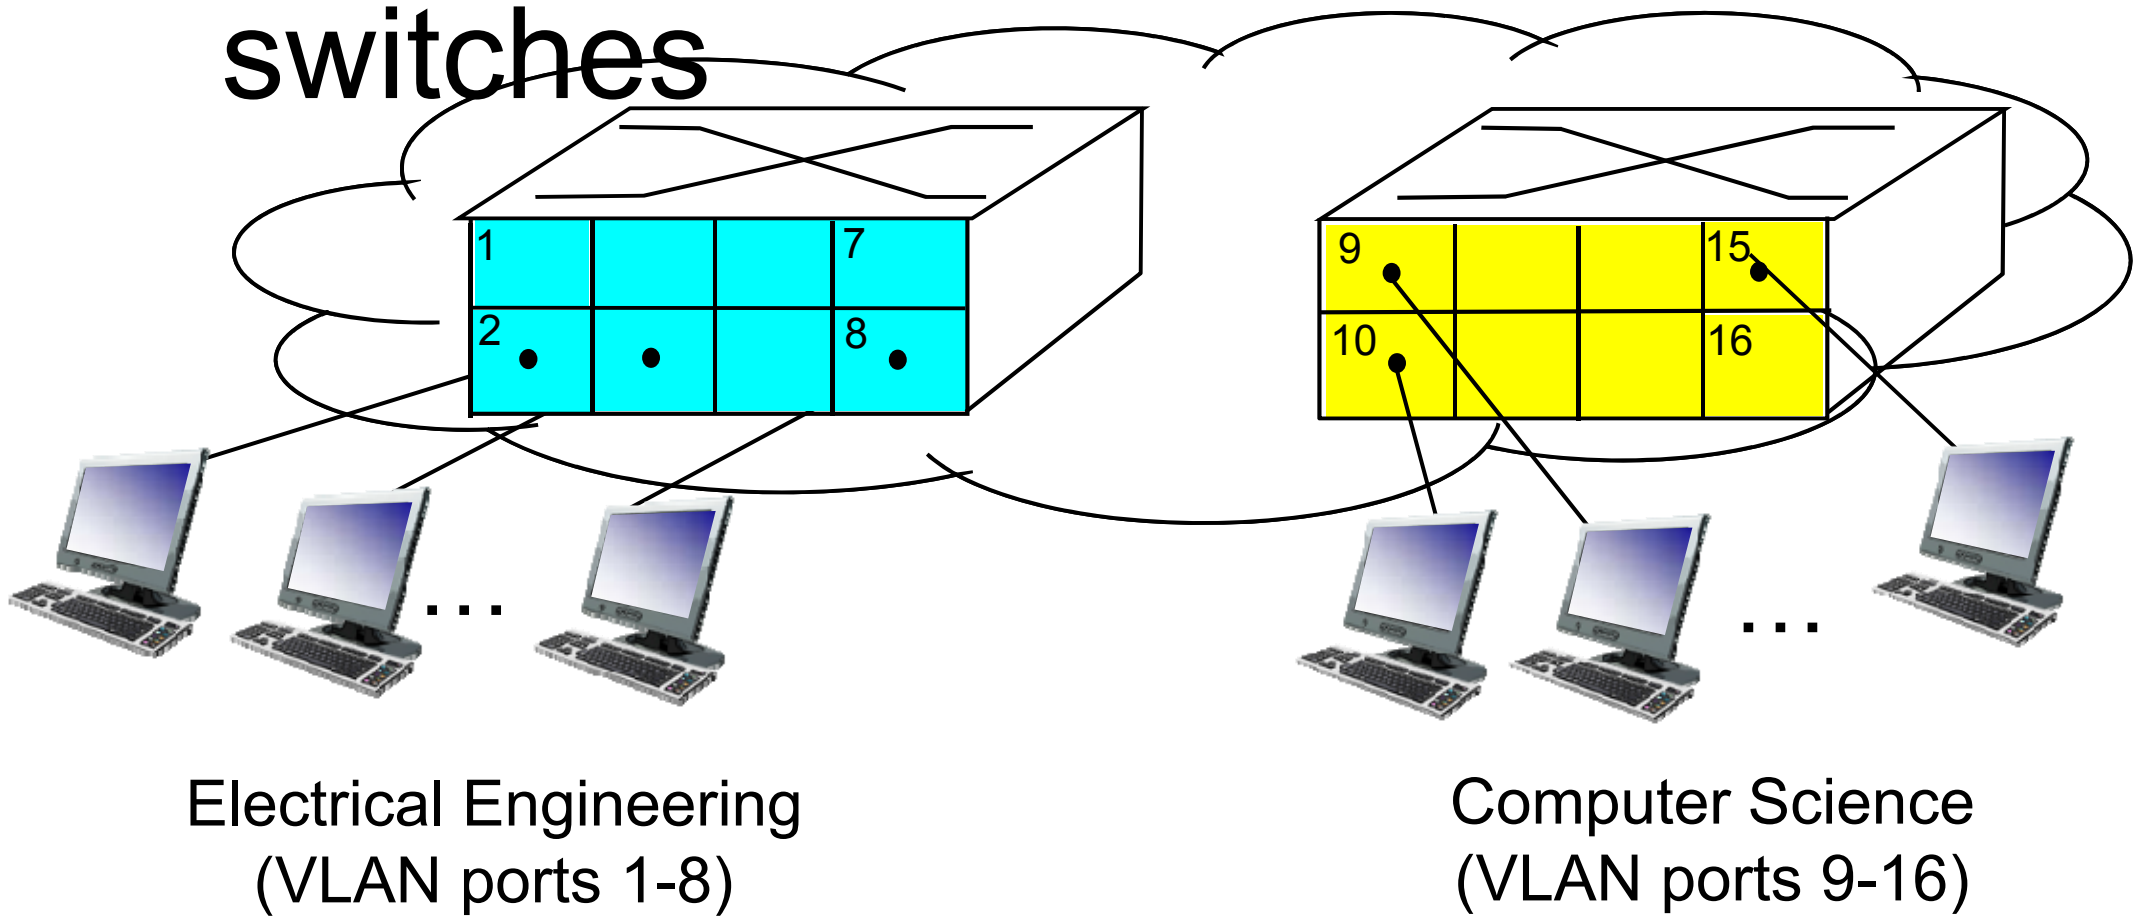

# Port-based VLAN

- *traffic isolation:* frames to/from ports 1-8 can *only* reach ports 1-8
  - can also define VLAN based on MAC addresses of endpoints, rather than switch port
- *dynamic membership:* ports can be dynamically assigned among VLANs
- *forwarding between VLANS:* done via routing (just as with separate switches)
  - in practice vendors sell combined switches plus routers

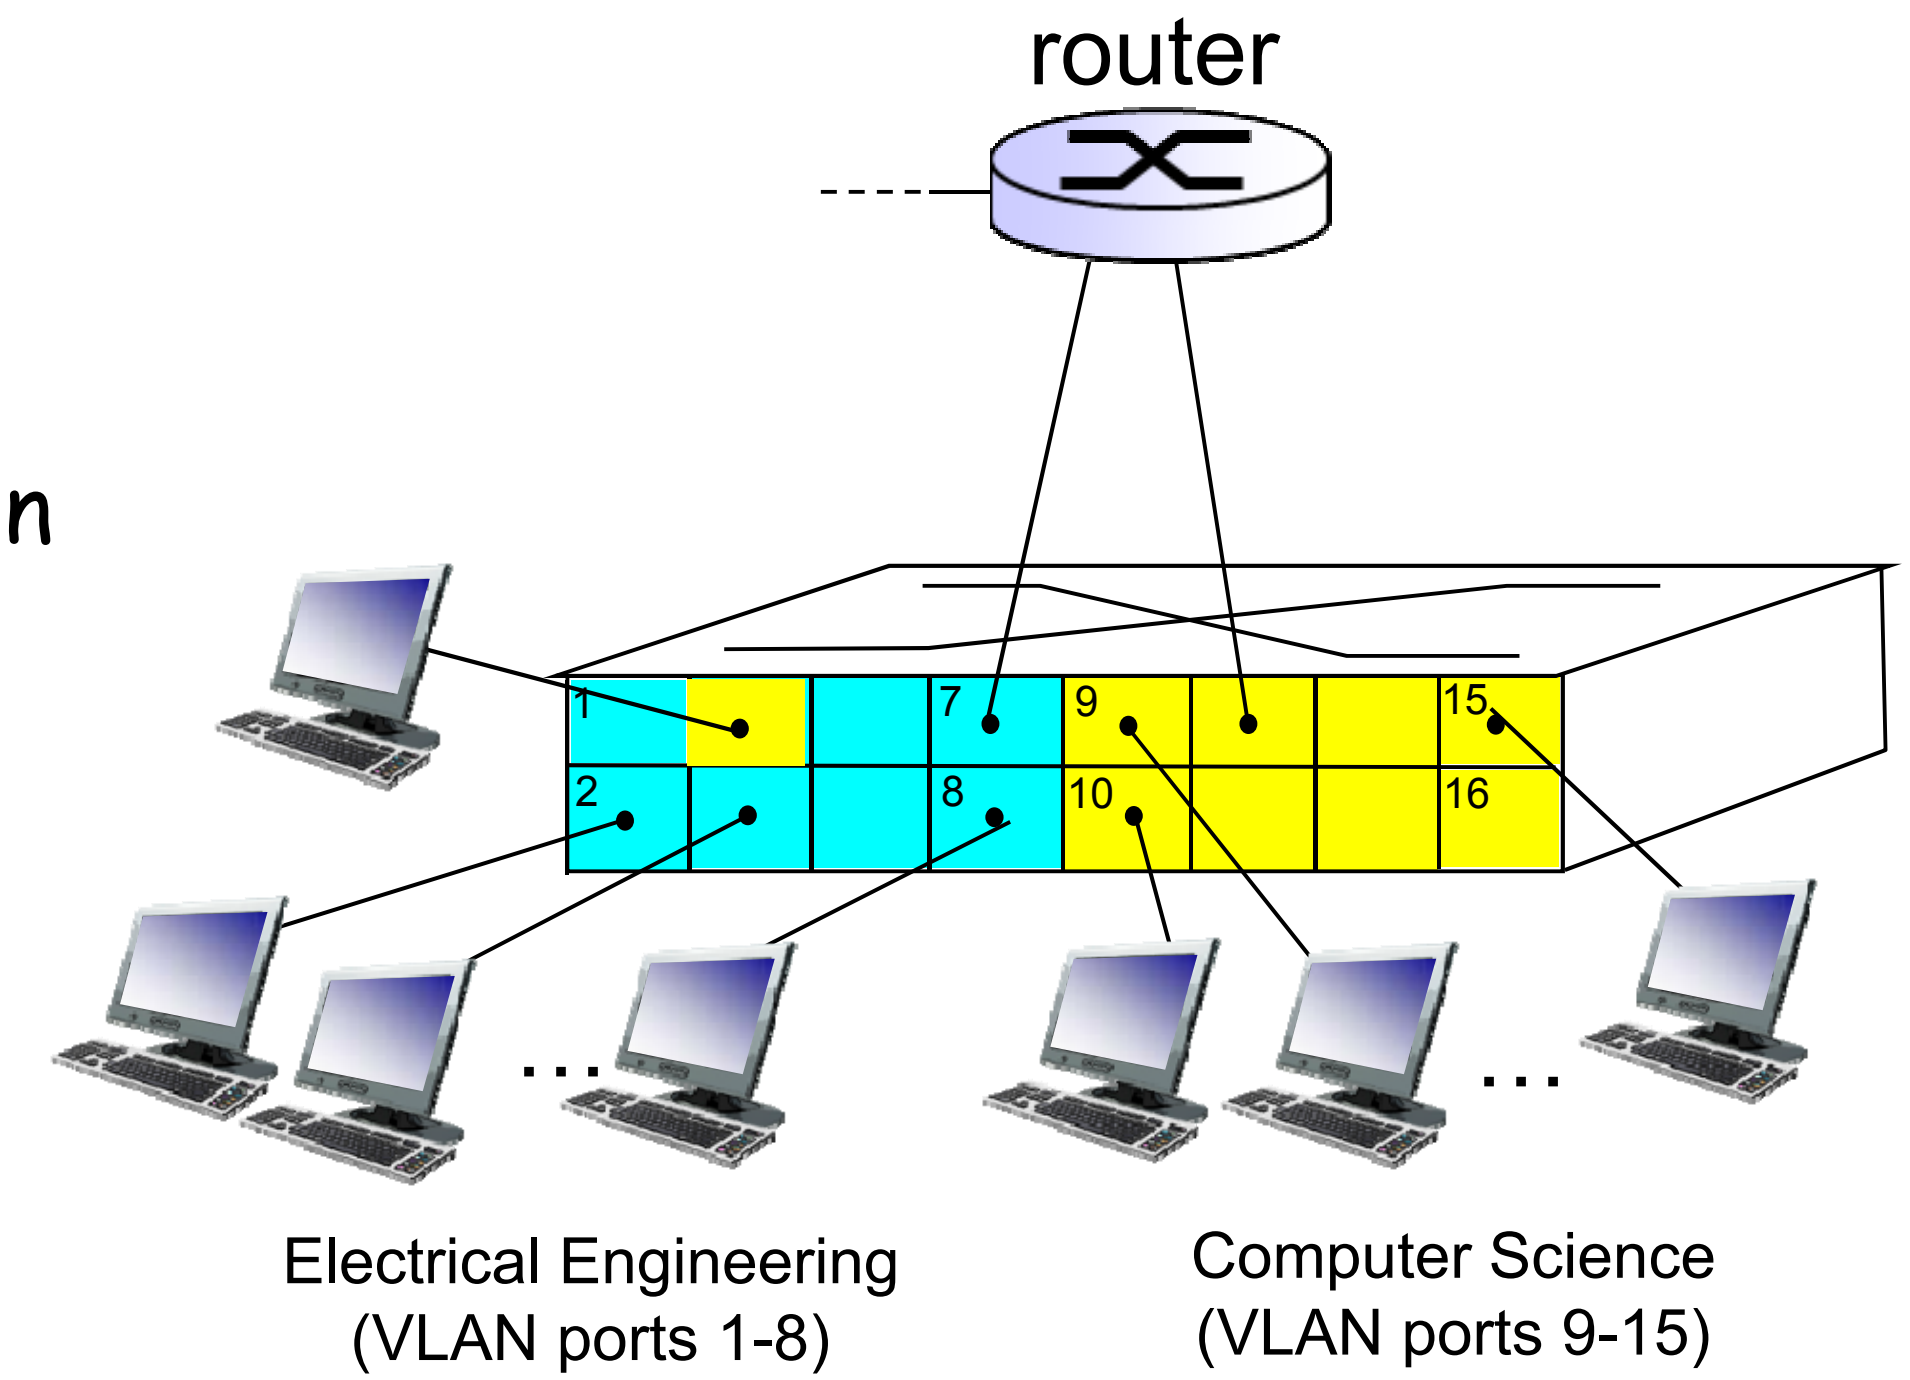

# VLANS spanning multiple switches

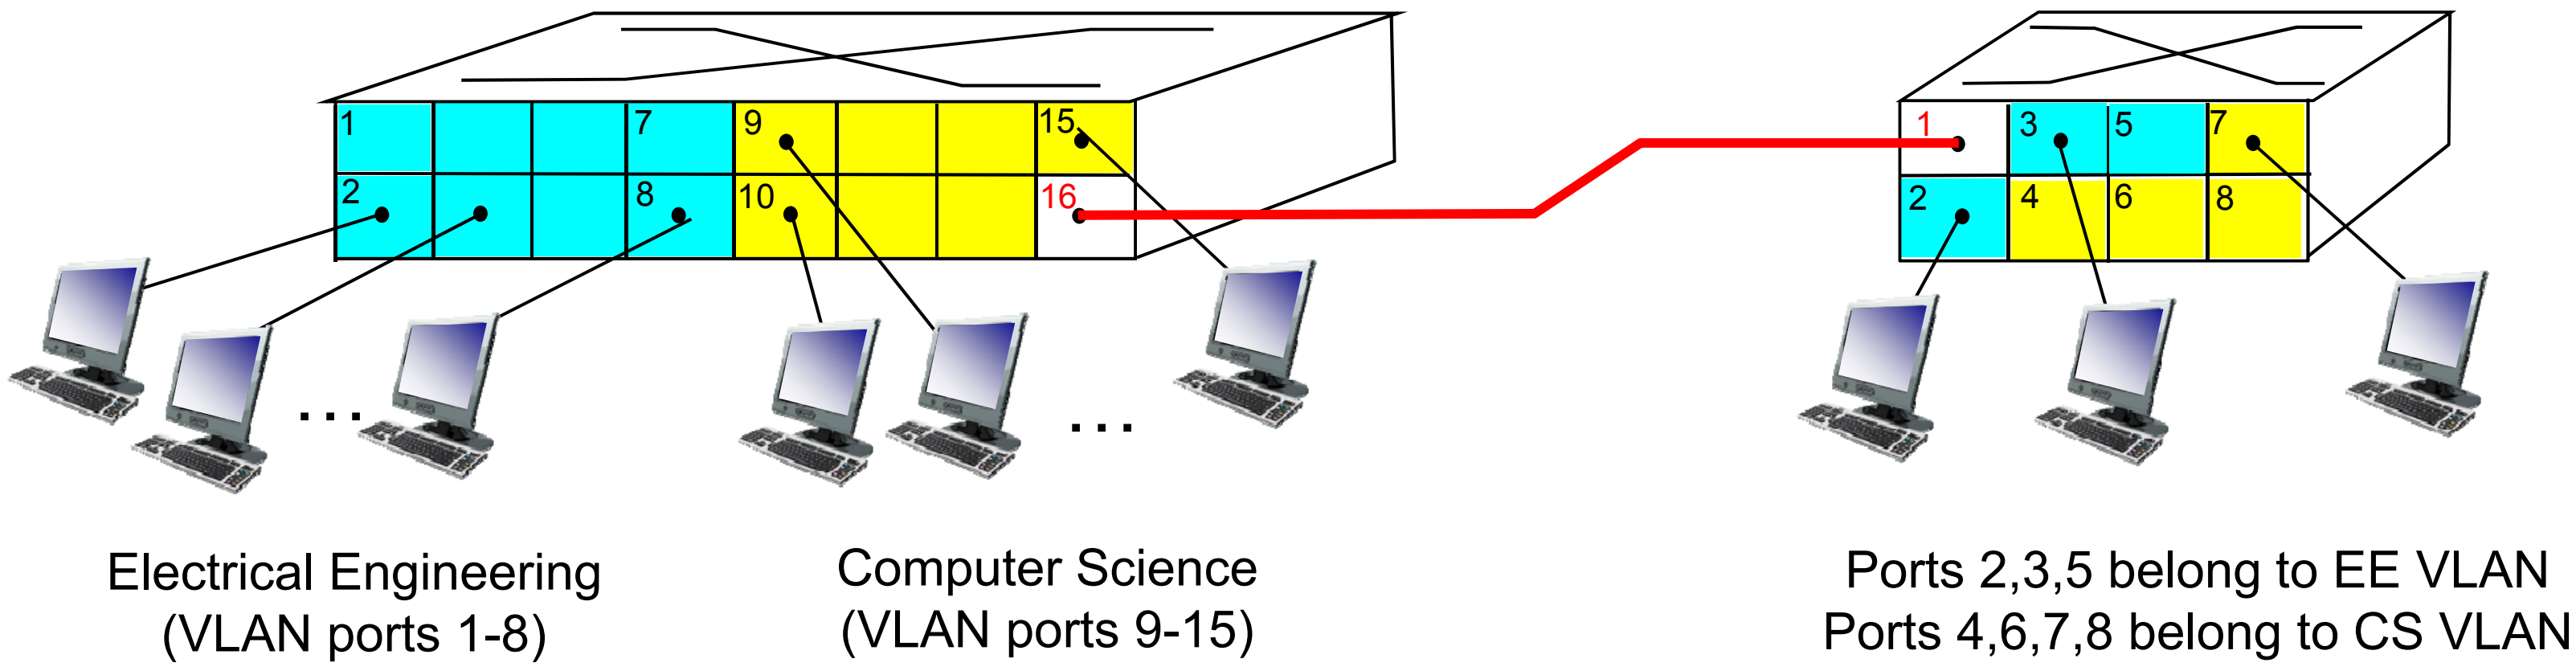


- *trunk port:* carries frames between VLANS defined over multiple physical switches
  - frames forwarded within VLAN between switches can't be vanilla 802.1 frames (must carry VLAN ID info)
  - 802.1q protocol adds/removed additional header fields for frames forwarded between trunk ports

# 802.1Q VLAN frame format

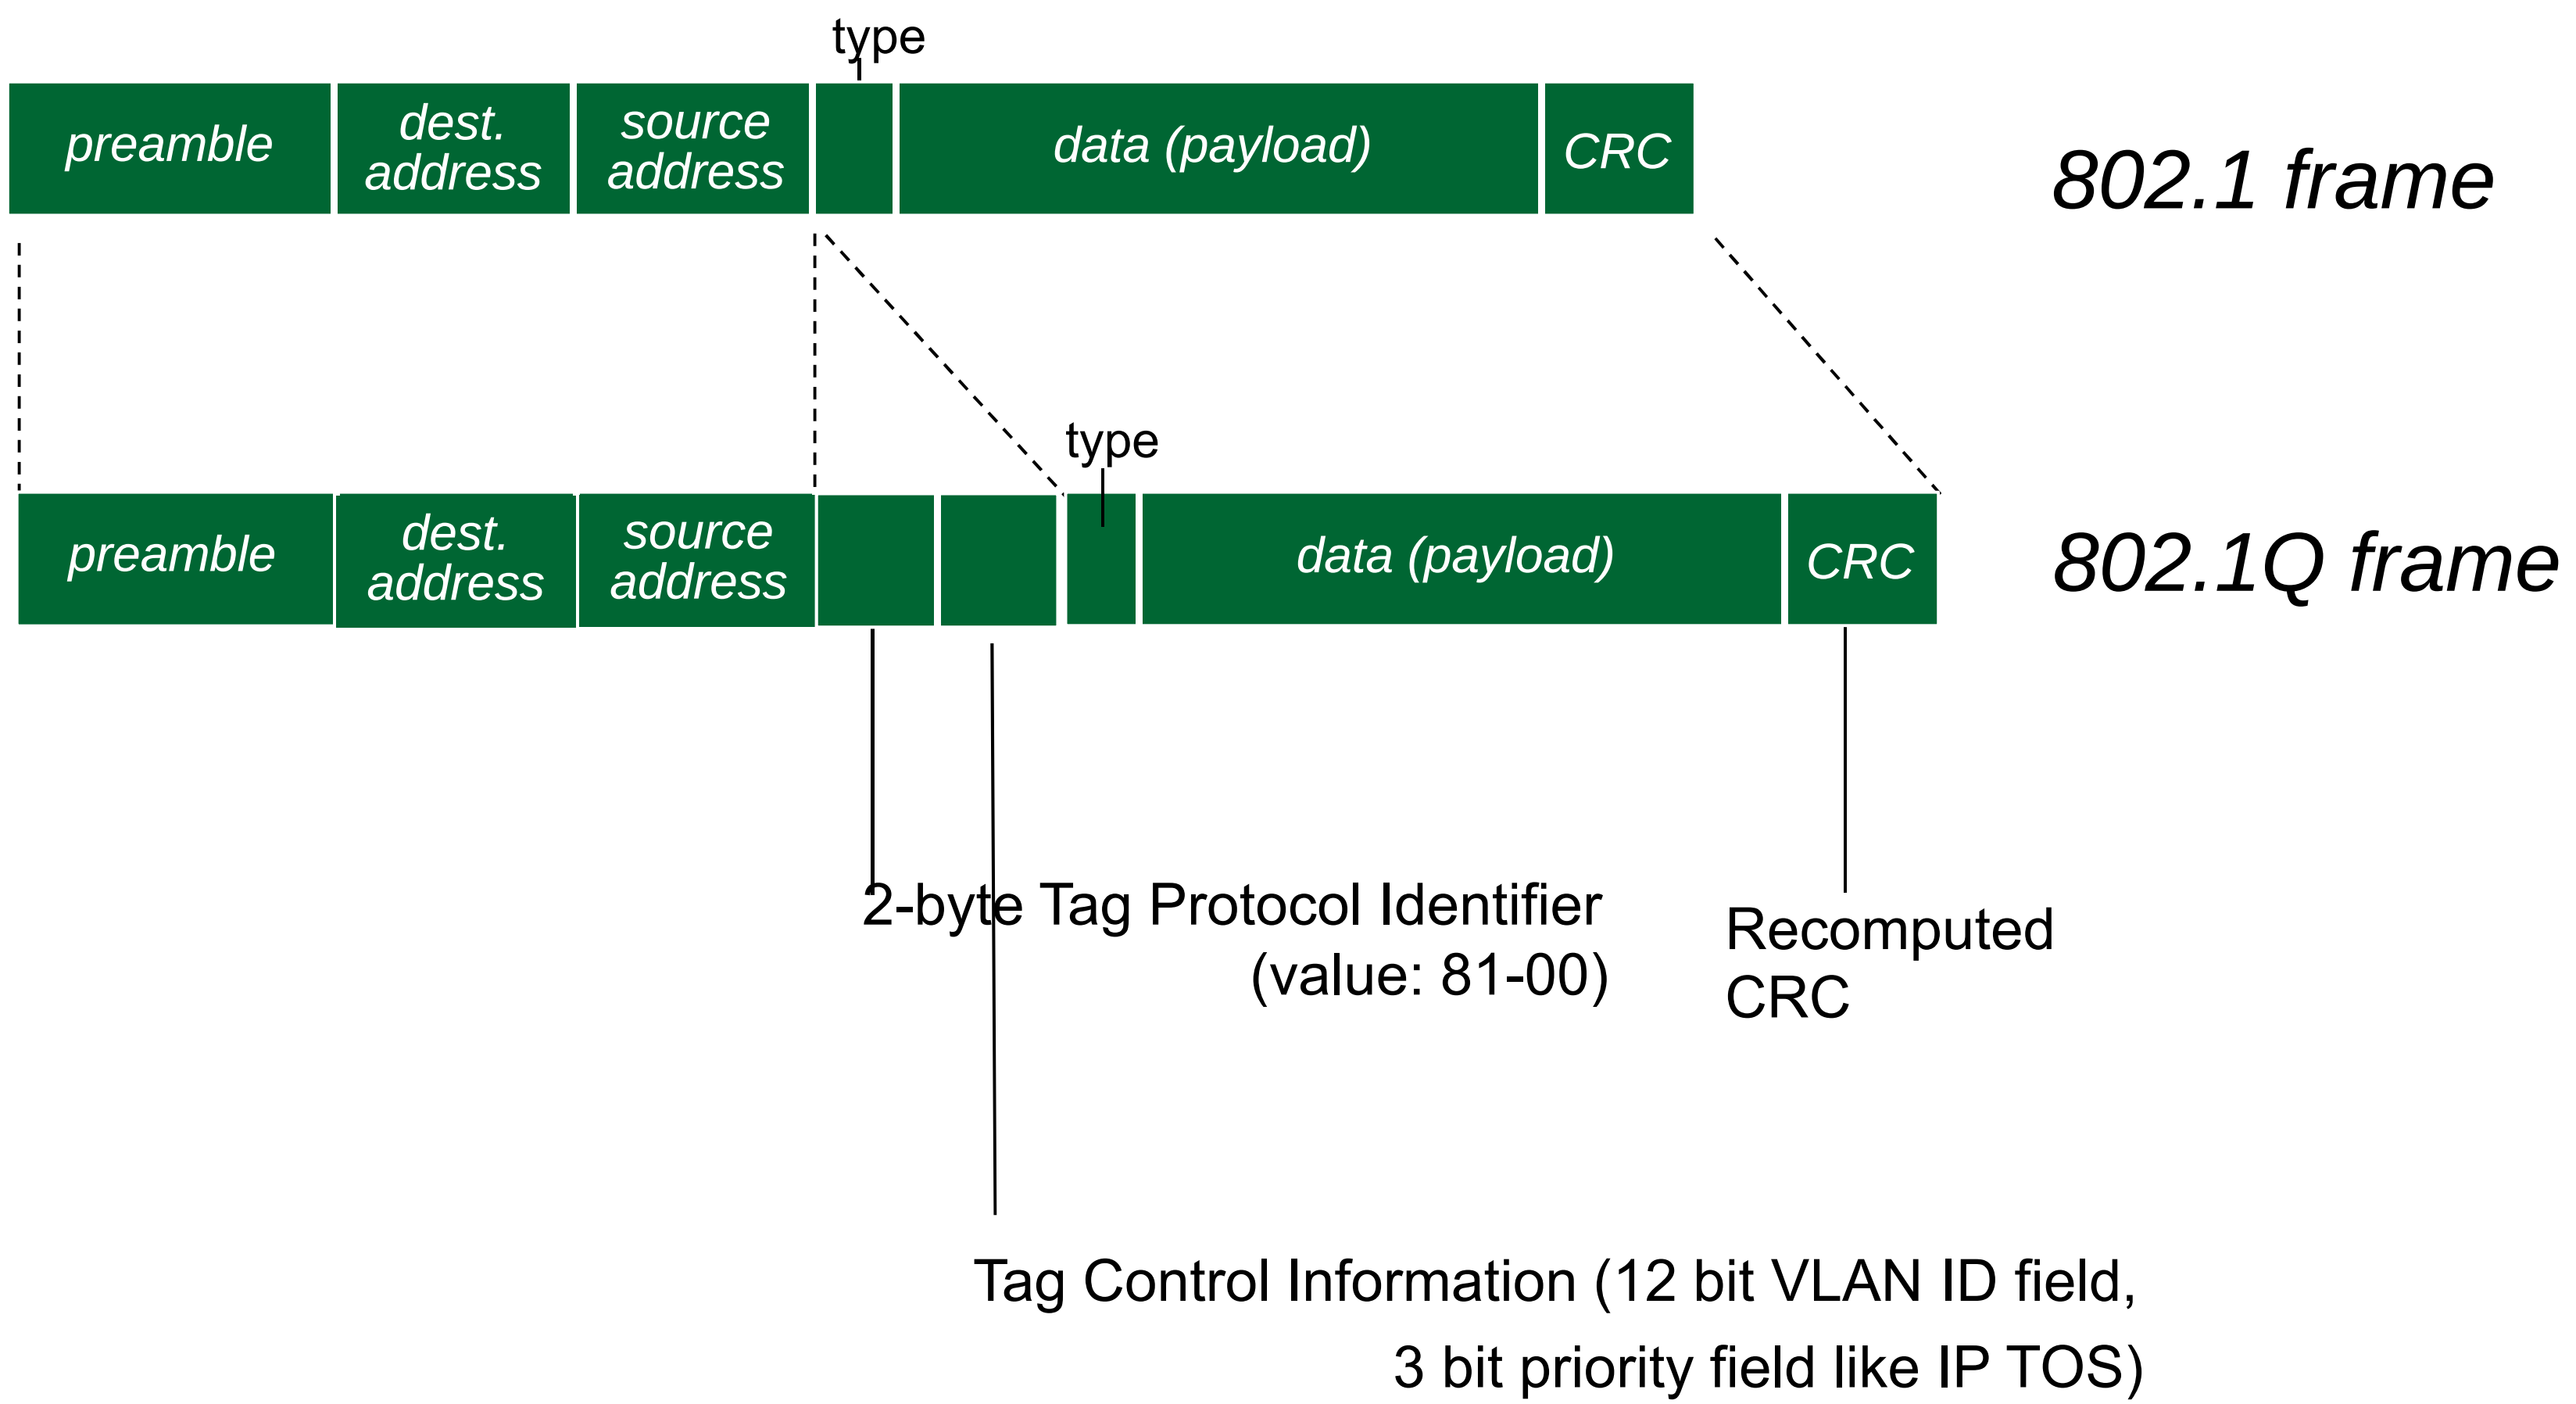

# Link layer, LANs: outline

5.1 introduction, services

5.2 error detection, correction

5.3 multiple access protocols

5.4 LANs
- addressing, ARP
- Ethernet
- switches
- VLANS

5.5 link virtualization: MPLS

5.6 data center networking

5.7 a day in the life of a web request

# *Synthesis:* a day in the life of a web request

- journey down protocol stack complete!
  - application, transport, network, link
- putting-it-all-together: synthesis!
  - *goal:* identify, review, understand protocols (at all layers) involved in seemingly simple scenario: requesting www page
  - *scenario:* student attaches laptop to campus network, requests/receives www.google.com

# A day in the life: scenario

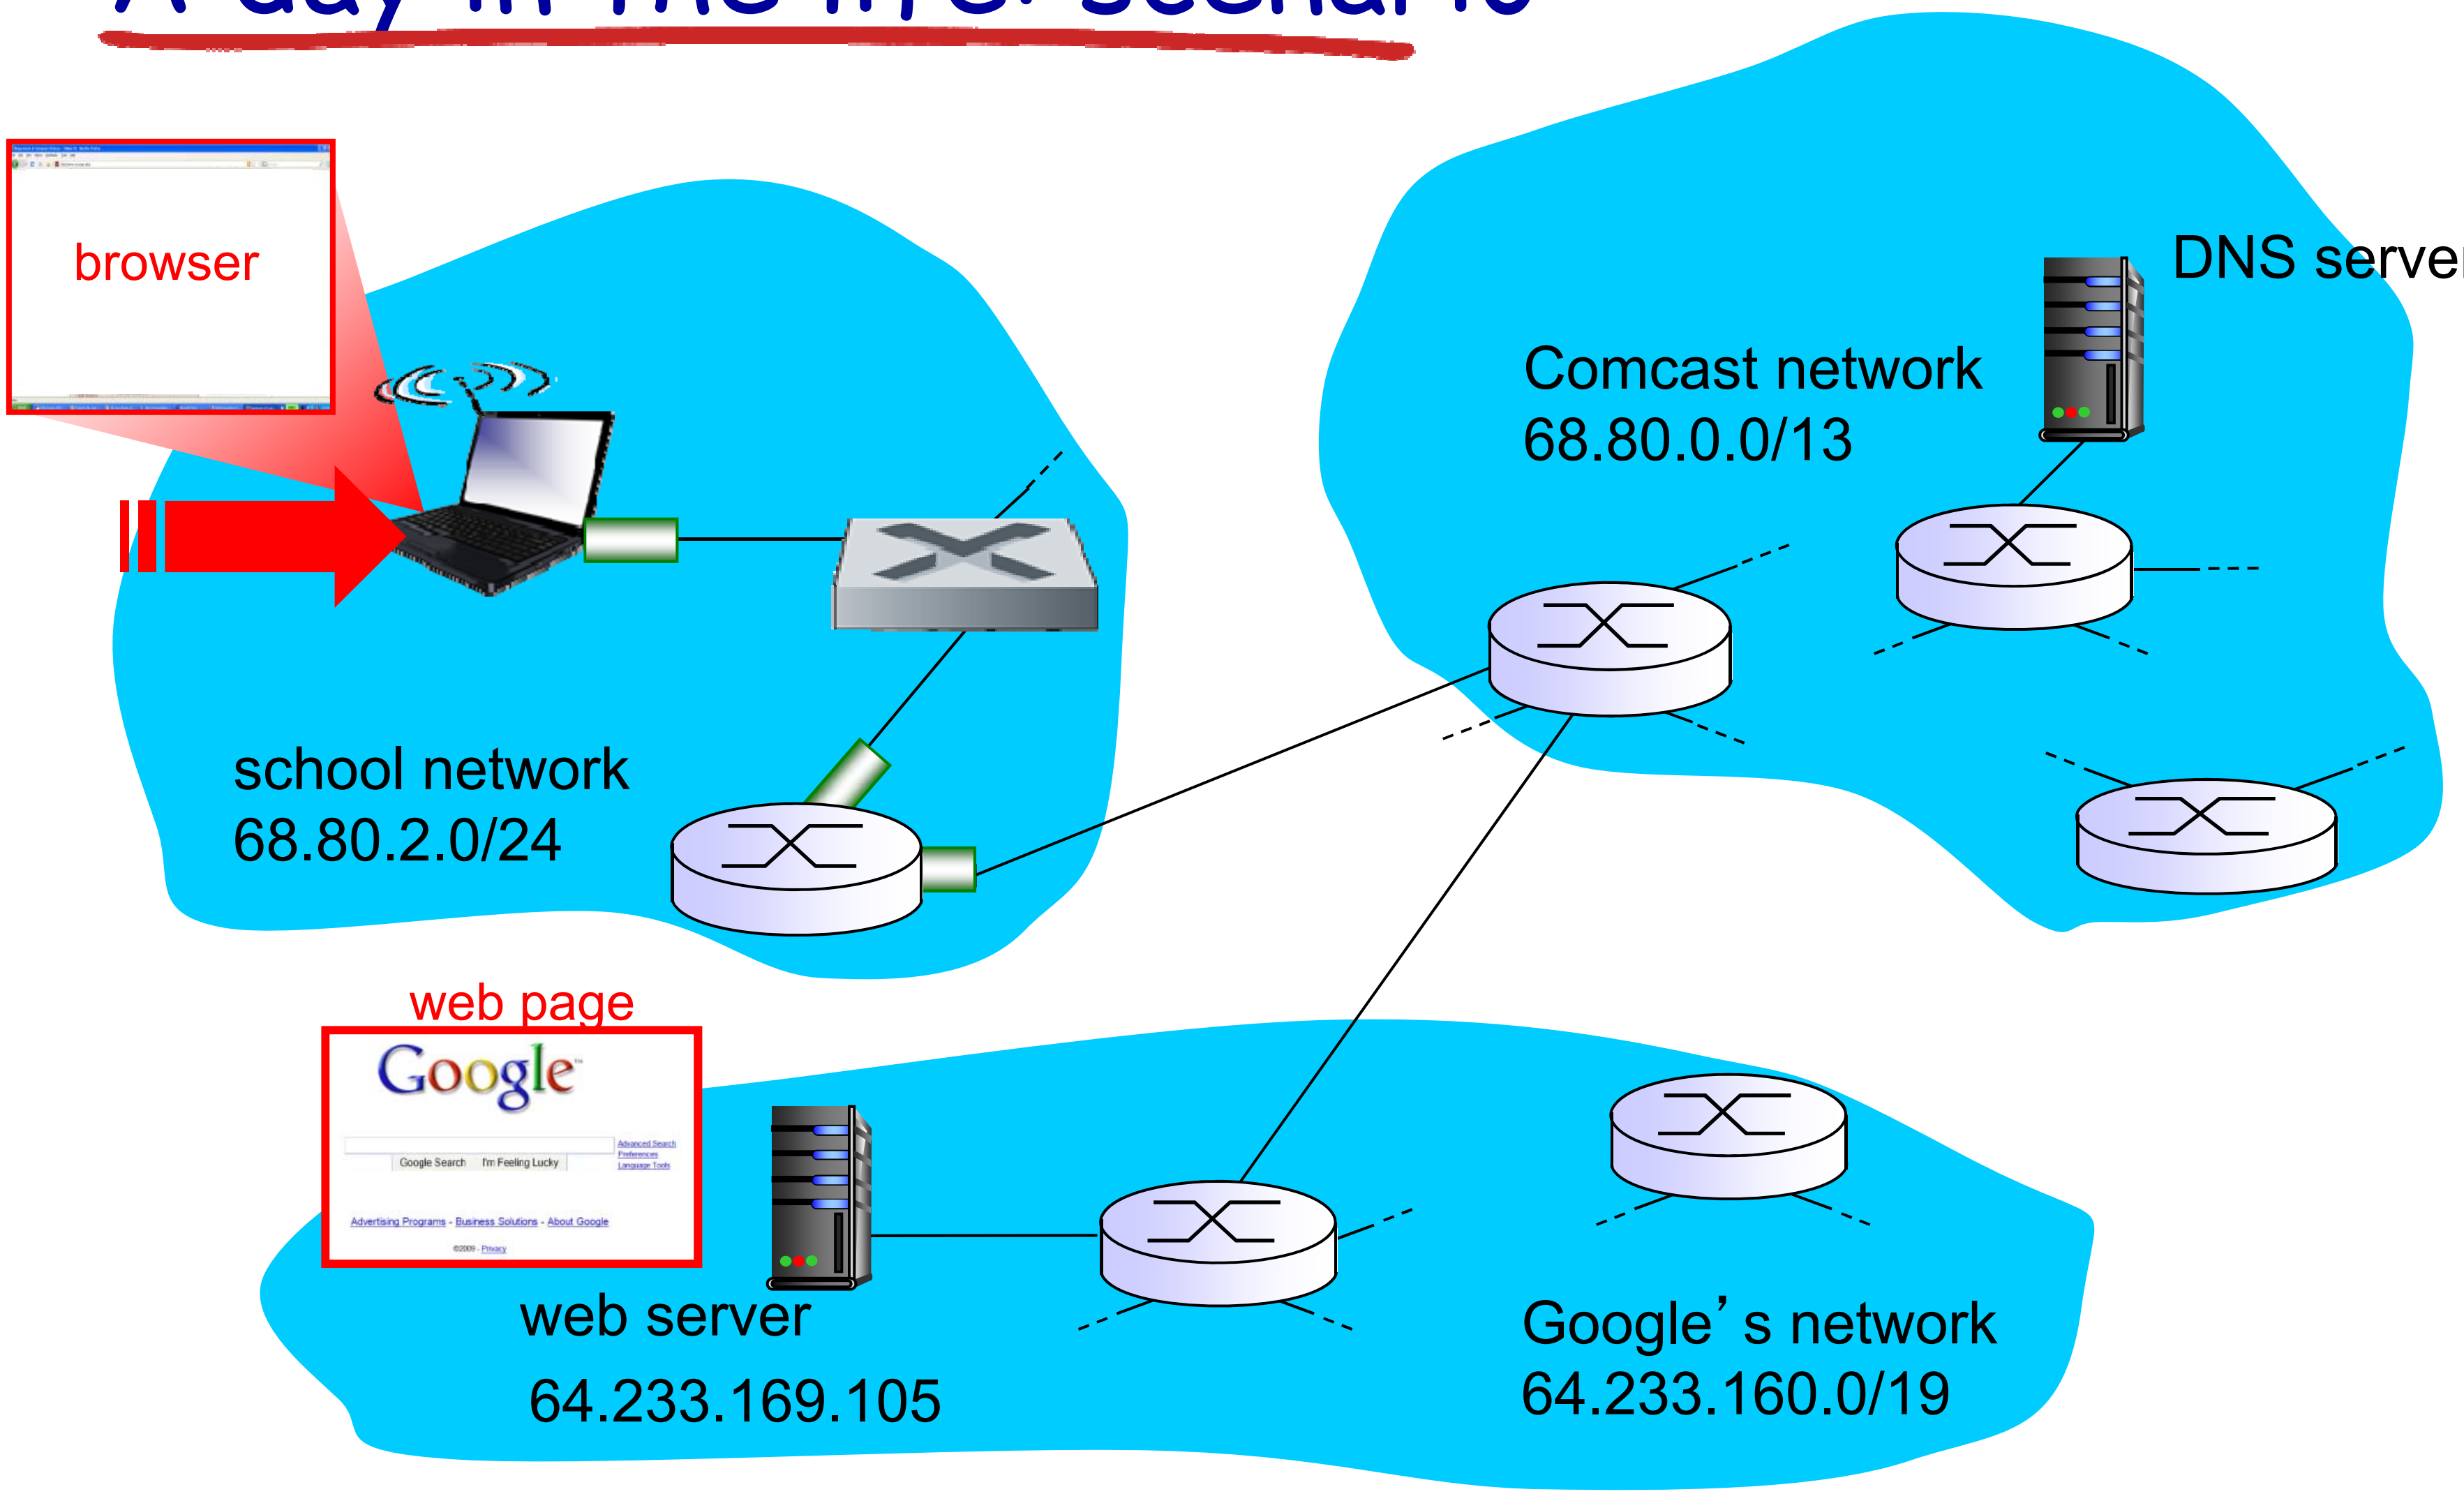

# A day in the life... connecting to the Internet

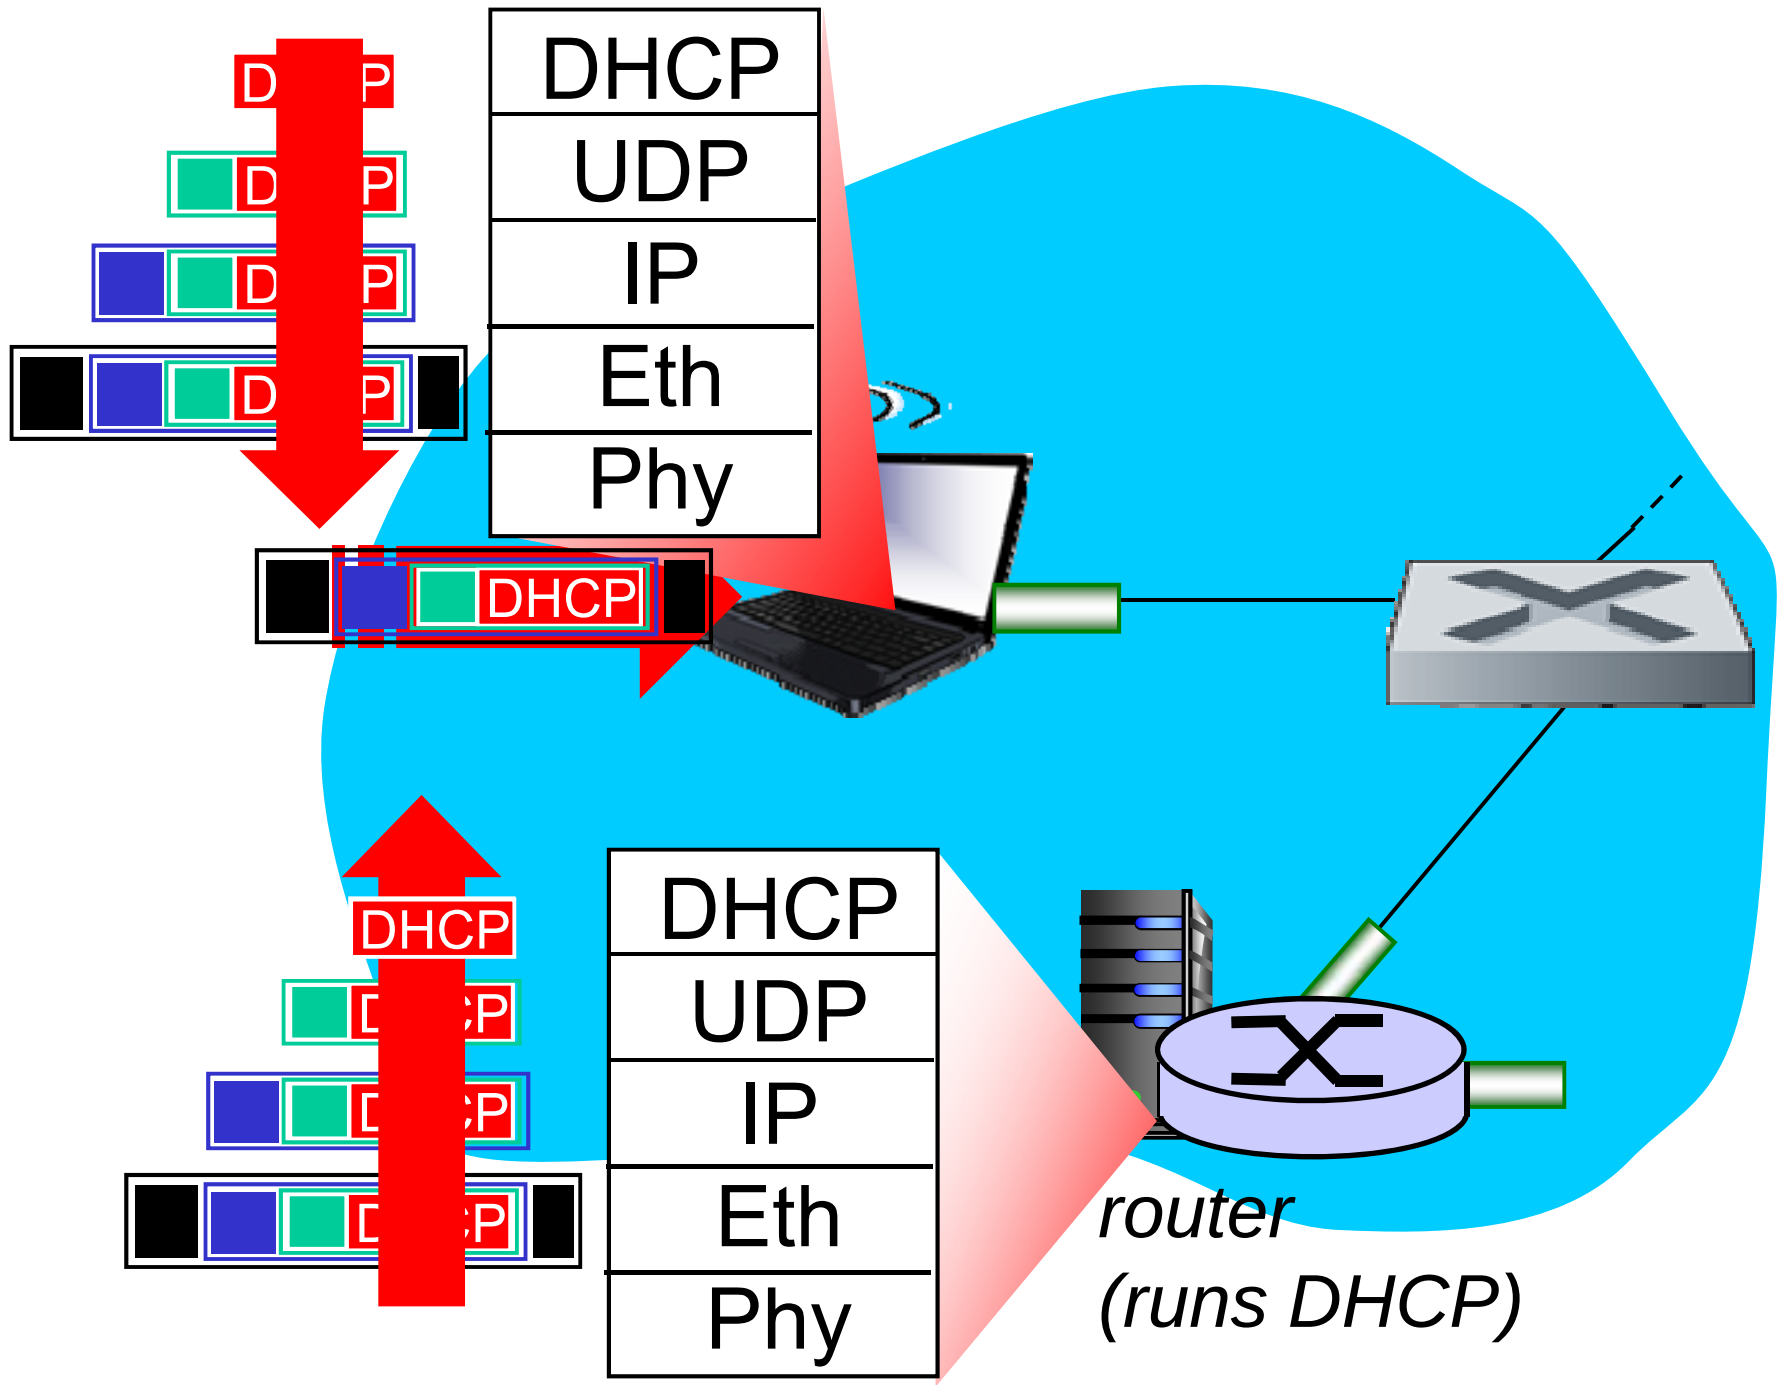


- connecting laptop needs to get its own IP address, addr of first-hop router, addr of DNS server: use *DHCP*
- DHCP request *encapsulated* in *UDP*, encapsulated in *IP*, encapsulated in *802.3* Ethernet
- Ethernet frame *broadcast* (dest: FFFFFFFFFFFF) on LAN, received at router running *DHCP* server
- Ethernet *demuxed* to IP demuxed, UDP demuxed to DHCP

# A day in the life… connecting to the Internet

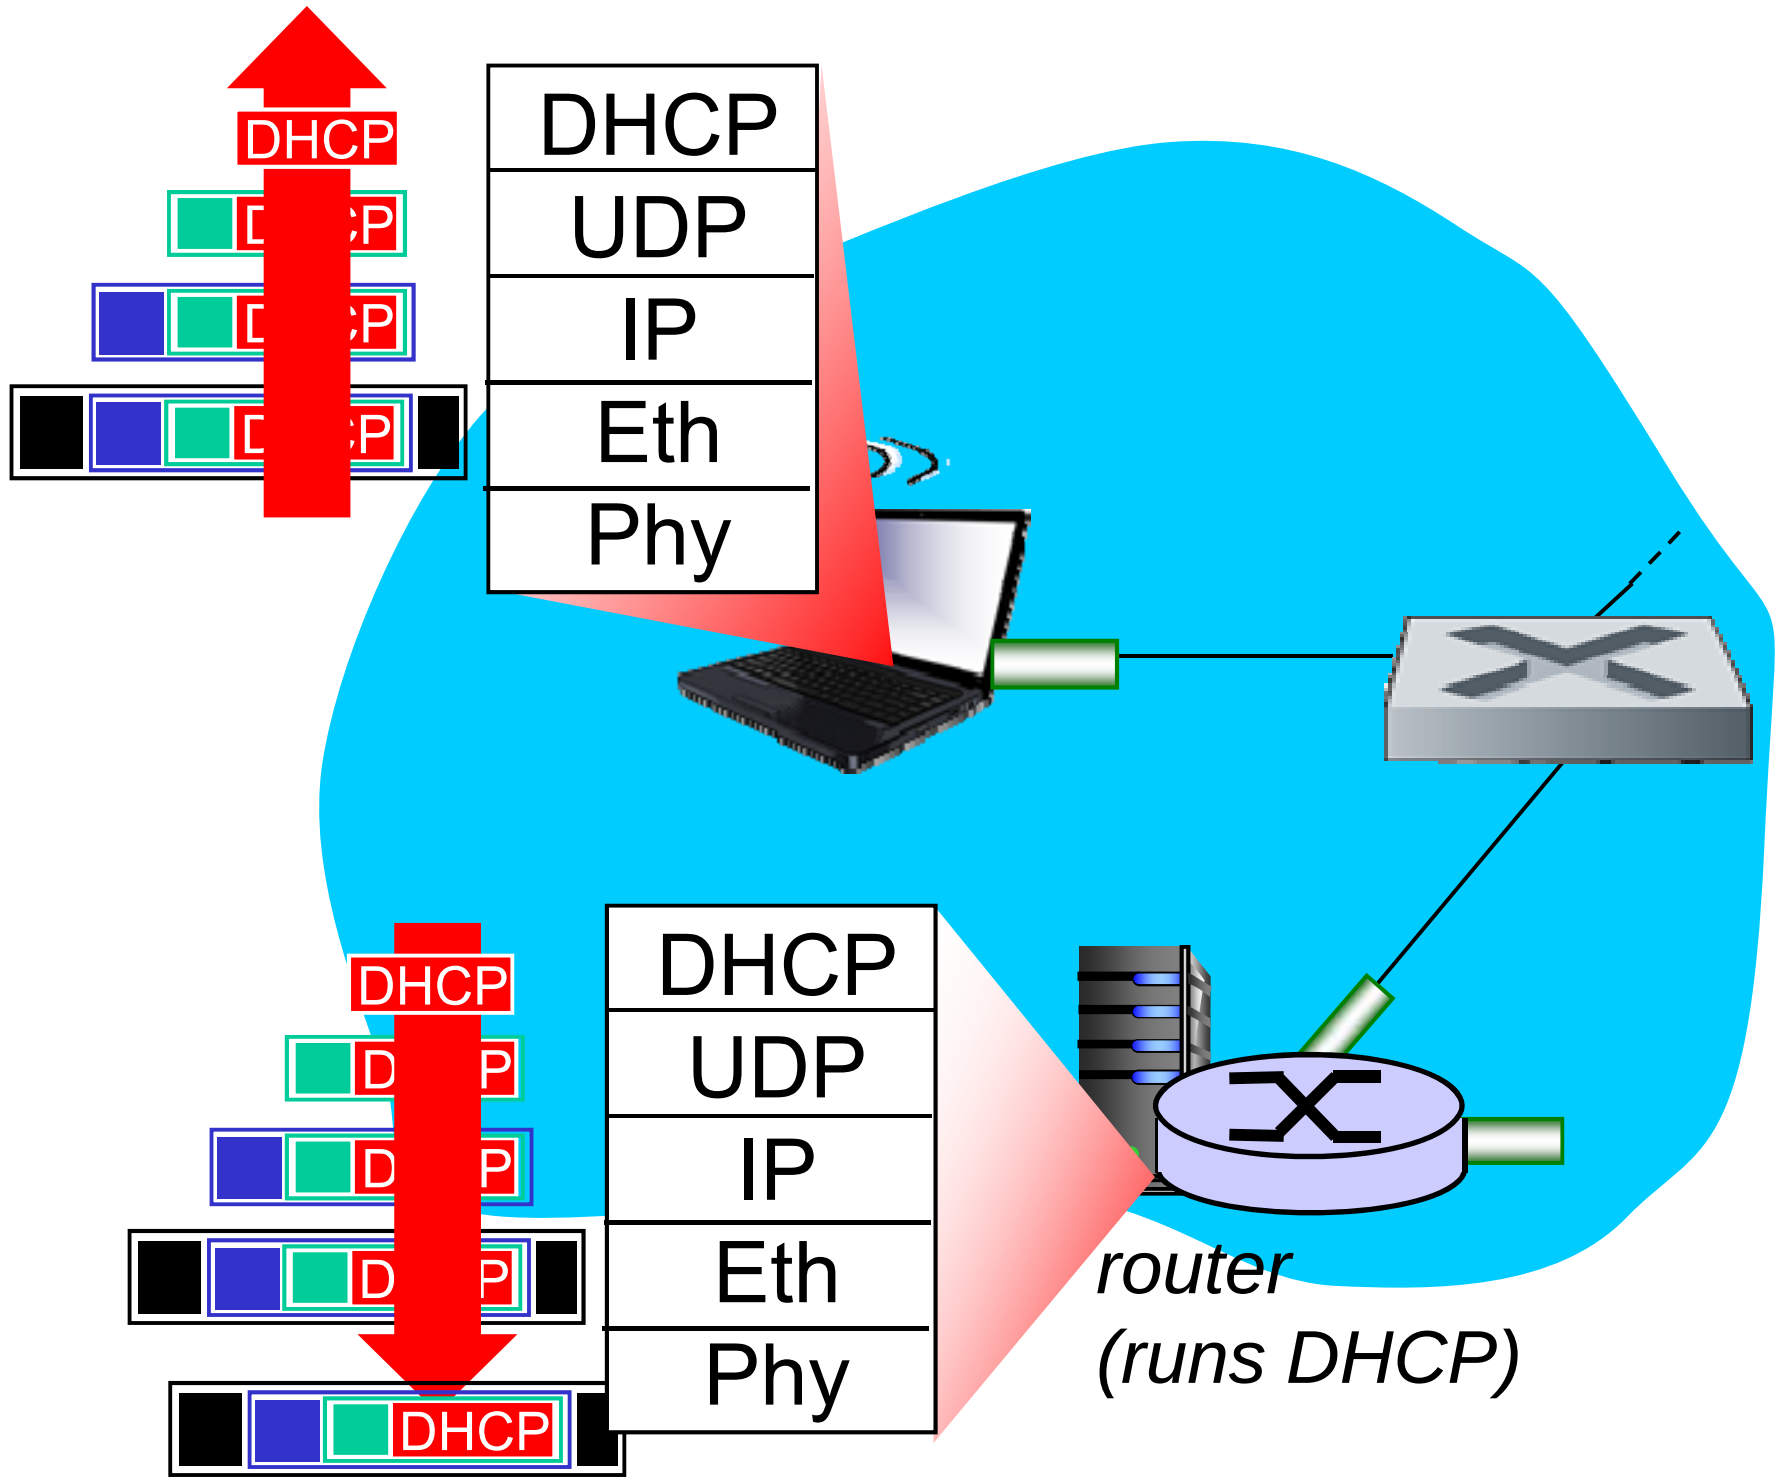


- DHCP server formulates *DHCP ACK* containing client's IP address, IP address of first-hop router for client, name & IP address of DNS server
- encapsulation at DHCP server, frame forwarded (*switch learning*) through LAN, demultiplexing at client
- DHCP client receives DHCP ACK reply

*Client now has IP address, knows name & addr of DNS server, IP address of its first-hop router*

# A day in the life... ARP (before DNS, before HTTP)

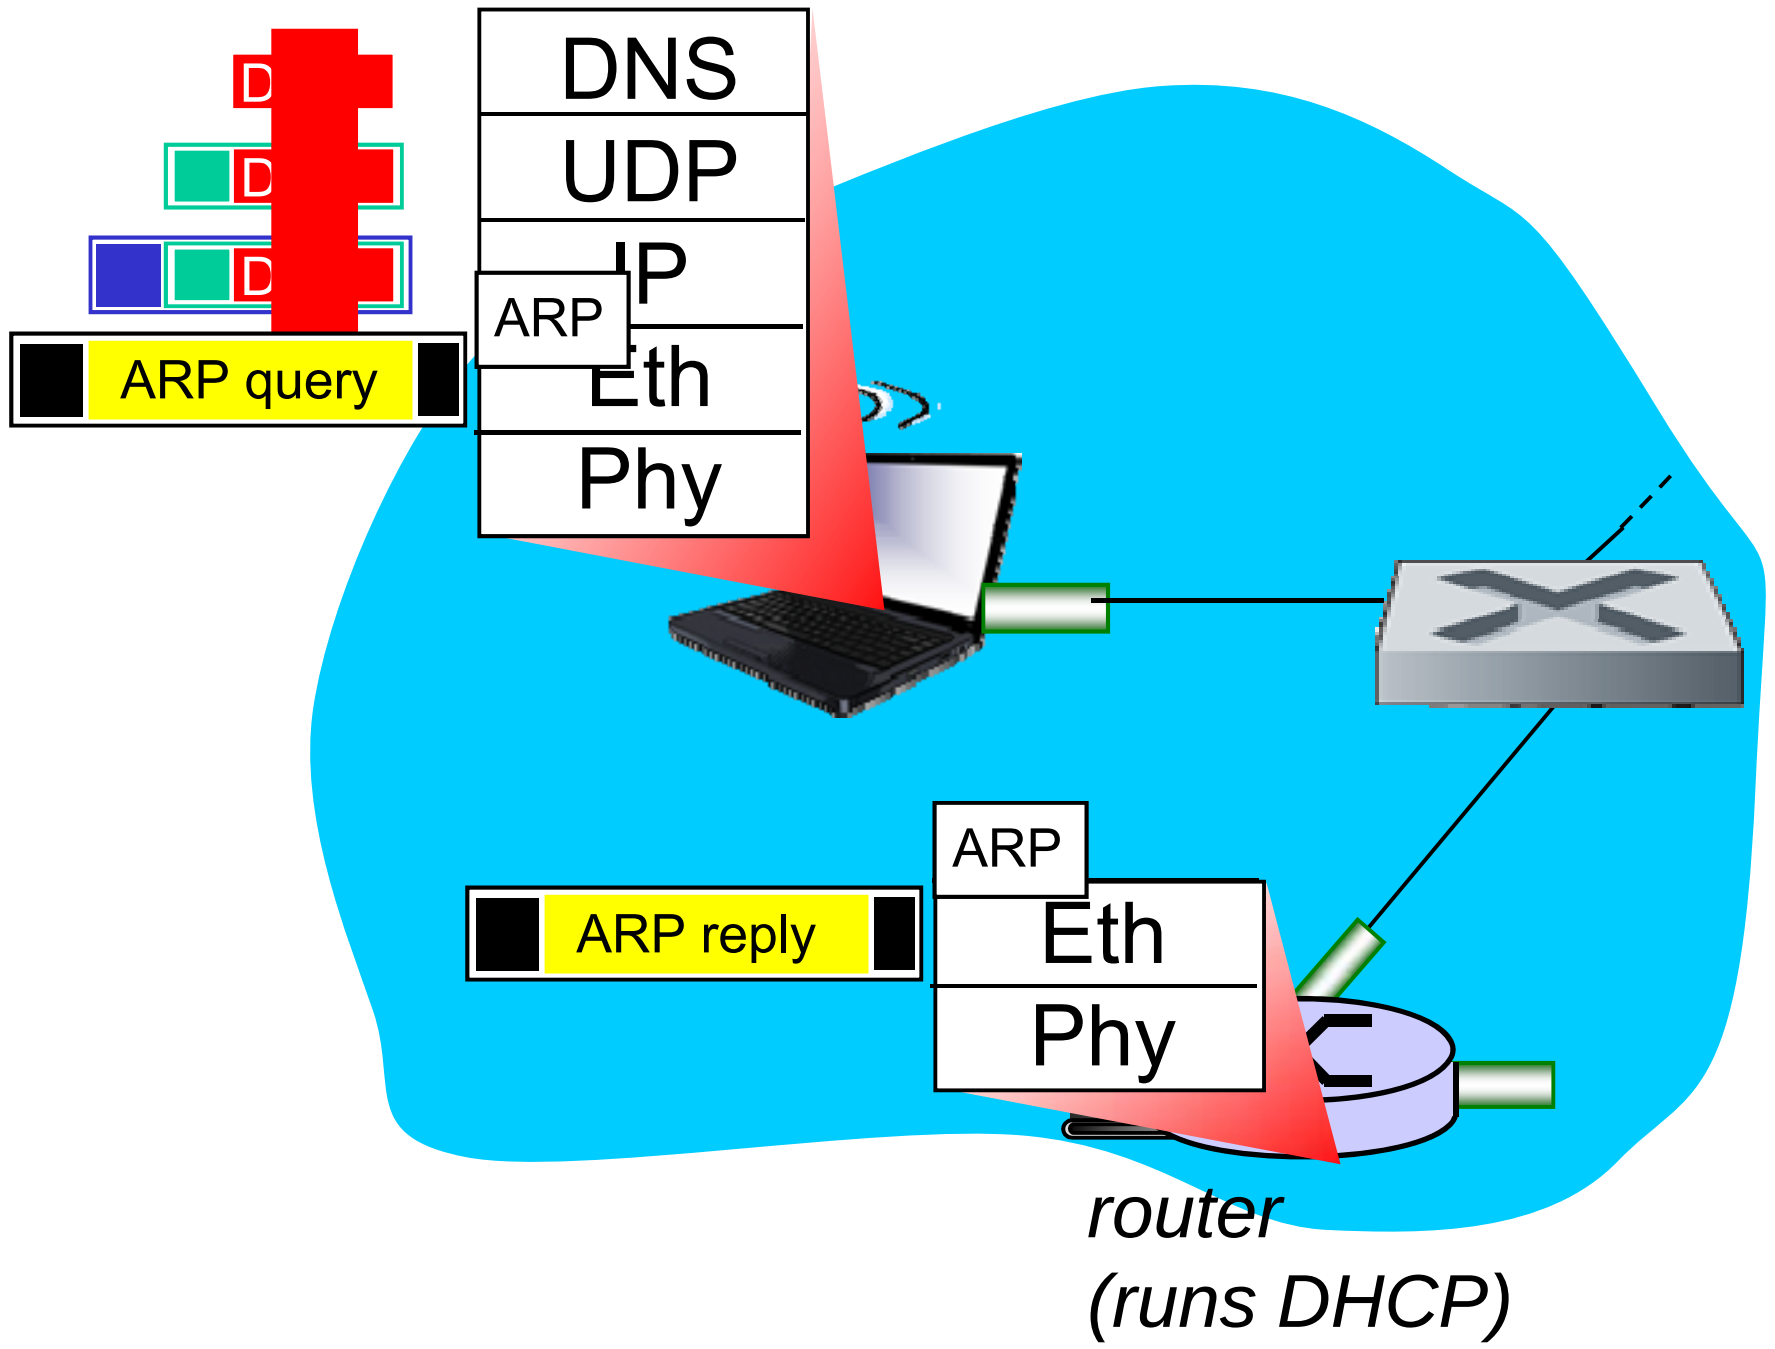


- before sending *HTTP* request, need IP address of www.google.com: *DNS*
- DNS query created, encapsulated in UDP, encapsulated in IP, encapsulated in Eth. To send frame to router, need MAC address of router interface: *ARP*
  - *ARP query* broadcast, received by router, which replies with *ARP reply* giving MAC address of router interface
  - client now knows MAC address of first hop router, so can now send frame containing DNS query

# A day in the life... using DNS

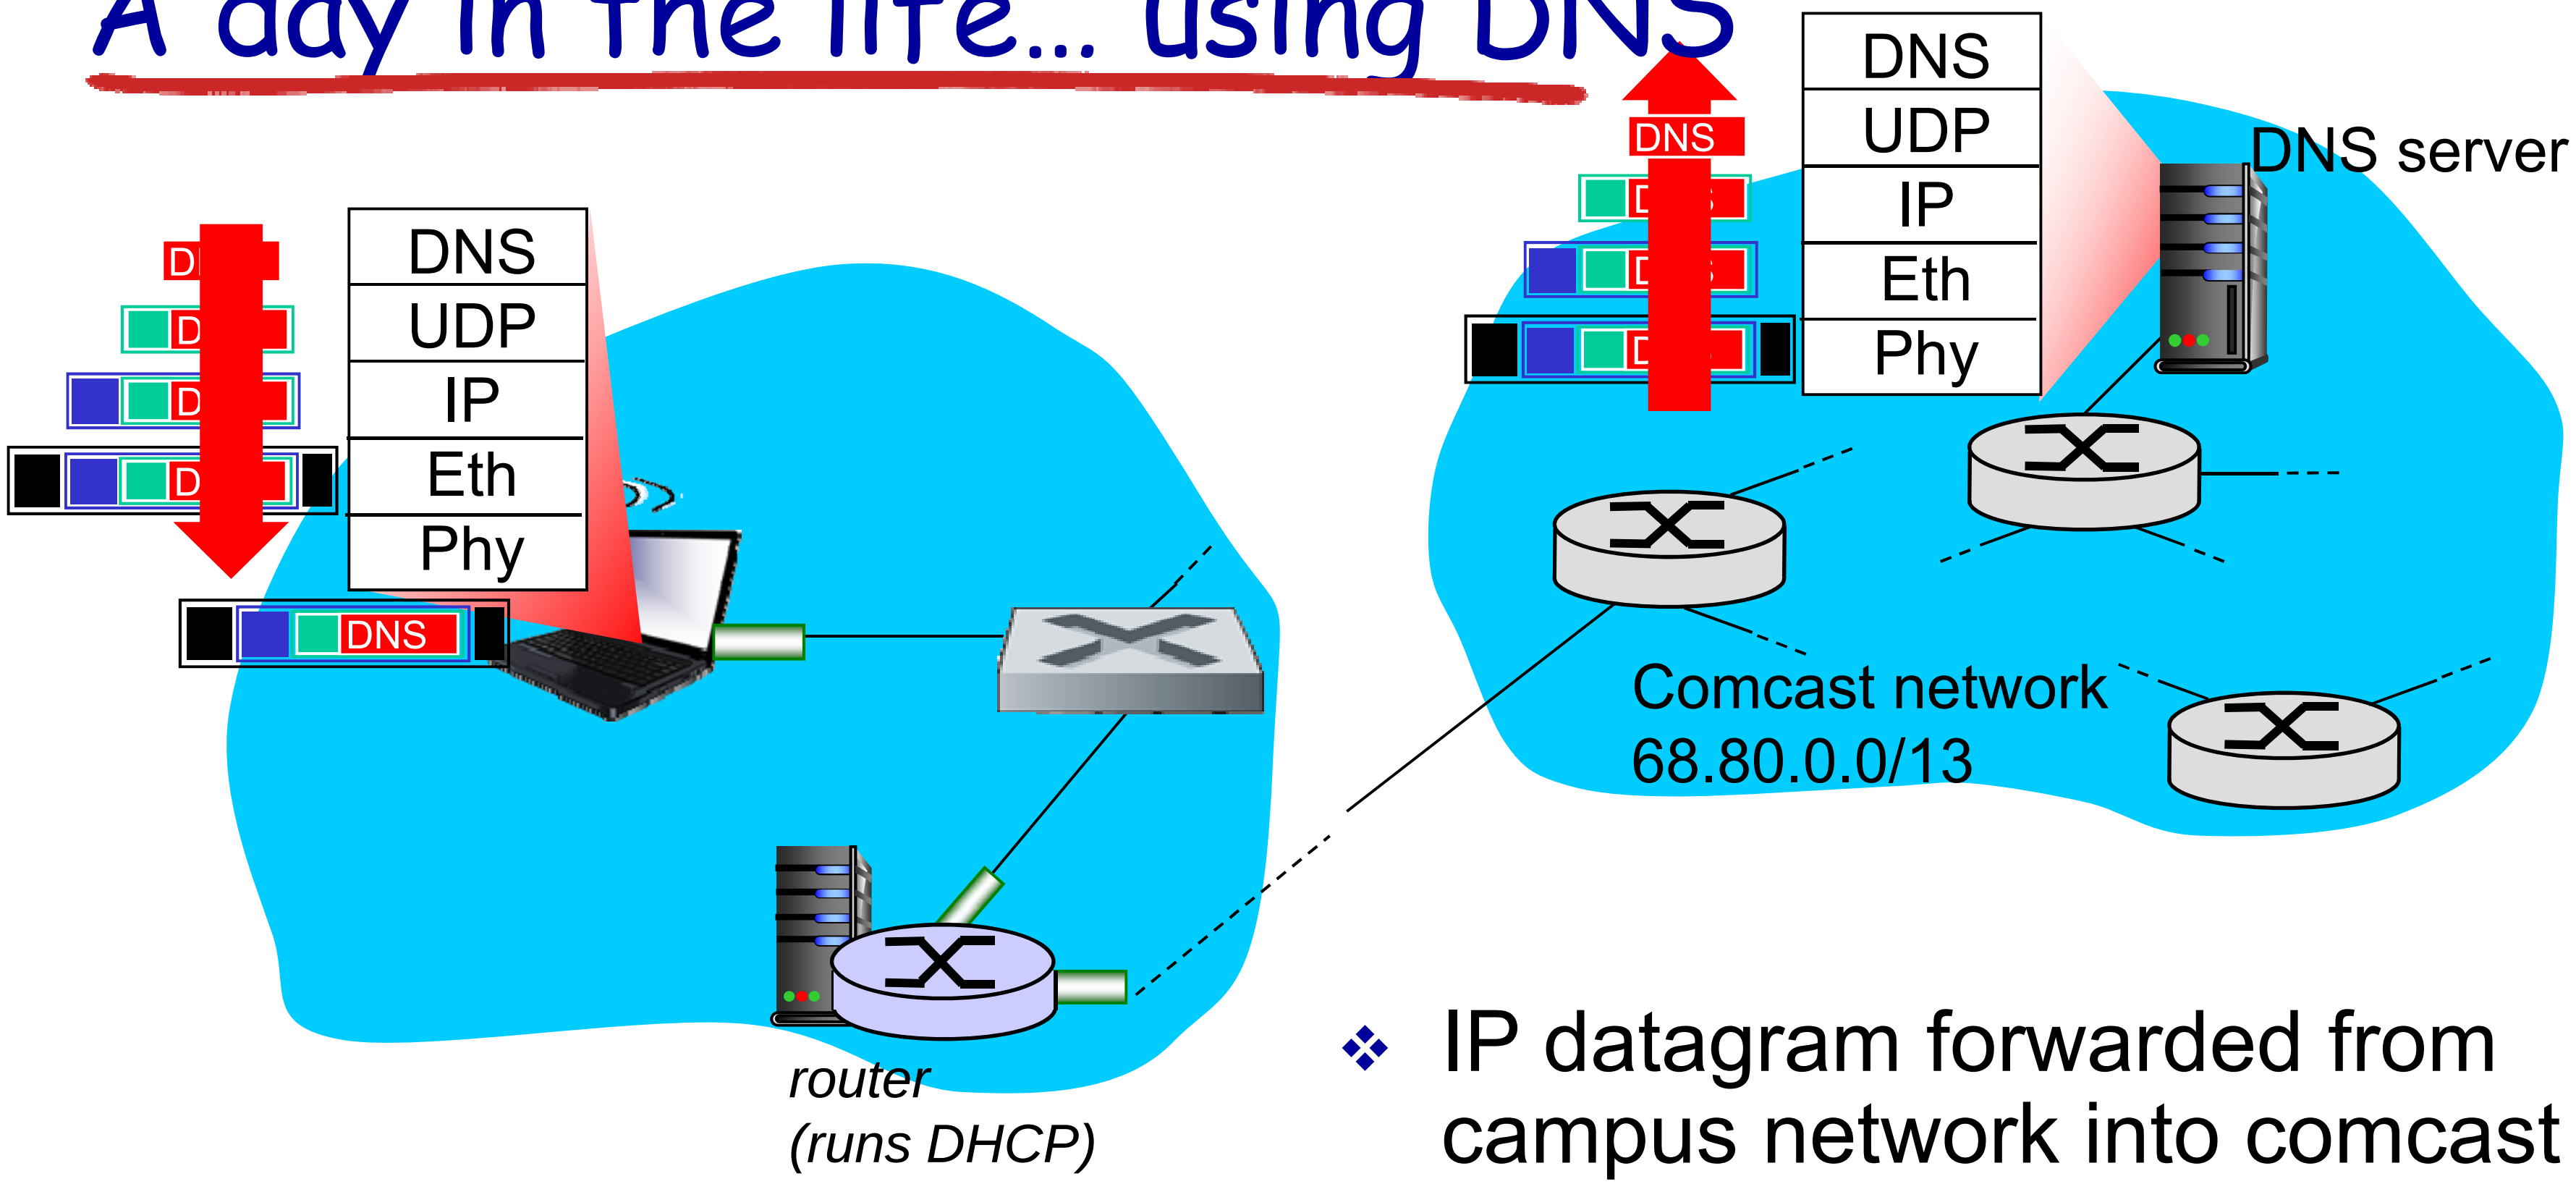


- IP datagram containing DNS query forwarded via LAN switch from client to 1st hop router

- IP datagram forwarded from campus network into comcast network, routed (tables created by *RIP, OSPF, IS-IS* and/or *BGP* routing protocols) to DNS server
- demux'ed to DNS server
- DNS server replies to client with IP address of www.google.com

# A day in the life…TCP connection carrying HTTP

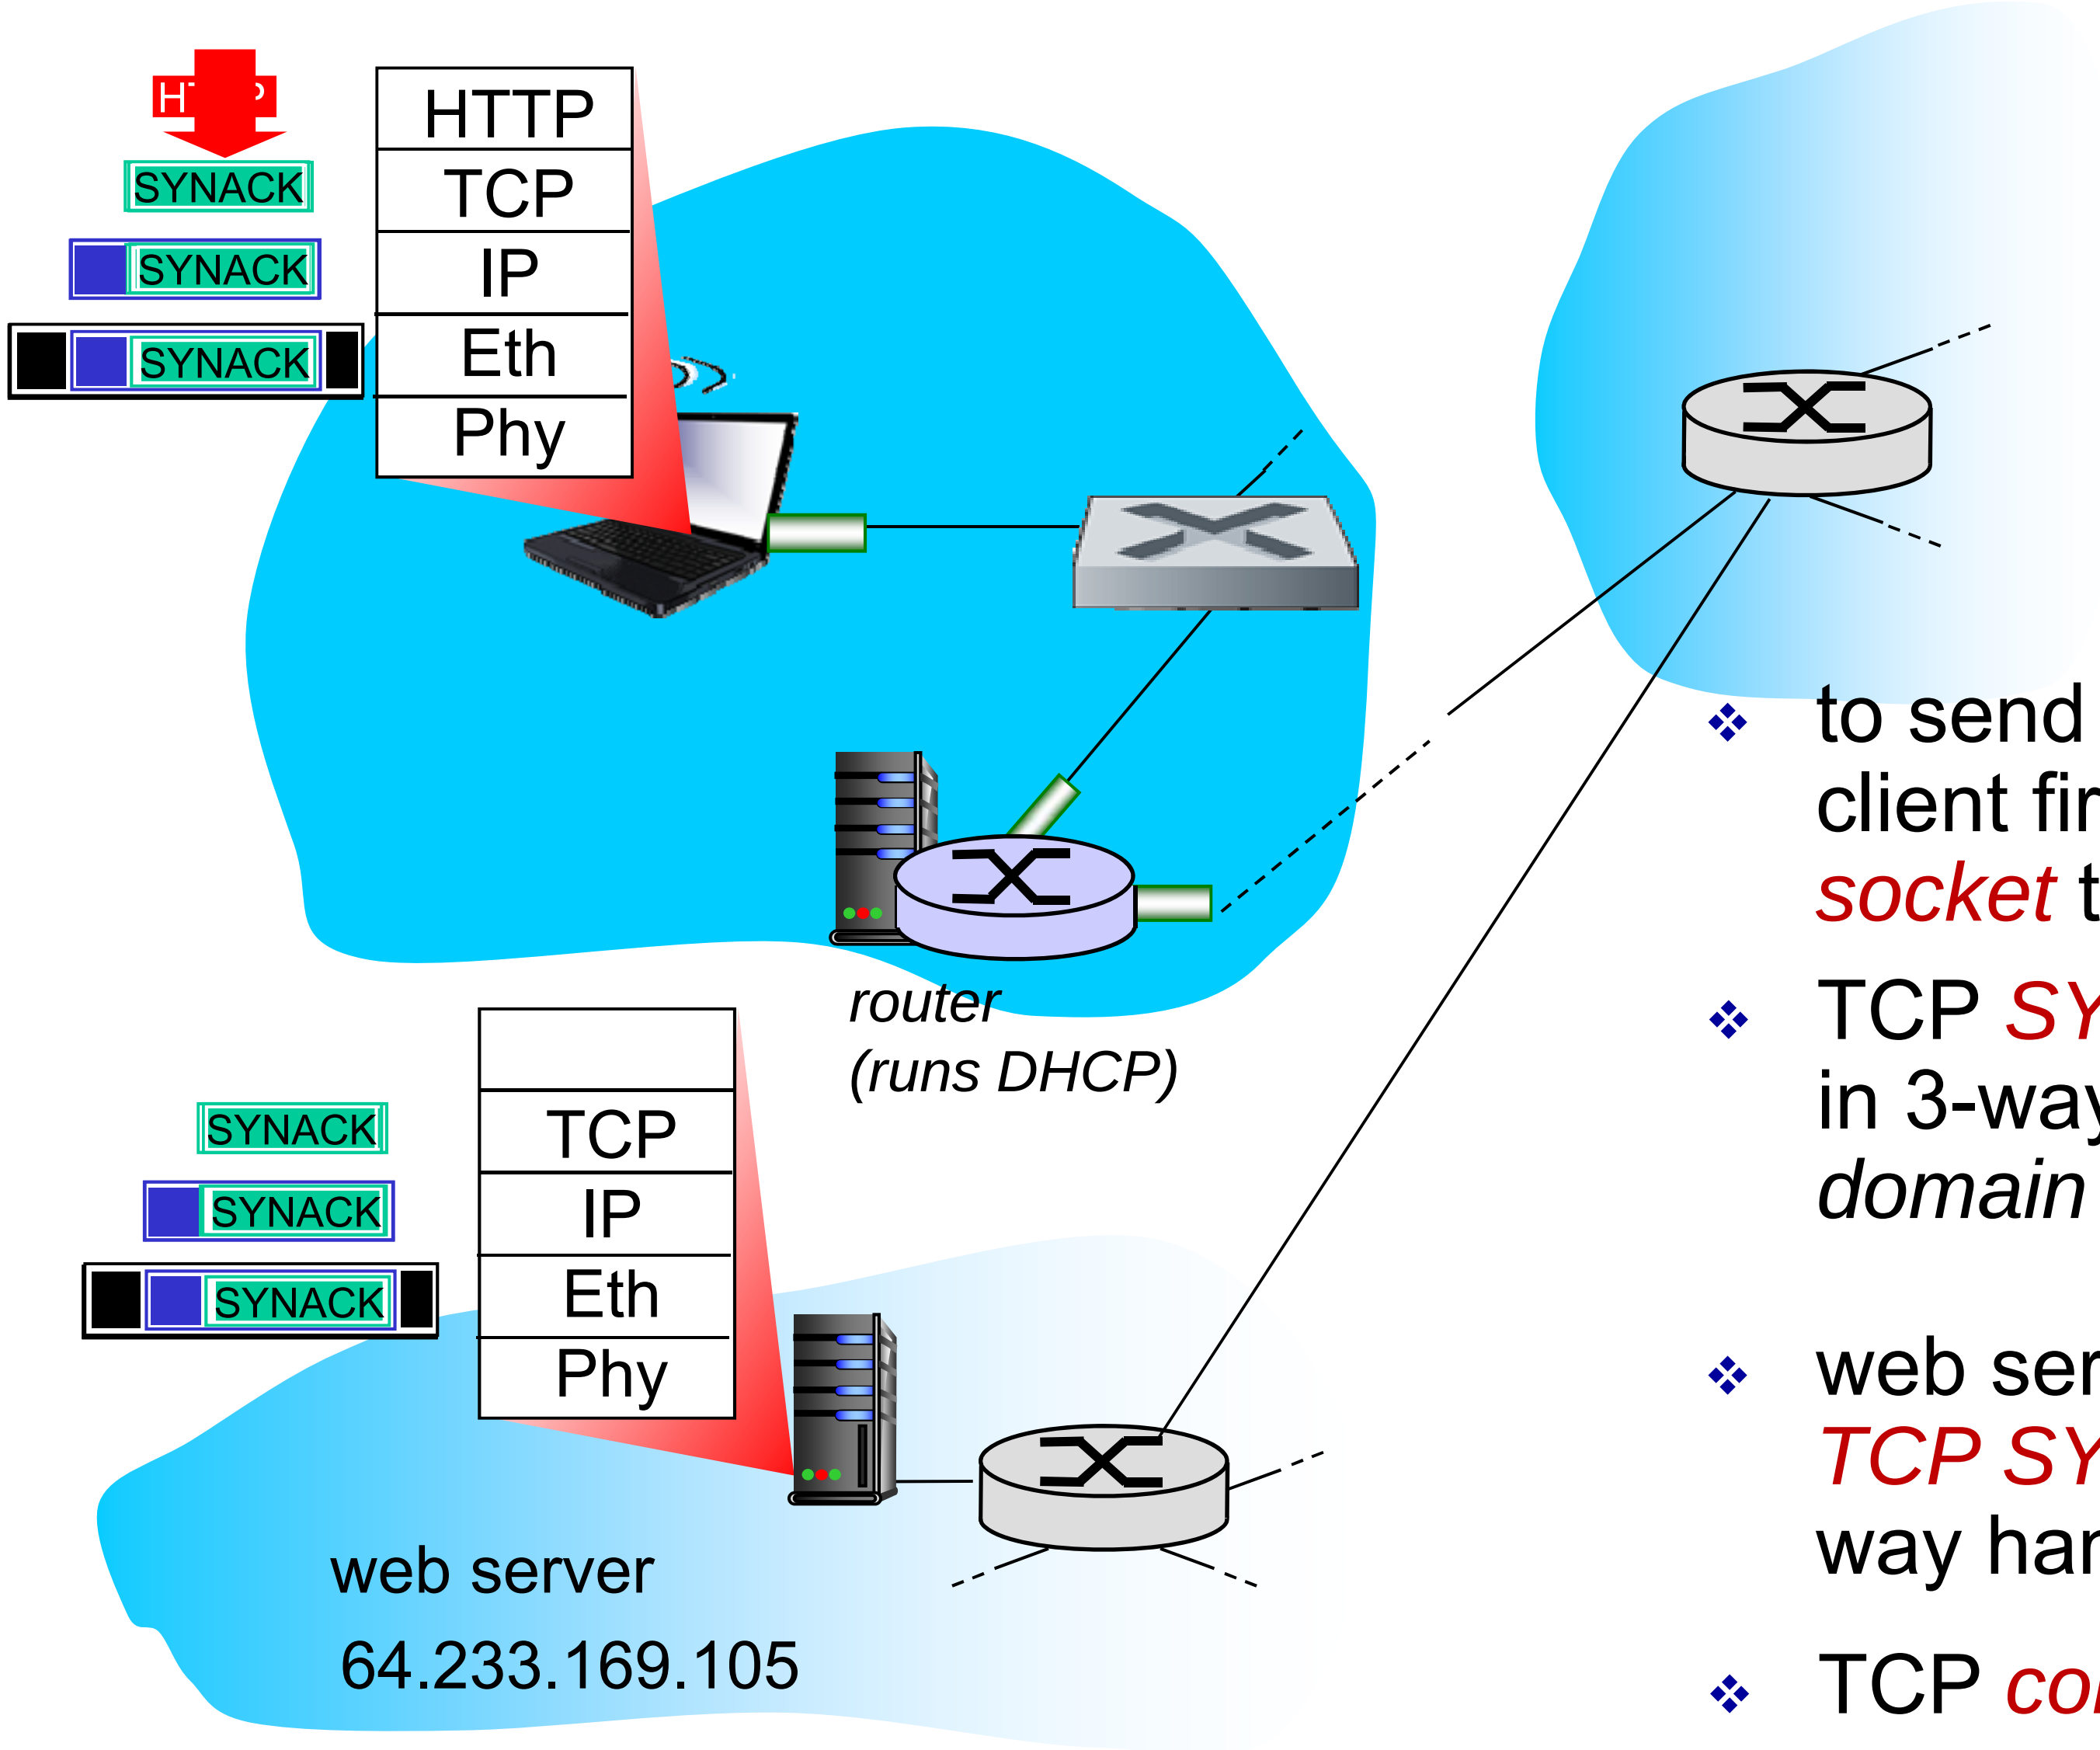


- to send HTTP request, client first opens *TCP socket* to web server
- TCP *SYN segment* (step 1 in 3-way handshake) *inter-domain routed* to web server
- web server responds with *TCP SYNACK* (step 2 in 3-way handshake)
- TCP *connection established!*

# A day in the life... HTTP request/reply

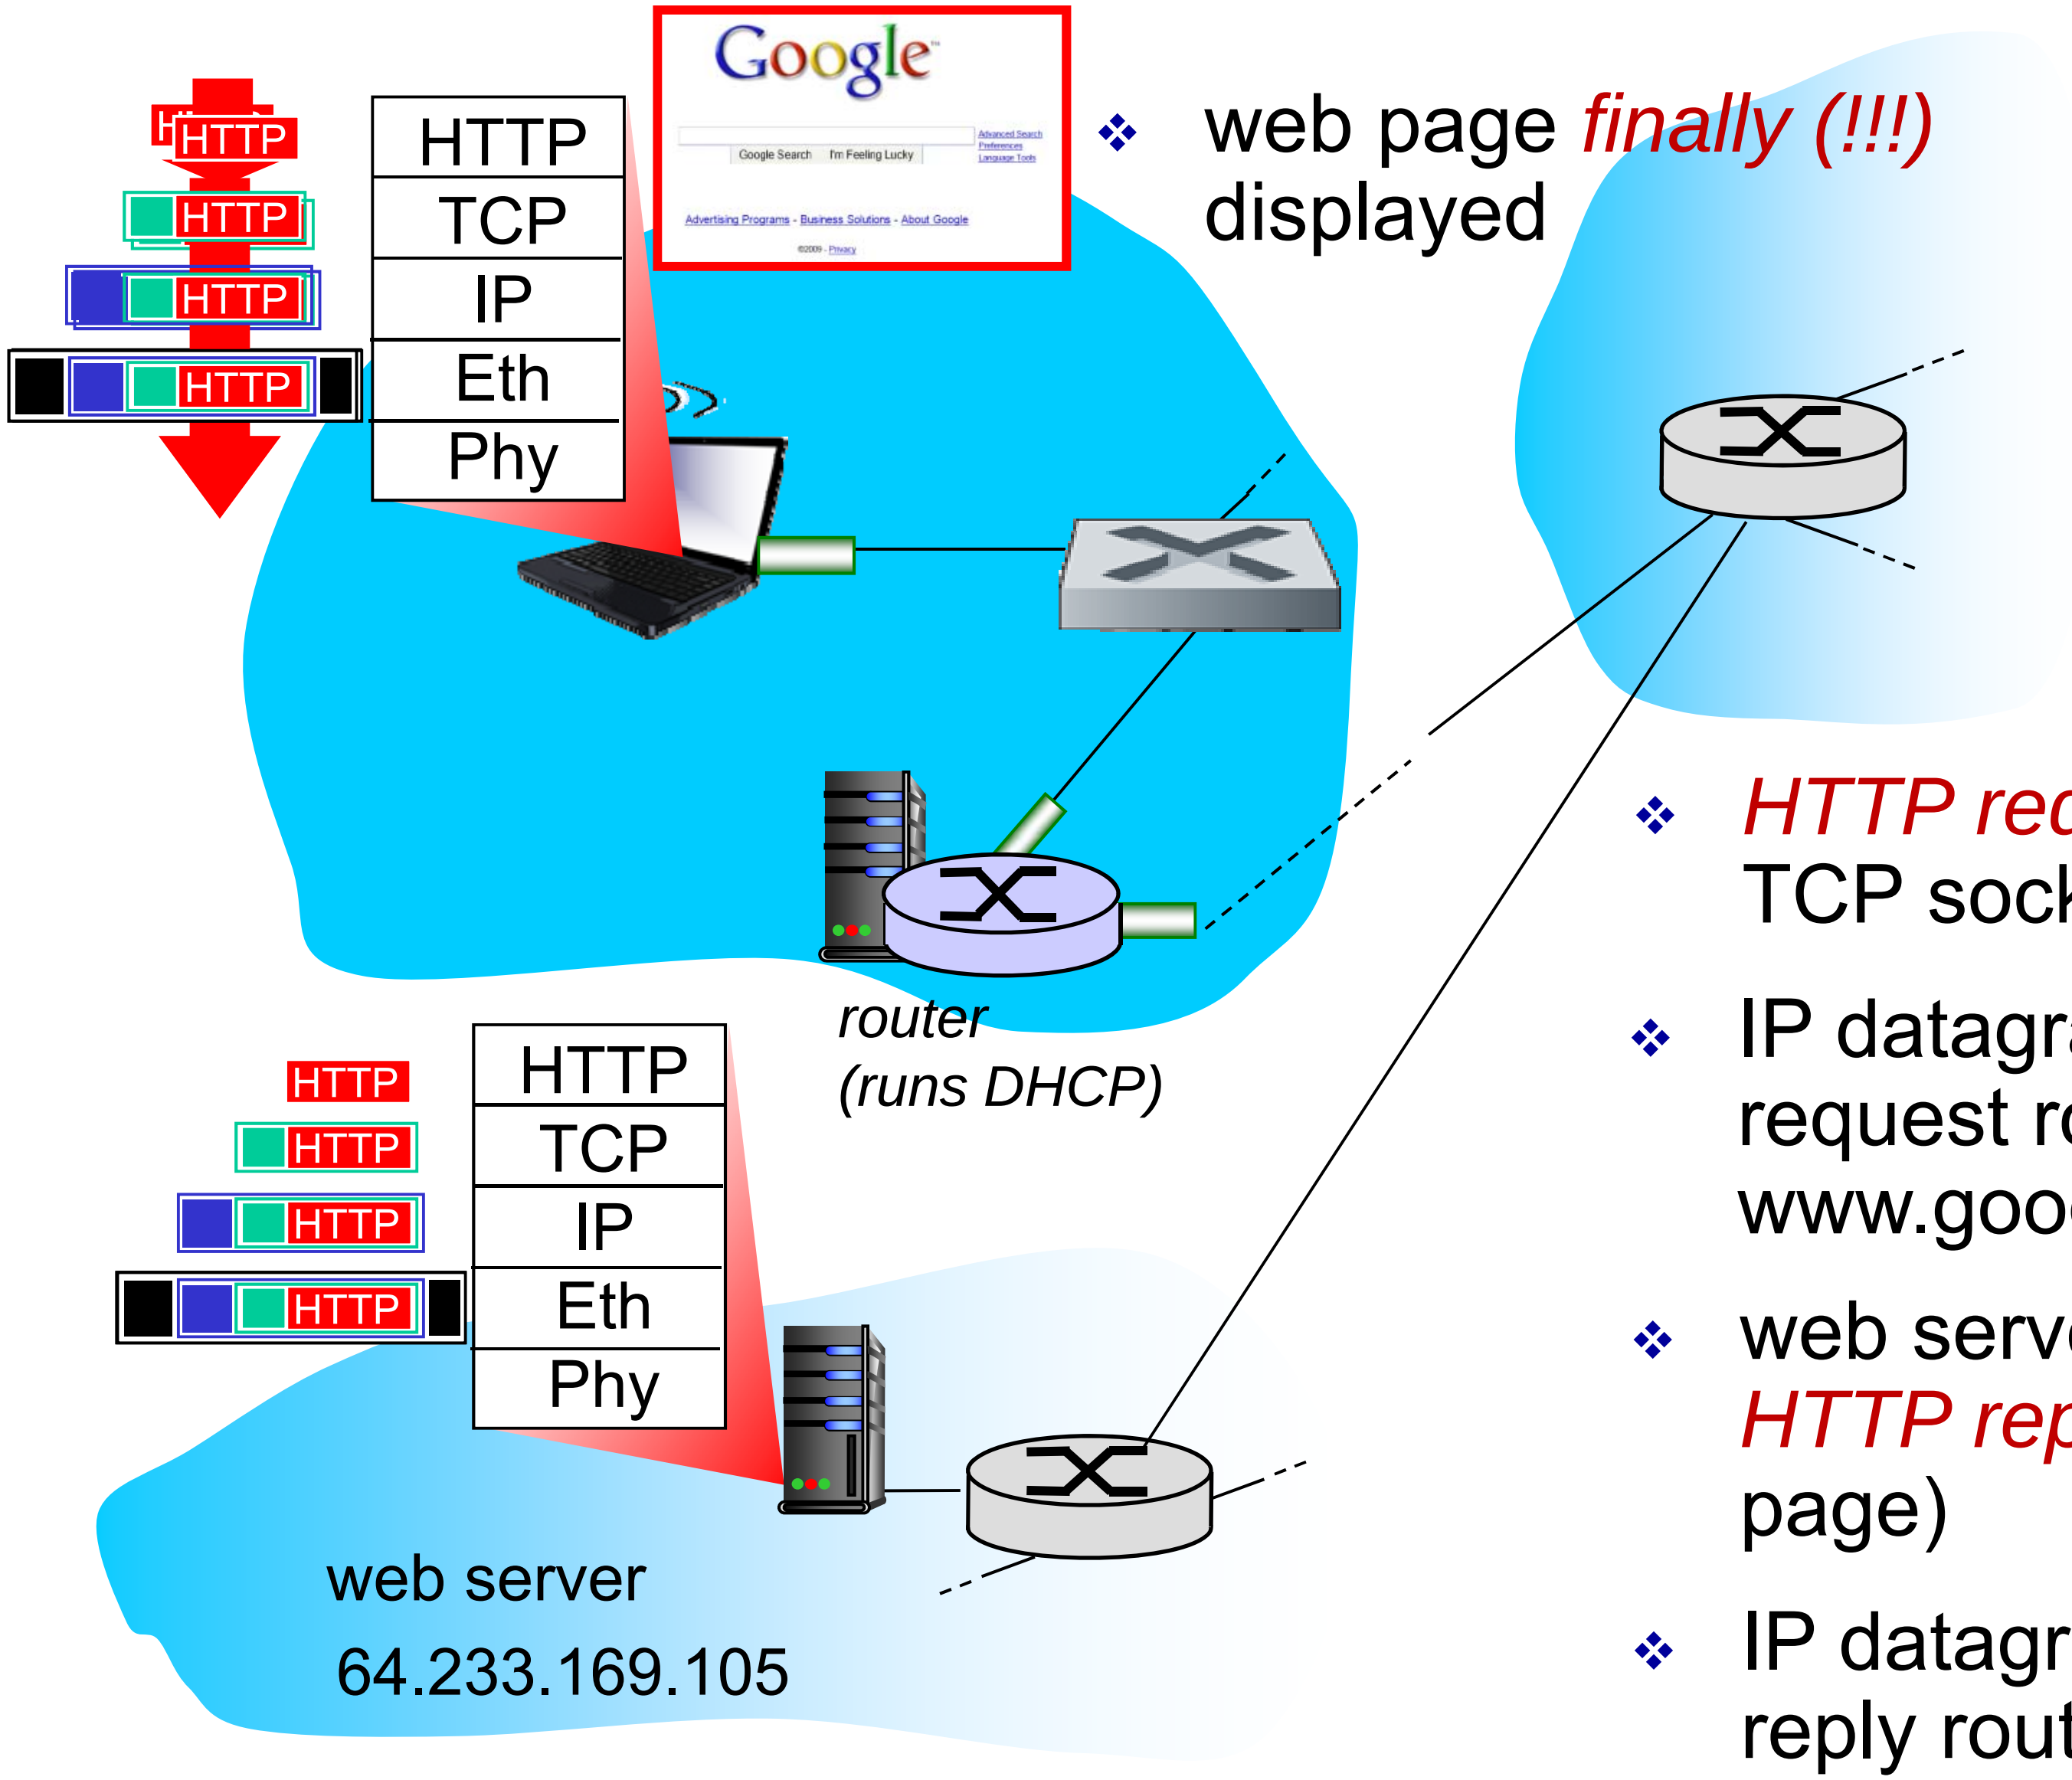


- web page *finally (!!!)* displayed

- *HTTP request* sent into TCP socket
- IP datagram containing HTTP request routed to www.google.com
- web server responds with *HTTP reply* (containing web page)
- IP datagram containing HTTP reply routed back to client

# Summary

- principles behind data link layer services:
  - error detection, correction
  - sharing a broadcast channel: multiple access
  - link layer addressing
- instantiation and implementation of various link layer technologies
  - Ethernet
  - switched LANS, VLANs
  - virtualized networks as a link layer: MPLS
- synthesis: a day in the life of a web request

# let's take a breath

- journey down protocol stack *complete* (except PHY)
- solid understanding of networking principles, practice
- ….. could stop here …. but *lots* of interesting topics!
  - wireless
  - multimedia
  - security
  - network management