Transport Layer

our goals:

- understand principles behind transport layer services:
  - multiplexing, demultiplexing
  - reliable data transfer
  - flow control
  - congestion control
- learn about Internet transport layer protocols:
  - UDP: connectionless transport
  - TCP: connection-oriented reliable transport
  - TCP congestion control

Outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP

- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

Transport services and protocols

- provide *logical communication* between app processes running on different hosts
- transport protocols run in end systems
  - send side: breaks app messages into *segments*, passes to network layer
  - rcv side: reassembles segments into messages, passes to app layer
- more than one transport protocol available to apps
  - Internet: TCP and UDP

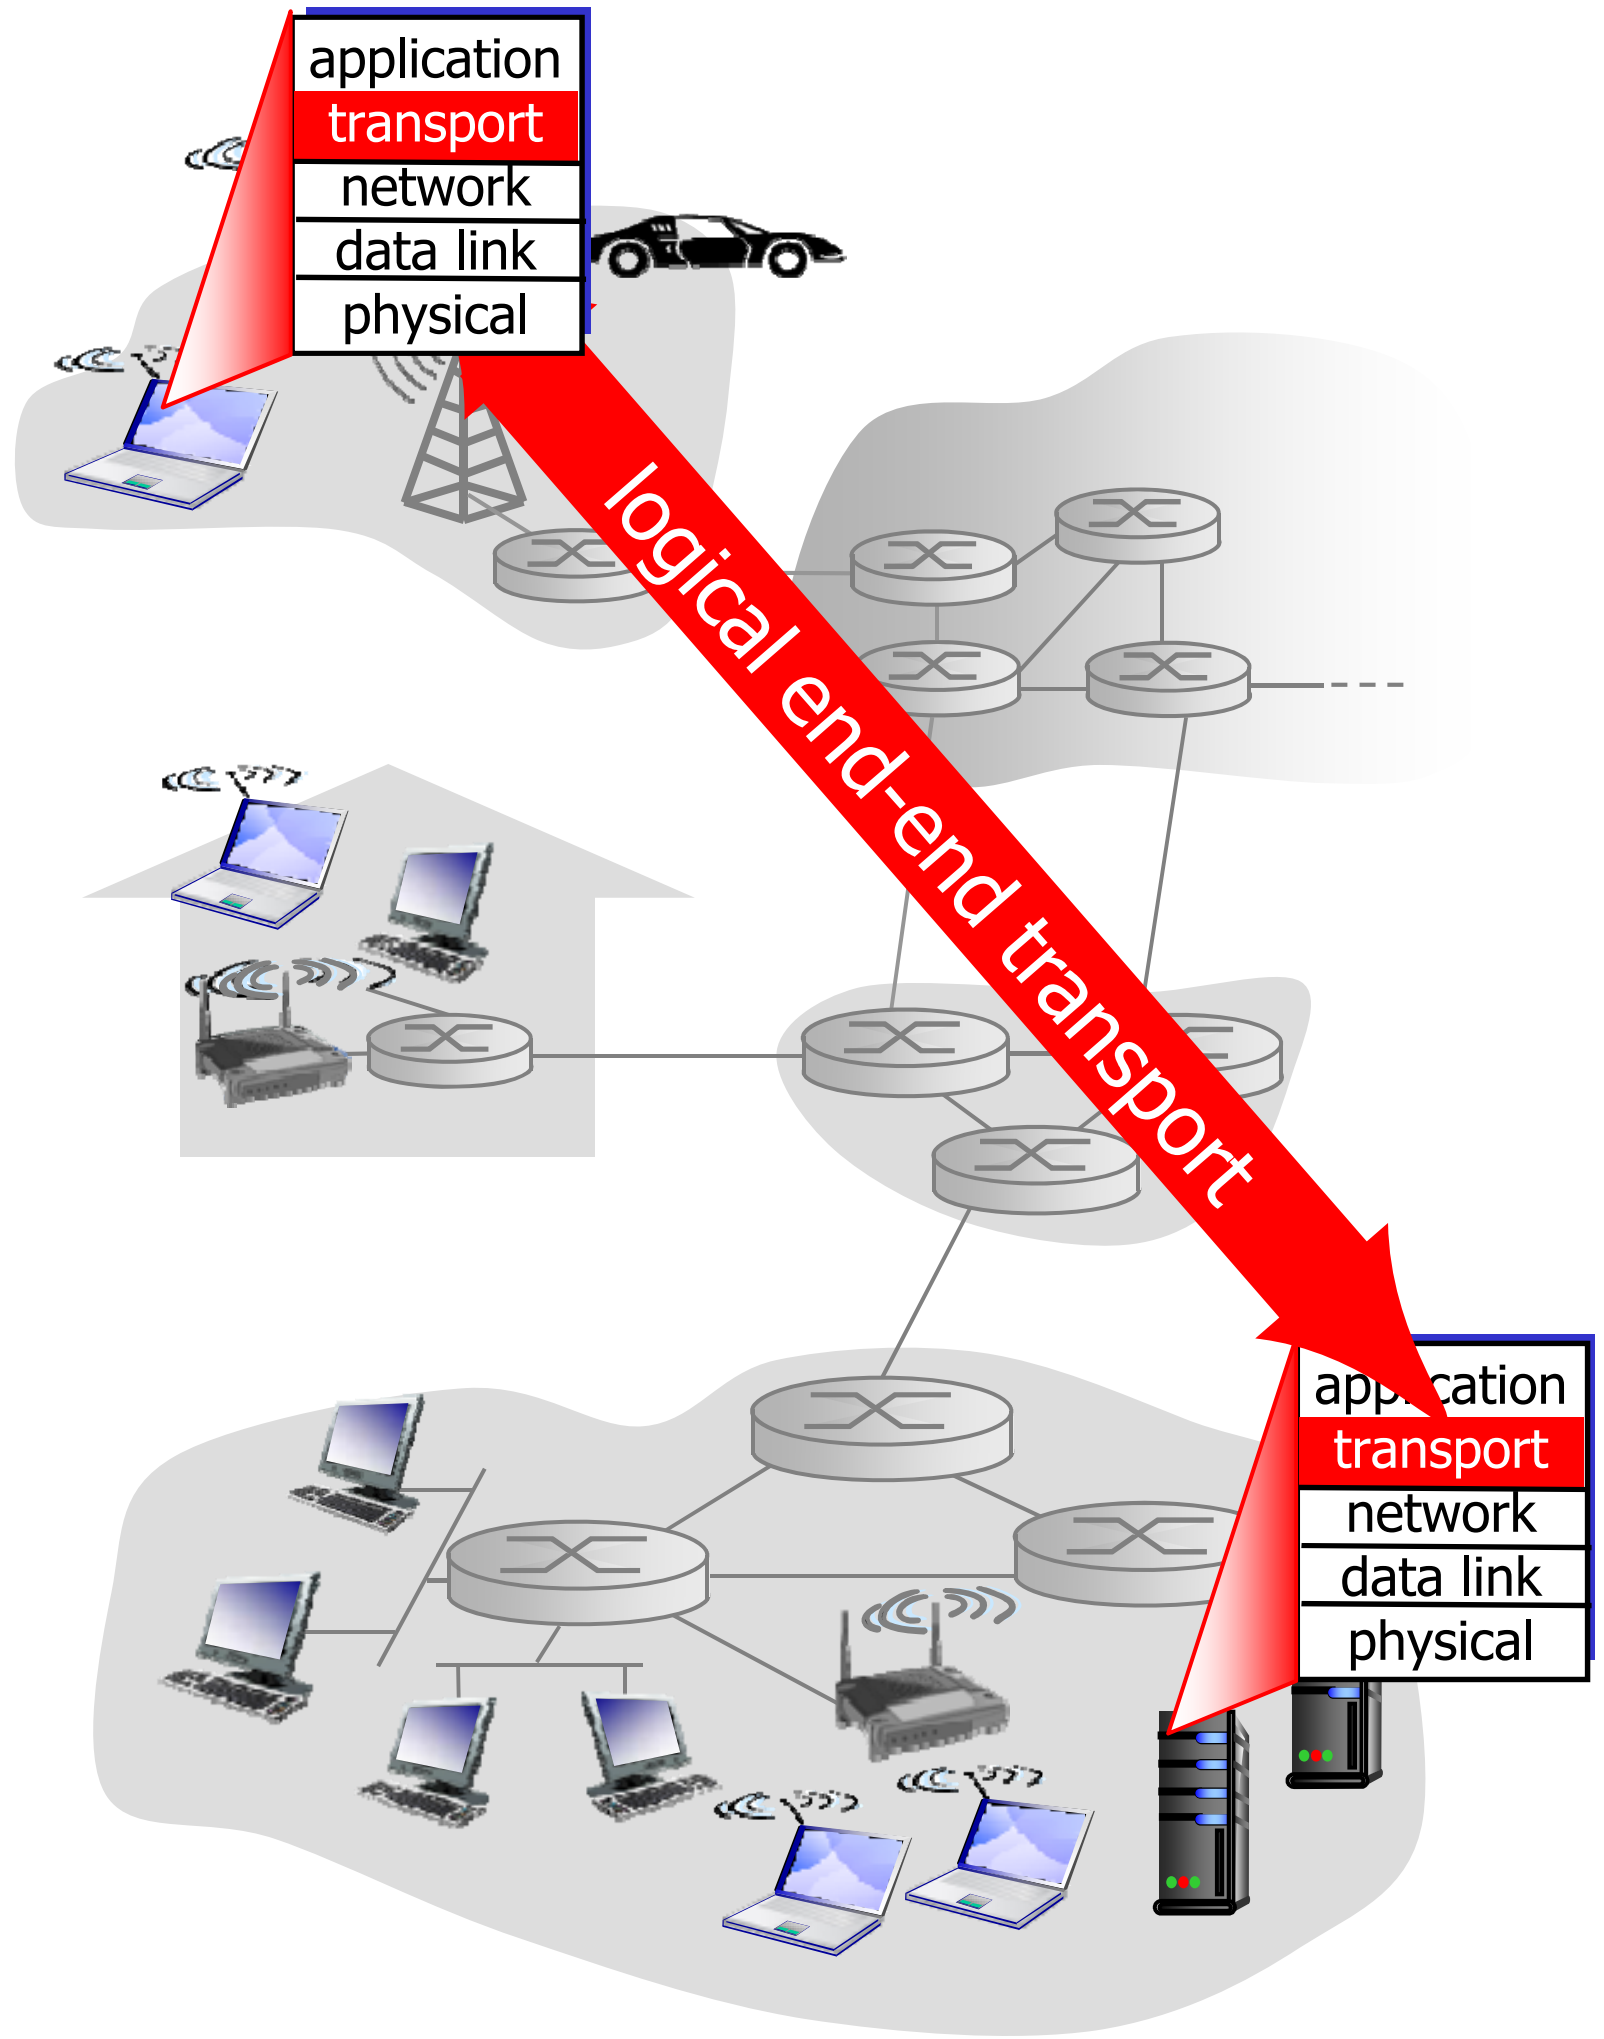

Transport vs. network layer

- *network layer:* logical communication between hosts
- *transport layer:* logical communication between processes
  - relies on, enhances, network layer services

household analogy:

12 kids in Ann's house sending letters to 12 kids in Bill's house:

- hosts = houses
- processes = kids
- app messages = letters in envelopes
- transport protocol = Ann and Bill who demux to in-house siblings
- network-layer protocol = postal service

Internet transport-layer protocols

- reliable, in-order delivery (TCP)
  - congestion control
  - flow control
  - connection setup
- unreliable, unordered delivery: UDP
  - no-frills extension of "best-effort" IP
- services not available:
  - delay guarantees
  - bandwidth guarantees

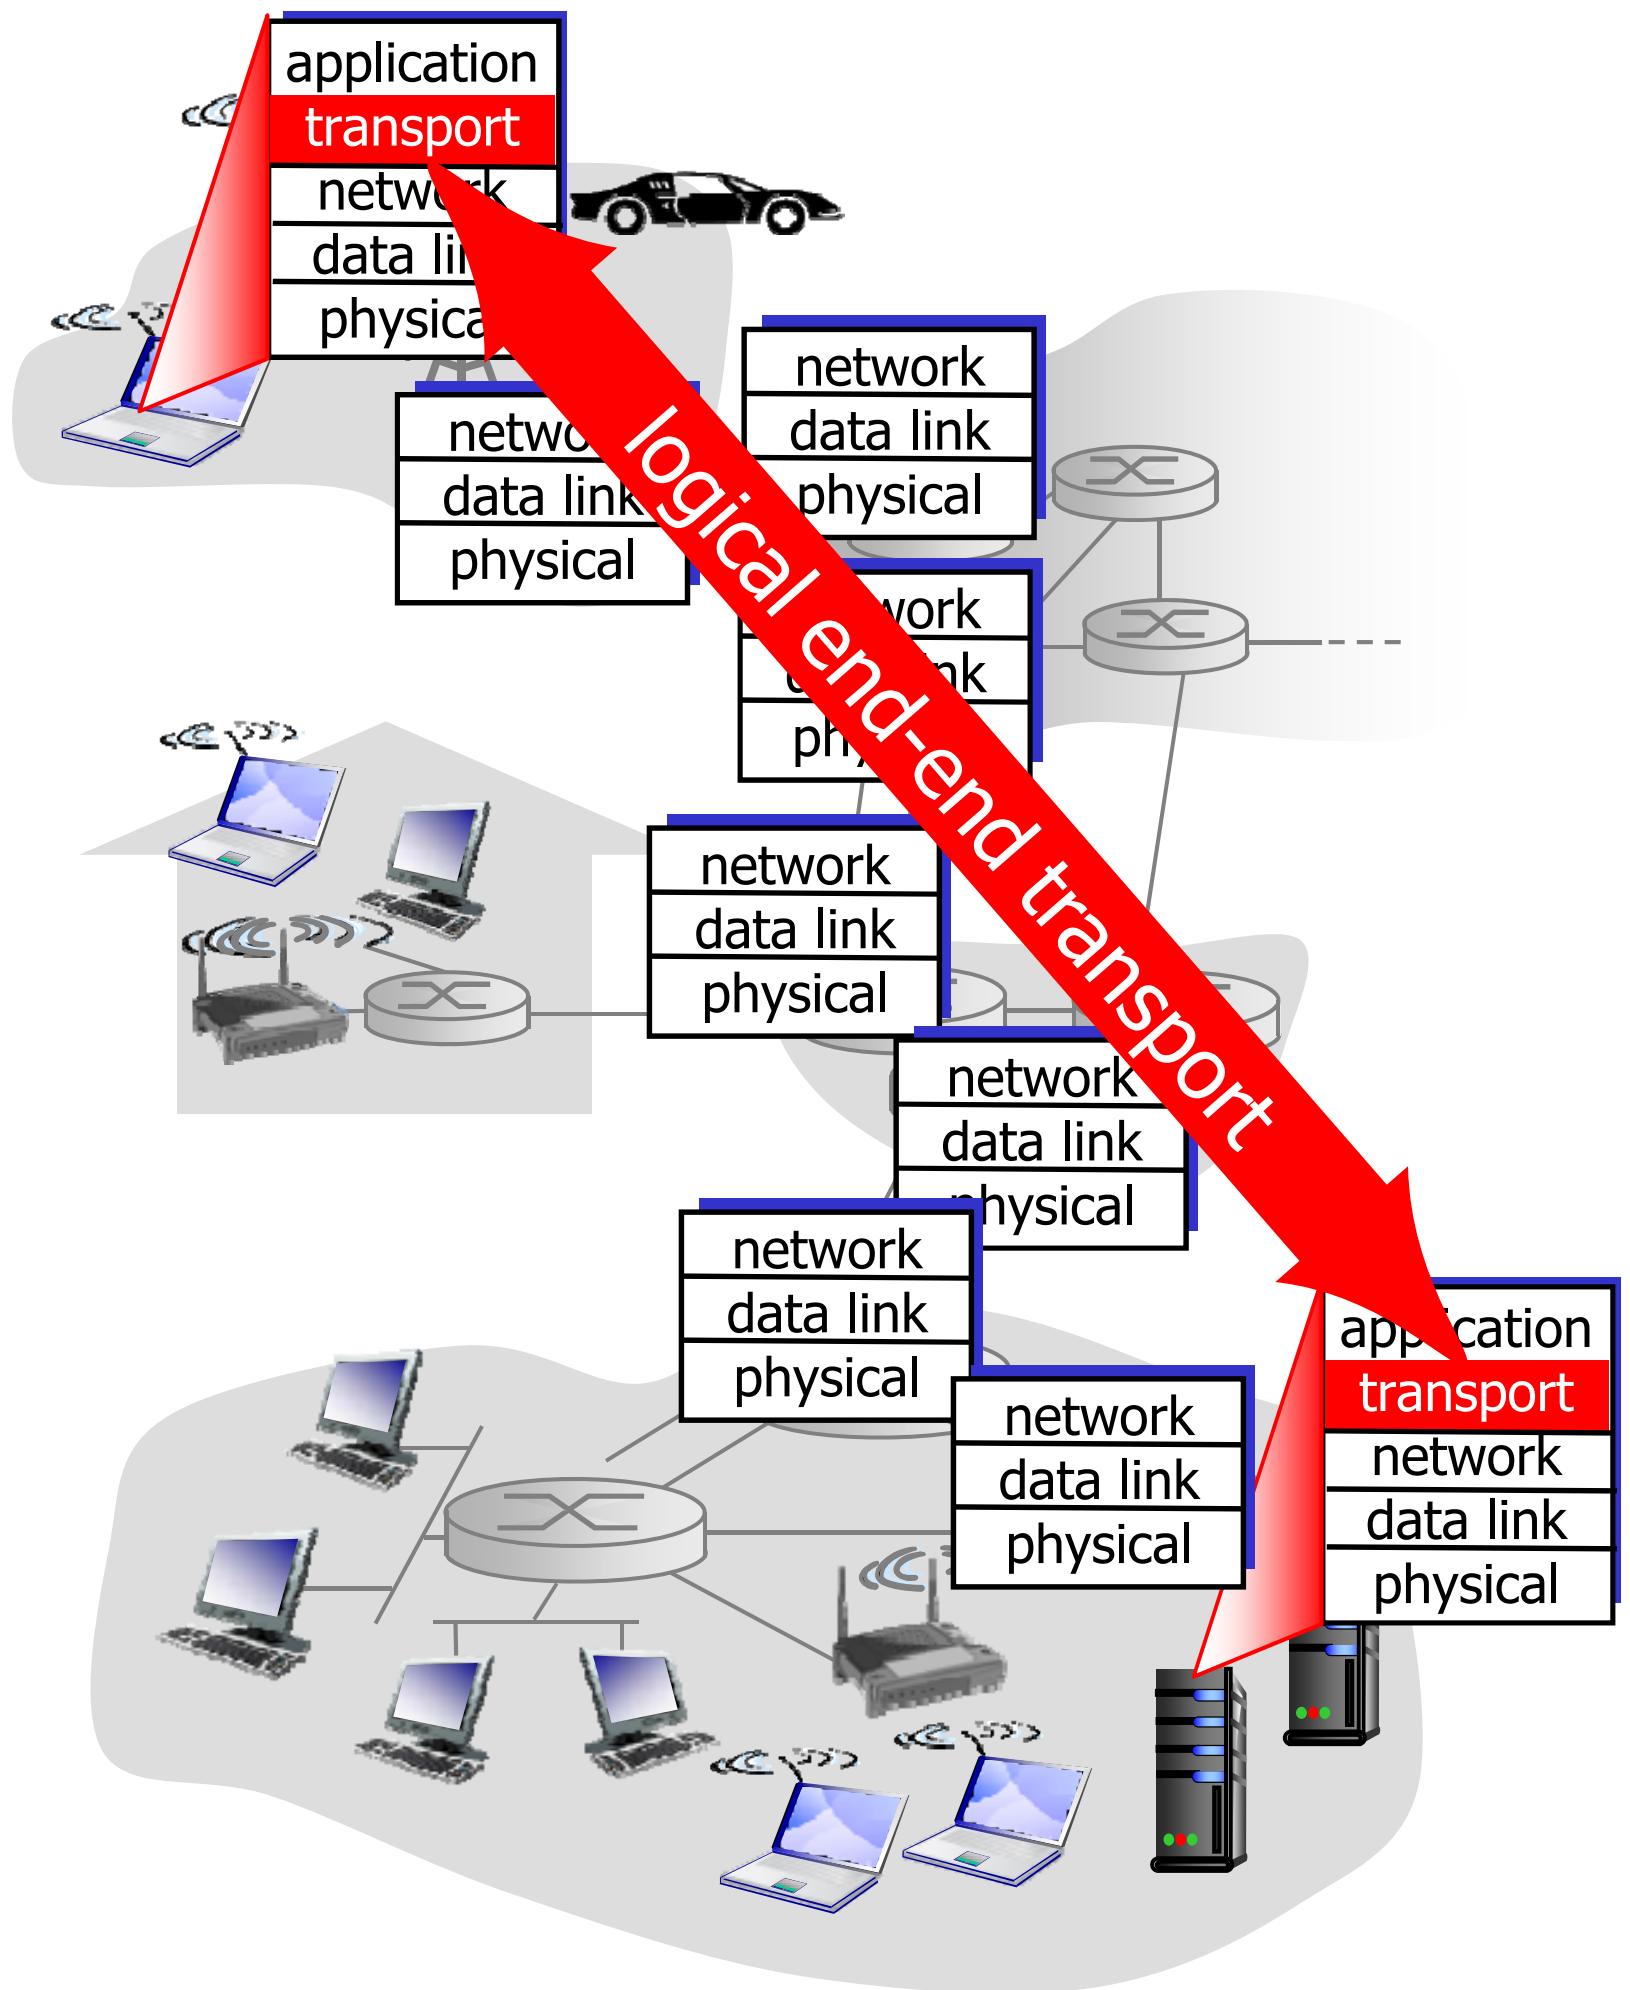

Outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

Multiplexing/demultiplexing

multiplexing at sender:

handle data from multiple sockets, add transport header (later used for demultiplexing)

demultiplexing at receiver:

use header info to deliver received segments to correct socket

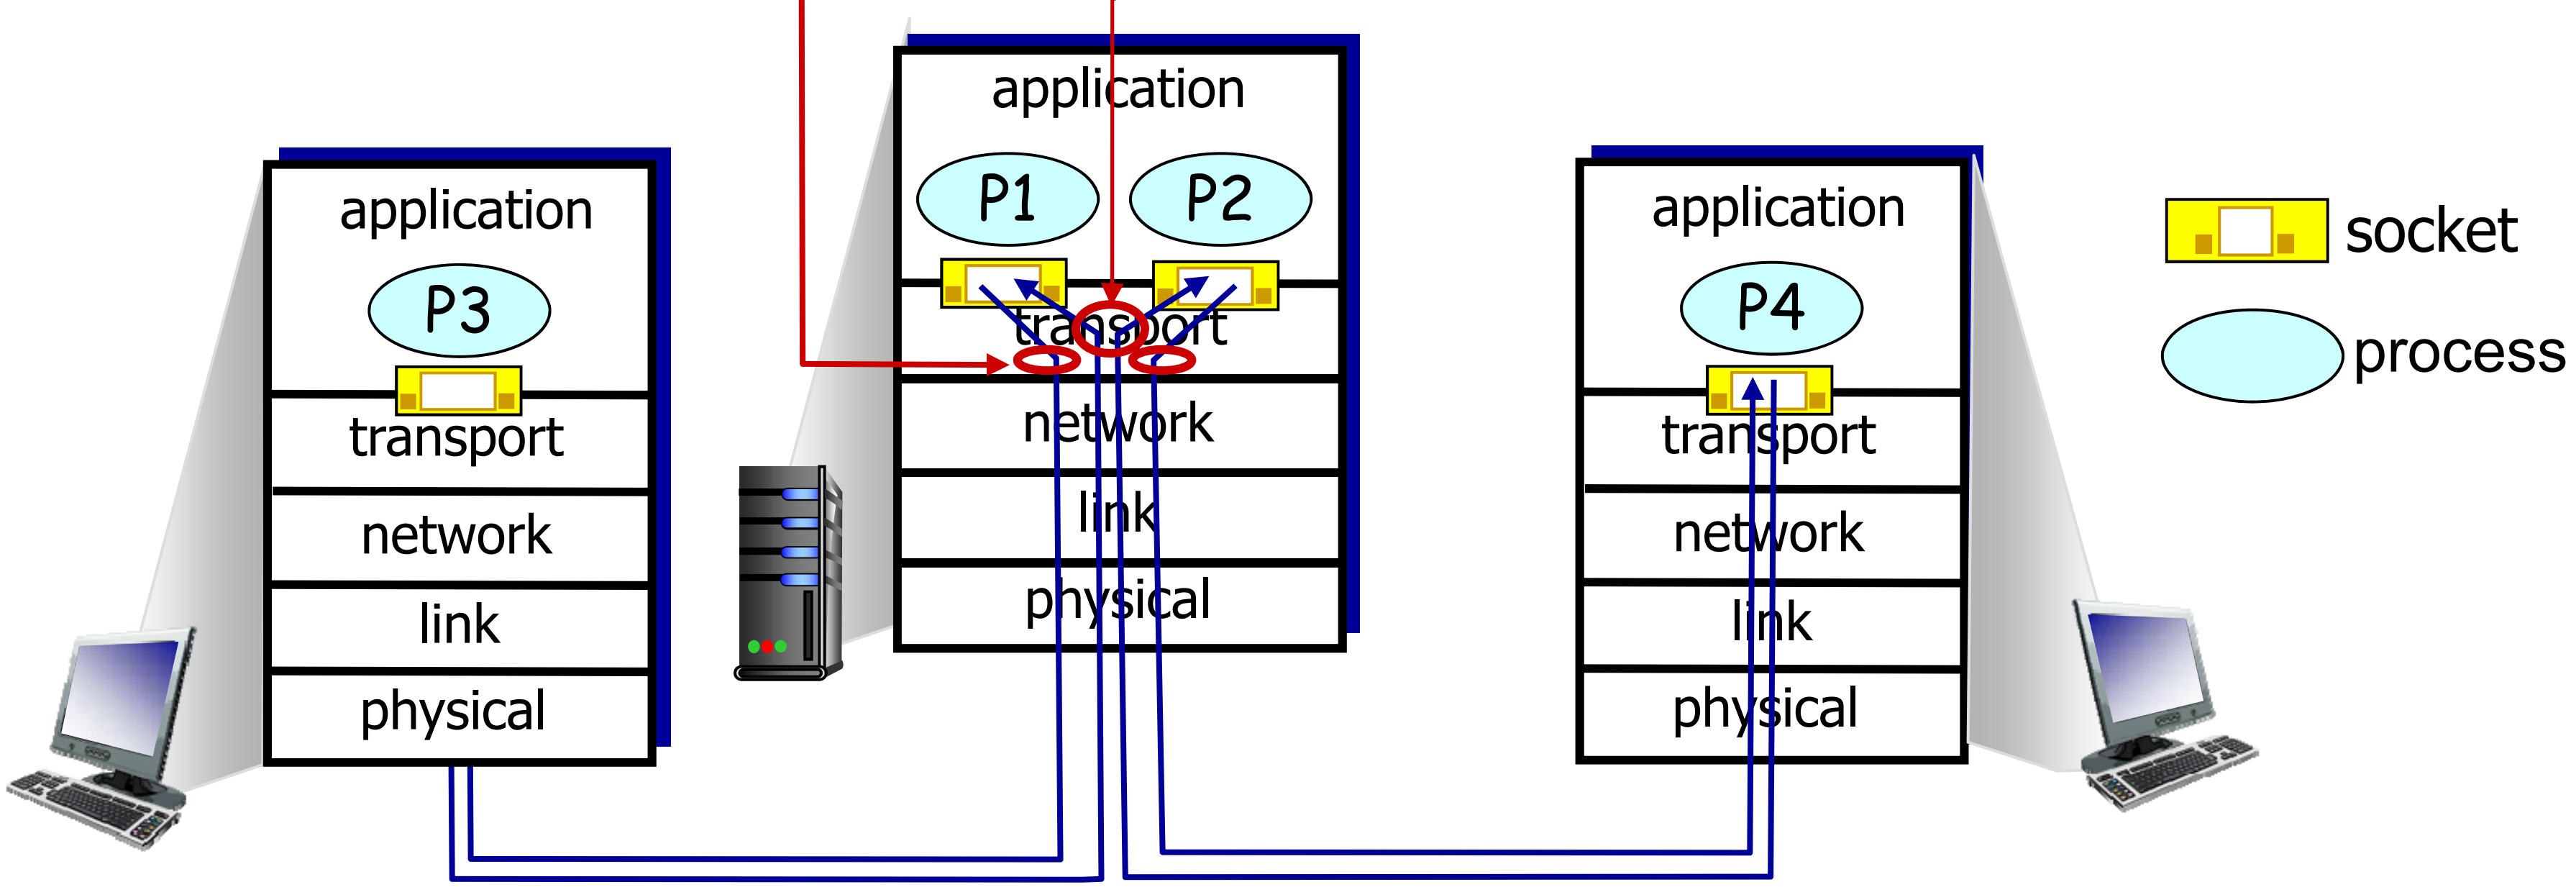

How demultiplexing works

- host receives IP datagrams
  - each datagram has source IP address, destination IP address
  - each datagram carries one transport-layer segment
  - each segment has source, destination port number
- host uses *IP addresses & port numbers* to direct segment to appropriate socket

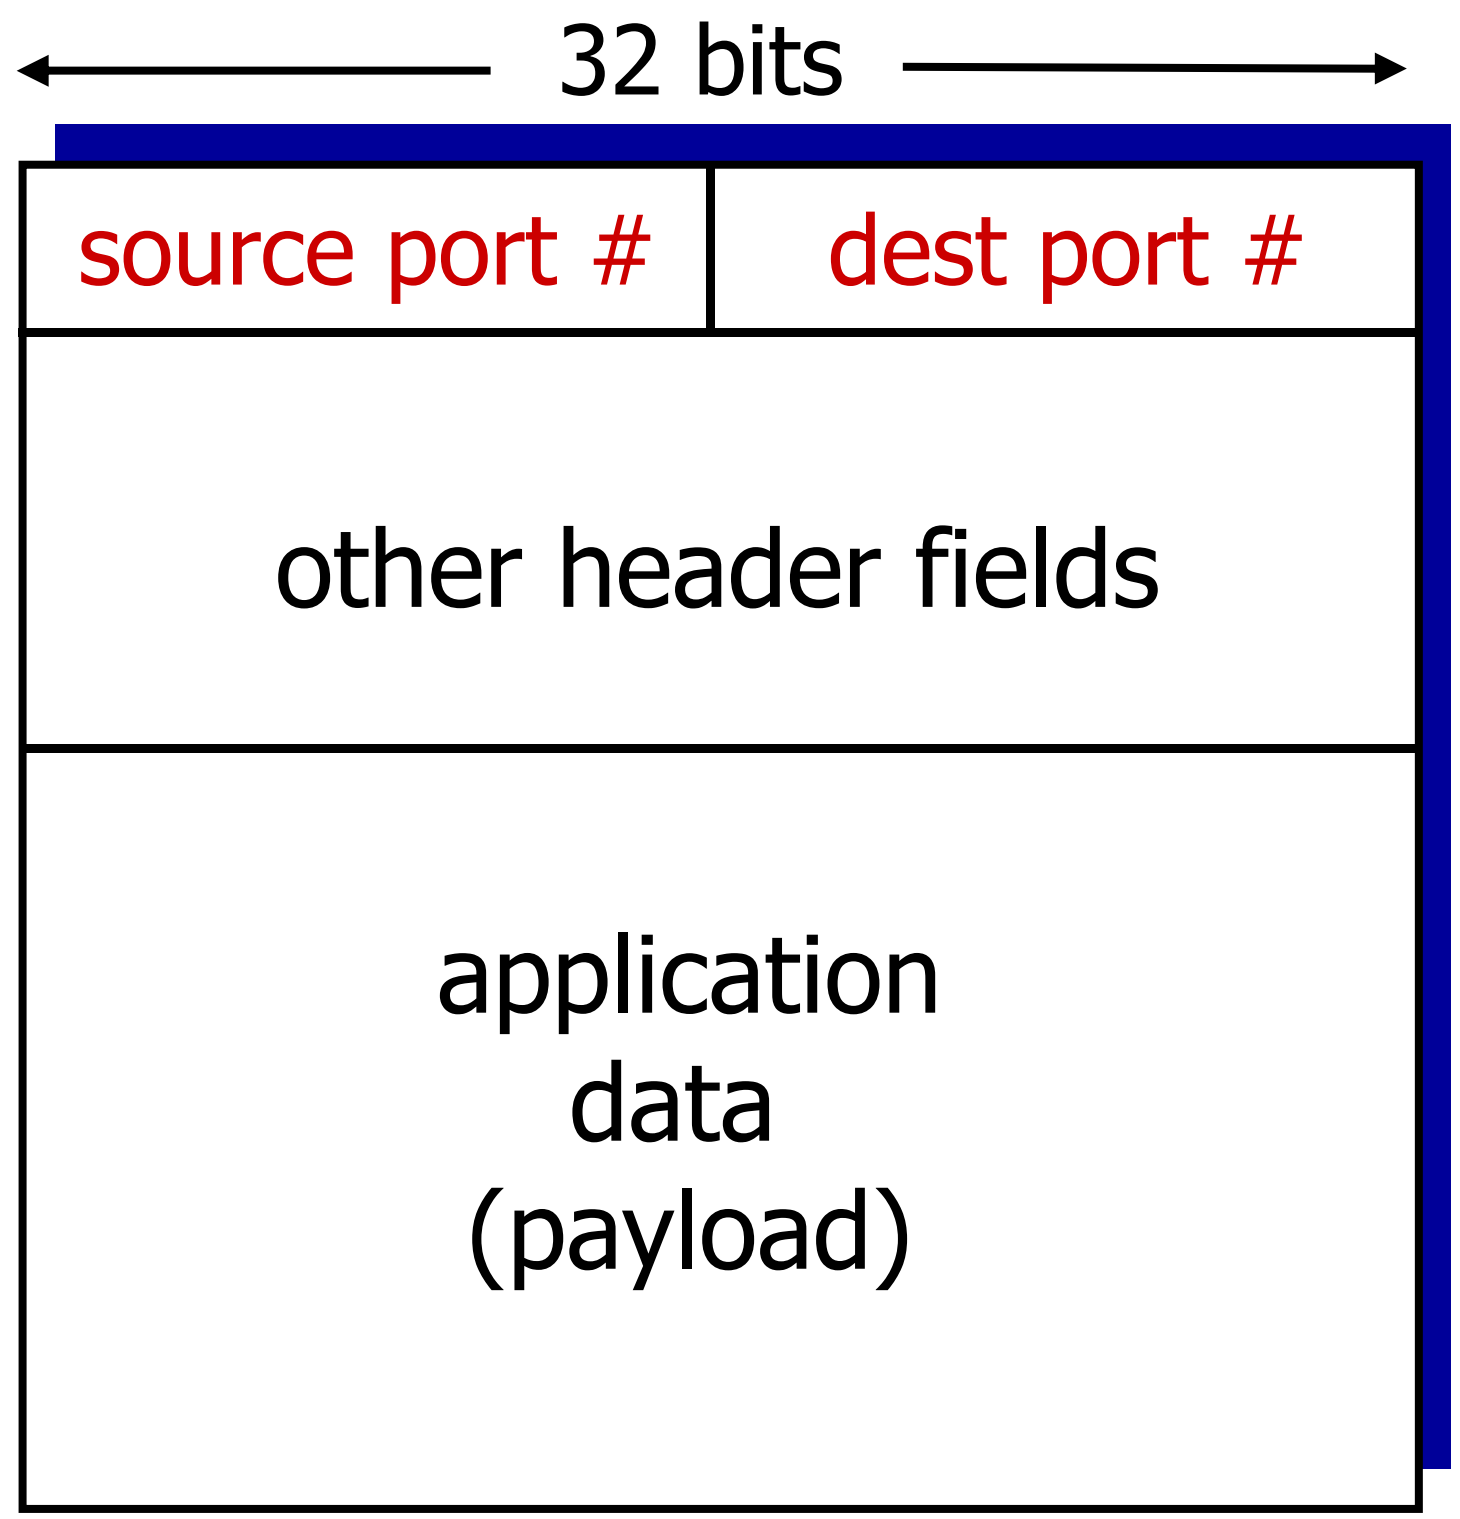

TCP/UDP segment format

Connectionless demultiplexing

- *recall:* created socket has host-local port #:

```
DatagramSocket mySocket1
 = new DatagramSocket(12534);
```

- *recall:* when creating datagram to send into UDP socket, must specify
  - destination IP address
  - destination port #

- when host receives UDP segment:
  - checks destination port # in segment
  - directs UDP segment to socket with that port #

→ IP datagrams with *same dest. port #,* but different source IP addresses and/or source port numbers will be directed to *same socket* at dest

Connectionless demux: example

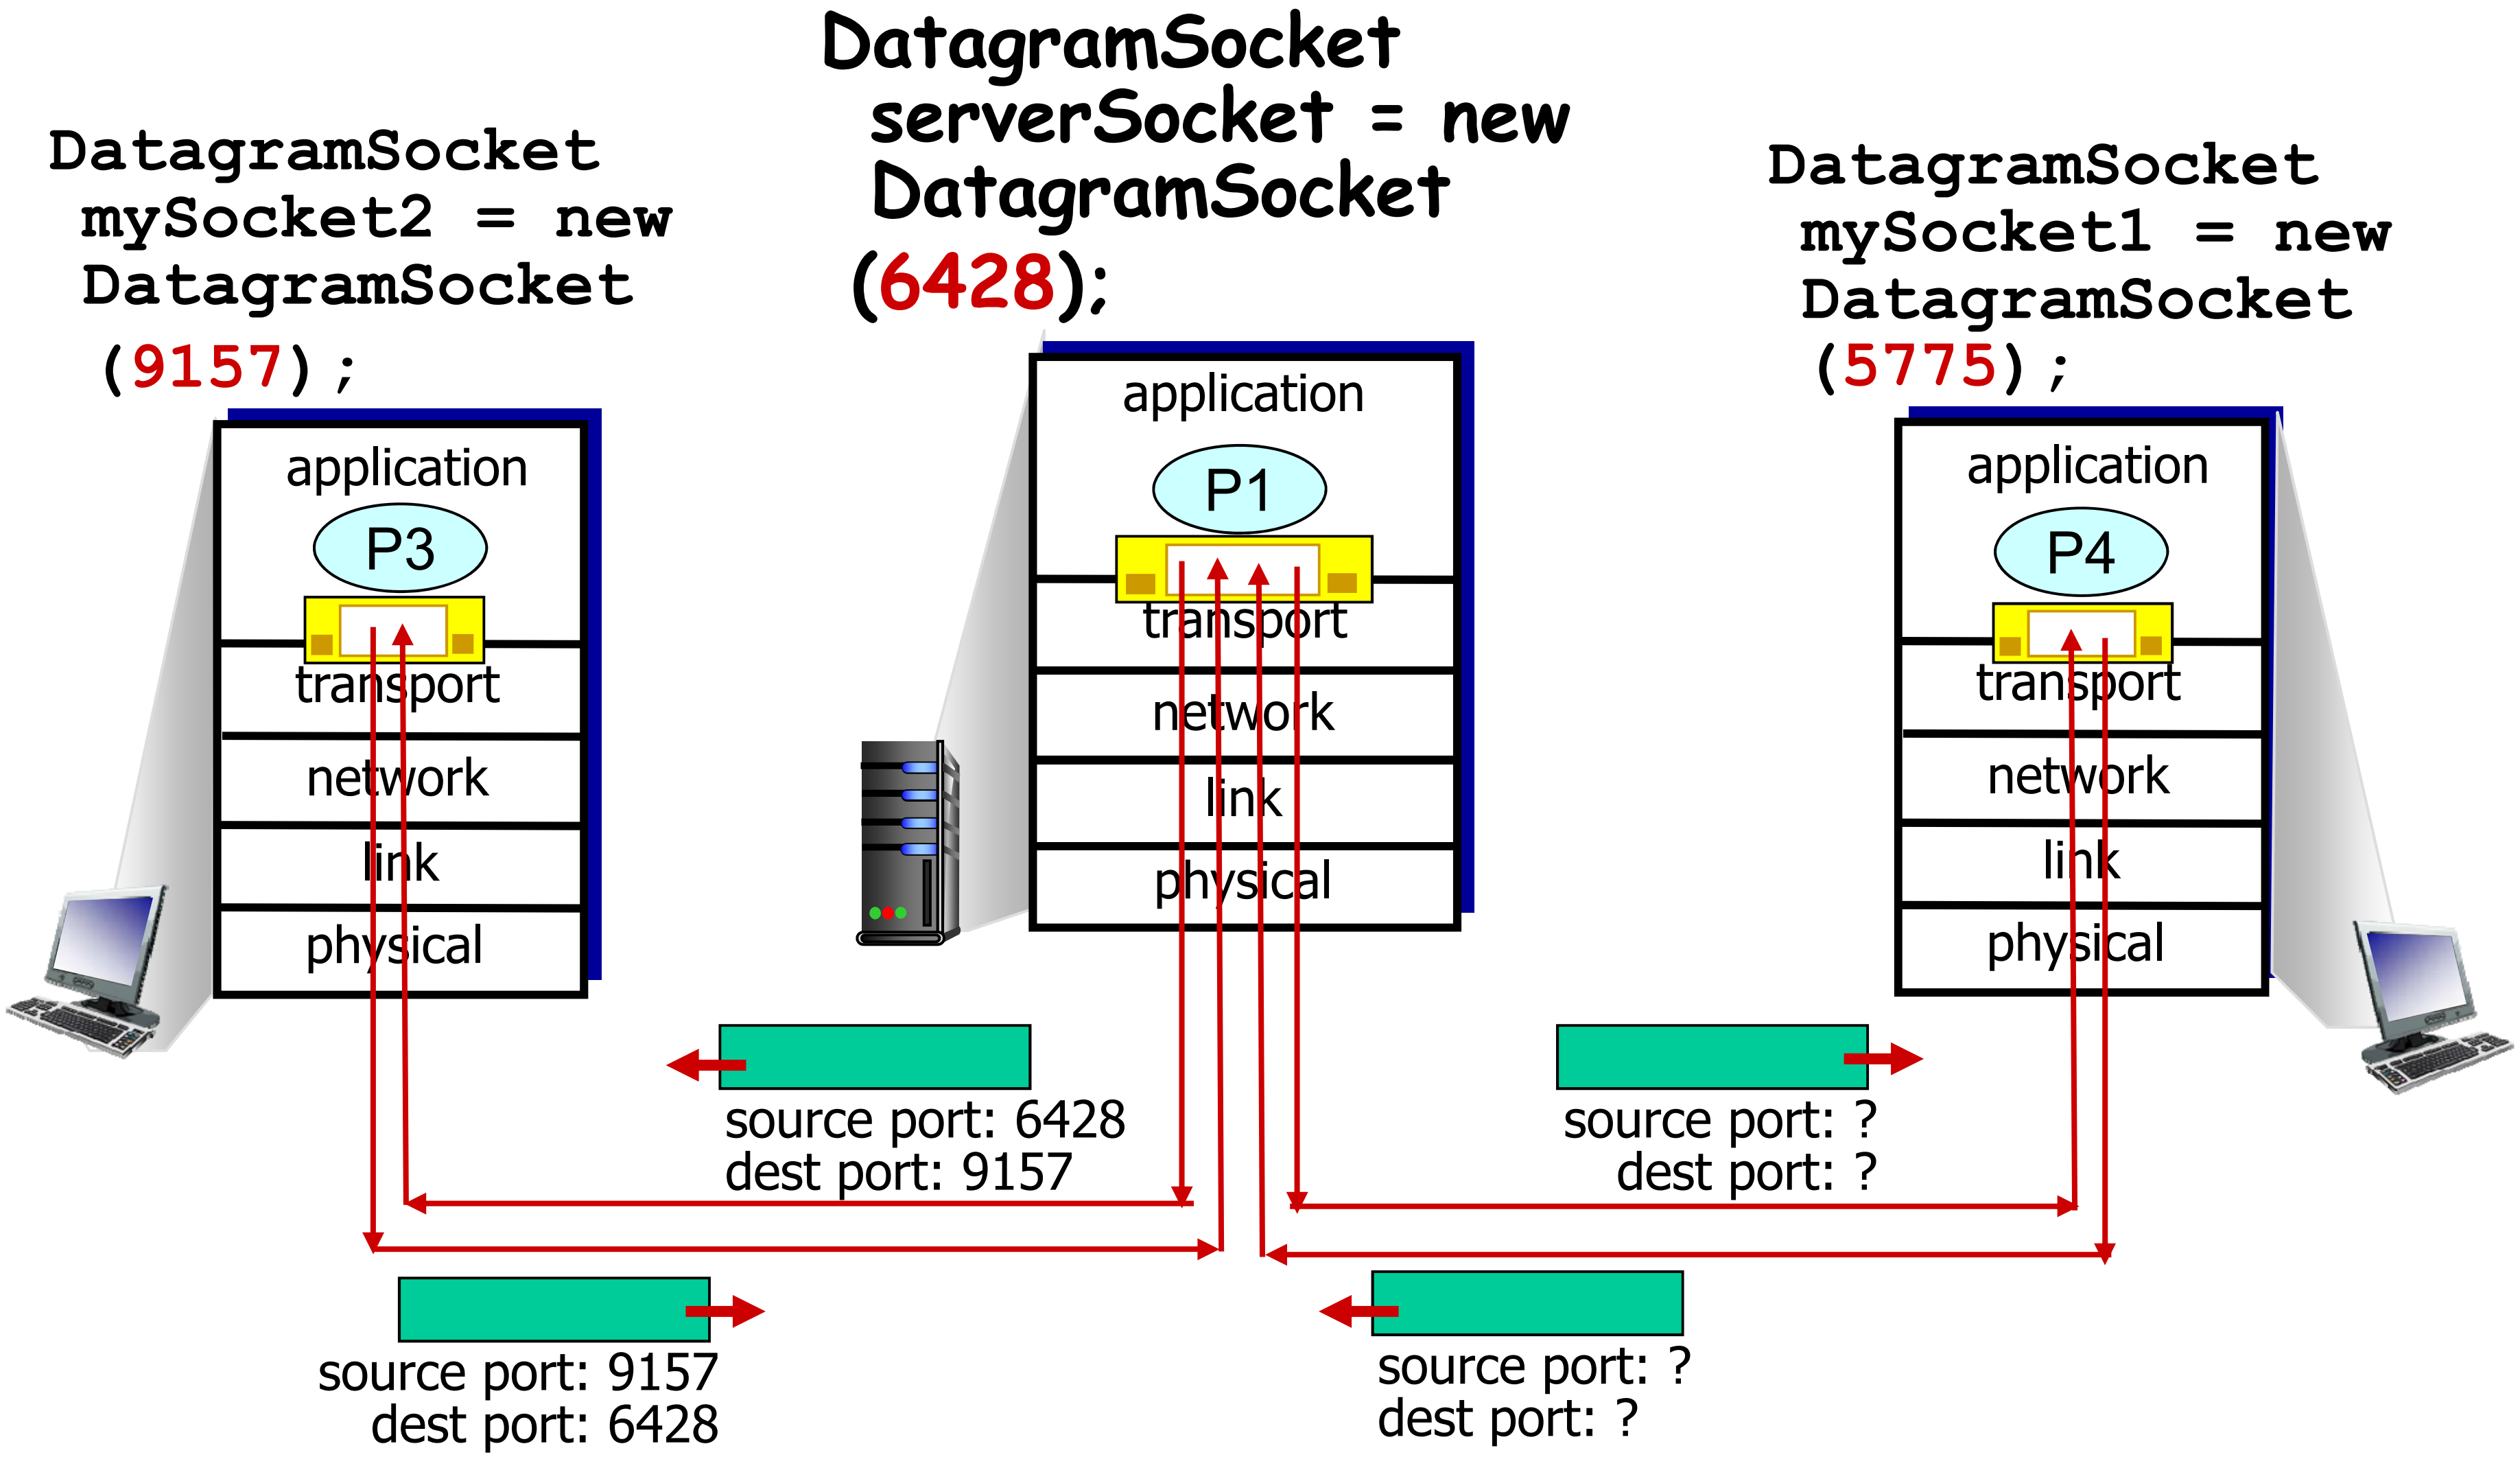

Connection-oriented demux

- TCP socket identified by 4-tuple:
  - source IP address
  - source port number
  - dest IP address
  - dest port number
- demux: receiver uses all four values to direct segment to appropriate socket
- server host may support many simultaneous TCP sockets:
  - each socket identified by its own 4-tuple
- web servers have different sockets for each connecting client
  - non-persistent HTTP will have different socket for each request

Connection-oriented demux: example

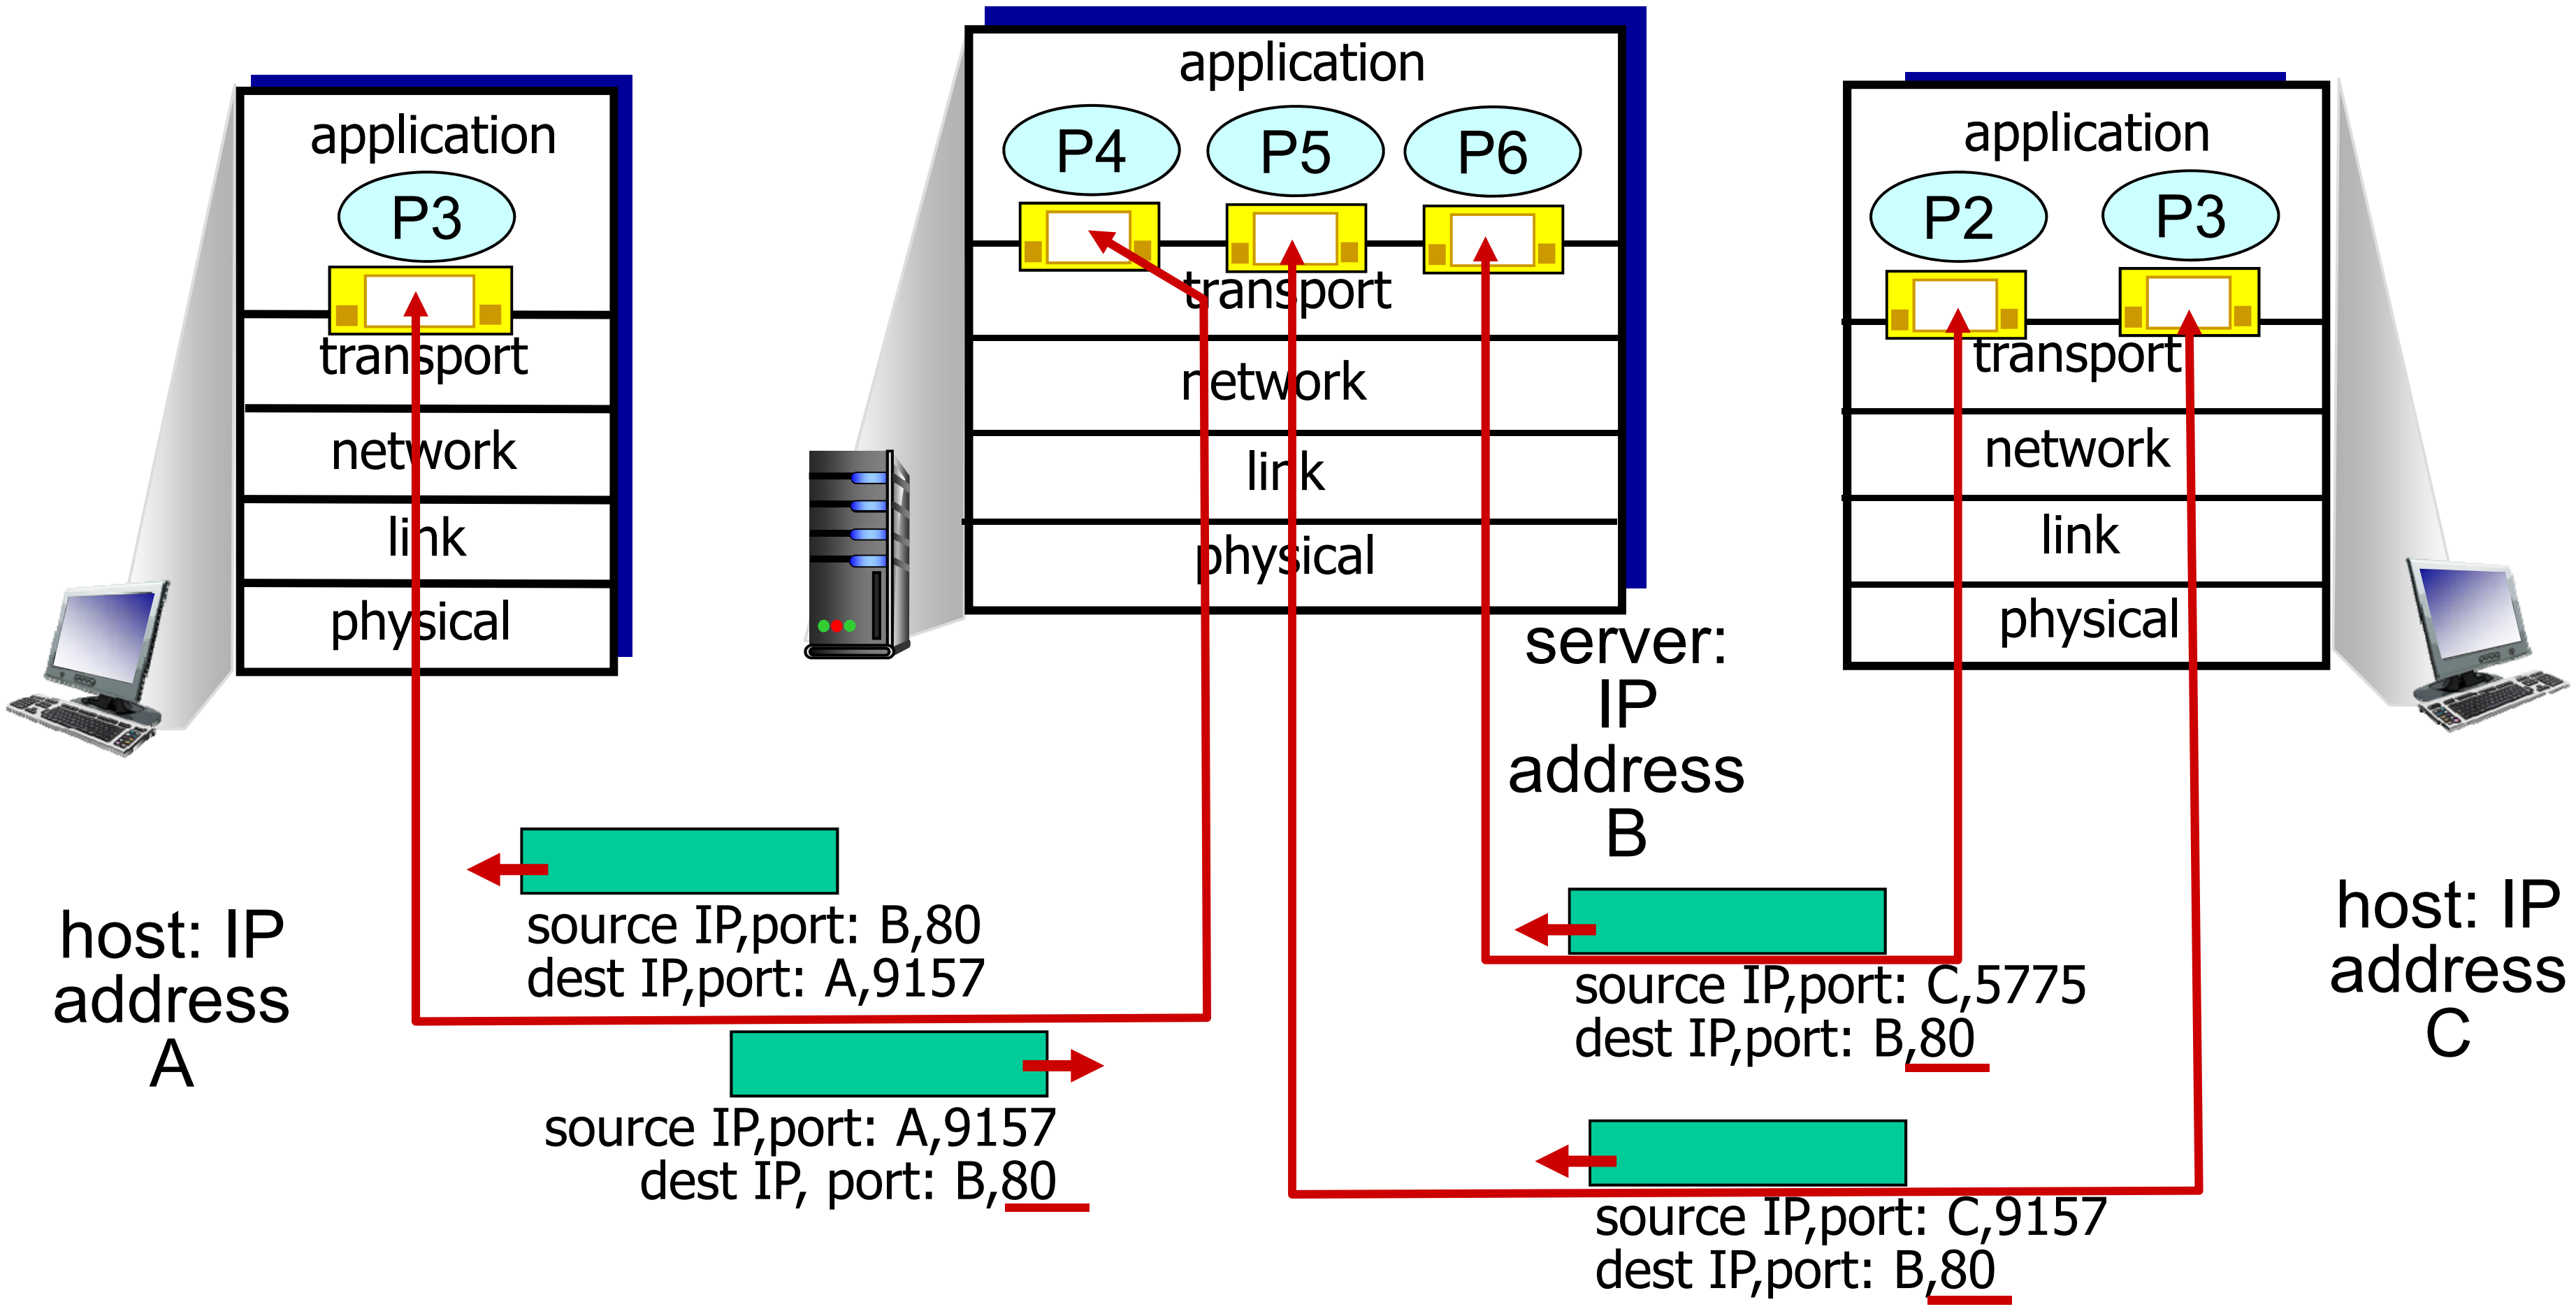

three segments, all destined to IP address: B,
dest port: 80 are demultiplexed to *different* sockets

Connection-oriented demux: example

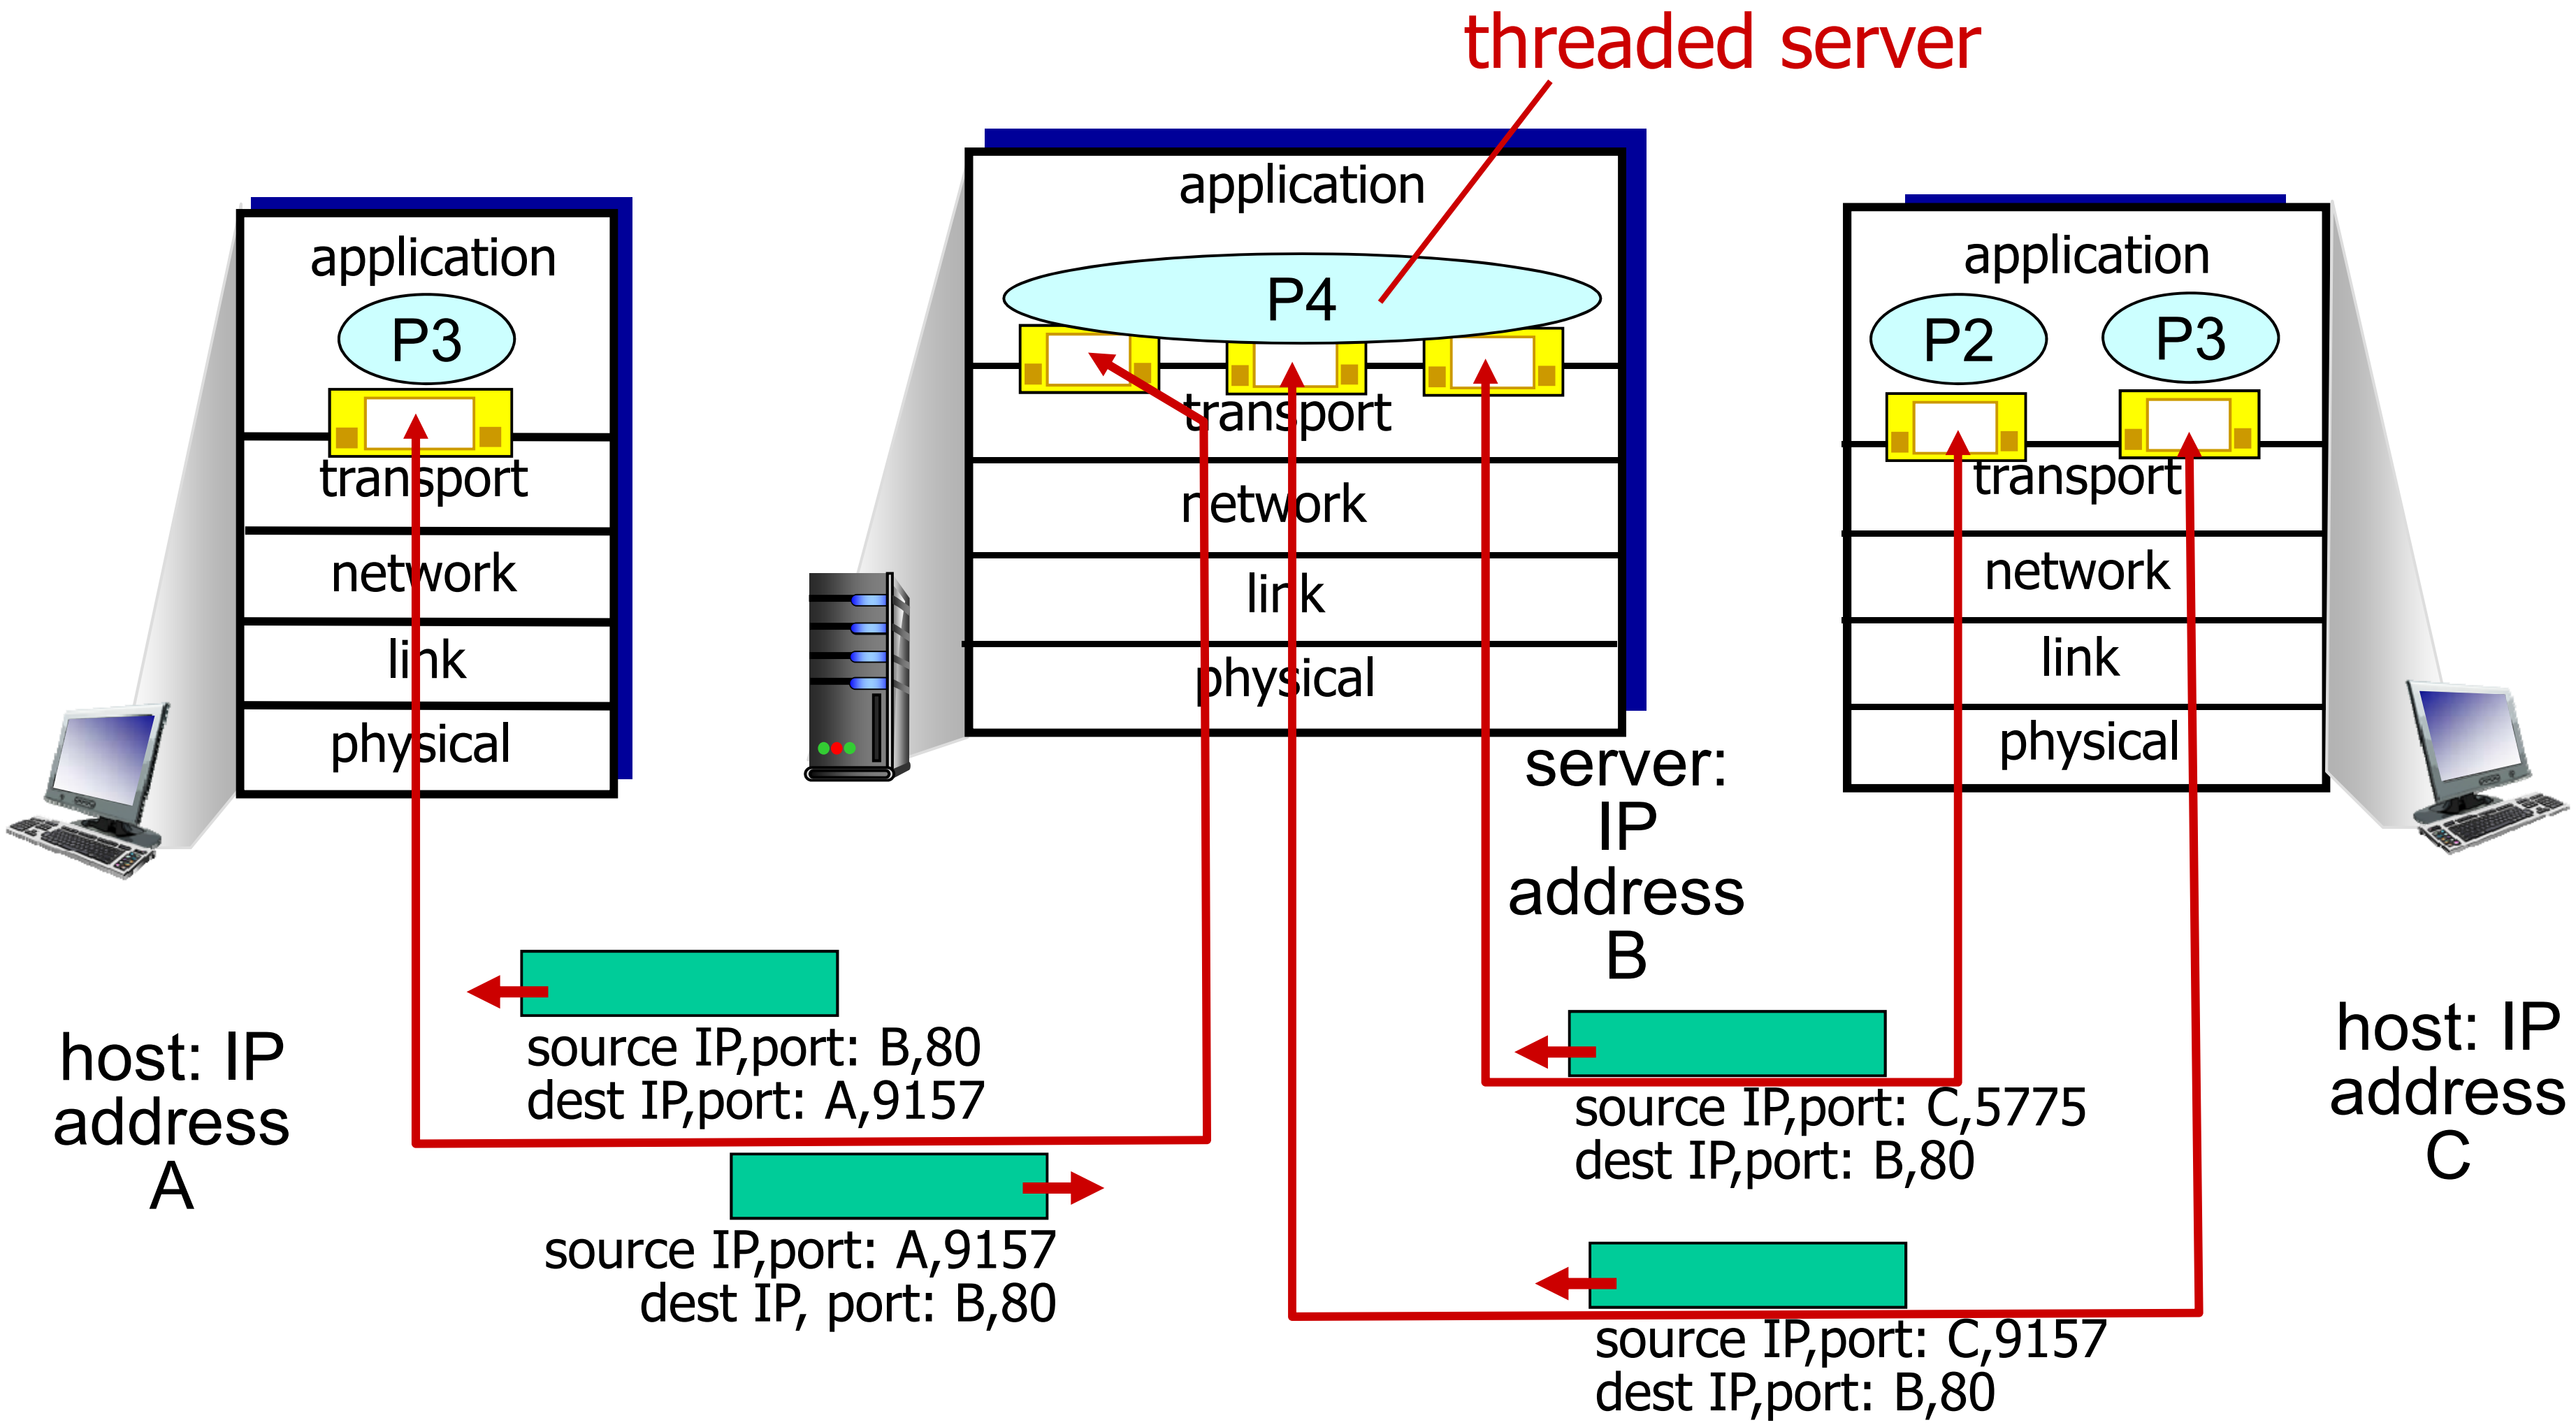

Outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP

- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

UDP: User Datagram Protocol [RFC 768]

- "no frills," "bare bones" Internet transport protocol
- "best effort" service, UDP segments may be:
  - lost
  - delivered out-of-order to app
- *connectionless:*
  - no handshaking between UDP sender, receiver
  - each UDP segment handled independently of others

- UDP use:
  - streaming multimedia apps (loss tolerant, rate sensitive)
  - DNS
  - SNMP
- reliable transfer over UDP:
  - add reliability at application layer
  - application-specific error recovery!

UDP: segment header

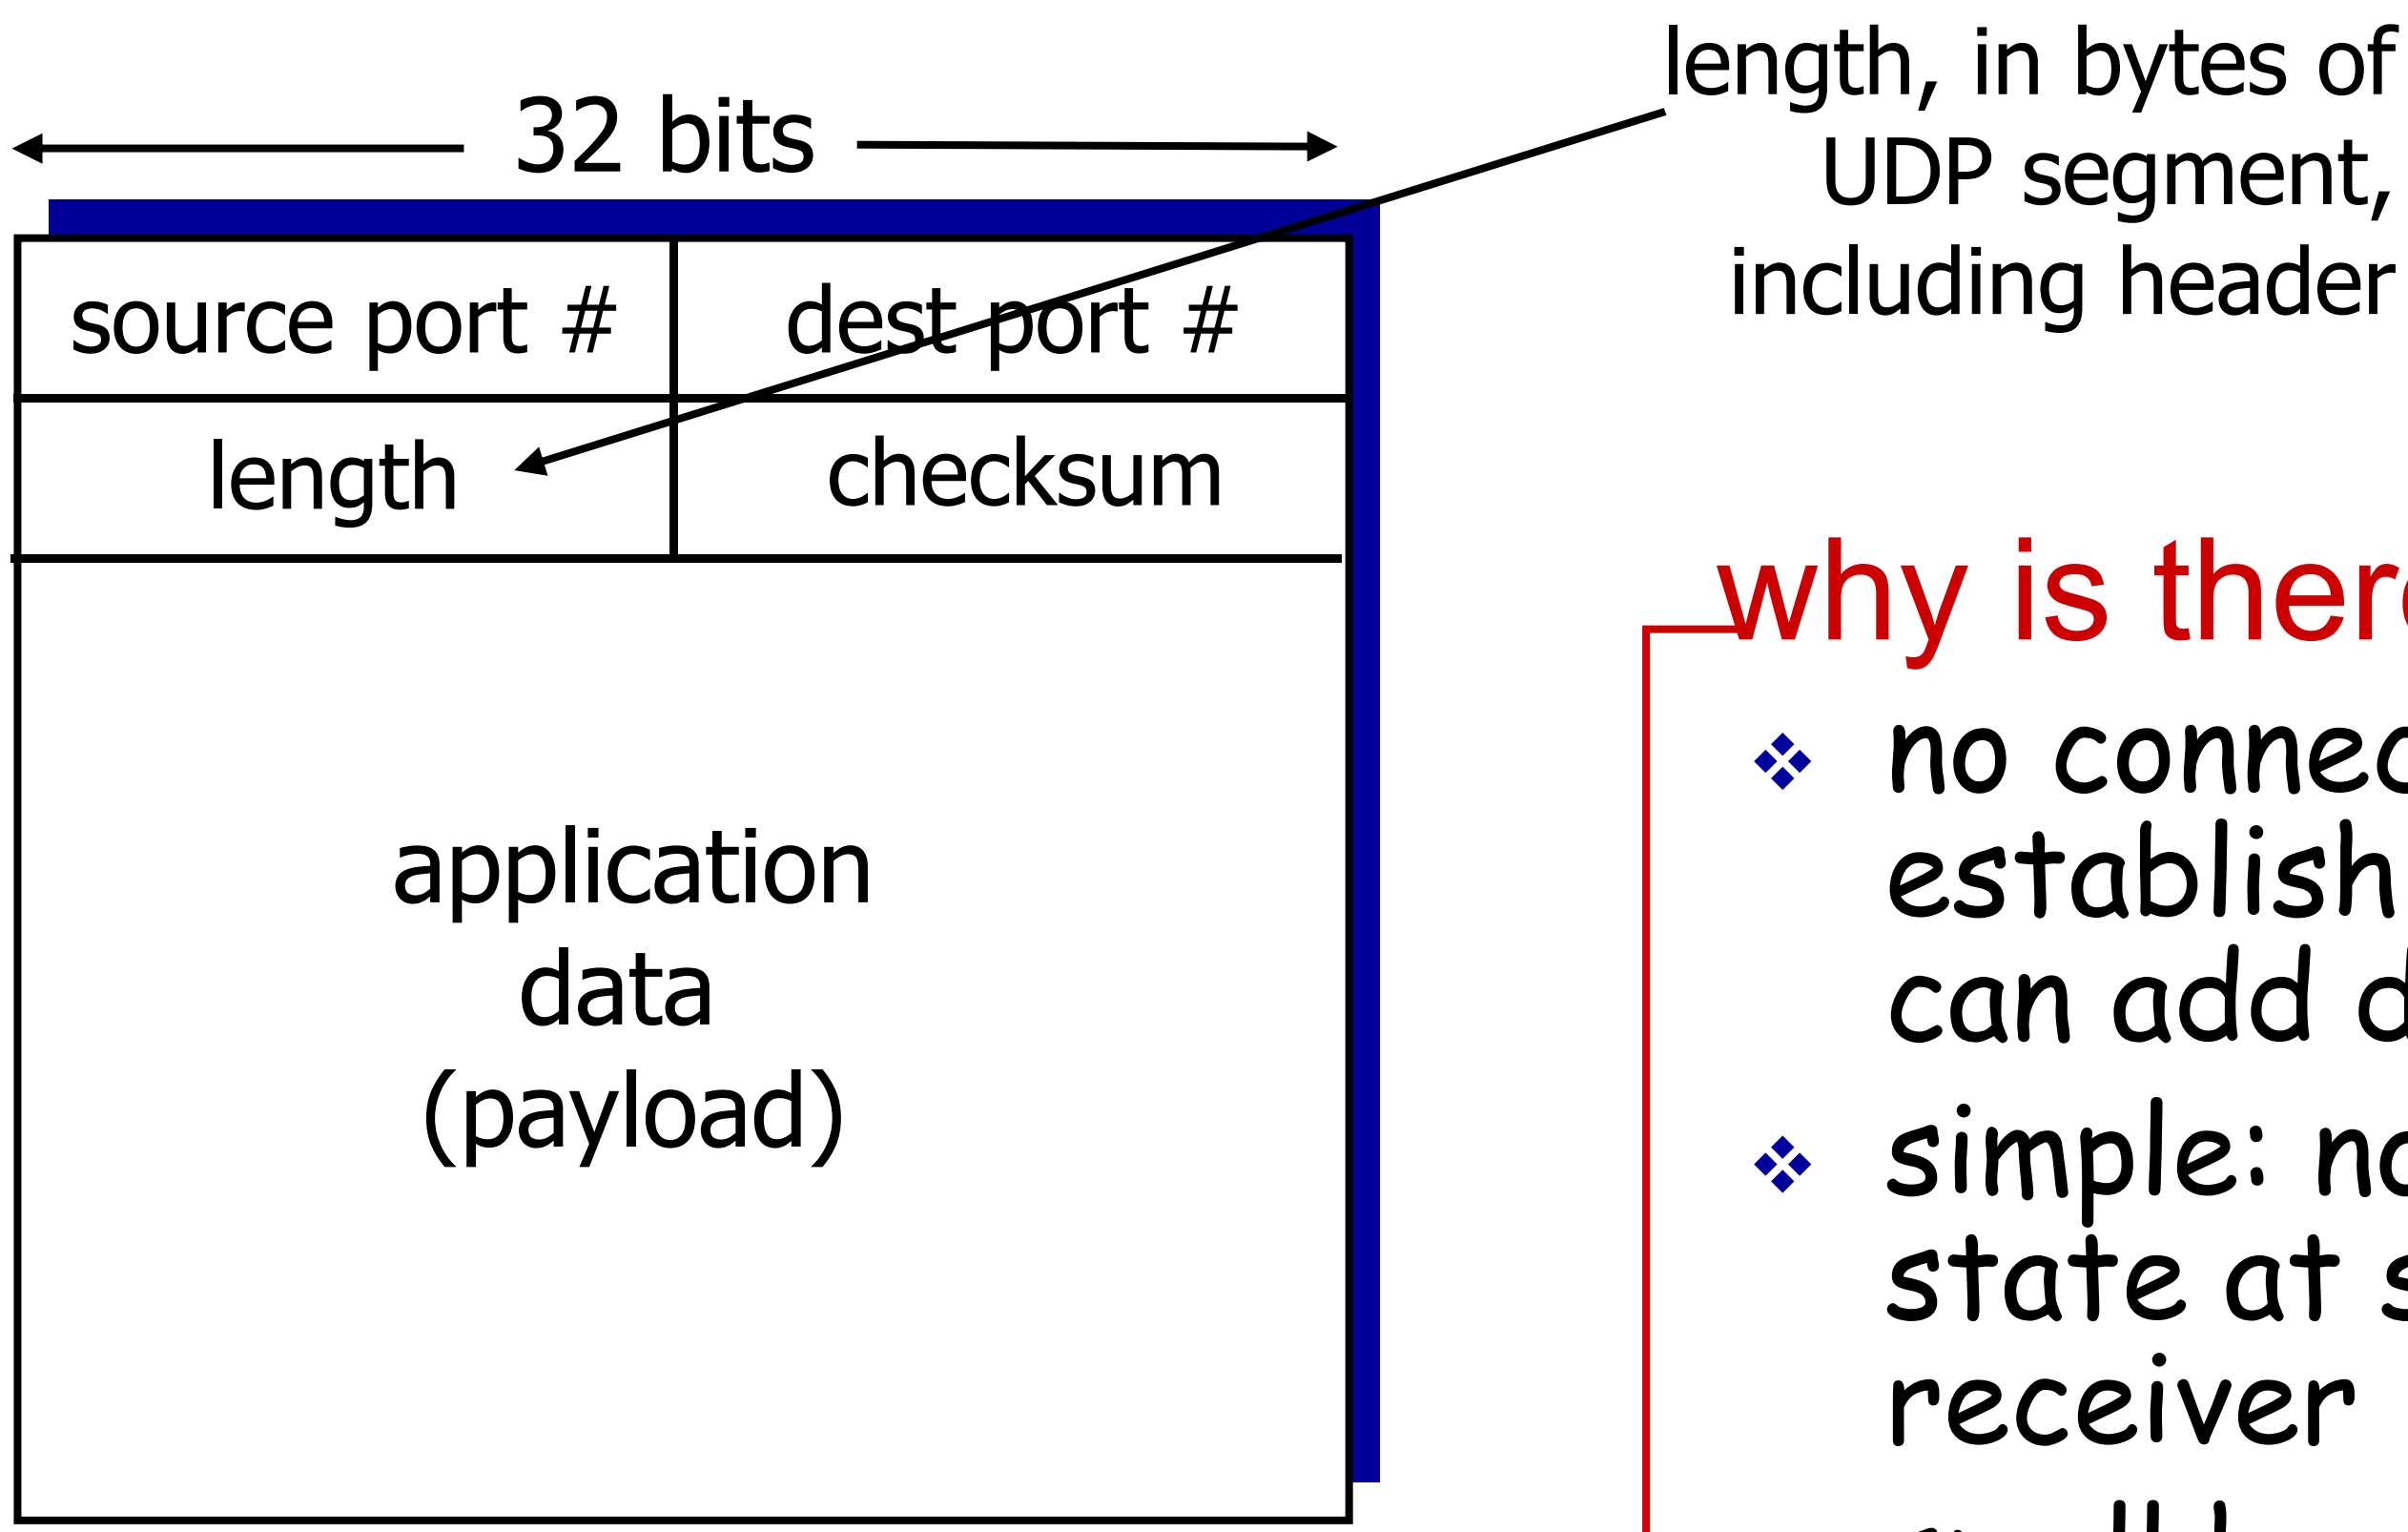

UDP segment format

why is there a UDP?

- no connection establishment (which can add delay)
- simple: no connection state at sender, receiver
- small header size
- no congestion control: UDP can blast away as fast as desired

UDP checksum

Goal: detect "errors" (e.g., flipped bits) in transmitted segment

sender:

- treat segment contents, including header fields, as sequence of 16-bit integers
- checksum: addition (one's complement sum) of segment contents
- sender puts checksum value into UDP checksum field

receiver:

- compute checksum of received segment
- check if computed checksum equals checksum field value:
  - NO - error detected
  - YES - no error detected. *But maybe errors nonetheless?* More later ….

一、下面的图是一个UDP的检验和所需要用到的所有信息，包括三个部分：
1.UDP伪首部
2.UDP首部
3.UDP的数据部分（切记不要遗漏该部分，否则就~吐血了~）

首先解释下伪首部的概念，伪首部包含IP首部一些字段。其目的是让UDP两次检查数据是否已经正确到达目的地，只
还有一个概念十分重要，那就是16位UDP总长度，请注意该长度不是报文的总长度，而只是UDP（包括UDP头和数据部
二、计算检验和（checksum）的过程很关键，主要分为以下几个步骤：
1.把伪首部添加到UDP上；
2.计算初始时是需要将检验和字段添零的；
3.把所有位划分为16位（2字节）的字
4.把所有16位的字相加，如果遇到进位，则将高于16字节的进位部分的值加到最低位上，举例，0xBB5E+0xFCED=0x1 E
5.将所有字相加得到的结果应该为一个16位的数，将该数取反则可以得到检验和checksum。

Internet checksum: example

example: add two 16-bit integers

		1	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0
		1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1
wraparound	1	1	0	1	1	1	0	1	1	1	0	1	1	1	0	1	1
sum		1	0	1	1	1	0	1	1	1	0	1	1	1	1	0	0
checksum		0	1	0	0	0	1	0	0	0	1	0	0	0	0	1	1

Note: when adding numbers, a carryout from the most significant bit needs to be added to the result

Outline

3.1 transport-layer services

3.2 multiplexing and demultiplexing

3.3 connectionless transport: UDP

3.4 principles of reliable data transfer

3.5 connection-oriented transport: TCP
- segment structure
- reliable data transfer
- flow control
- connection management

3.6 principles of congestion control

3.7 TCP congestion control

Principles of reliable data transfer

- important in application, transport, link layers
  - top-10 list of important networking topics!

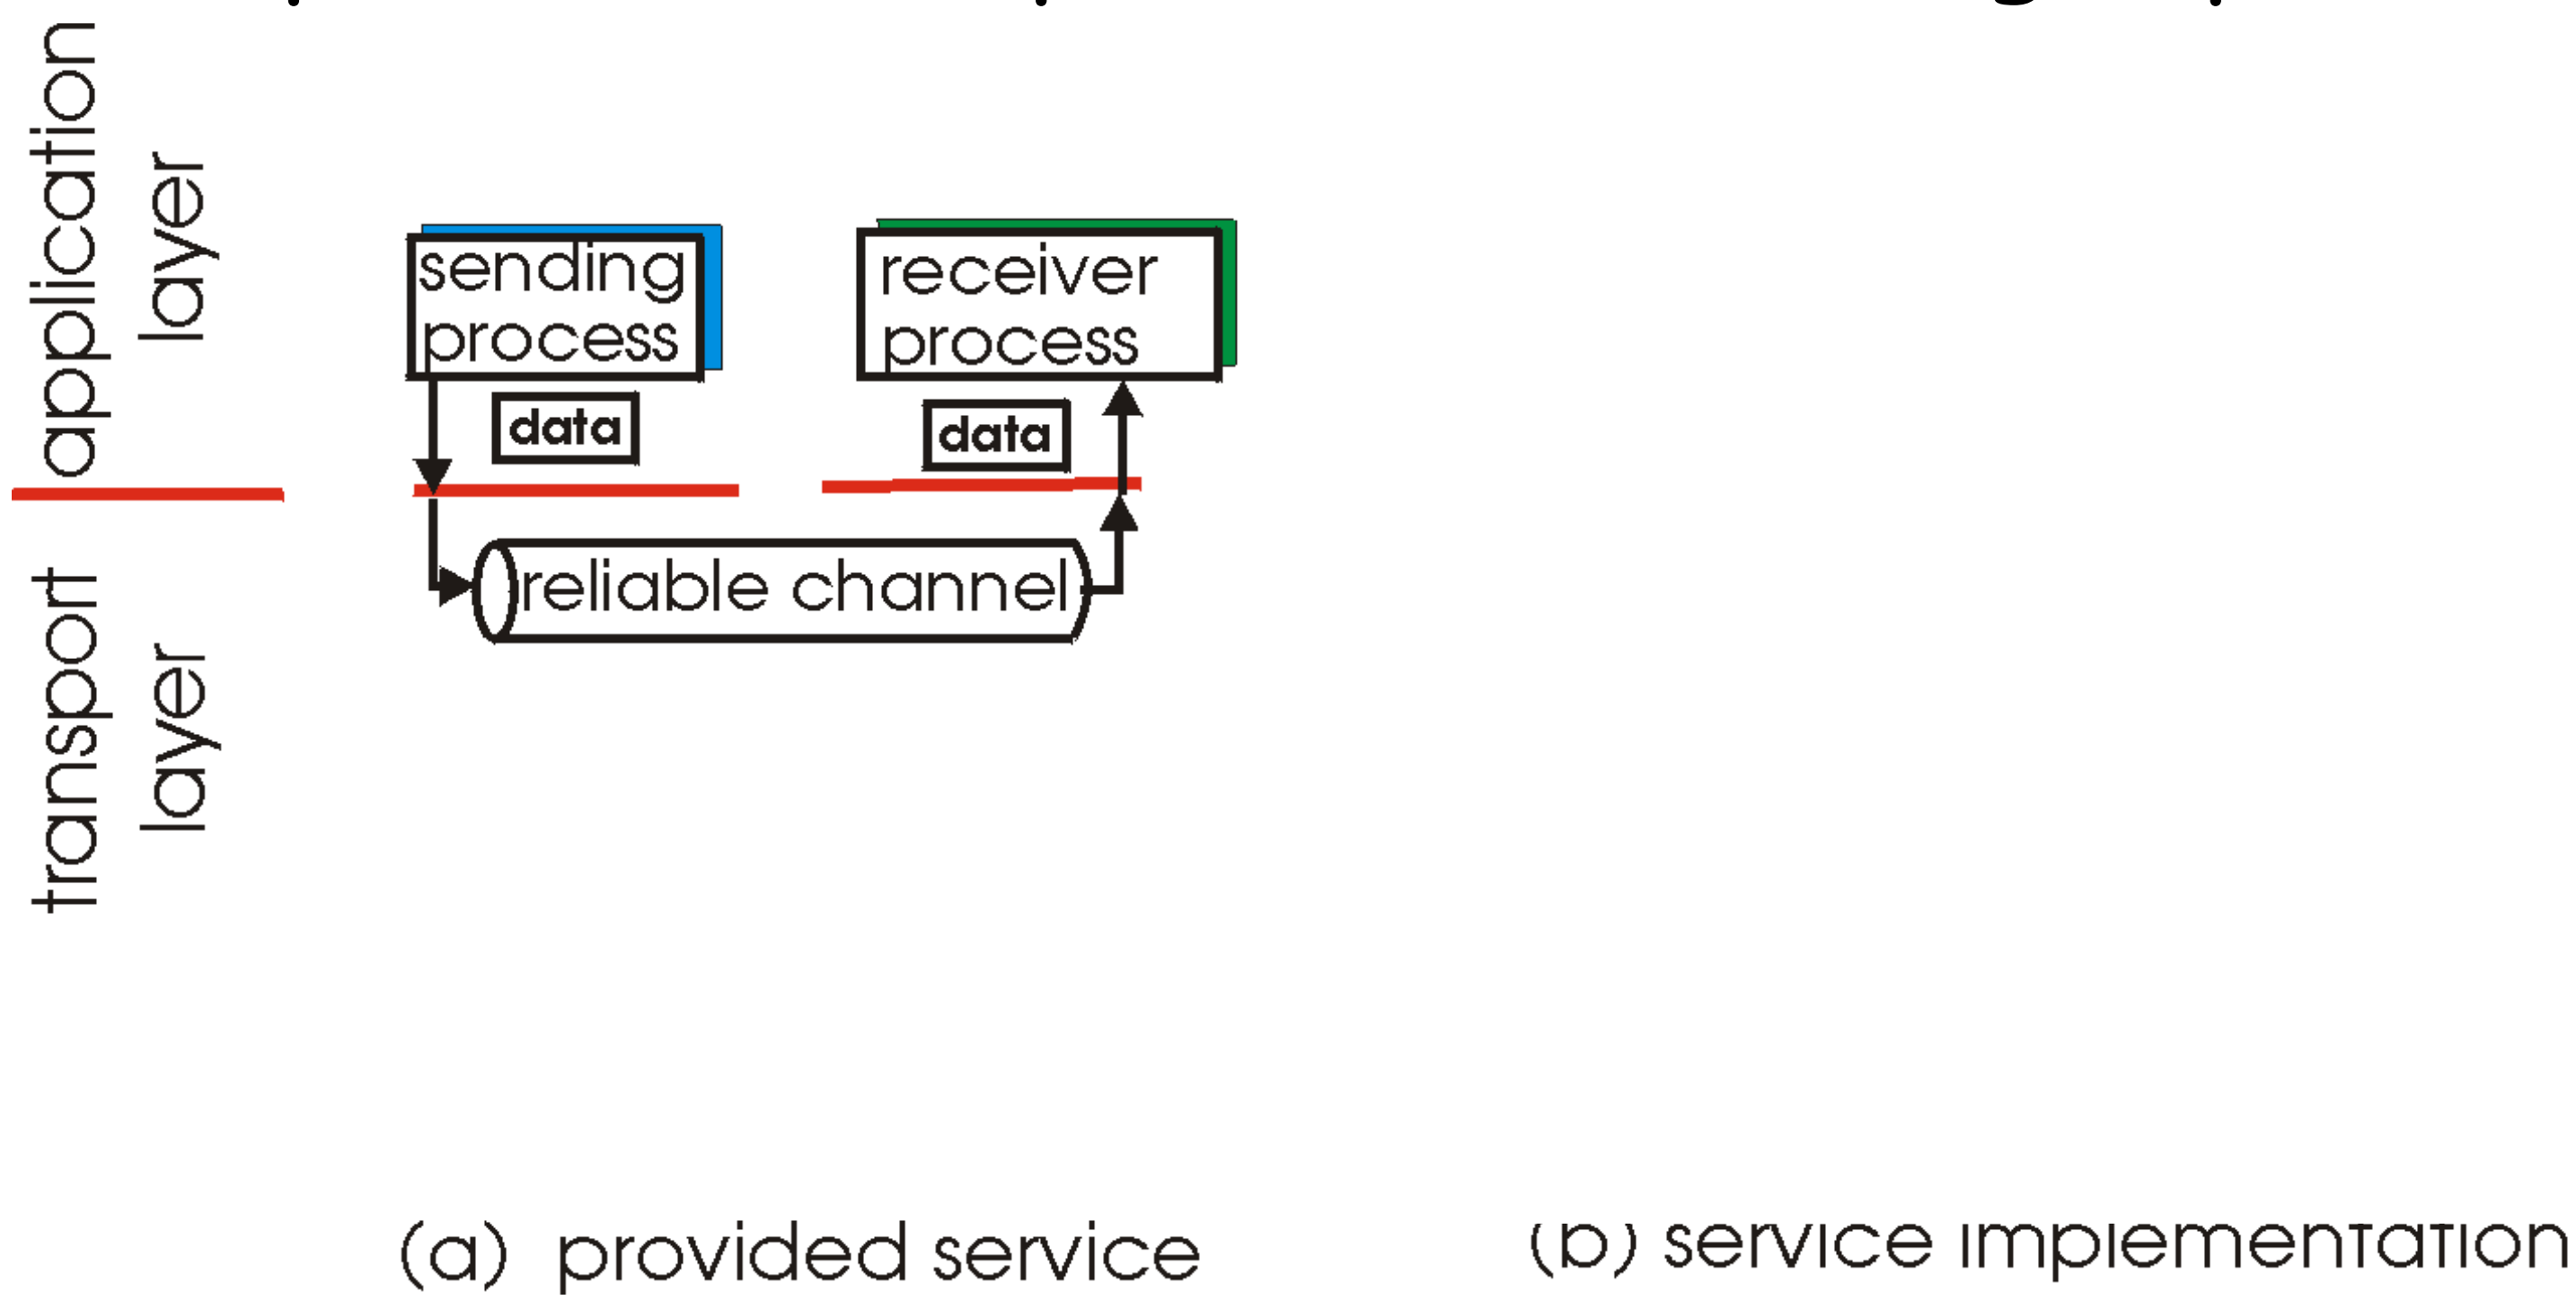

- characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Principles of reliable data transfer

- important in application, transport, link layers
  - top-10 list of important networking topics!

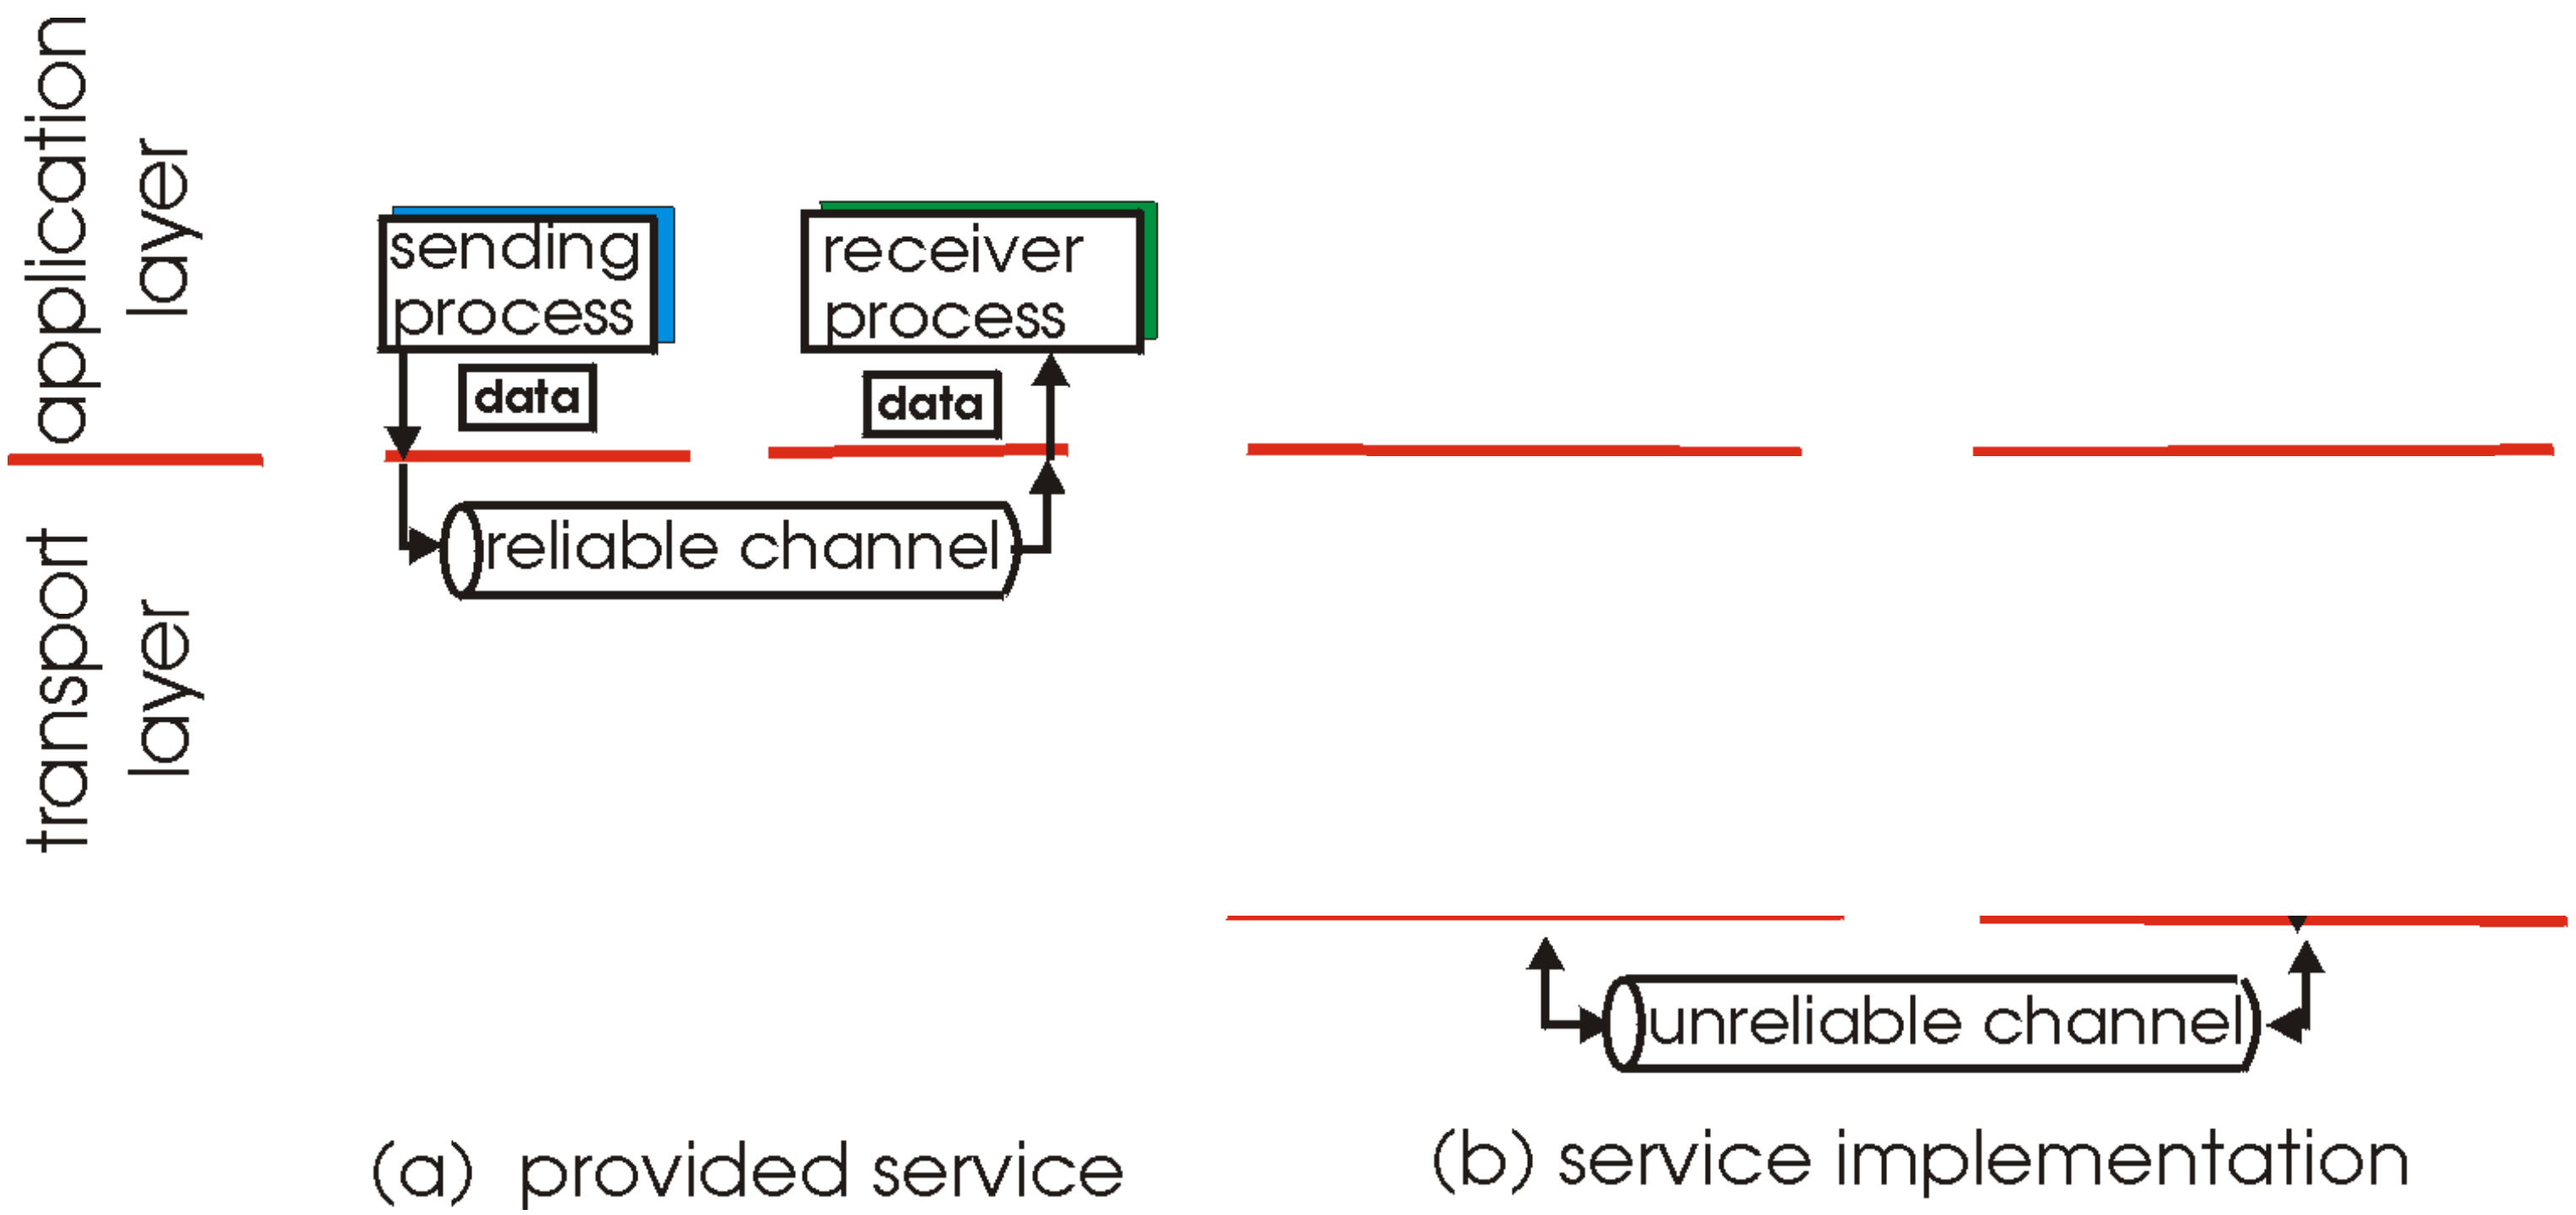

- characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Principles of reliable data transfer

- important in application, transport, link layers
  - top-10 list of important networking topics!

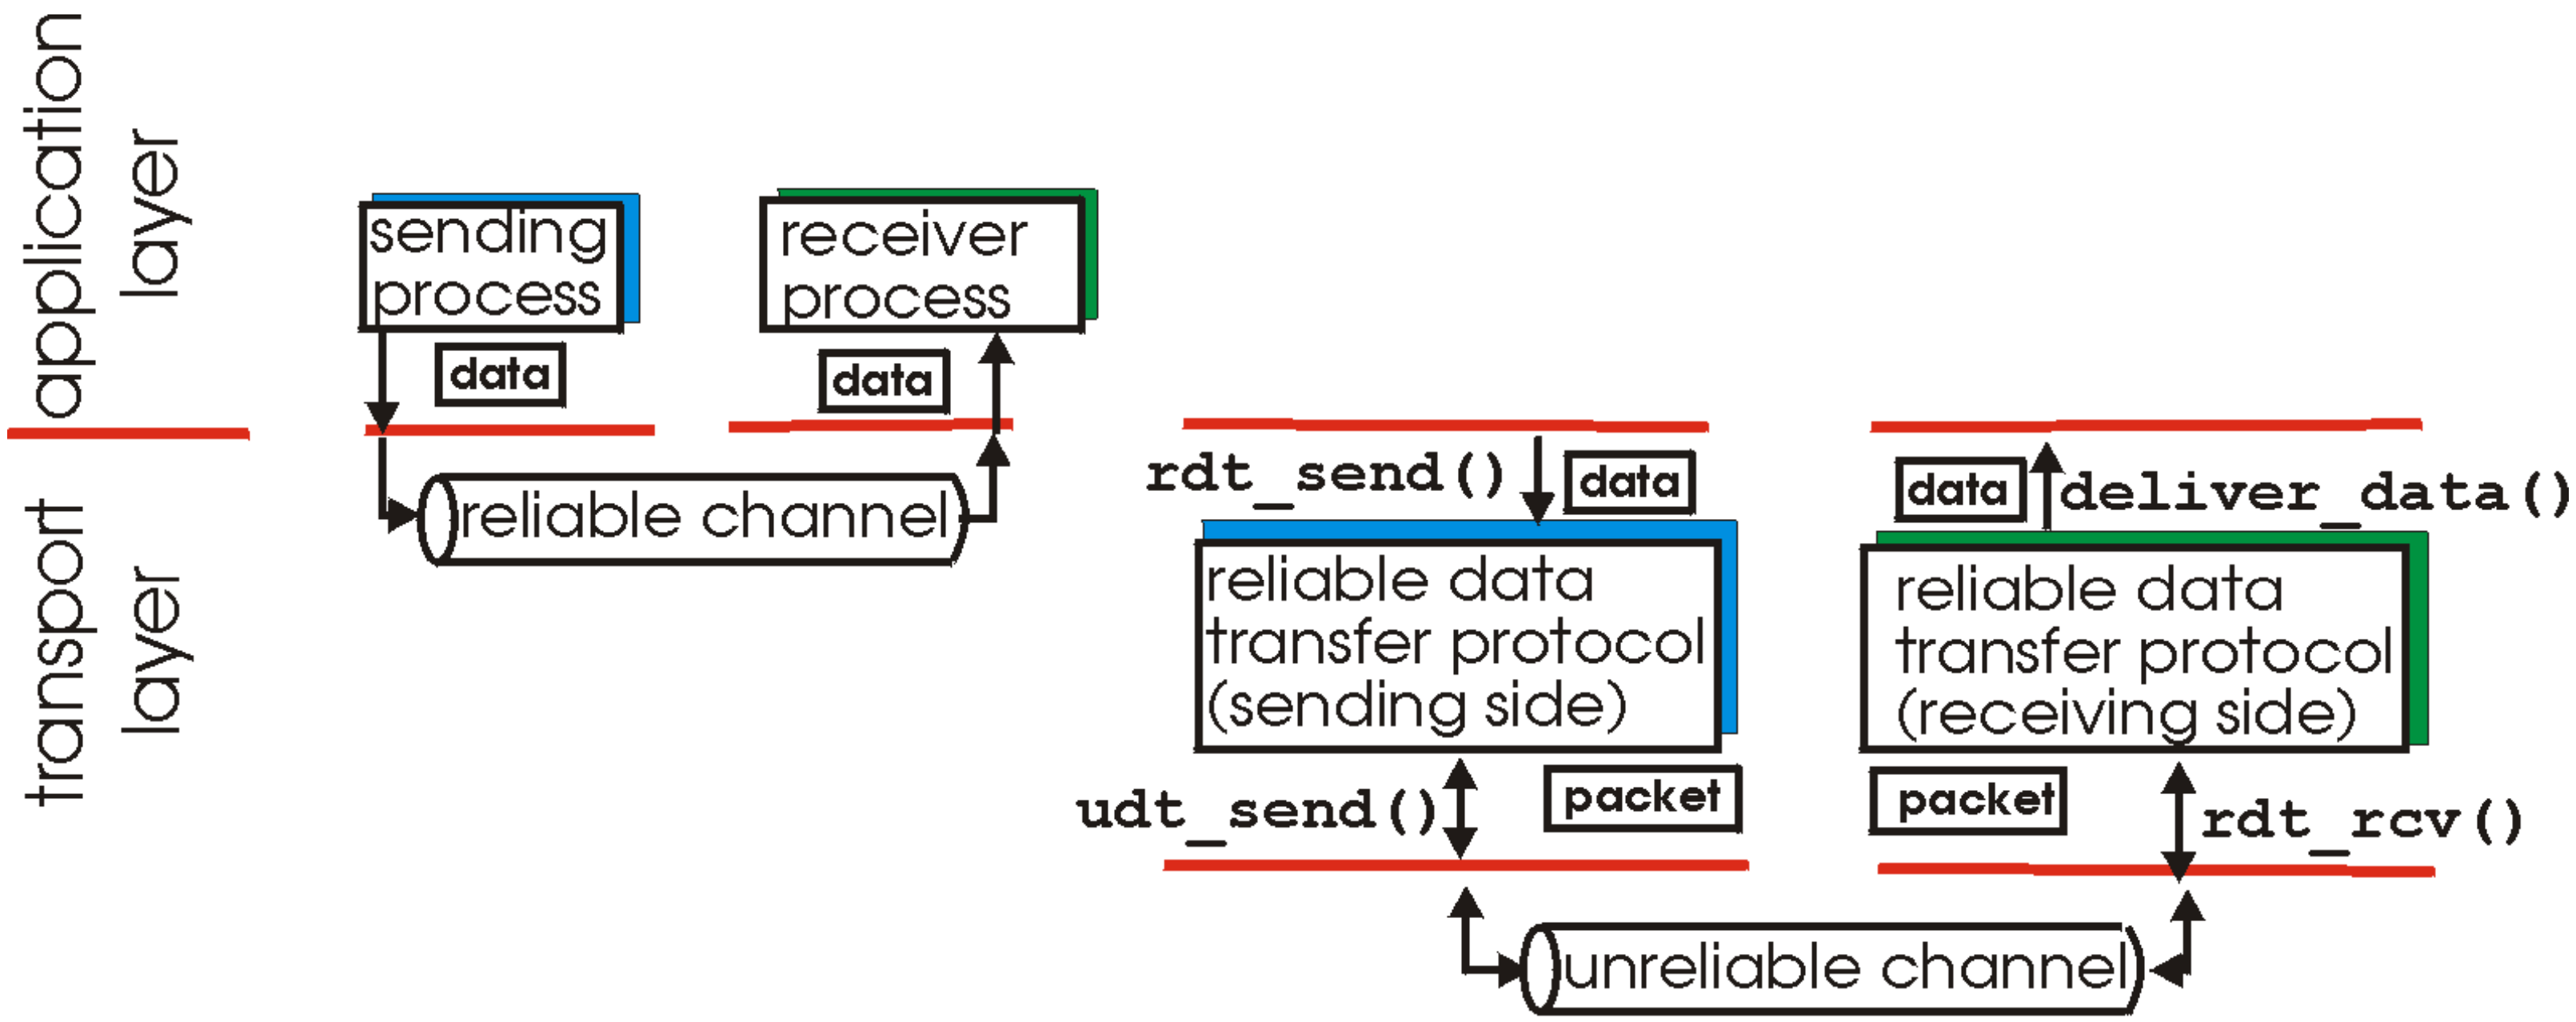

(a) provided service

(b) service implementation

- characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Principles of reliable data transfer

- important in application, transport, link layers
  - top-10 list of important networking topics!

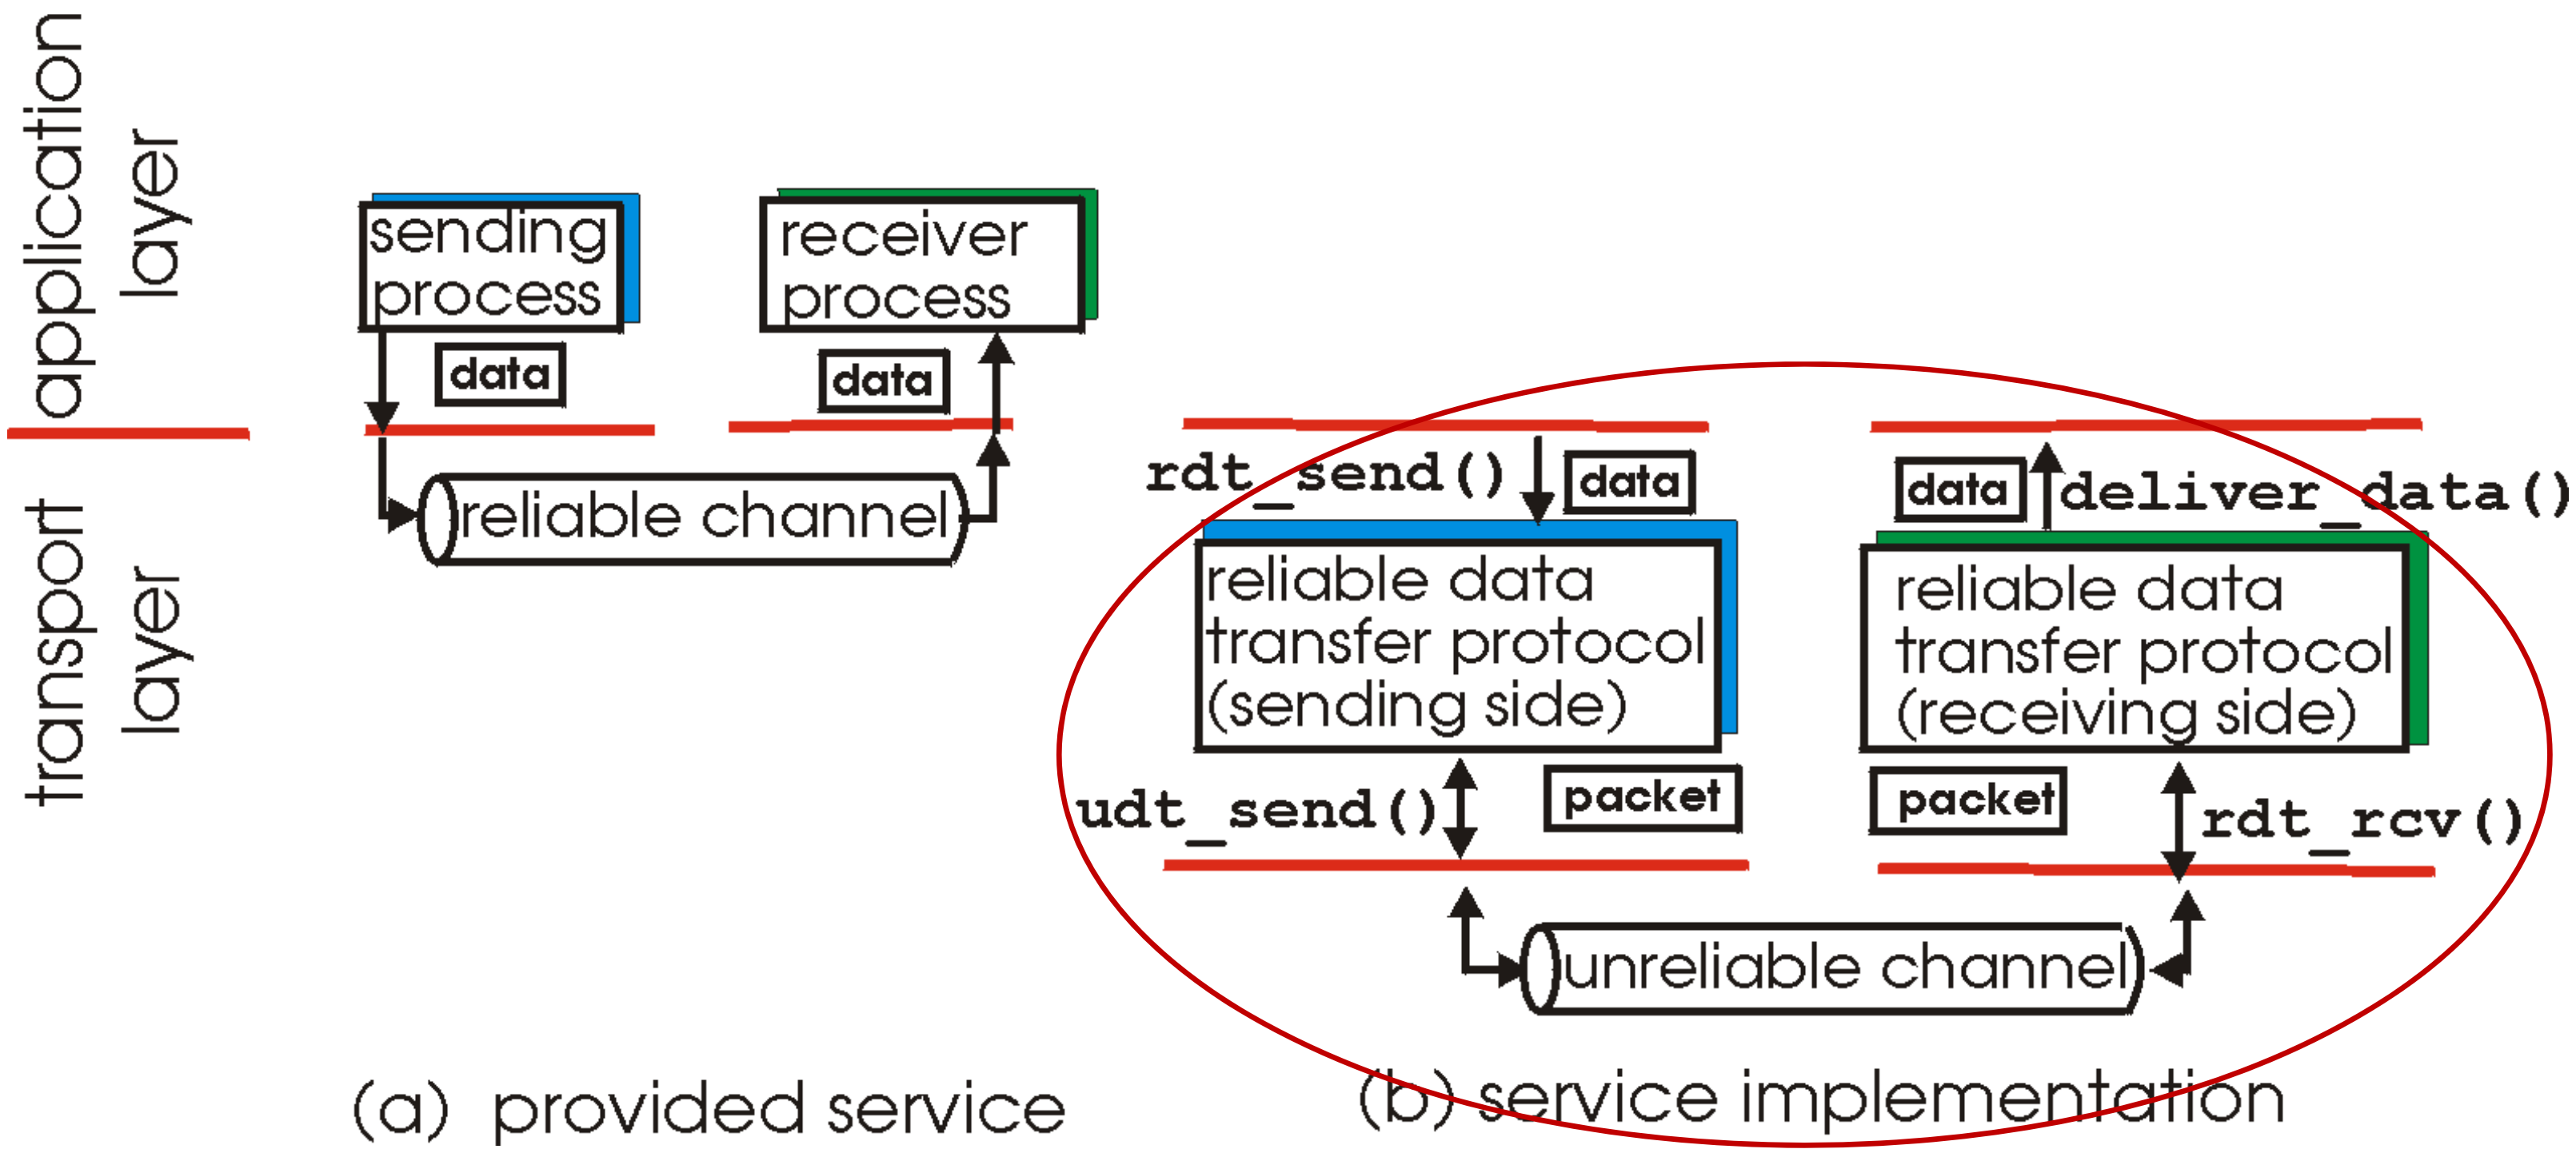

- characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Reliable data transfer: getting started

rdt_send(): called from above, (e.g., by app.). Passed data to deliver to receiver upper layer

deliver_data(): called by **rdt** to deliver data to upper

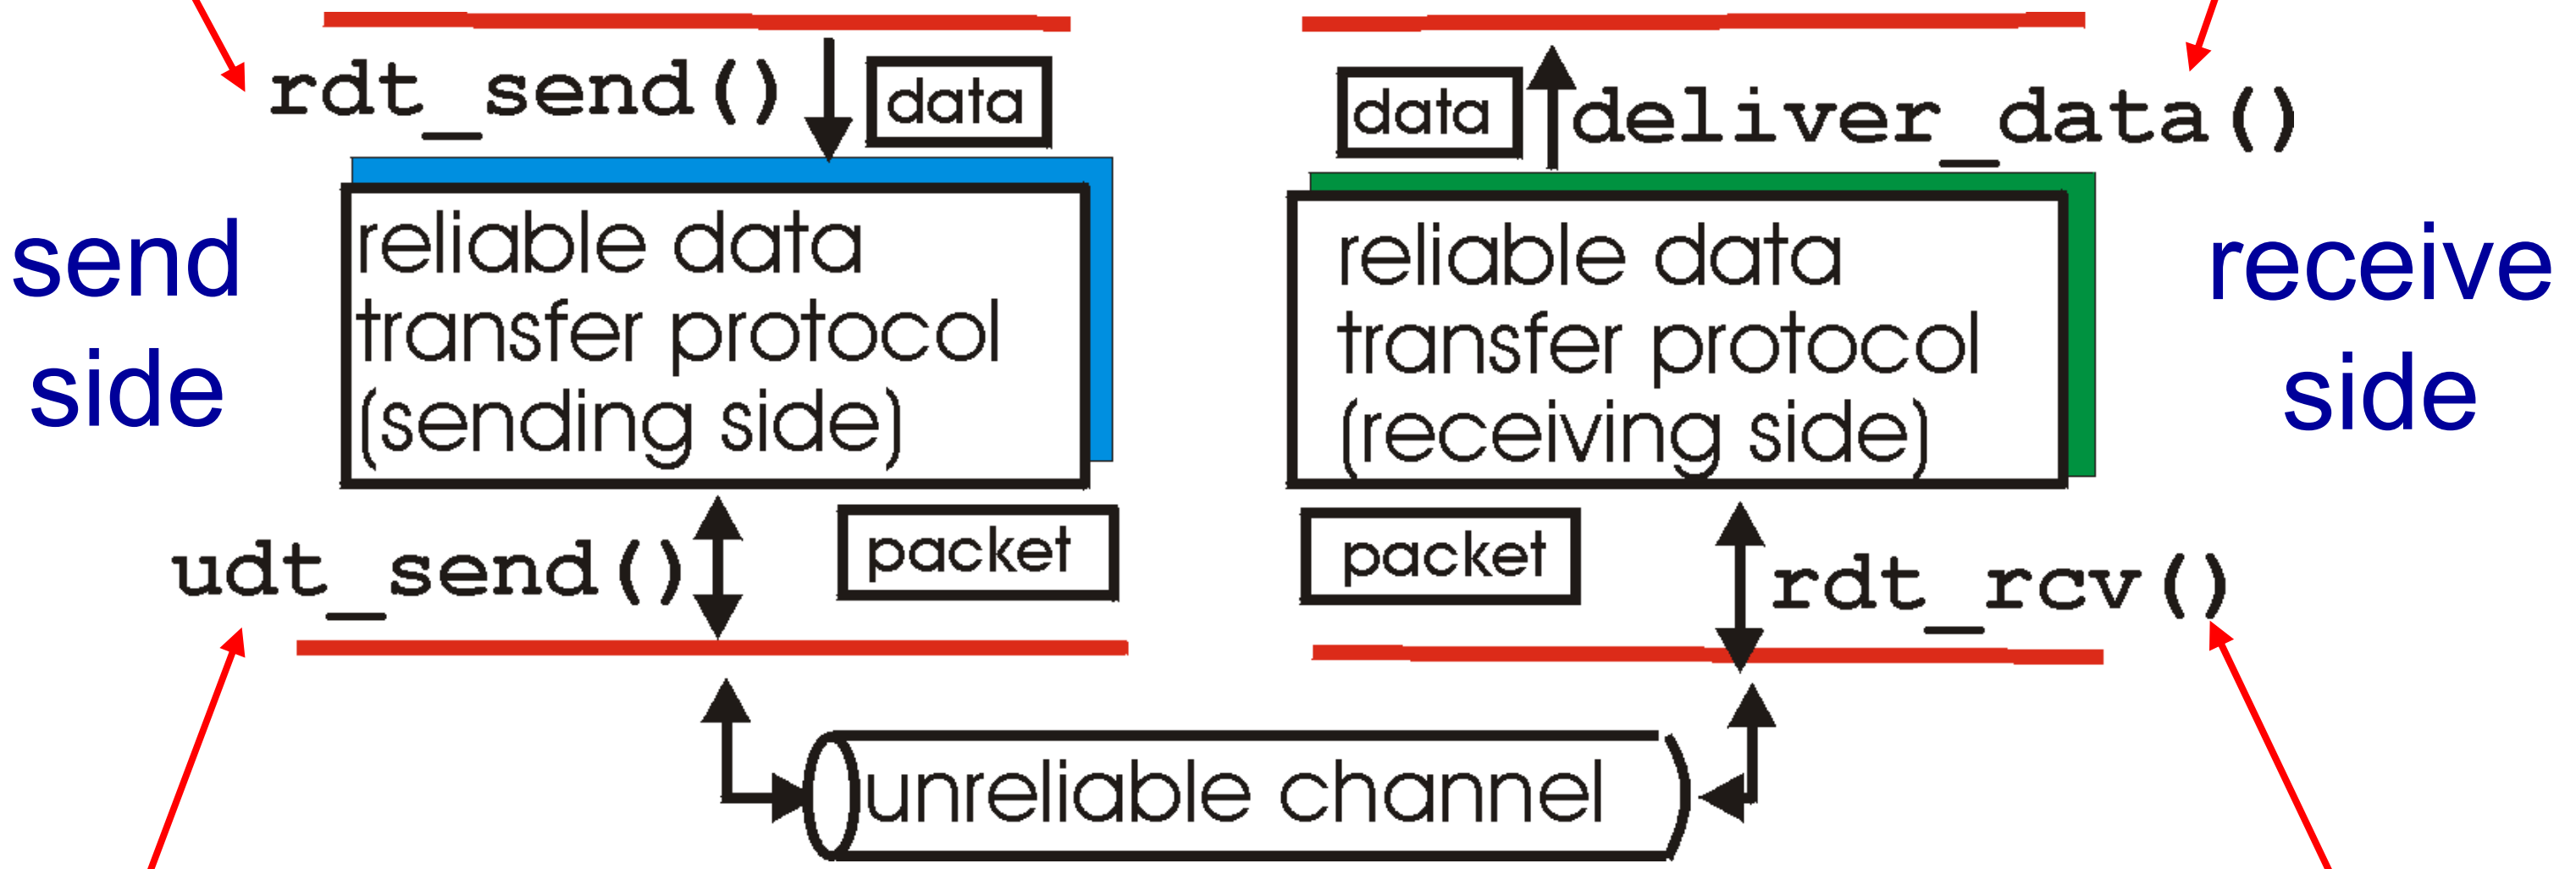

udt_send(): called by rdt, to transfer packet over unreliable channel to receiver

rdt_rcv(): called when packet arrives on rcv-side of channel

Reliable data transfer: getting started

we'll:

- incrementally develop sender, receiver sides of reliable data transfer protocol (rdt)
- consider only unidirectional data transfer
  - but control info will flow on both directions!
- use finite state machines (FSM) to specify sender, receiver

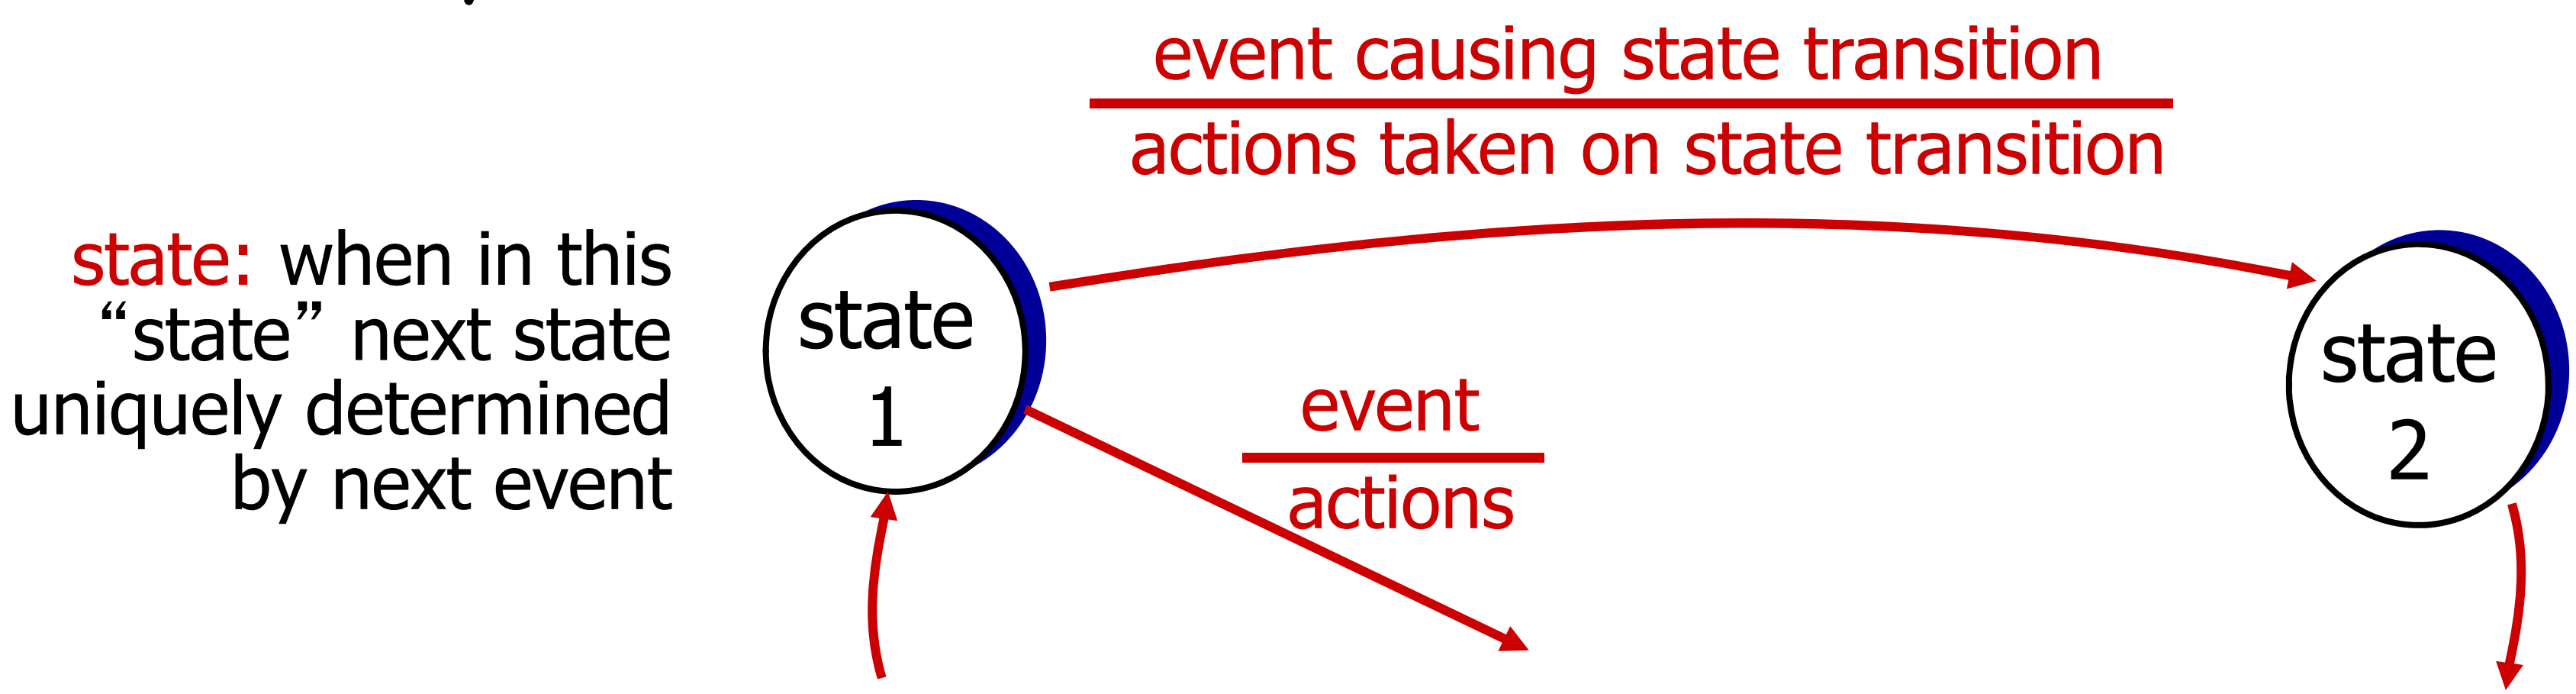

rdt1.0: reliable transfer over a reliable channel

- underlying channel perfectly reliable
  - no bit errors
  - no loss of packets
- separate FSMs for sender, receiver:
  - sender sends data into underlying channel
  - receiver reads data from underlying channel

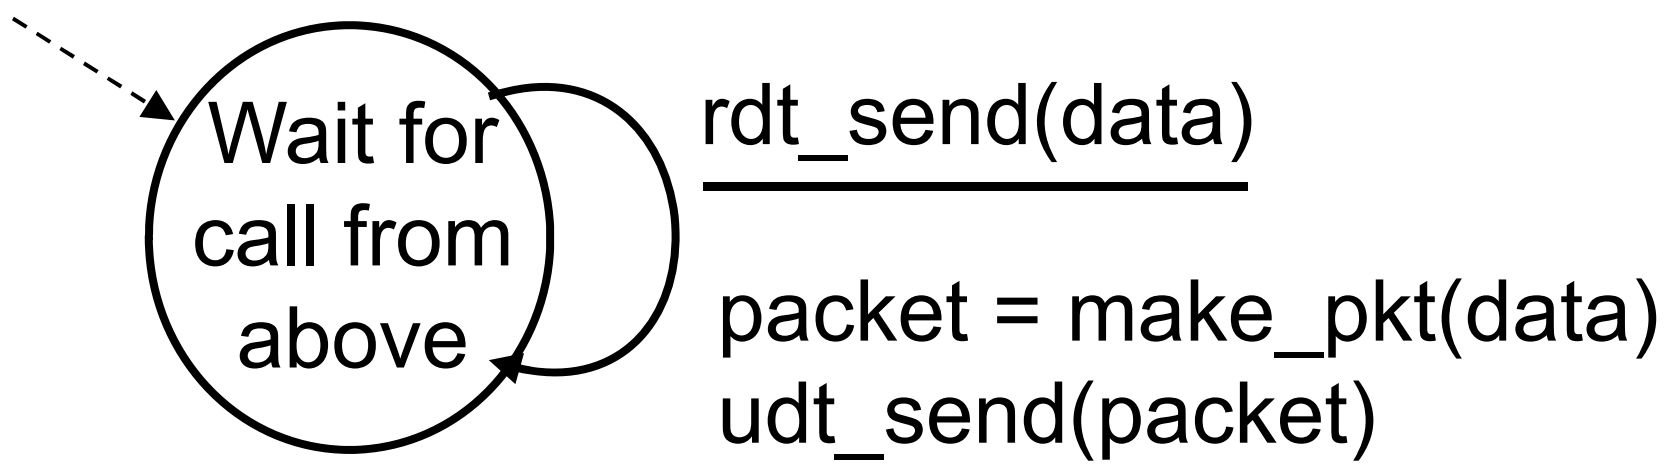

sender

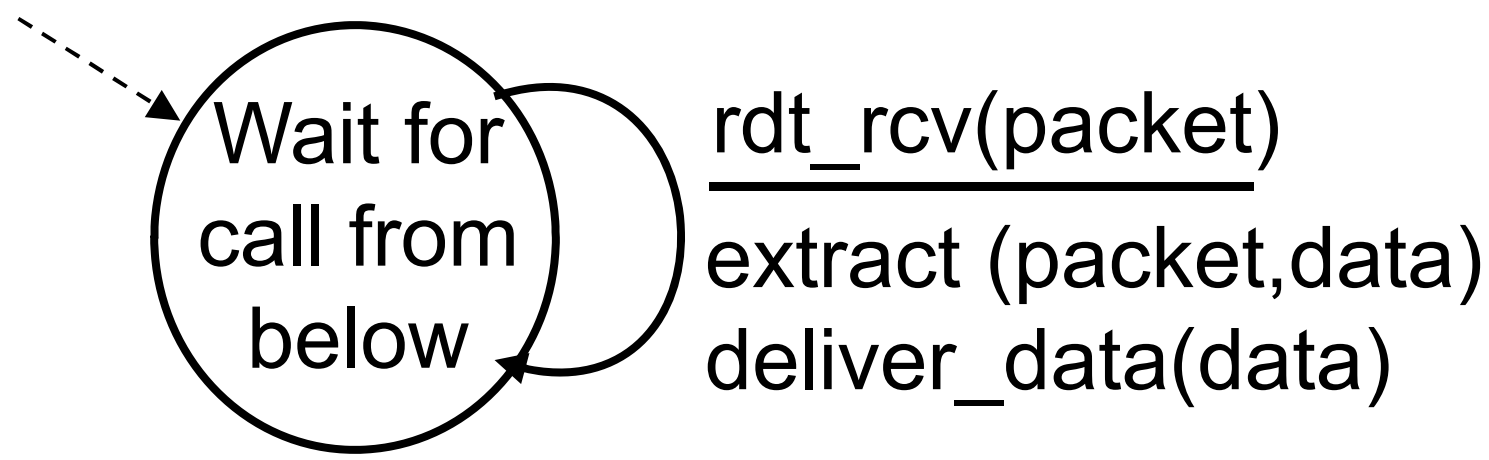

receiver

rdt2.0: channel with bit errors

- underlying channel may flip bits in packet
  - checksum to detect bit errors
- *the* question: how to recover from errors:

How do humans recover from "errors" during conversation?

rdt2.0: channel with bit errors

- underlying channel may flip bits in packet
  - checksum to detect bit errors
- *the* question: how to recover from errors:
  - *acknowledgements (ACKs):* receiver explicitly tells sender that pkt received OK
  - *negative acknowledgements (NAKs):* receiver explicitly tells sender that pkt had errors
  - sender retransmits pkt on receipt of NAK
- new mechanisms in **rdt2.0** (beyond **rdt1.0**):
  - error detection
  - feedback: control msgs (ACK,NAK) from receiver to sender

rdt2.0: FSM specification

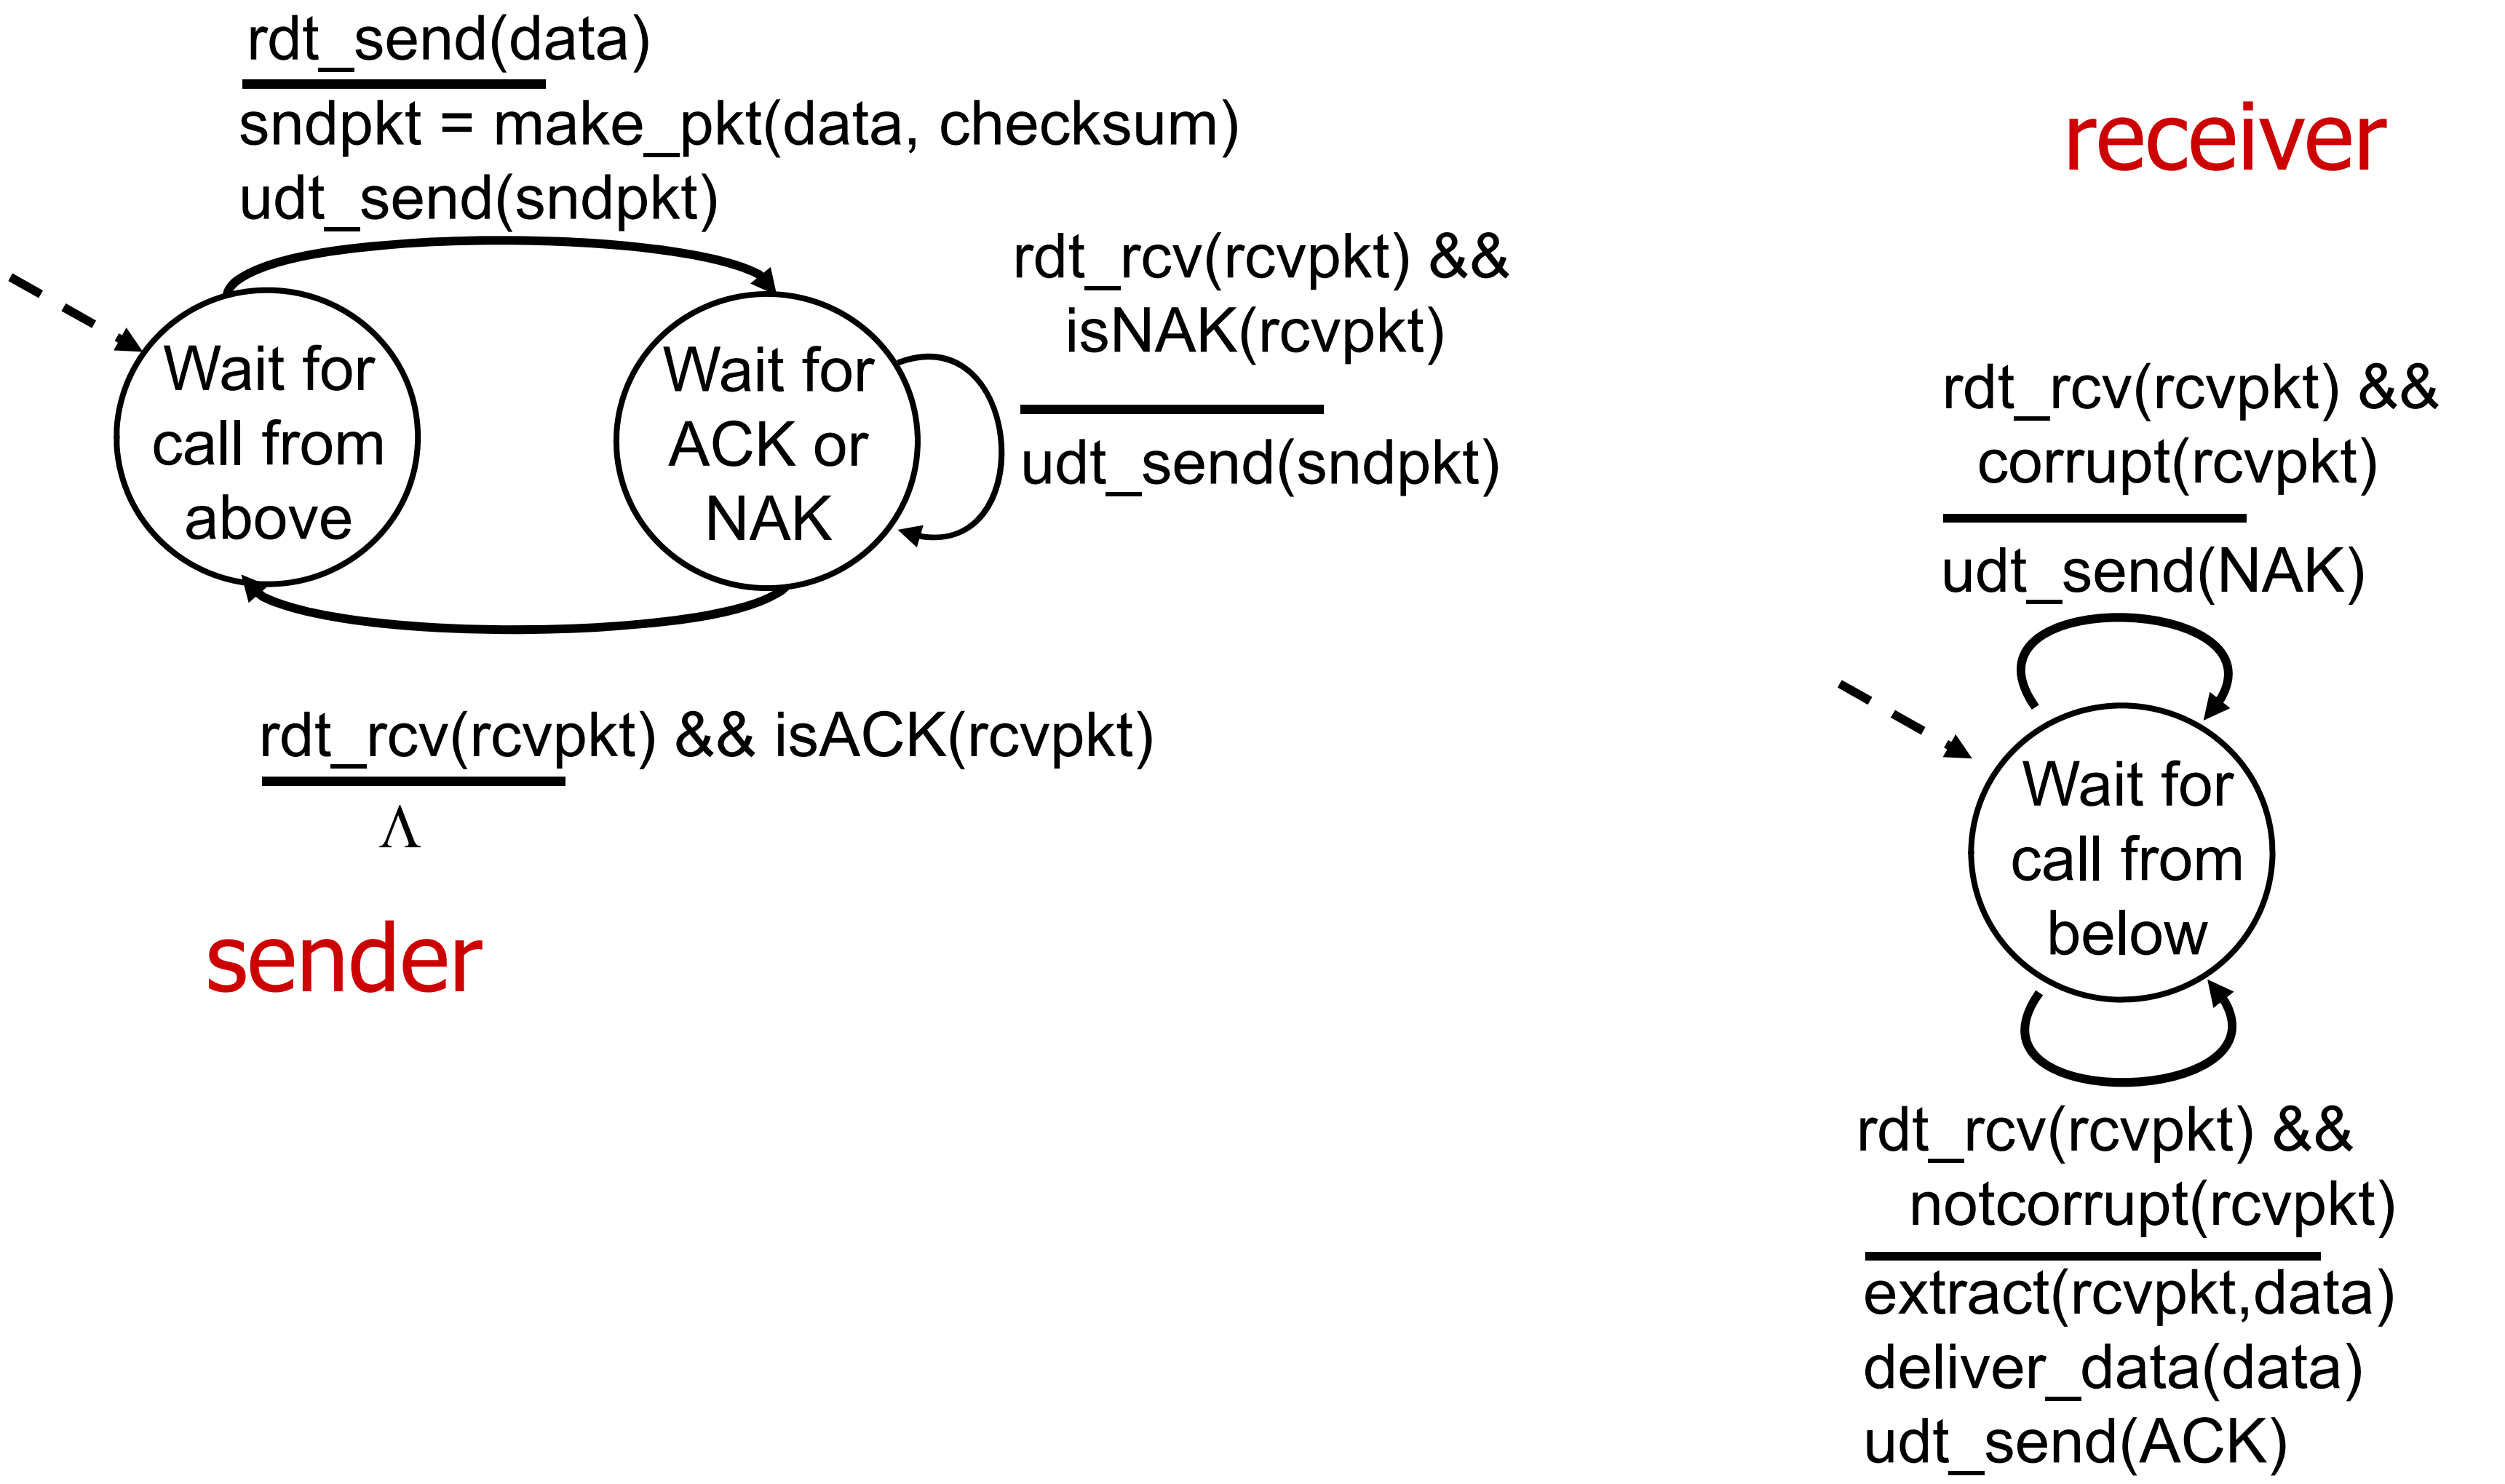

rdt2.0: operation with no errors

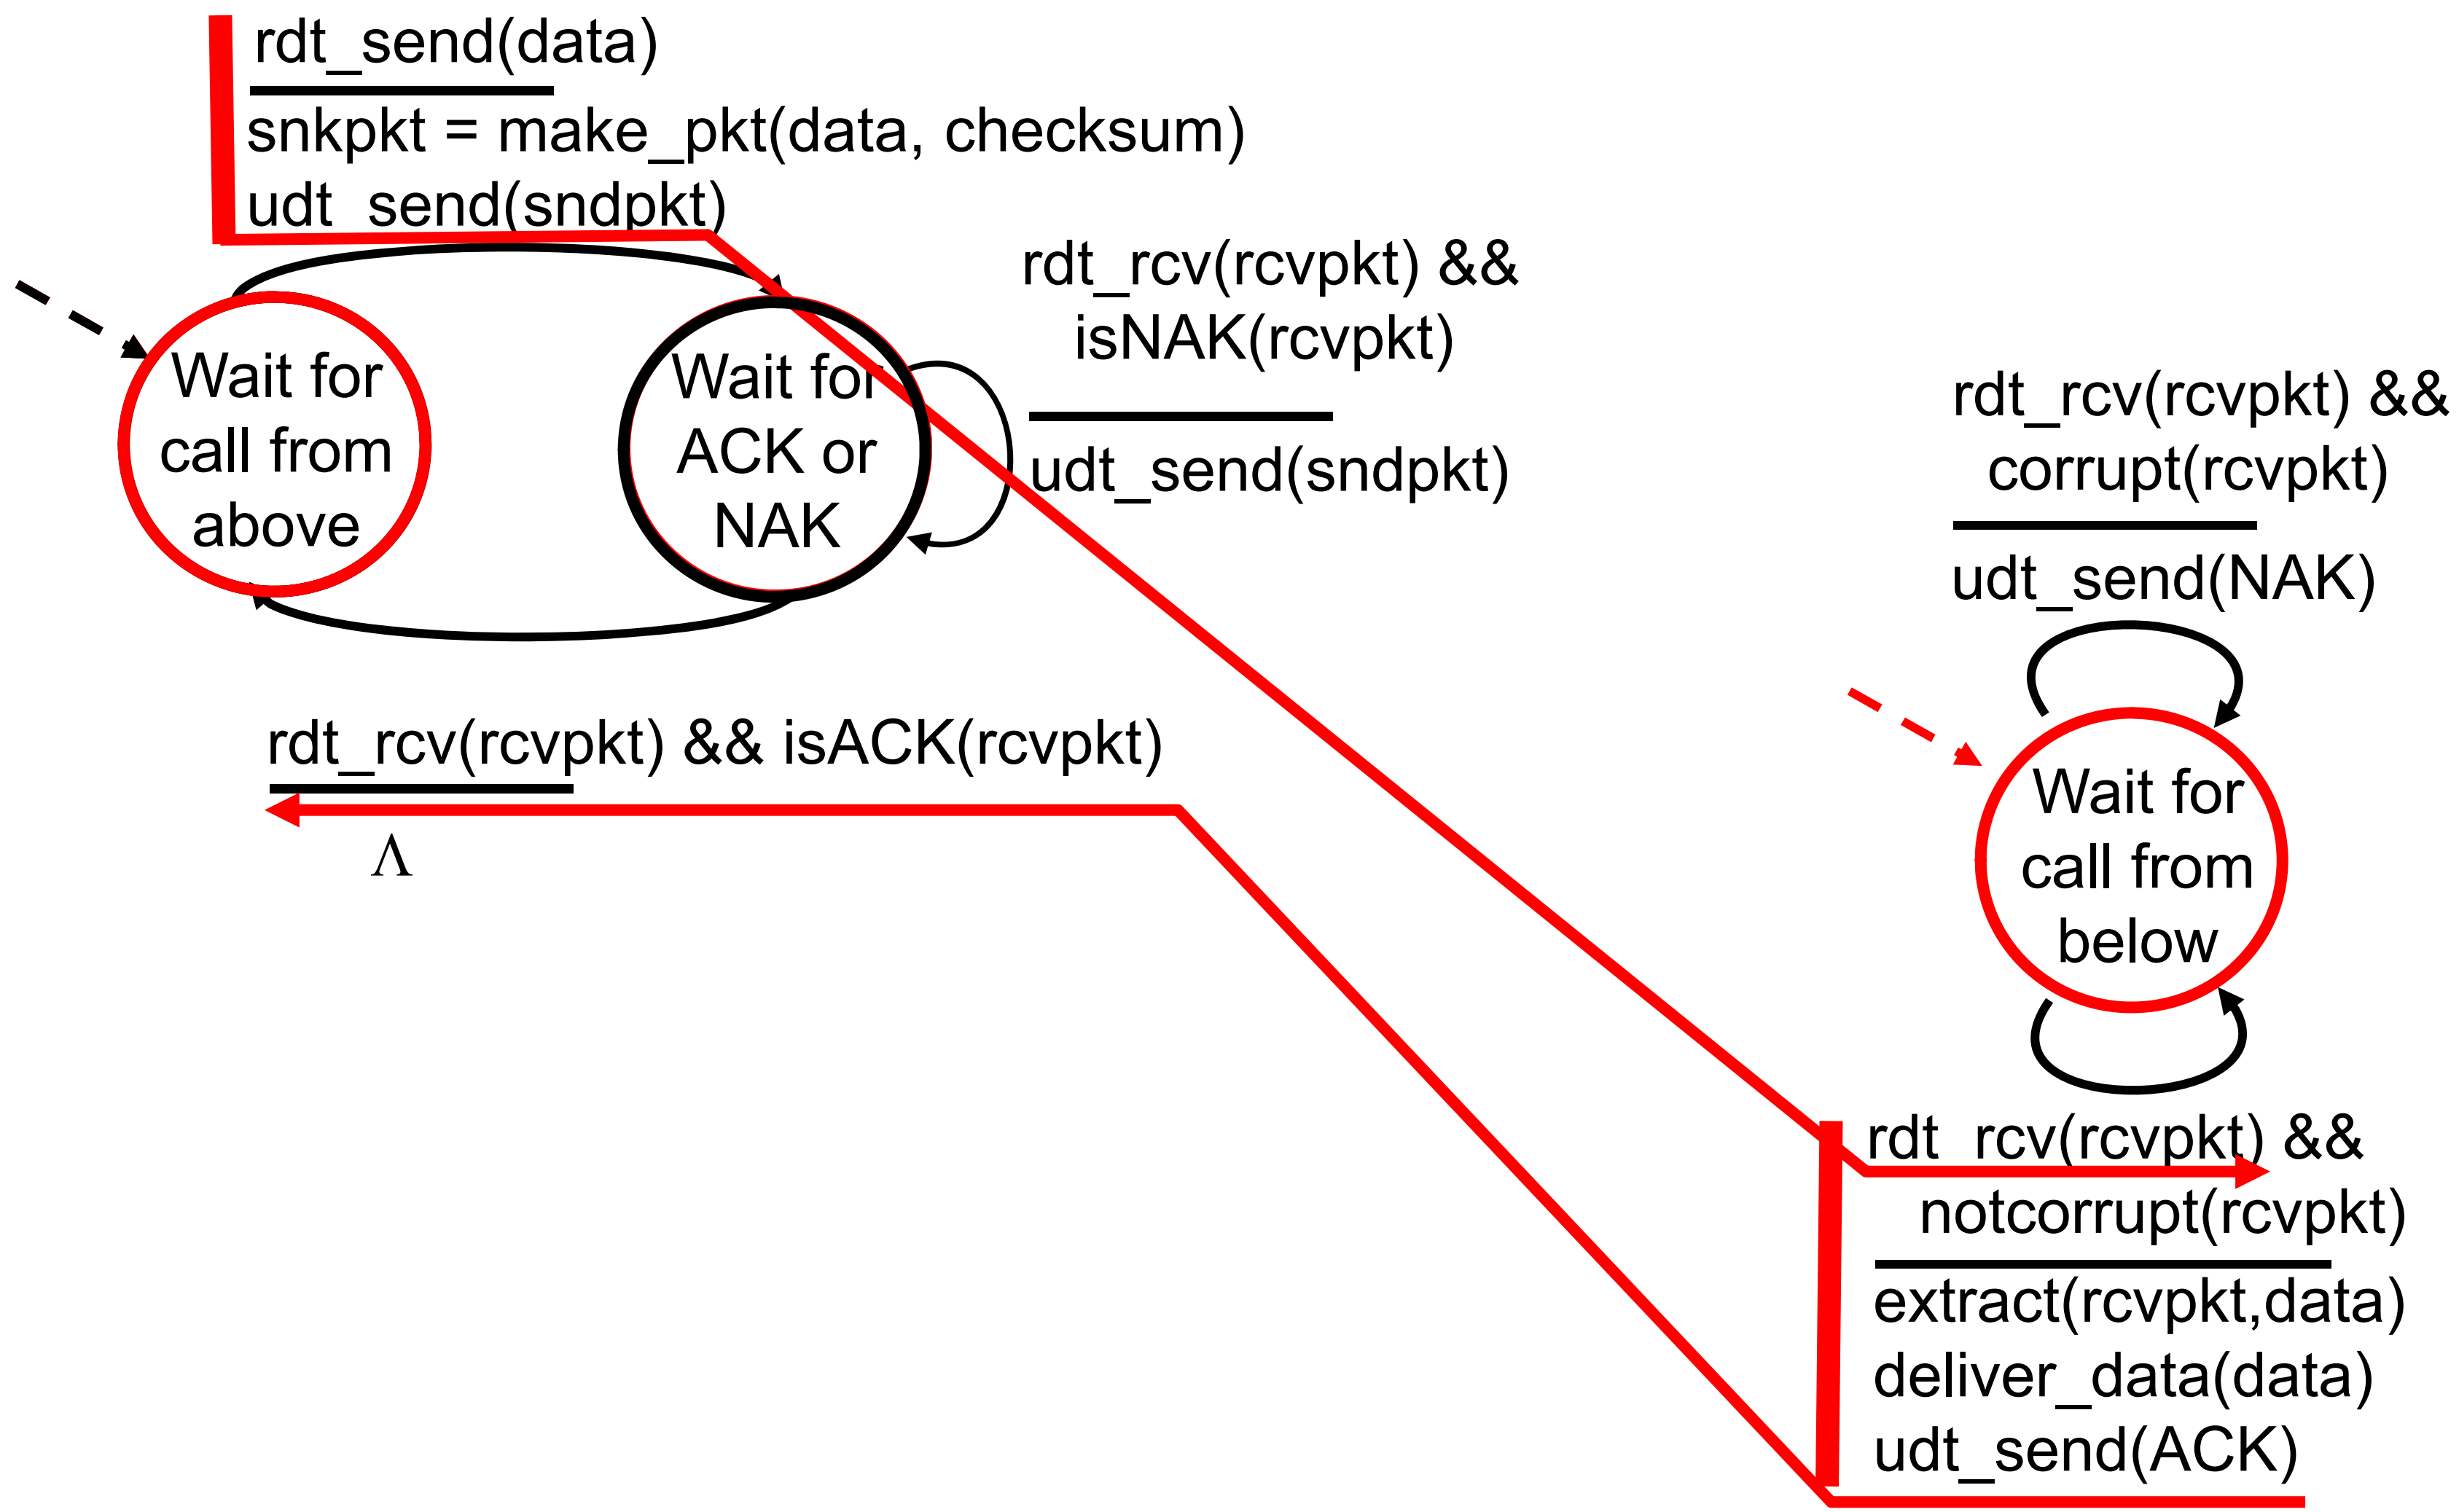

rdt2.0: error scenario

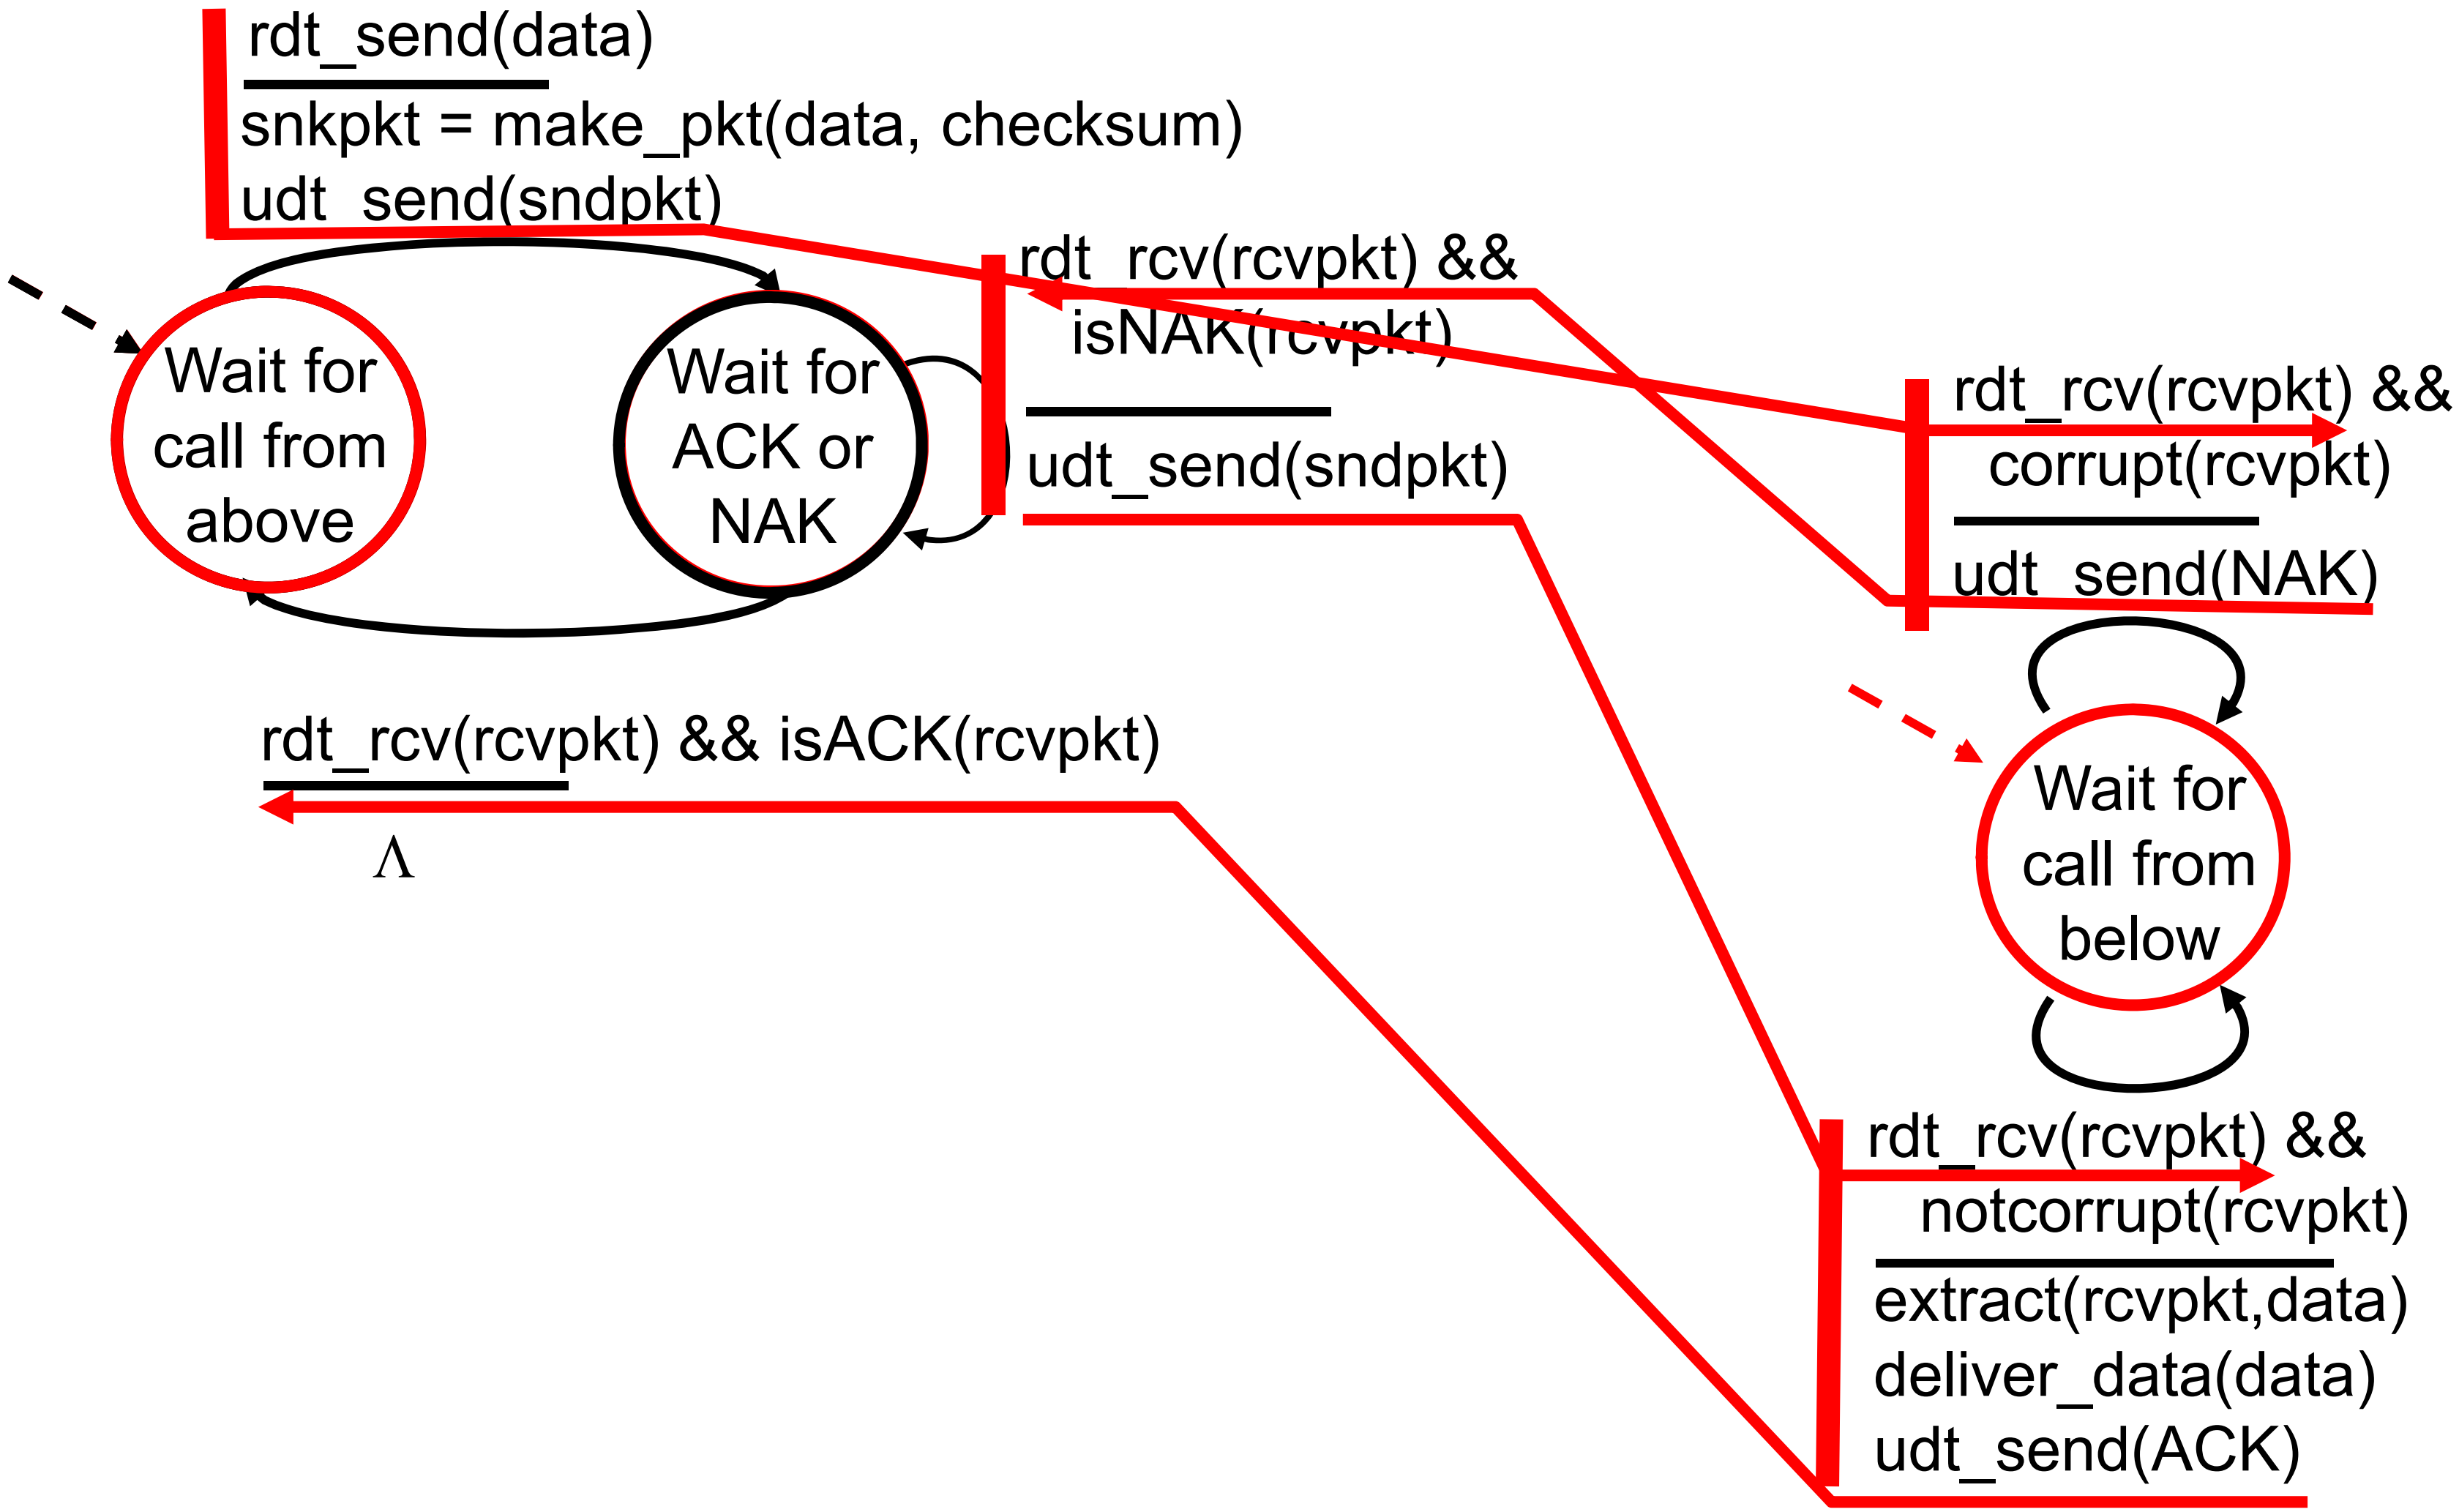

rdt2.0 has a fatal flaw!

what happens if ACK/NAK corrupted?

- sender doesn't know what happened at receiver!
- can't just retransmit: possible duplicate

handling duplicates:

- sender retransmits current pkt if ACK/NAK corrupted
- sender adds *sequence number* to each pkt
- receiver discards (doesn't deliver up) duplicate pkt

stop and wait

sender sends one packet, then waits for receiver response

rdt2.1: sender, handles garbled ACK/NAKs

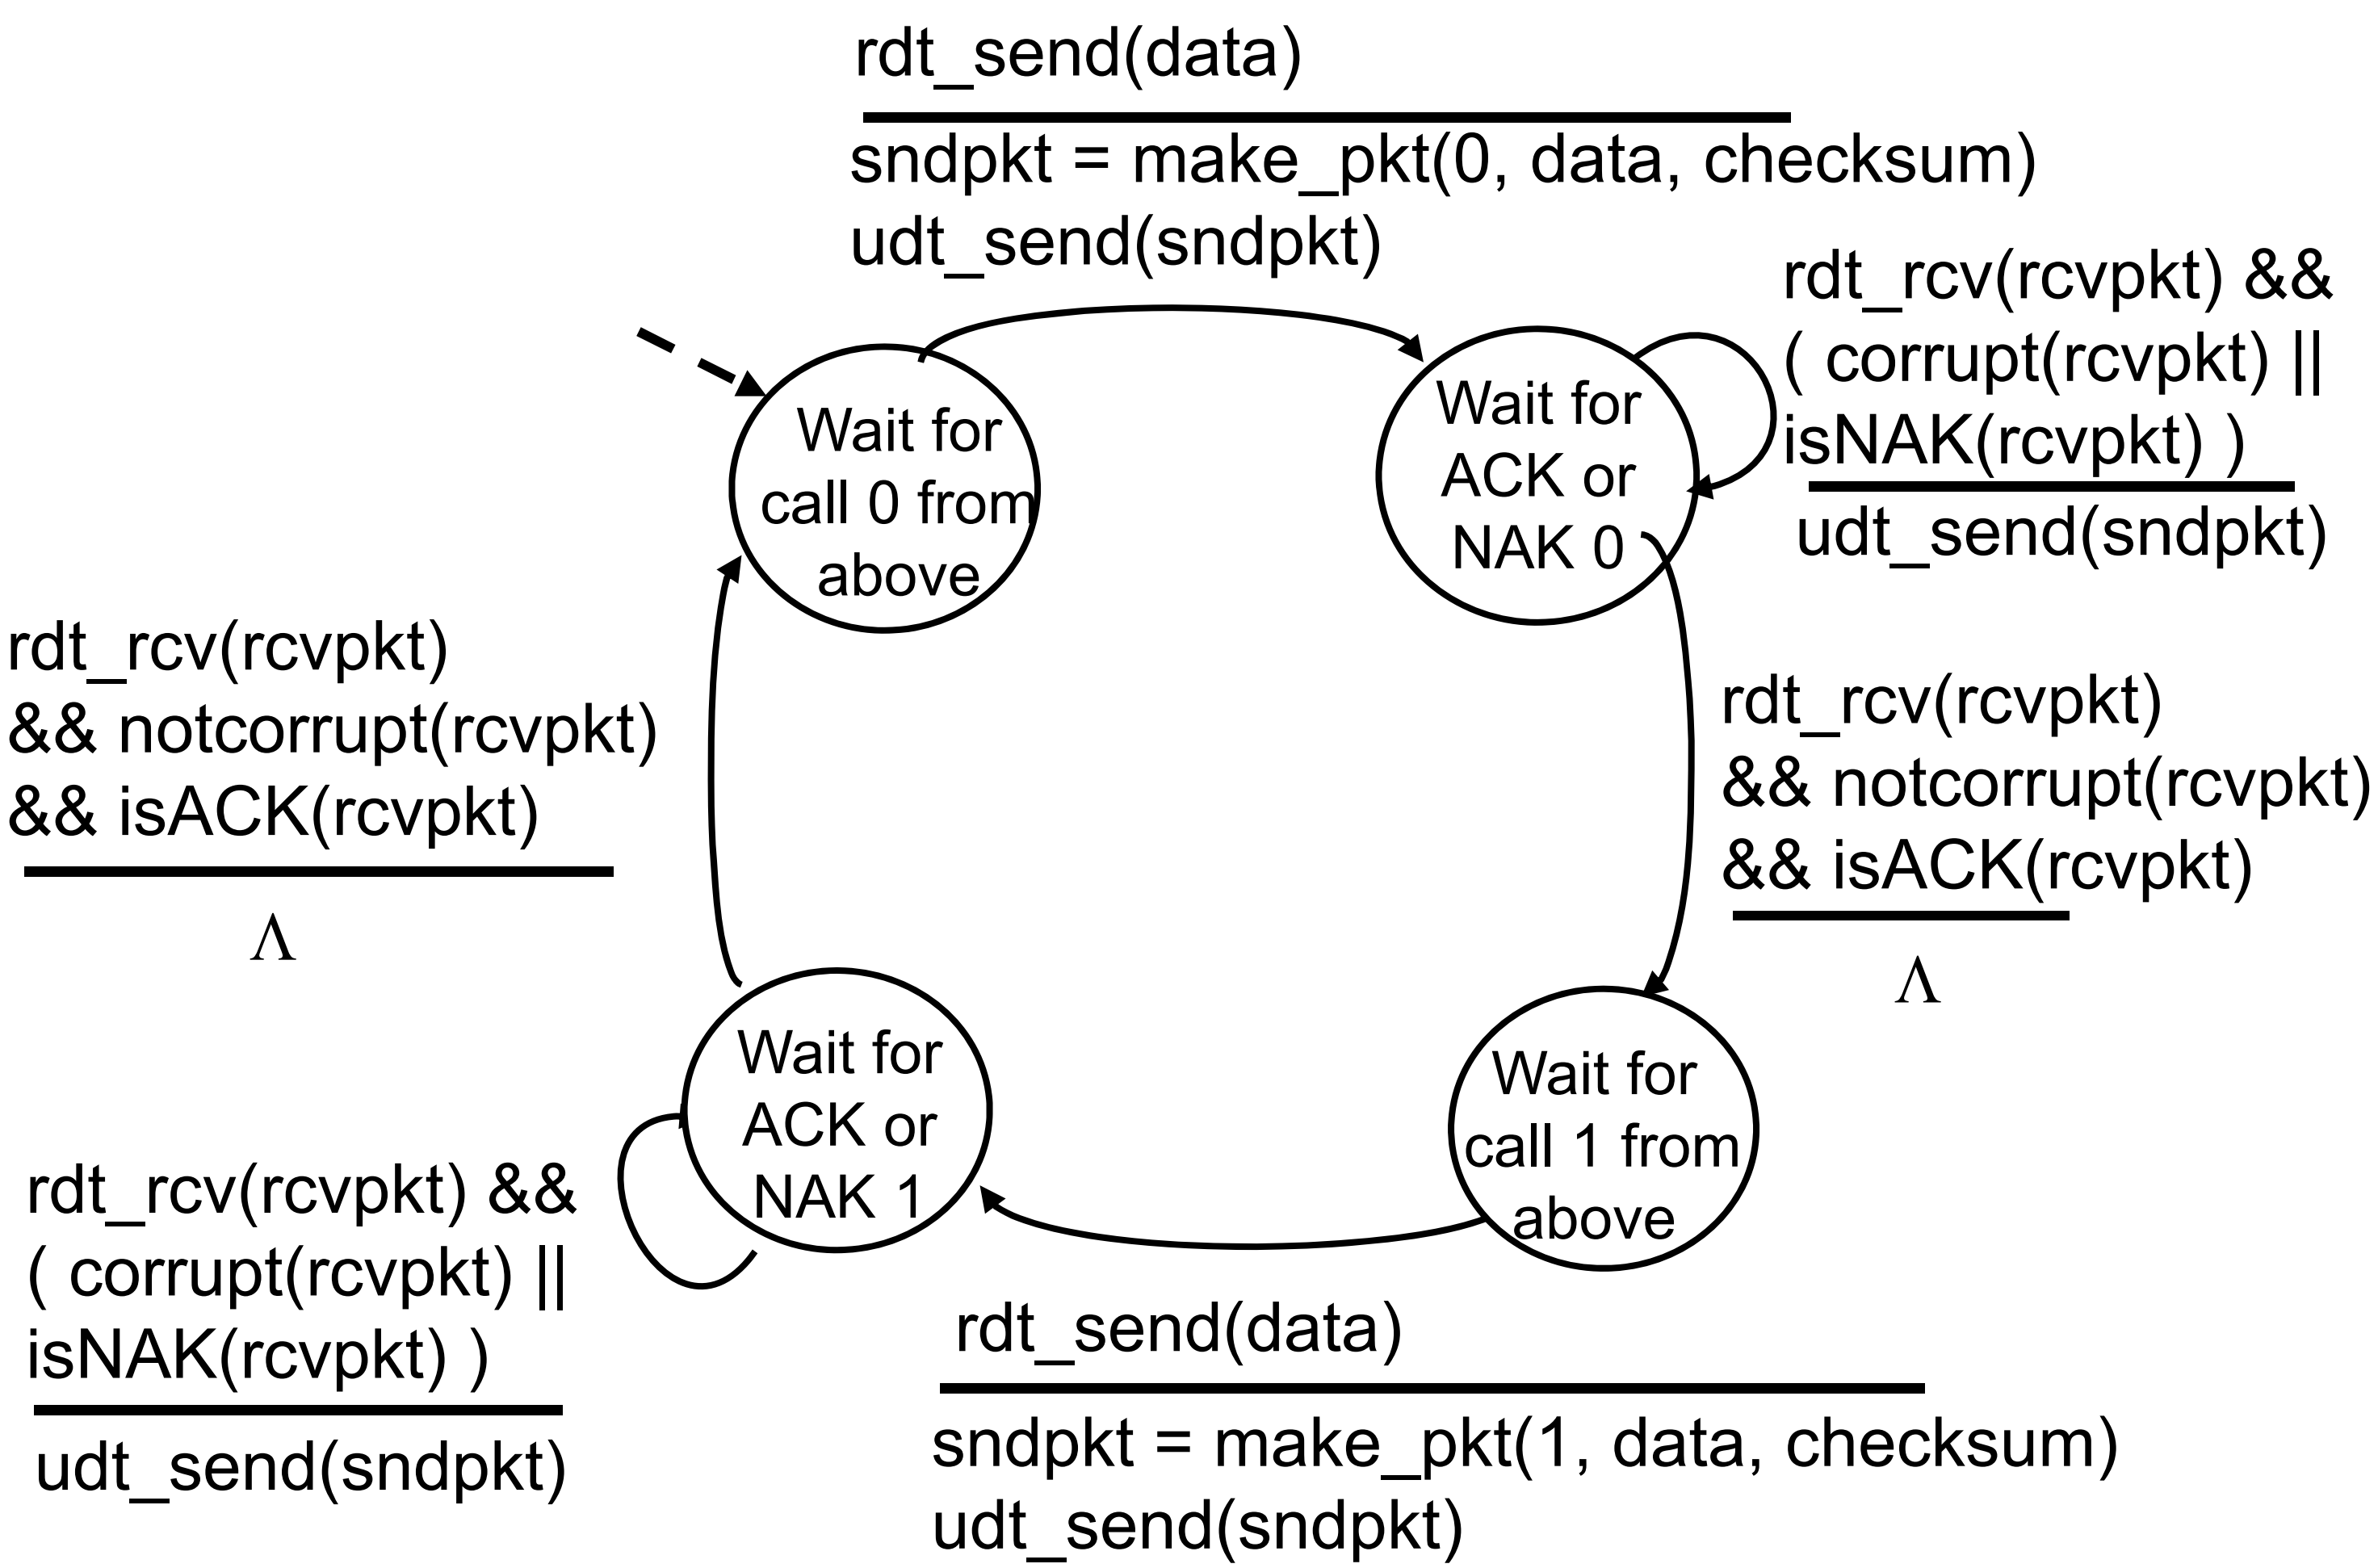

rdt2.1: receiver, handles garbled ACK/NAKs

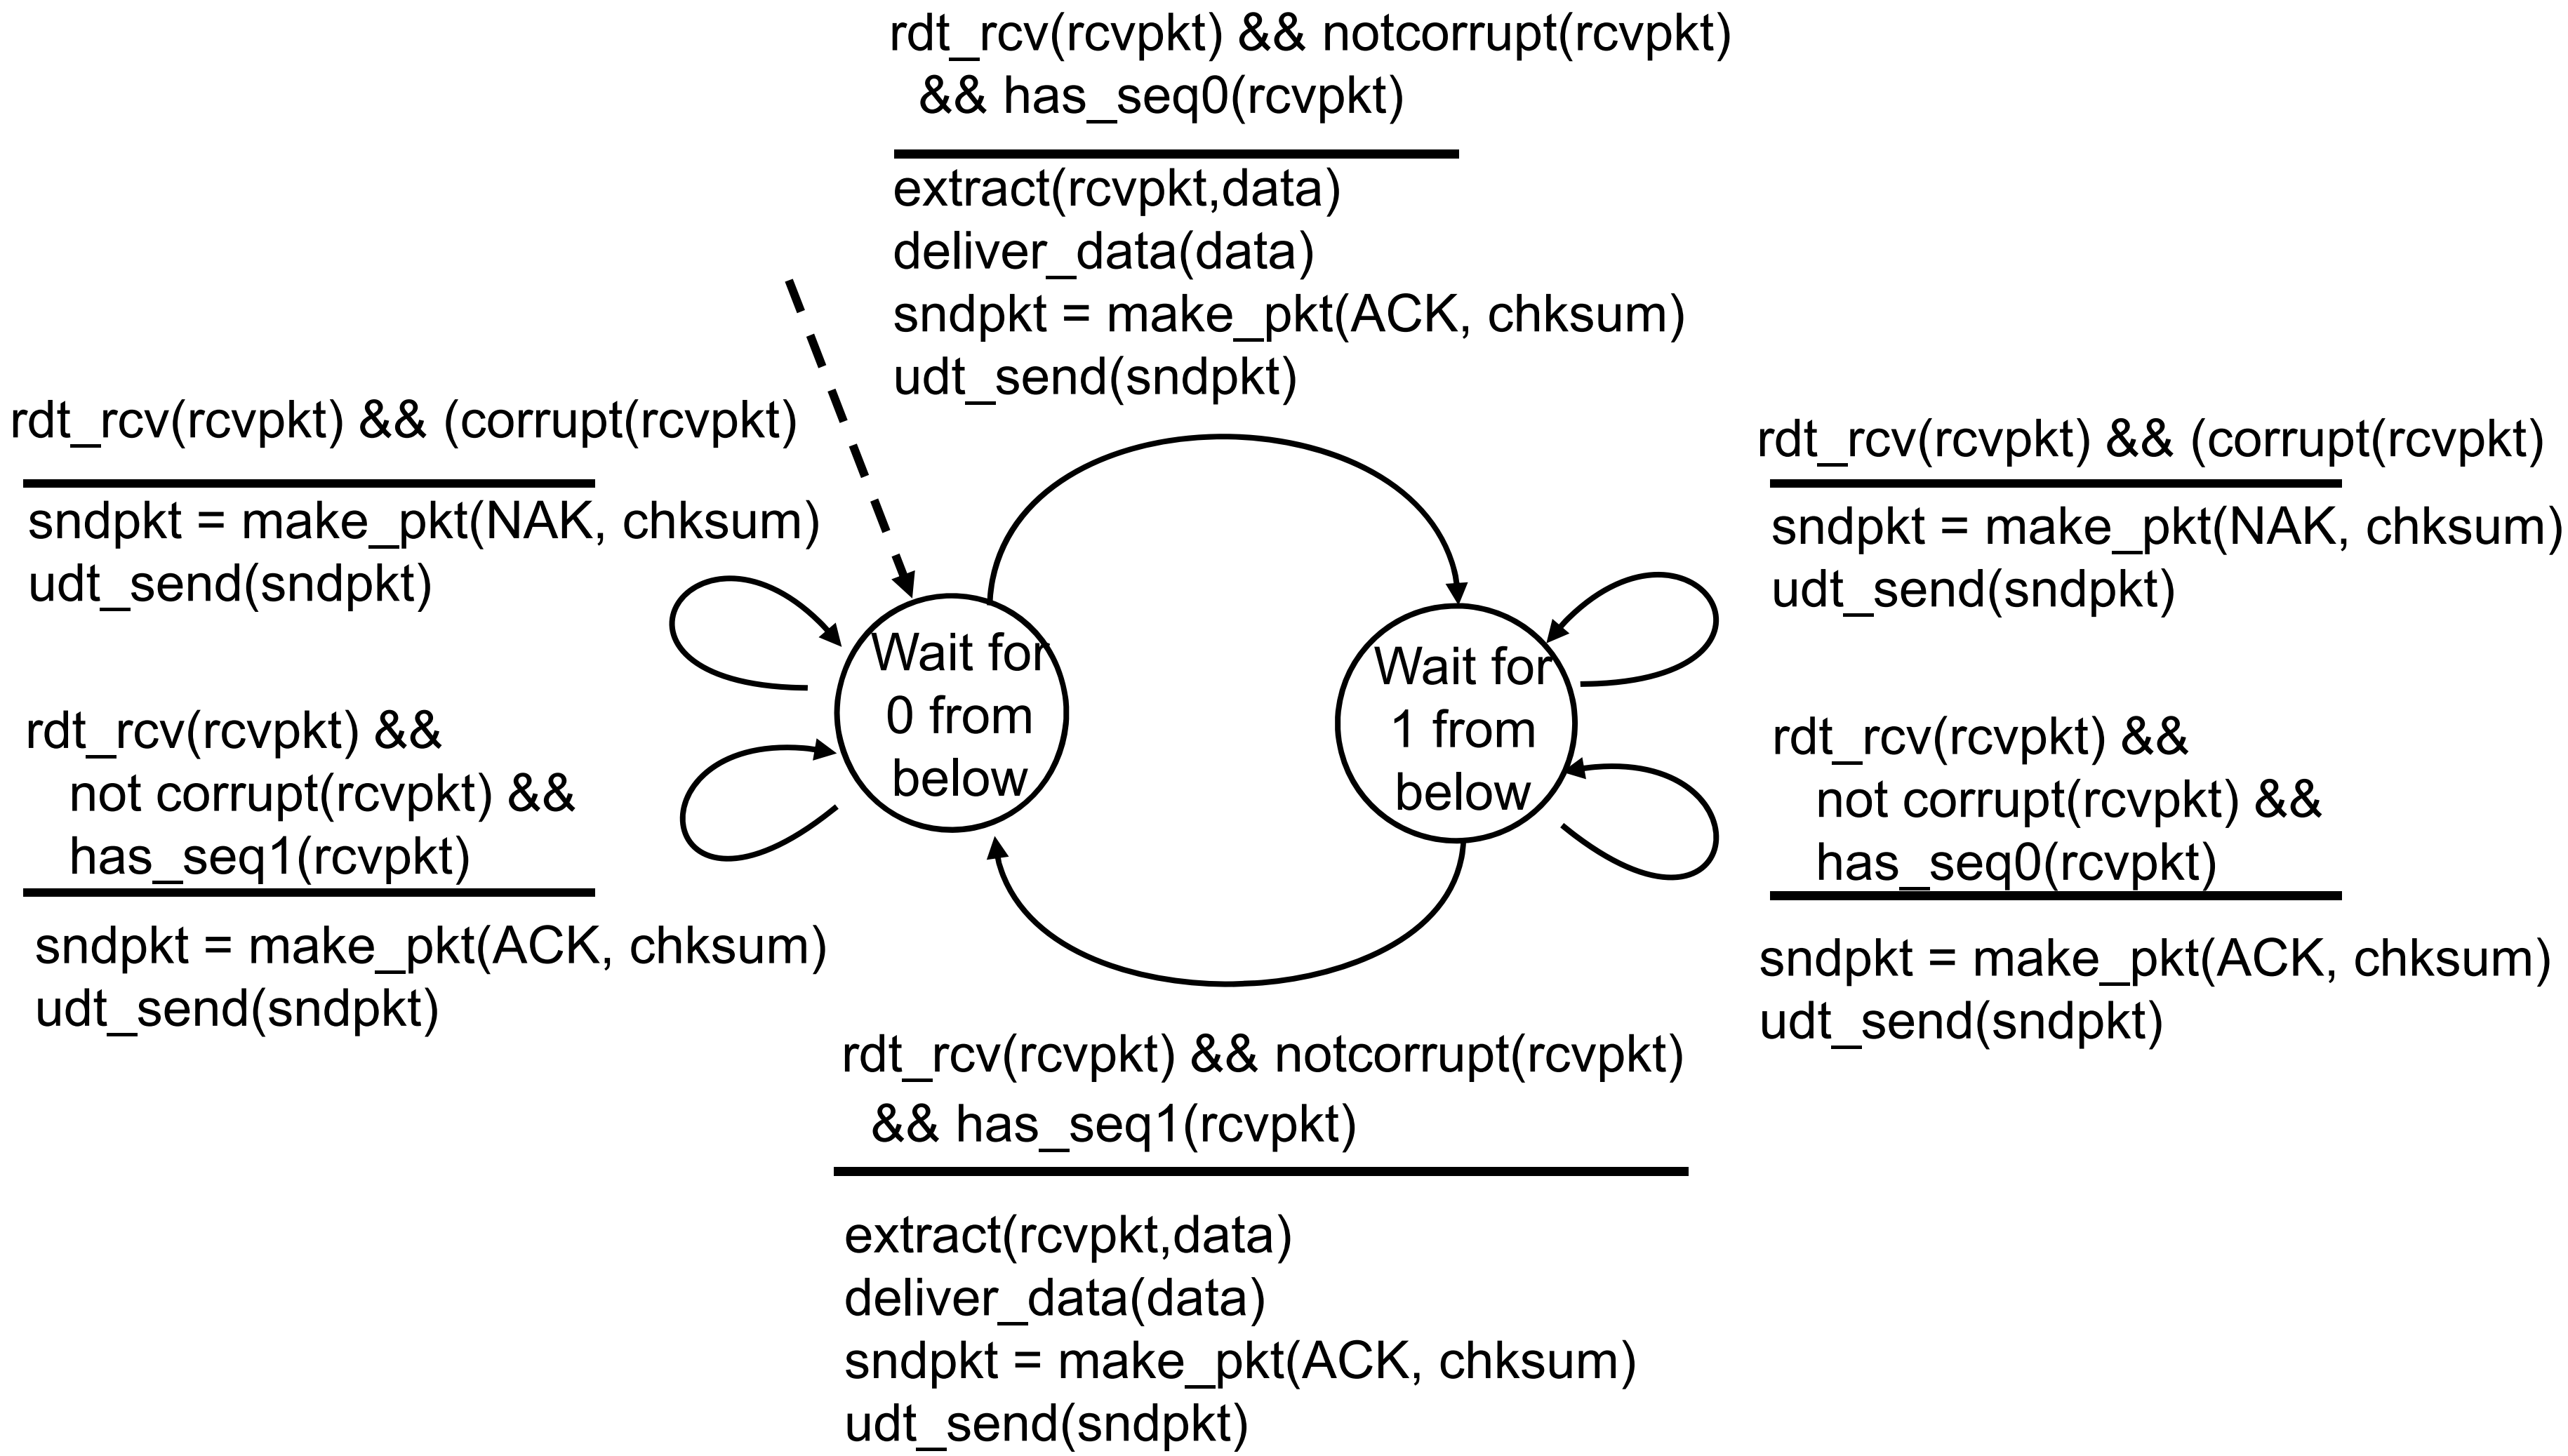

rdt2.1: discussion

sender:

- seq # added to pkt
- two seq. #'s (0,1) will suffice. Why?
- must check if received ACK/NAK corrupted
- twice as many states
  - state must "remember" whether "expected" pkt should have seq # of 0 or 1

receiver:

- must check if received packet is duplicate
  - state indicates whether 0 or 1 is expected pkt seq #
- note: receiver can *not* know if its last ACK/NAK received OK at sender

rdt2.2: a NAK-free protocol

- same functionality as rdt2.1, using ACKs only
- instead of NAK, receiver sends ACK for last pkt received OK
  - receiver must *explicitly* include seq # of pkt being ACKed
- duplicate ACK at sender results in same action as NAK: *retransmit current pkt*

rdt2.2: sender, receiver fragments

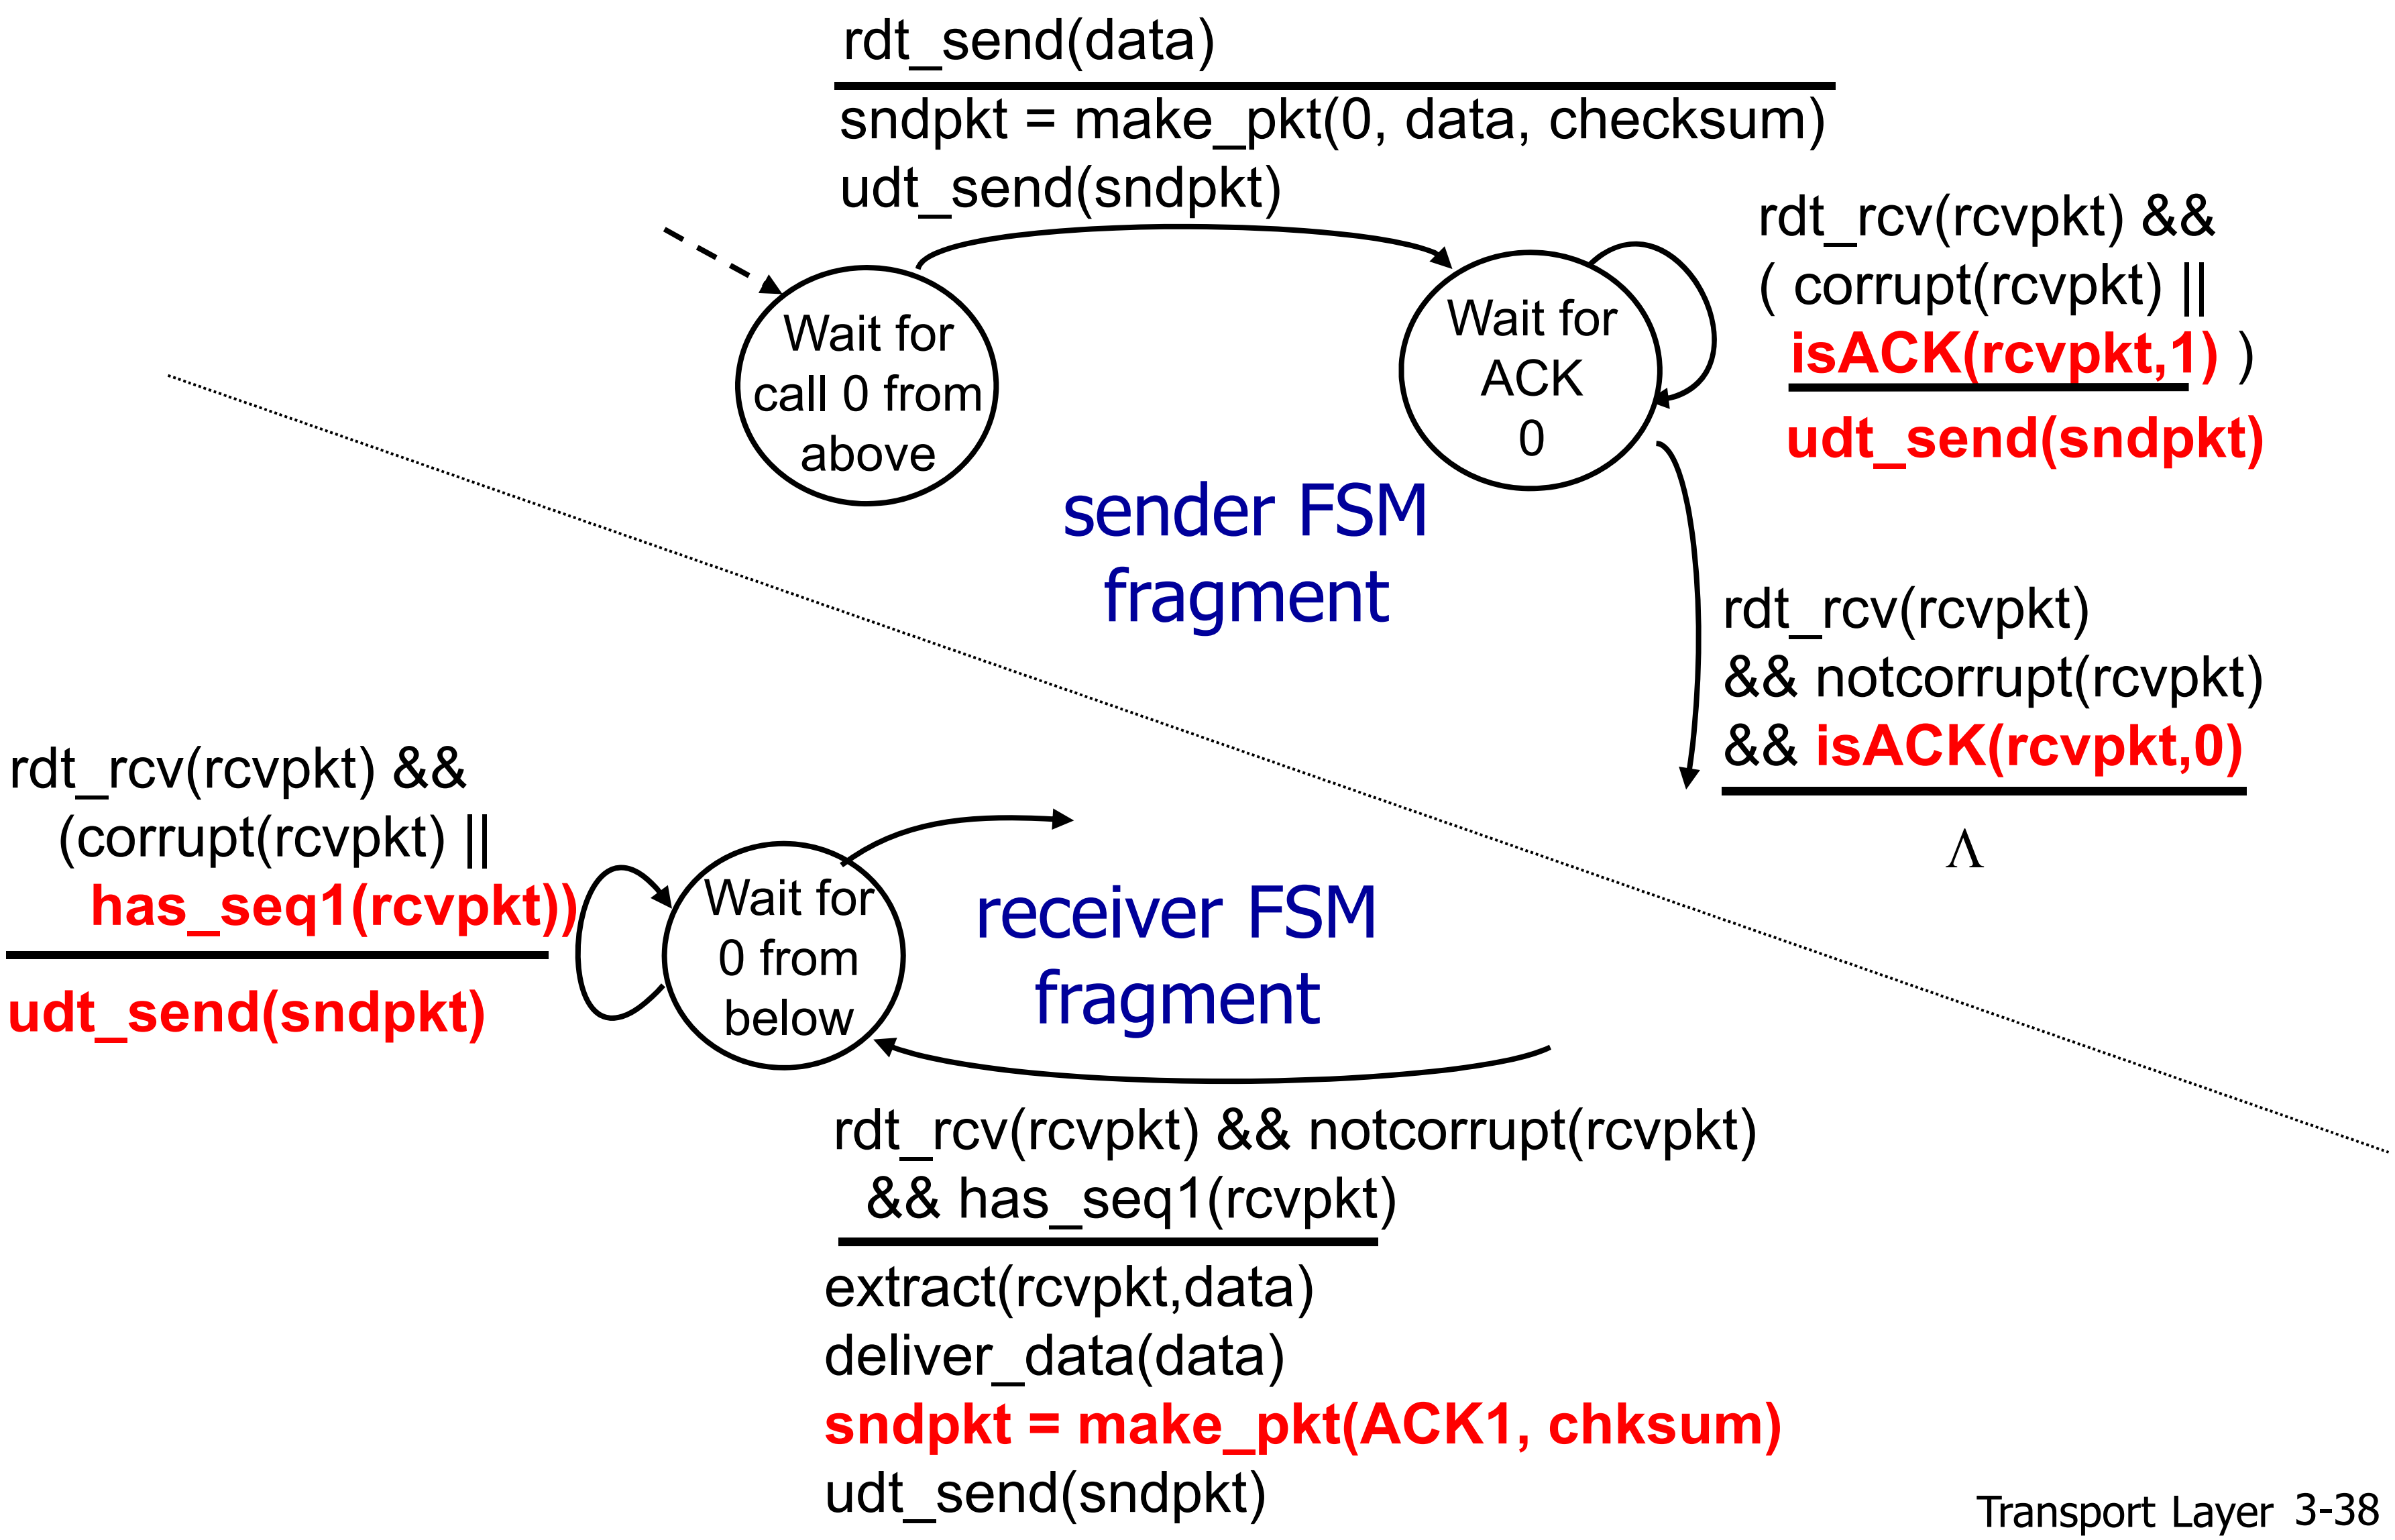

rdt3.0: channels with errors *and* loss

new assumption: underlying channel can also lose packets (data, ACKs)

- checksum, seq. #, ACKs, retransmissions will be of help … but not enough

approach: sender waits "reasonable" amount of time for ACK

- retransmits if no ACK received in this time
- if pkt (or ACK) just delayed (not lost):
  - retransmission will be duplicate, but seq. #'s already handles this
  - receiver must specify seq # of pkt being ACKed
- requires countdown timer

rdt3.0 sender

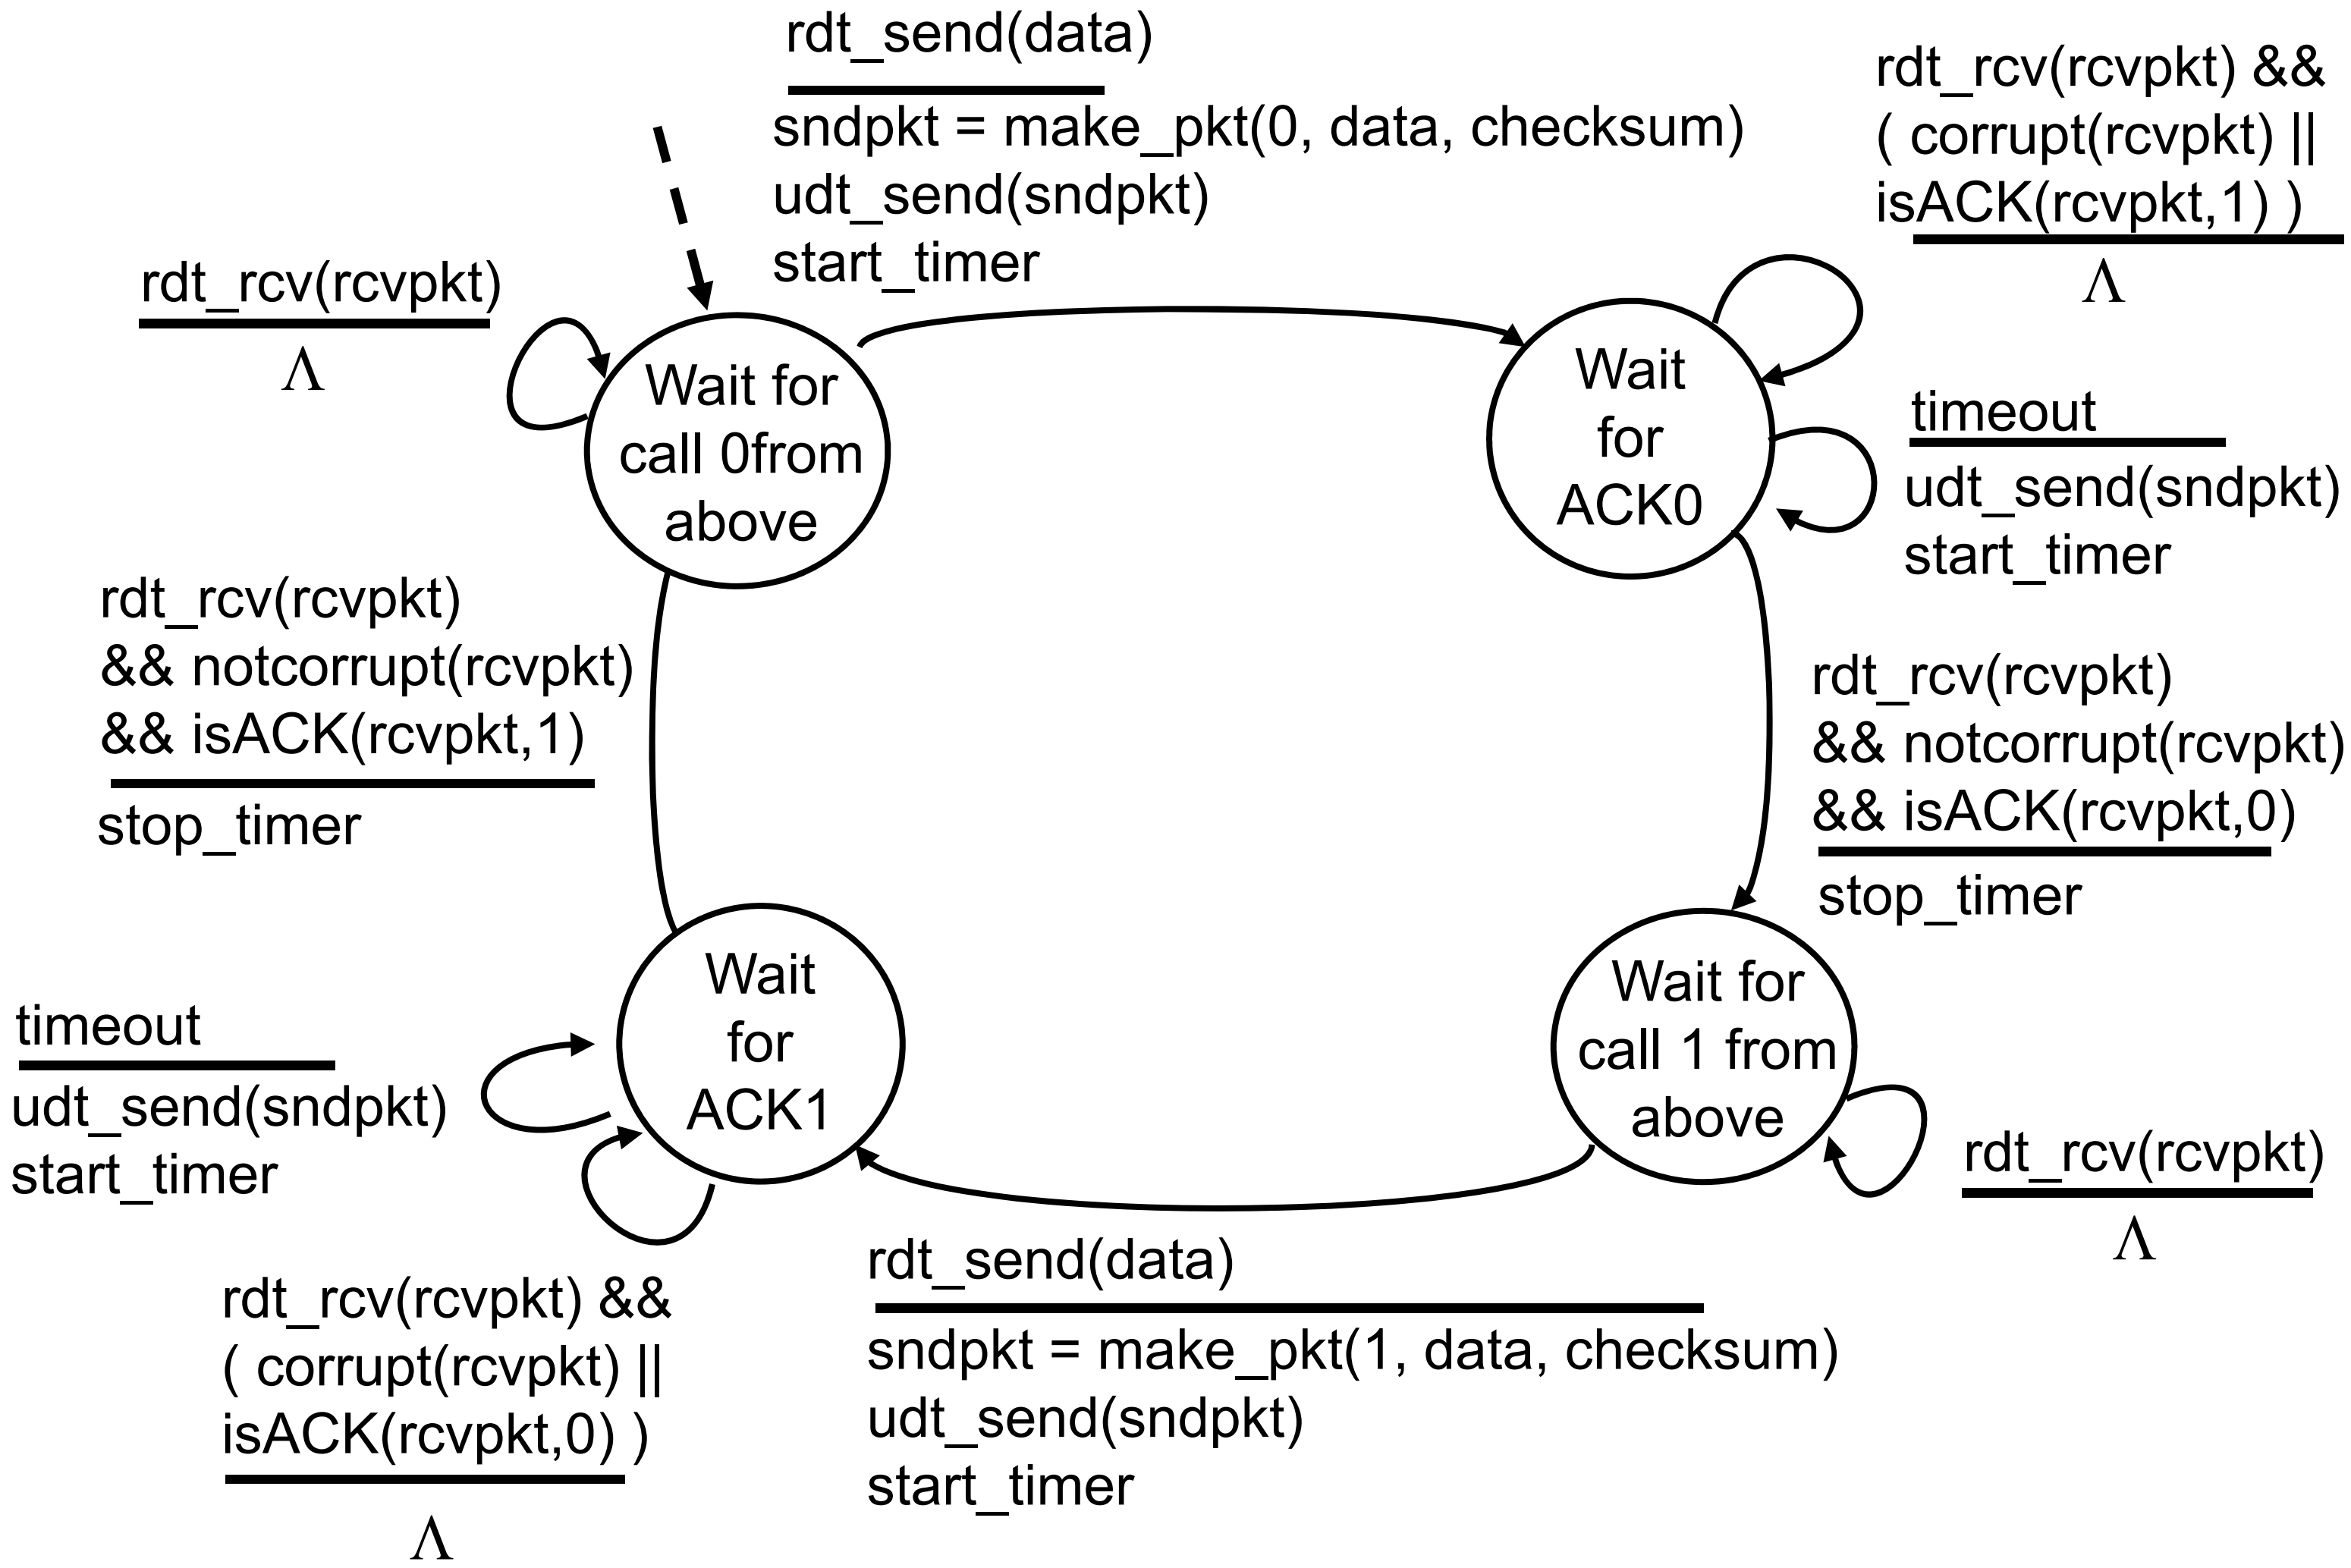

rdt3.0 in action

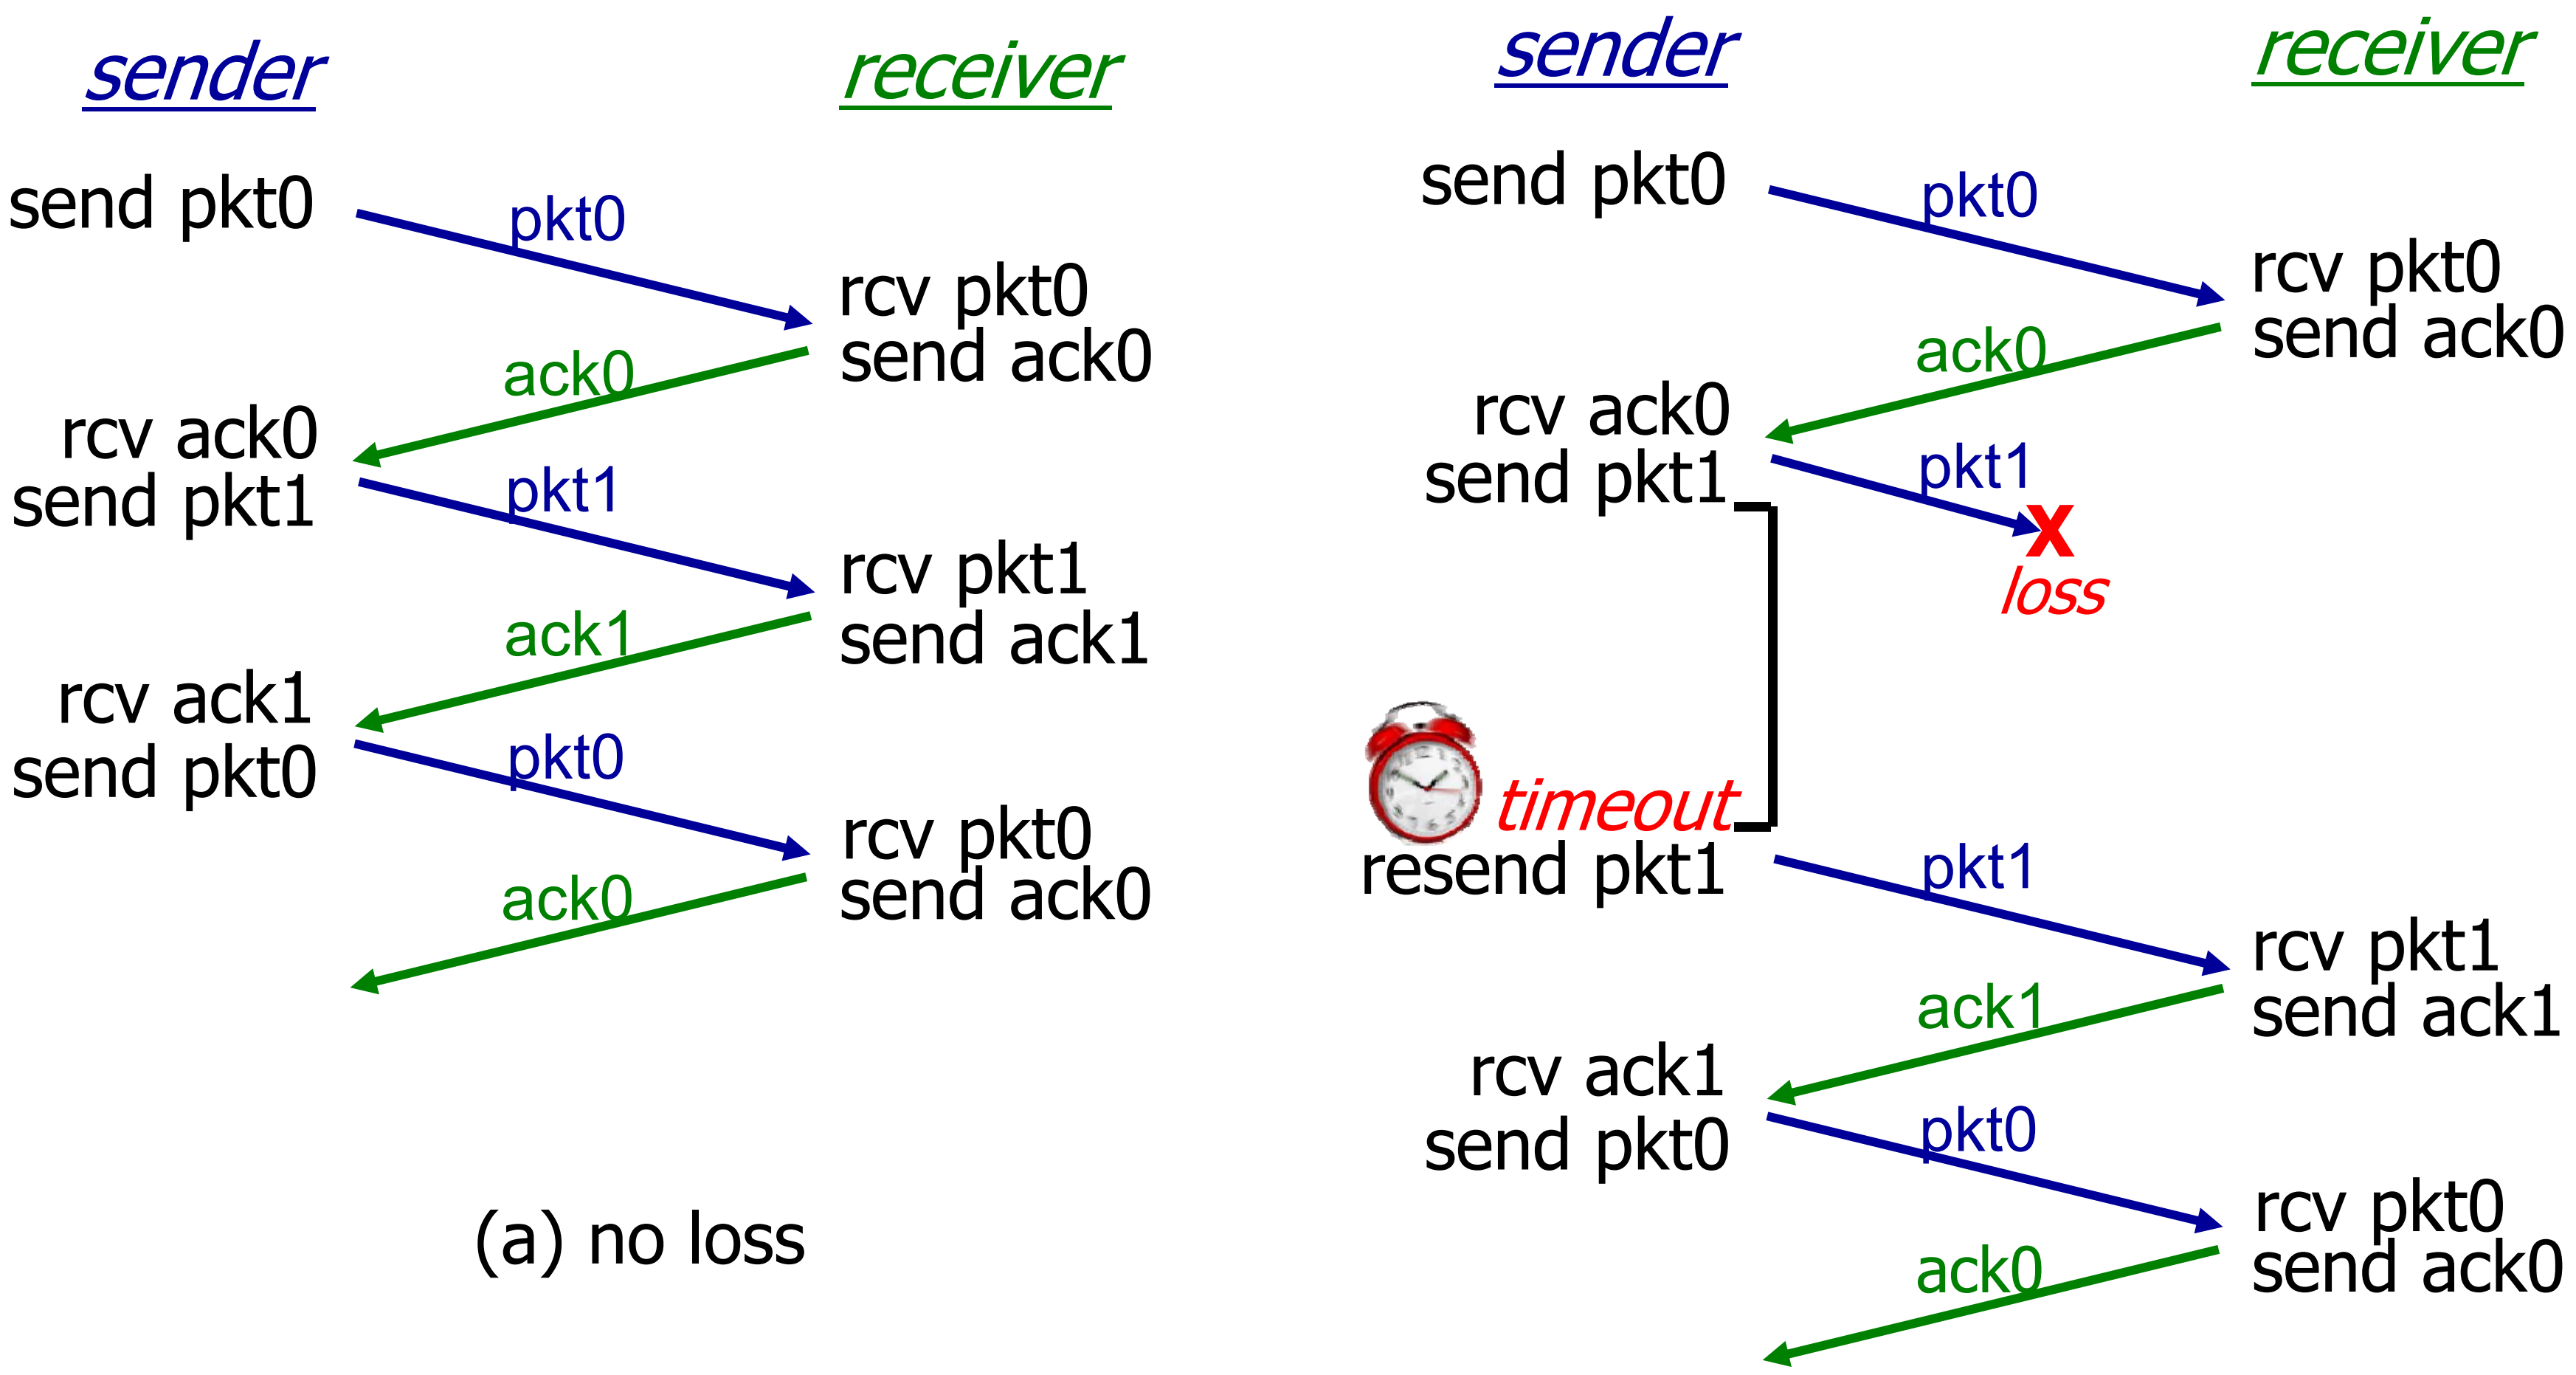

(a) no loss

(b) packet loss

rdt3.0 in action

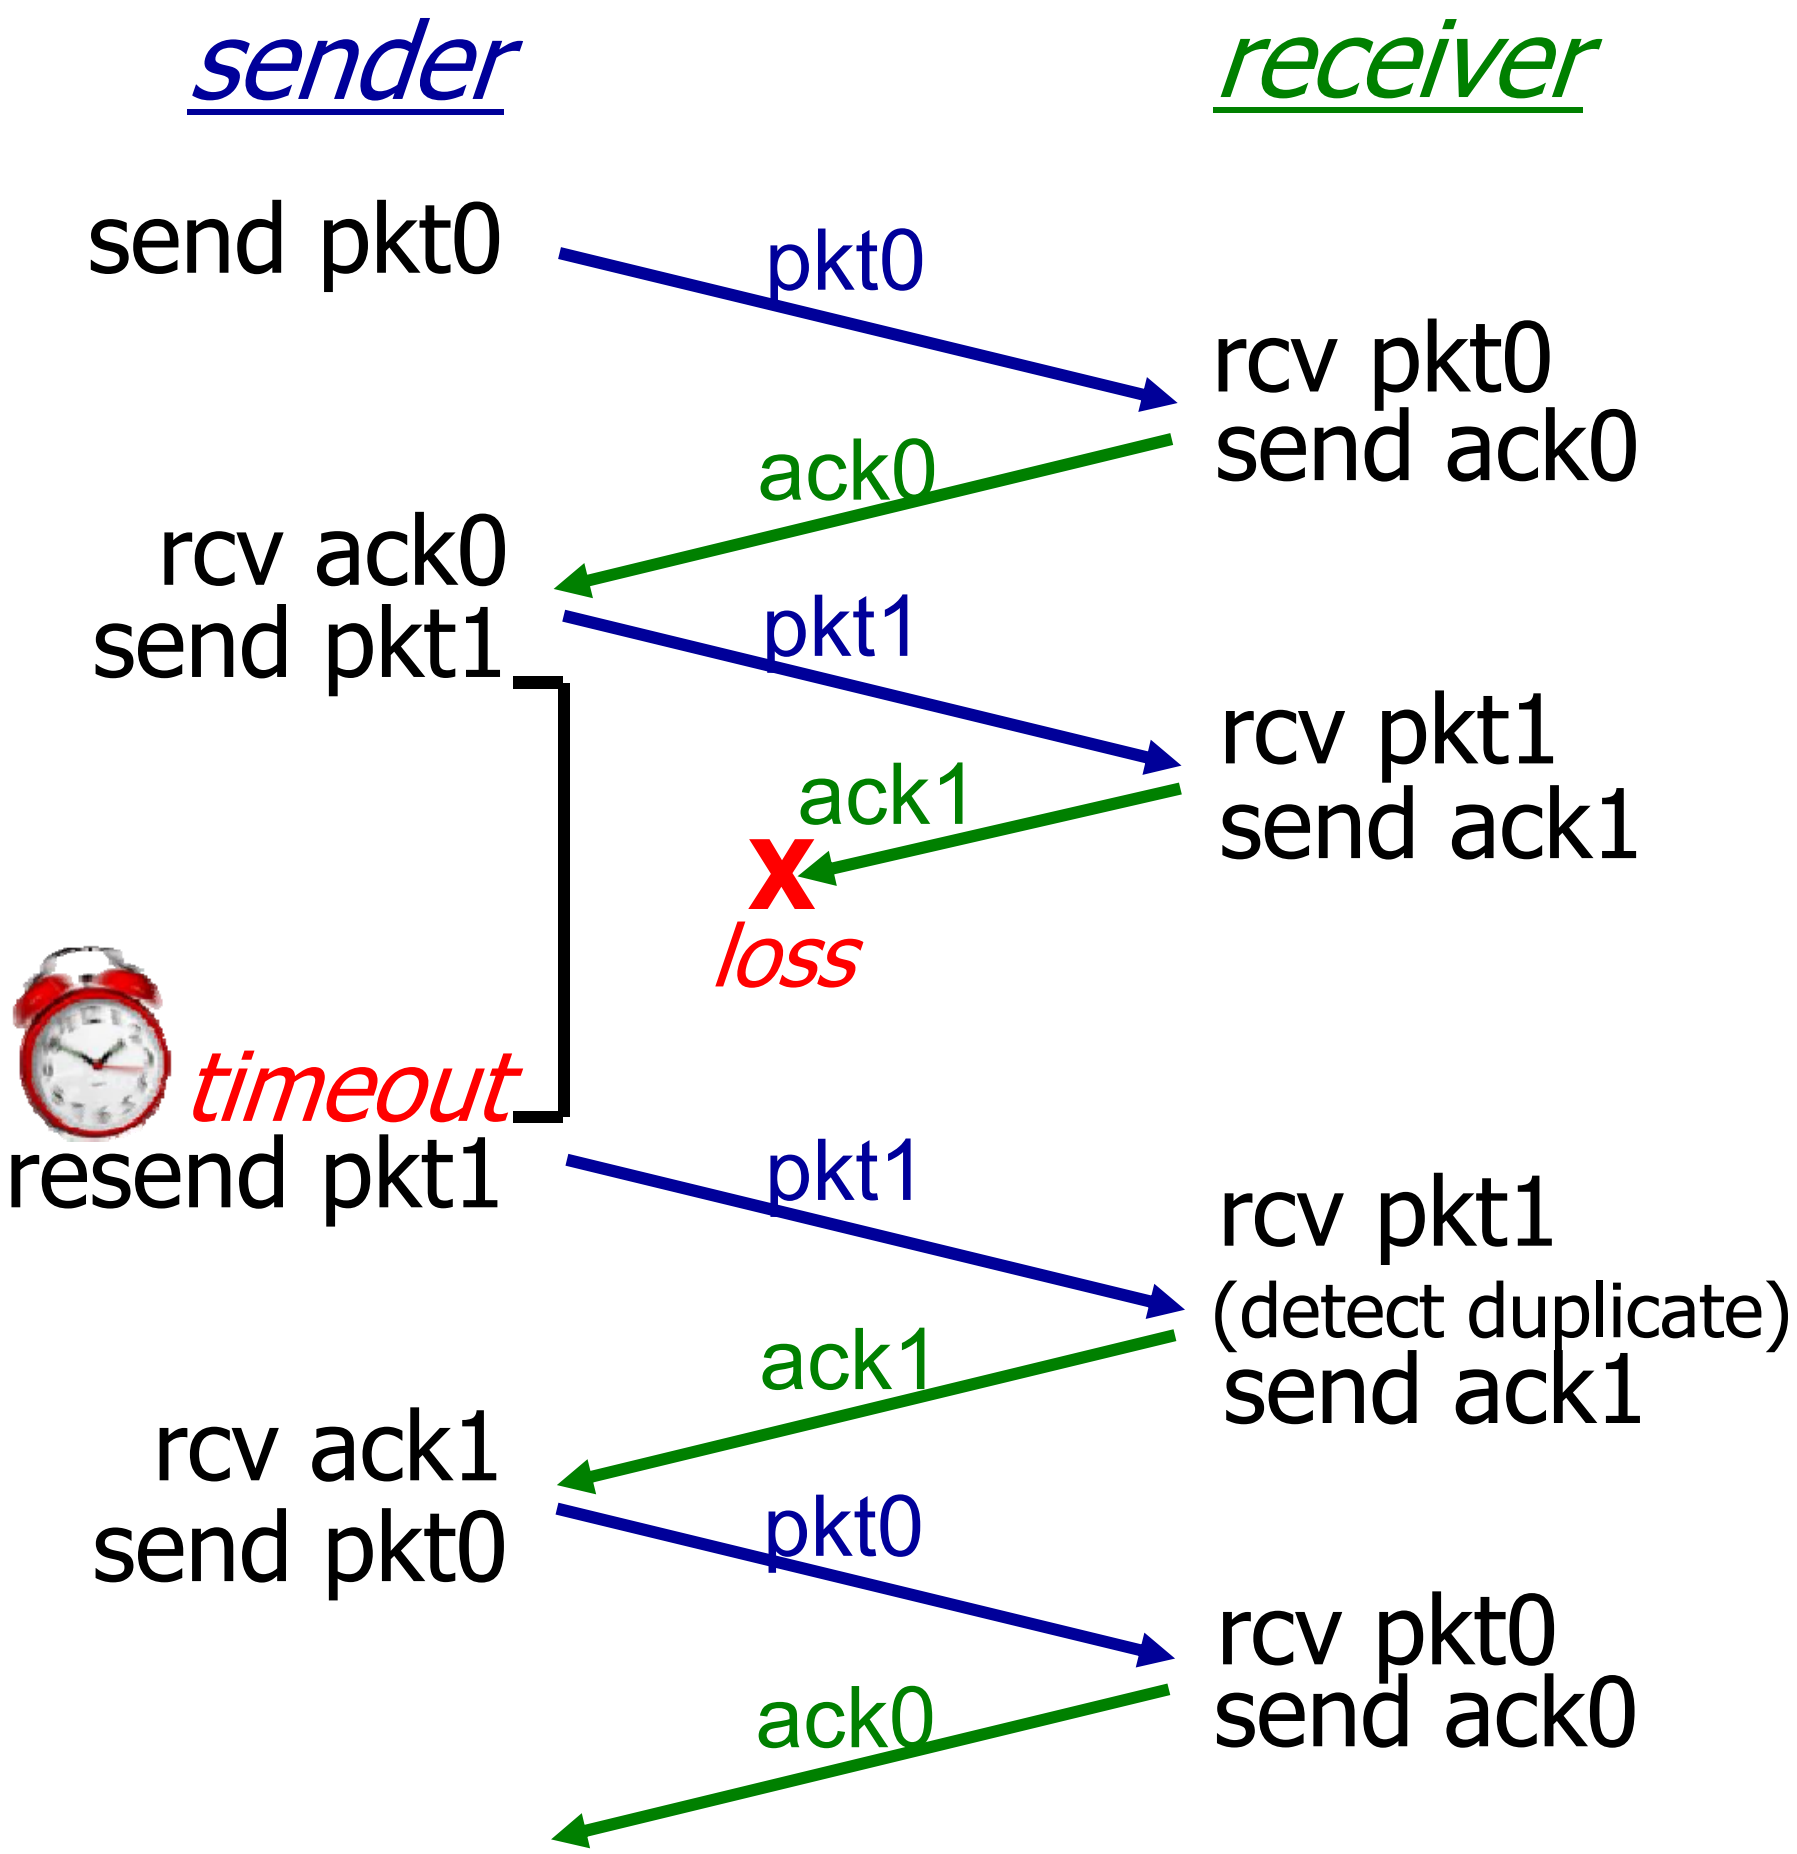

(c) ACK loss

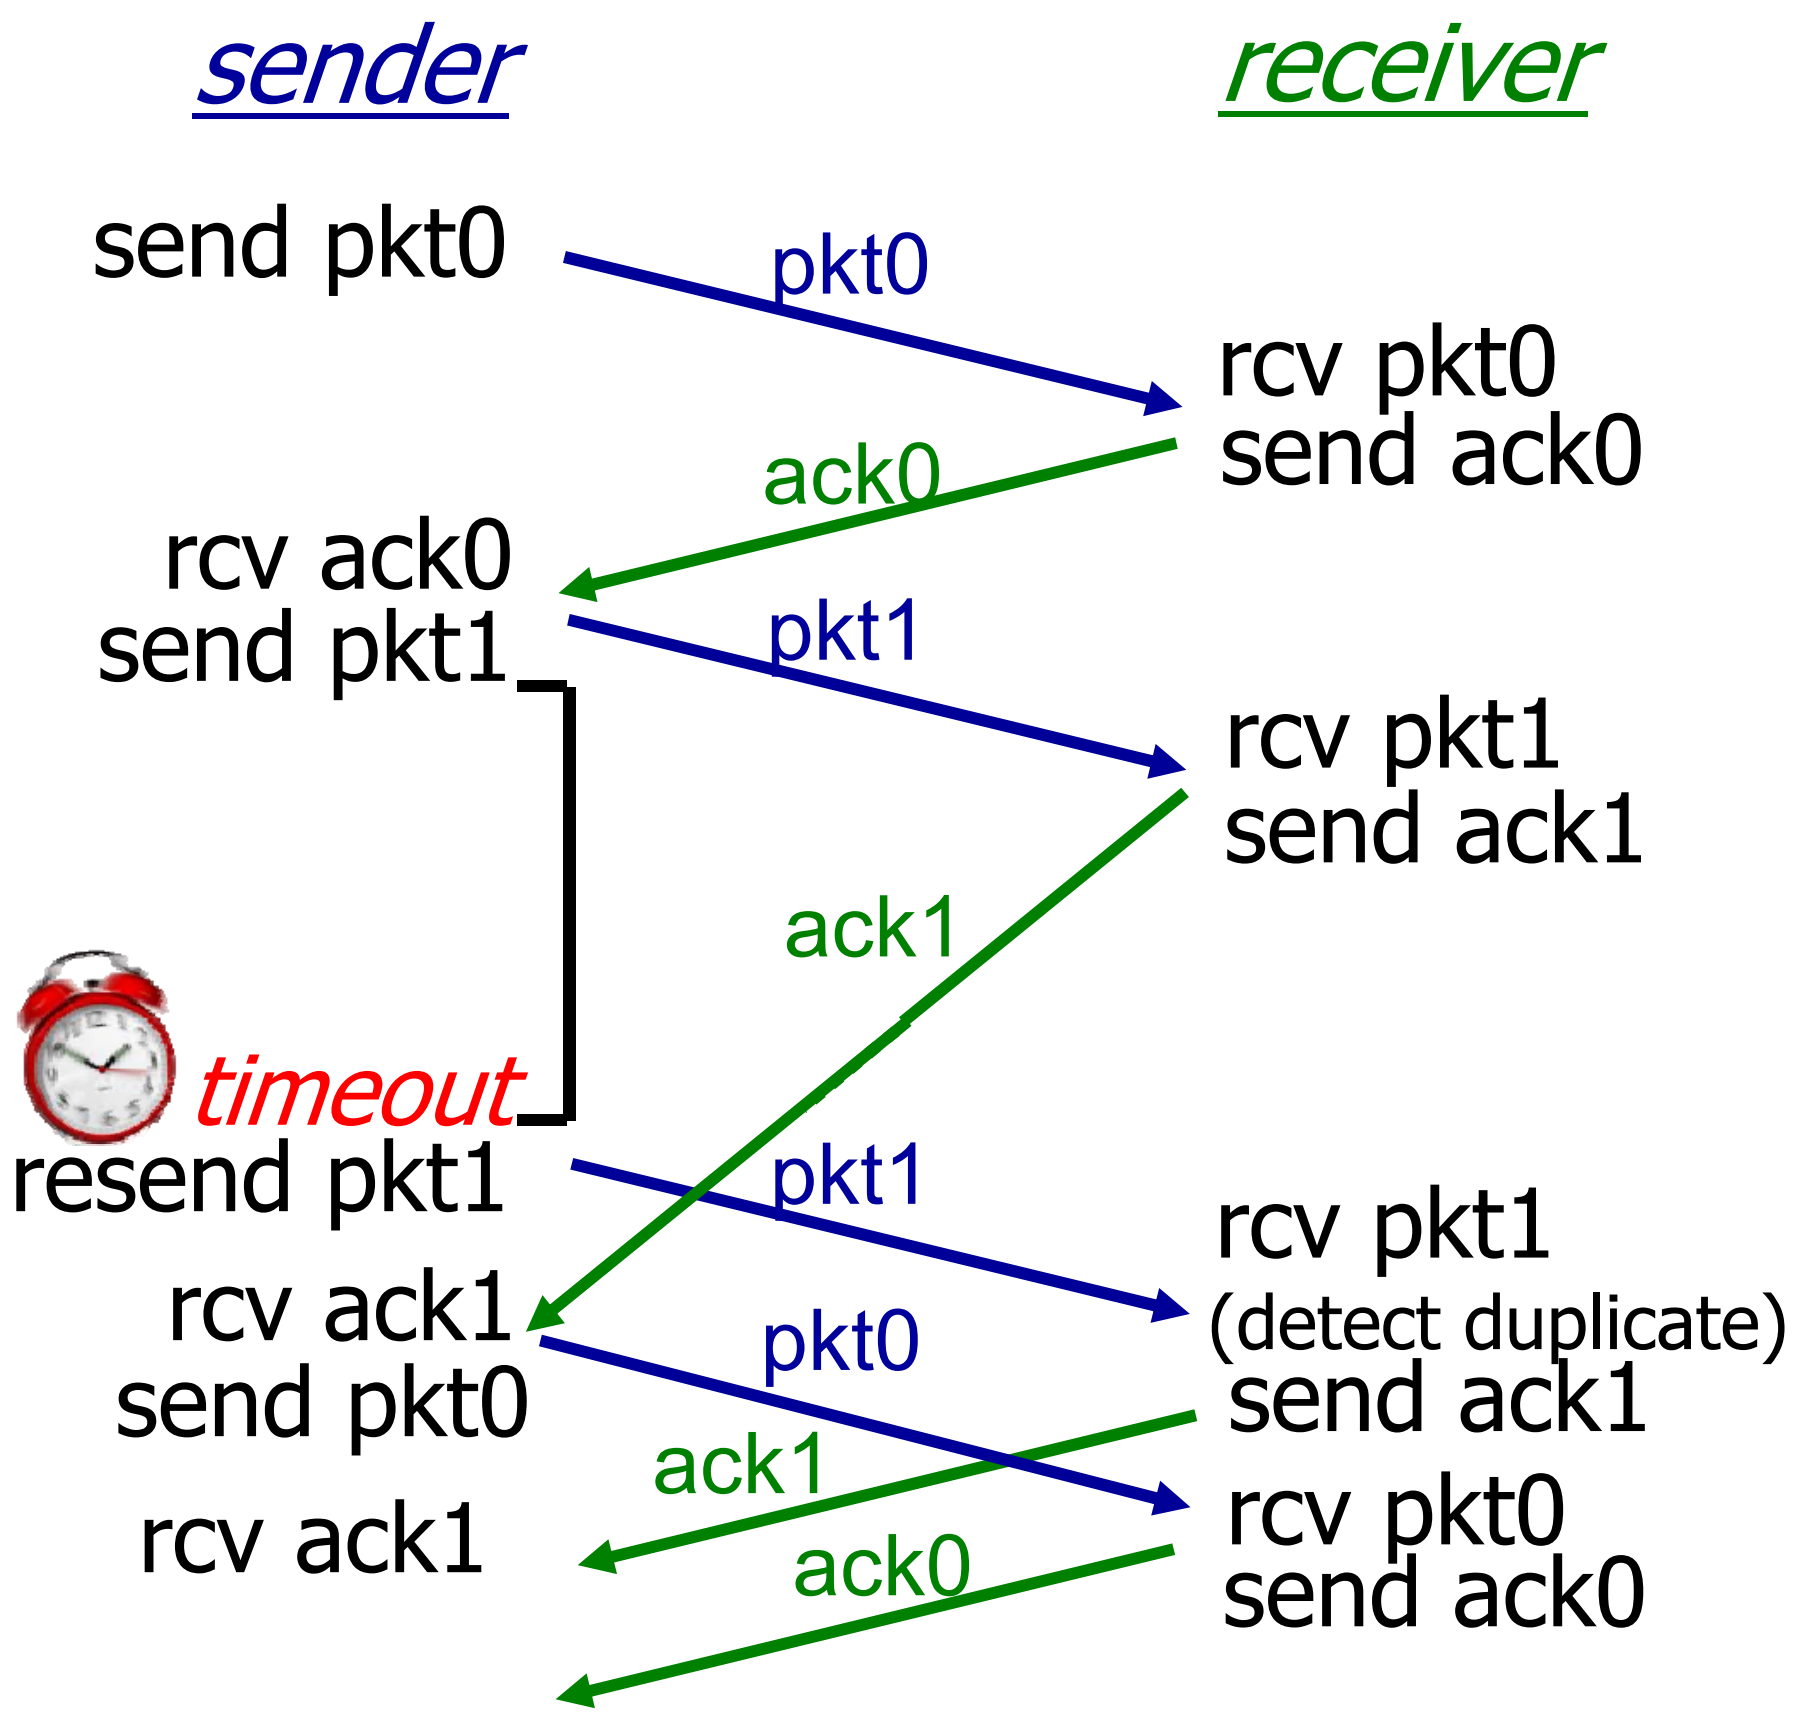

(d) premature timeout/ delayed ACK

Performance of rdt3.0

- rdt3.0 is correct, but performance stinks
- e.g.: 1 Gbps link, 15 ms prop. delay, 8000 bit packet:

$$D_{trans} = \frac{L}{R} = \frac{8000 \text{ bits}}{10^9 \text{ bits/sec}} = 8 \text{ microsecs}$$

- U_{sender}: *utilization* – fraction of time sender busy sending

$$U_{sender} = \frac{L / R}{RTT + L / R} = \frac{.008}{30.008} = 0.00027$$

  - if RTT=30 msec, 1KB pkt every 30 msec: 33kB/sec thruput over 1 Gbps link
- network protocol limits use of physical resources!

rdt3.0: stop-and-wait operation

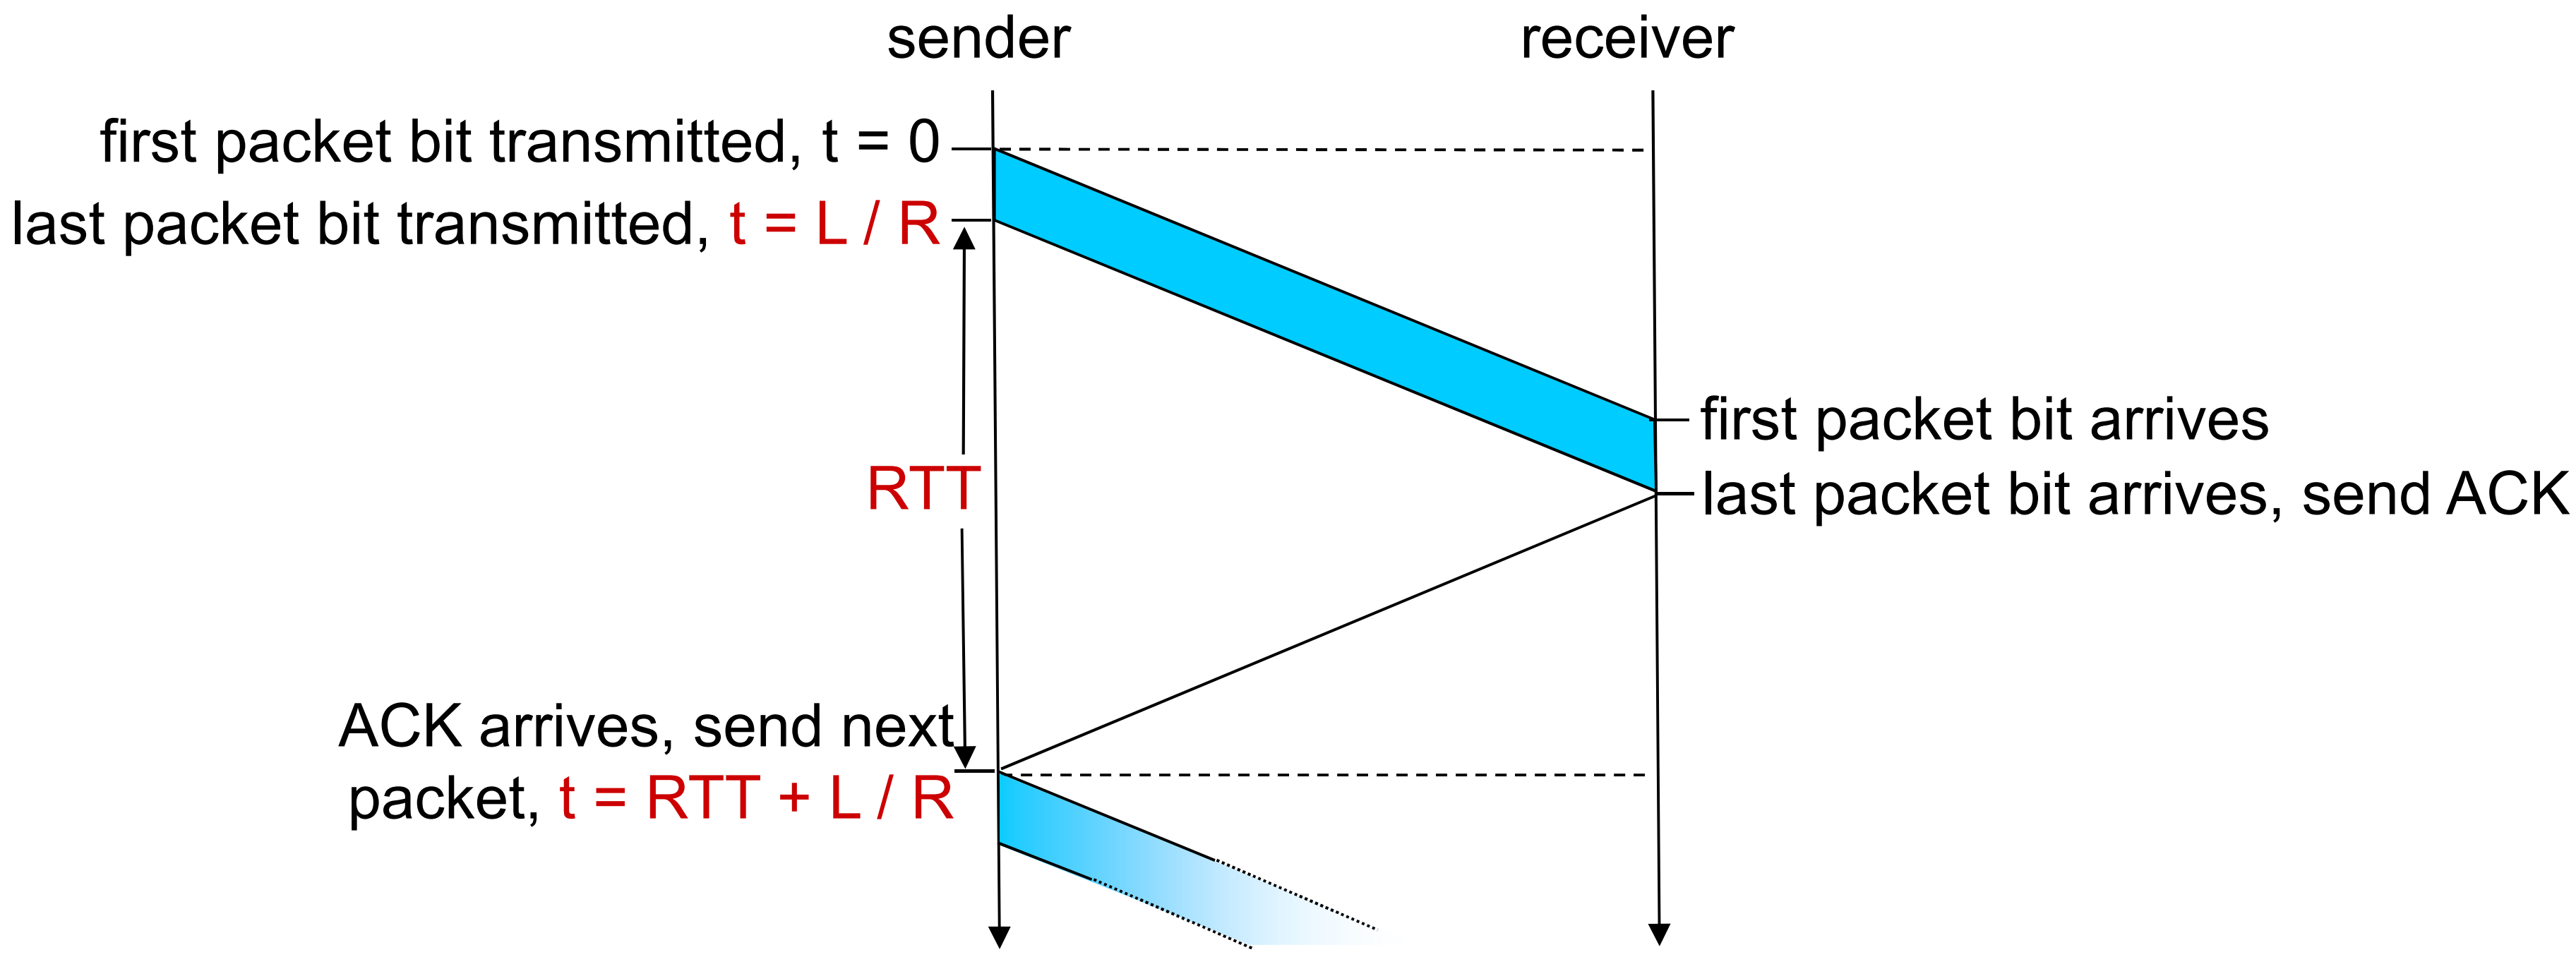

$$U_{sender} = \frac{L / R}{RTT + L / R} = \frac{.008}{30.008} = 0.00027$$

Pipelined protocols

pipelining: sender allows multiple, "in-flight", yet-to-be-acknowledged pkts
- range of sequence numbers must be increased
- buffering at sender and/or receiver

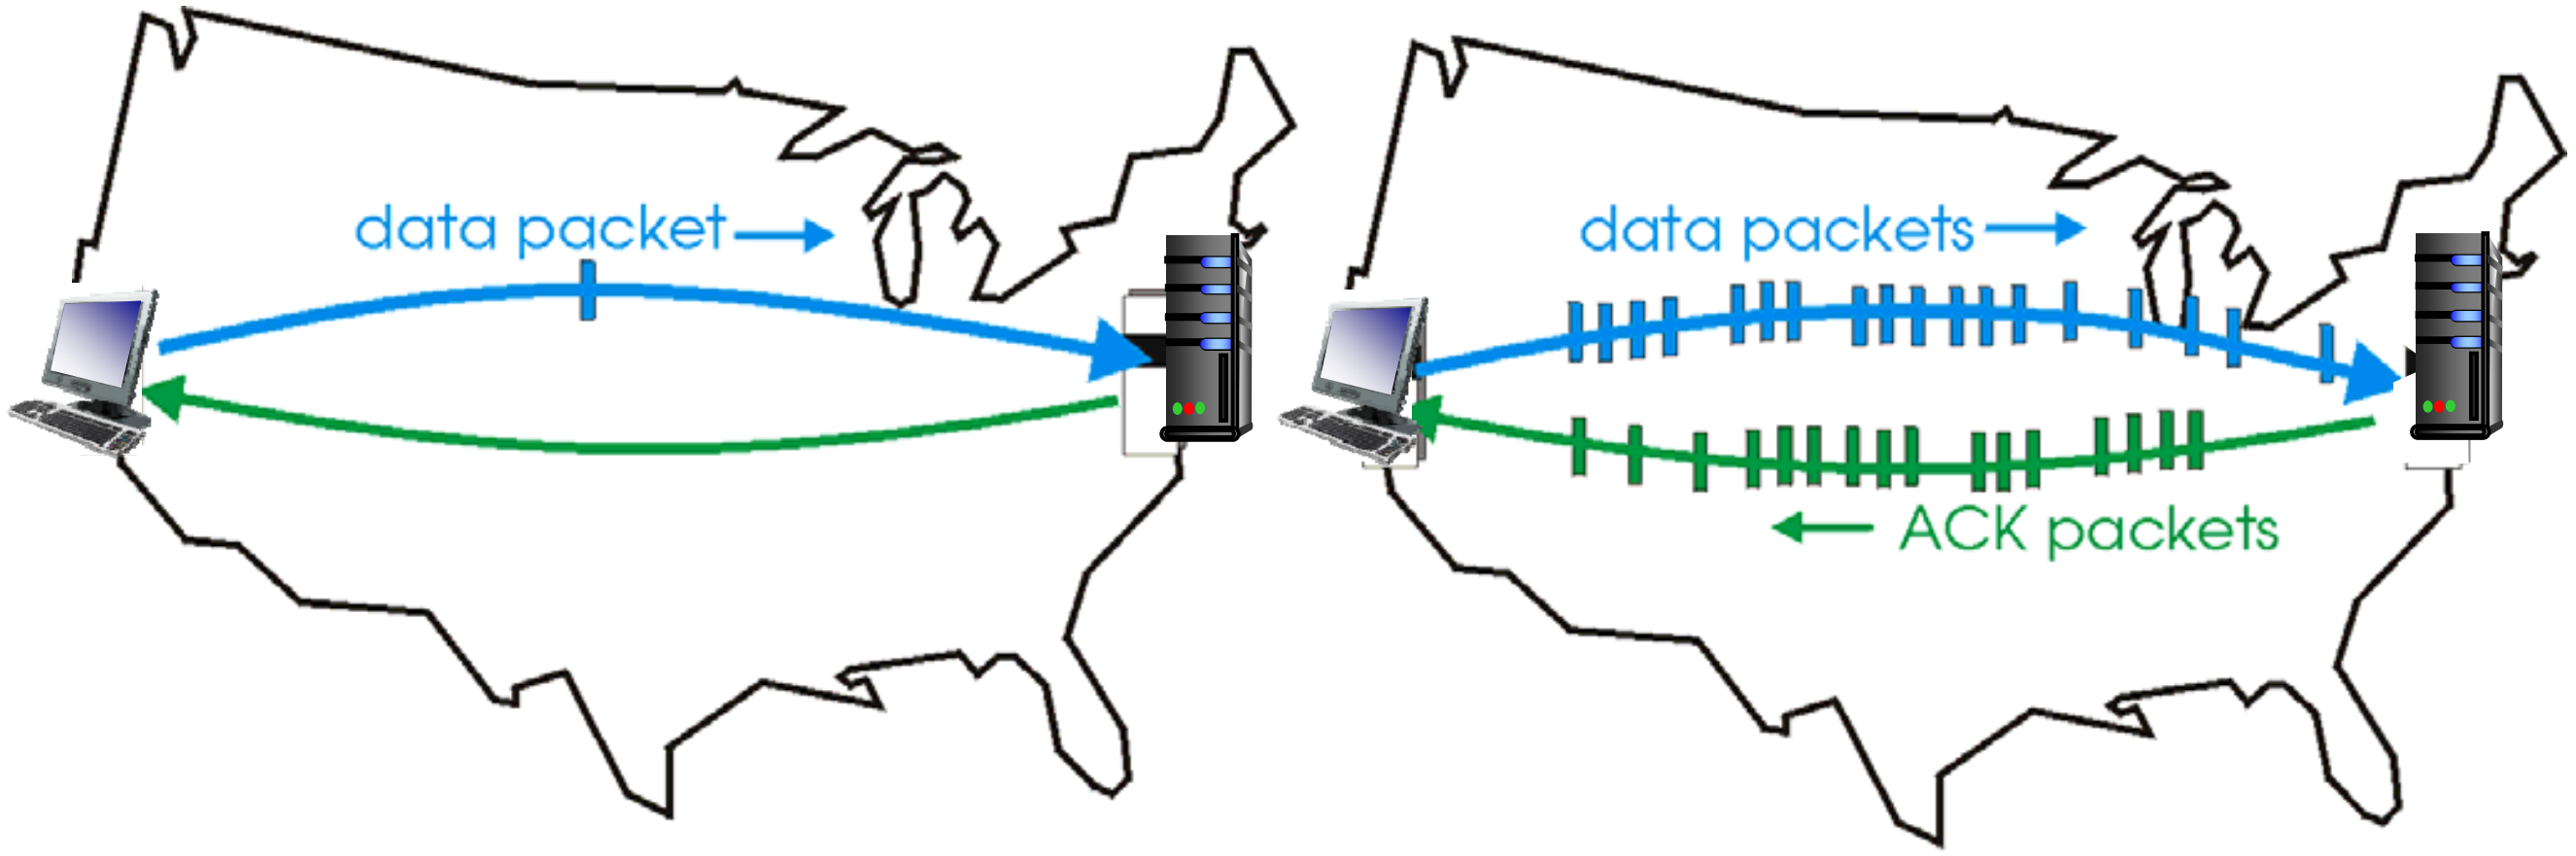

(a) a stop-and-wait protocol in operation (b) a pipelined protocol in operation

- two generic forms of pipelined protocols: *go-Back-N, selective repeat*

Pipelining: increased utilization

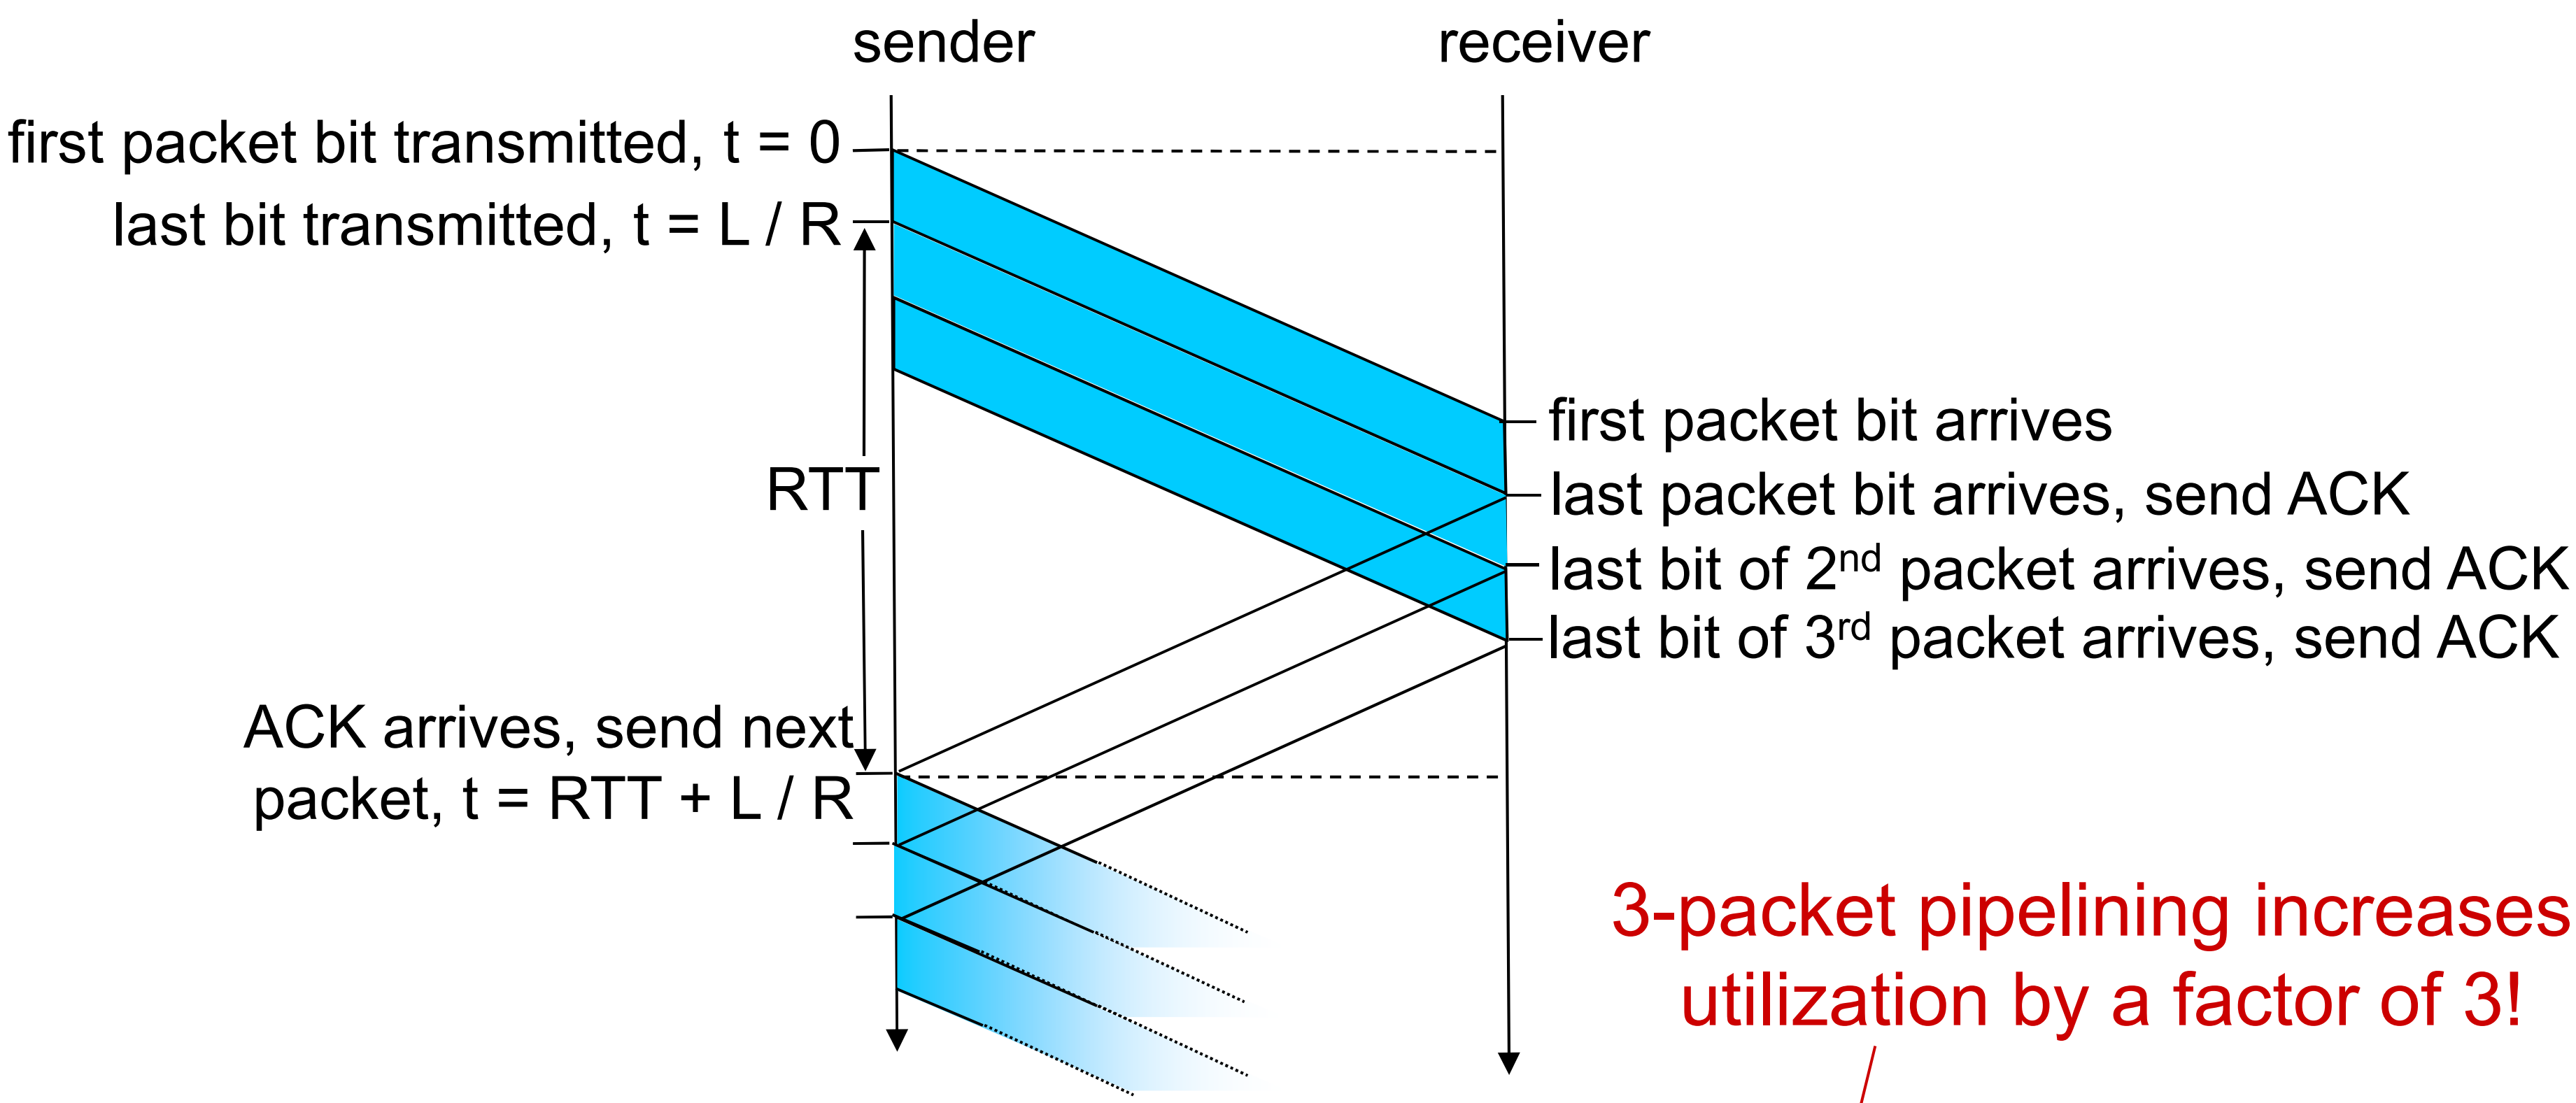

3-packet pipelining increases utilization by a factor of 3!

$$U_{sender} = \frac{3L / R}{RTT + L / R} = \frac{.0024}{30.008} = 0.00081$$

Throughput (more)

- What is average end-end throughput?

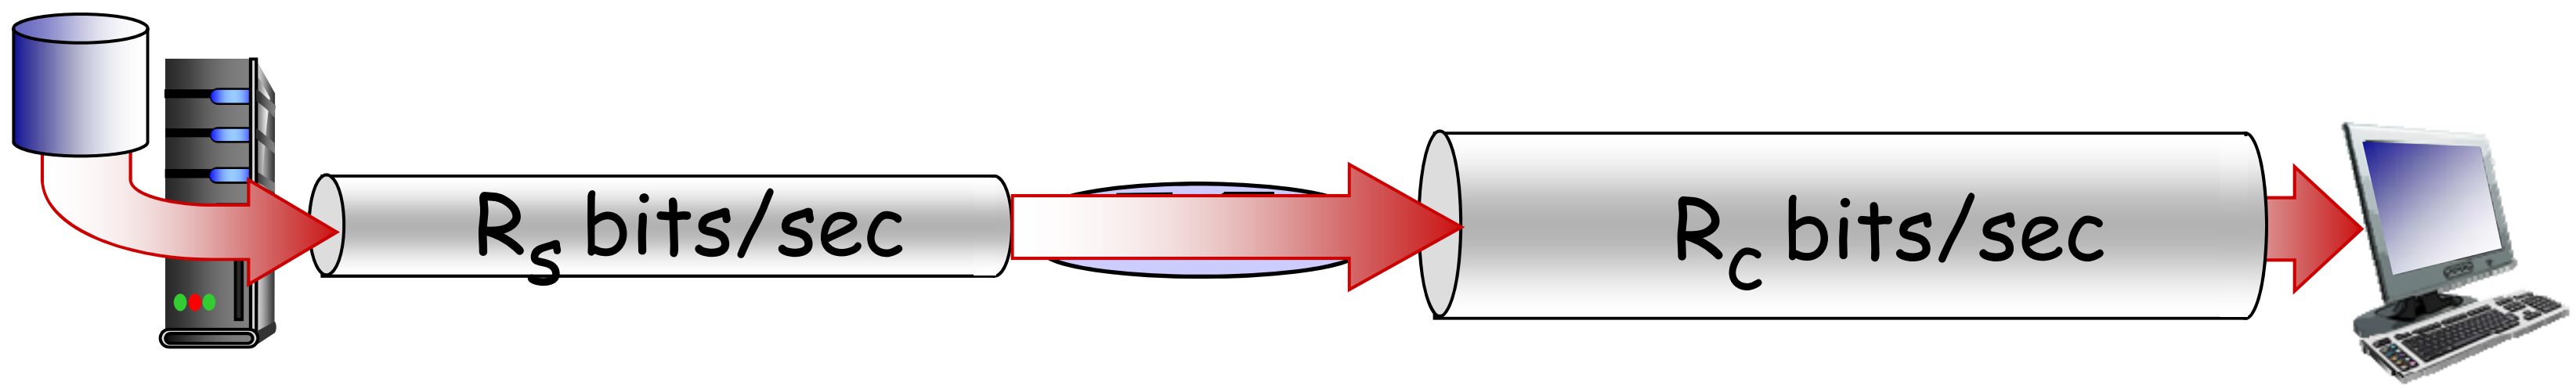

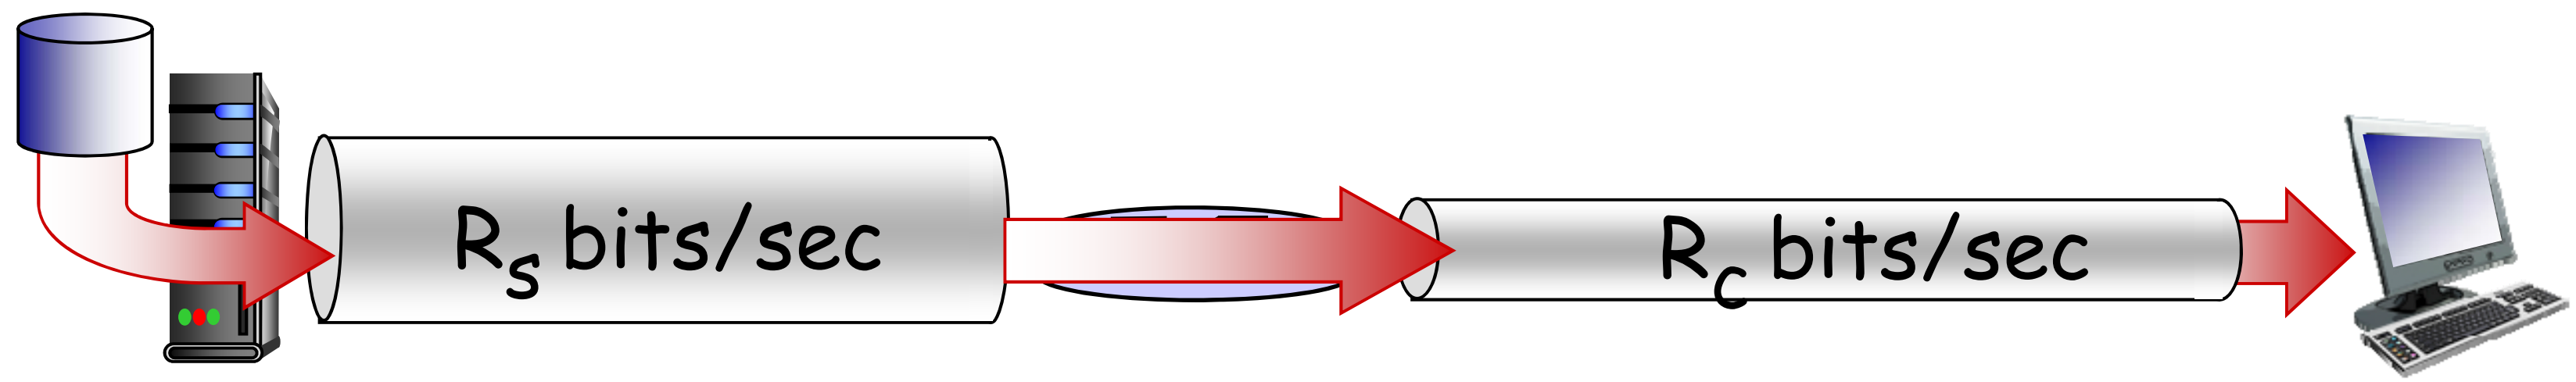

bottleneck link

link on end-end path that constrains end-end throughput

Pipelined protocols: overview

Go-back-N:

- sender can have up to N unacked packets in pipeline
- receiver only sends *cumulative ack*
  - doesn't ack packet if there's a gap
- sender has timer for oldest unacked packet
  - when timer expires, retransmit *all* unacked packets

Selective Repeat:

- sender can have up to N unack'ed packets in pipeline
- rcvr sends *individual ack* for each packet
- sender maintains timer for each unacked packet
  - when timer expires, retransmit only that unacked packet

Go-Back-N: sender

- k-bit seq # in pkt header
- "window" of up to N, consecutive unack'ed pkts allowed

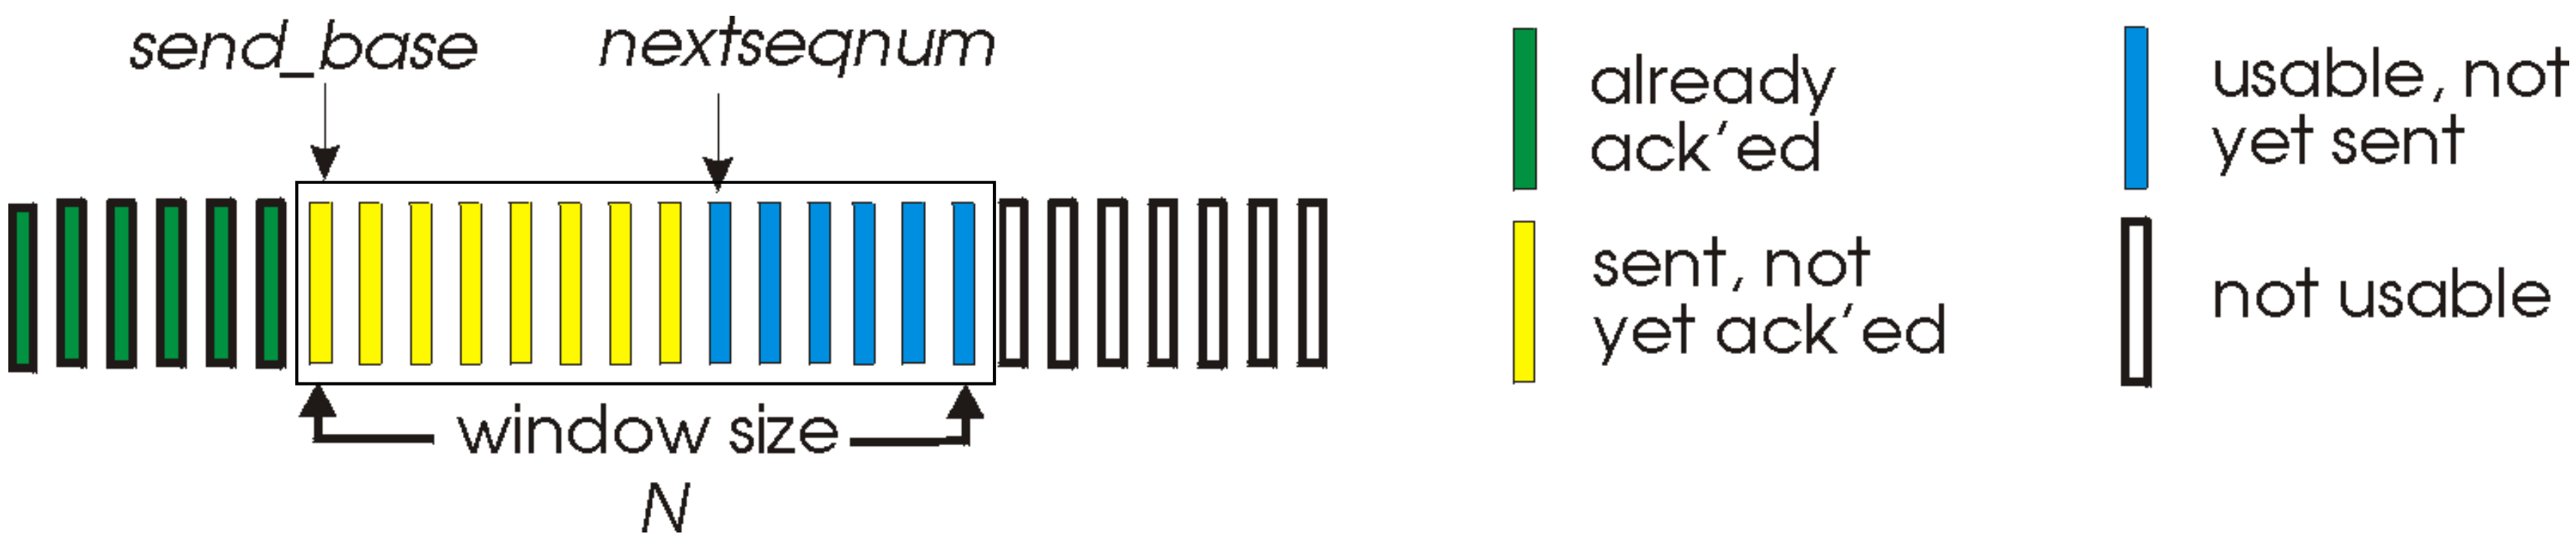

- ACK(n): ACKs all pkts up to, including seq # n - *"cumulative ACK"*
  - may receive duplicate ACKs (see receiver)
- timer for oldest in-flight pkt
- *timeout(n):* retransmit packet n and all higher seq # pkts in window

GBN: sender extended FSM

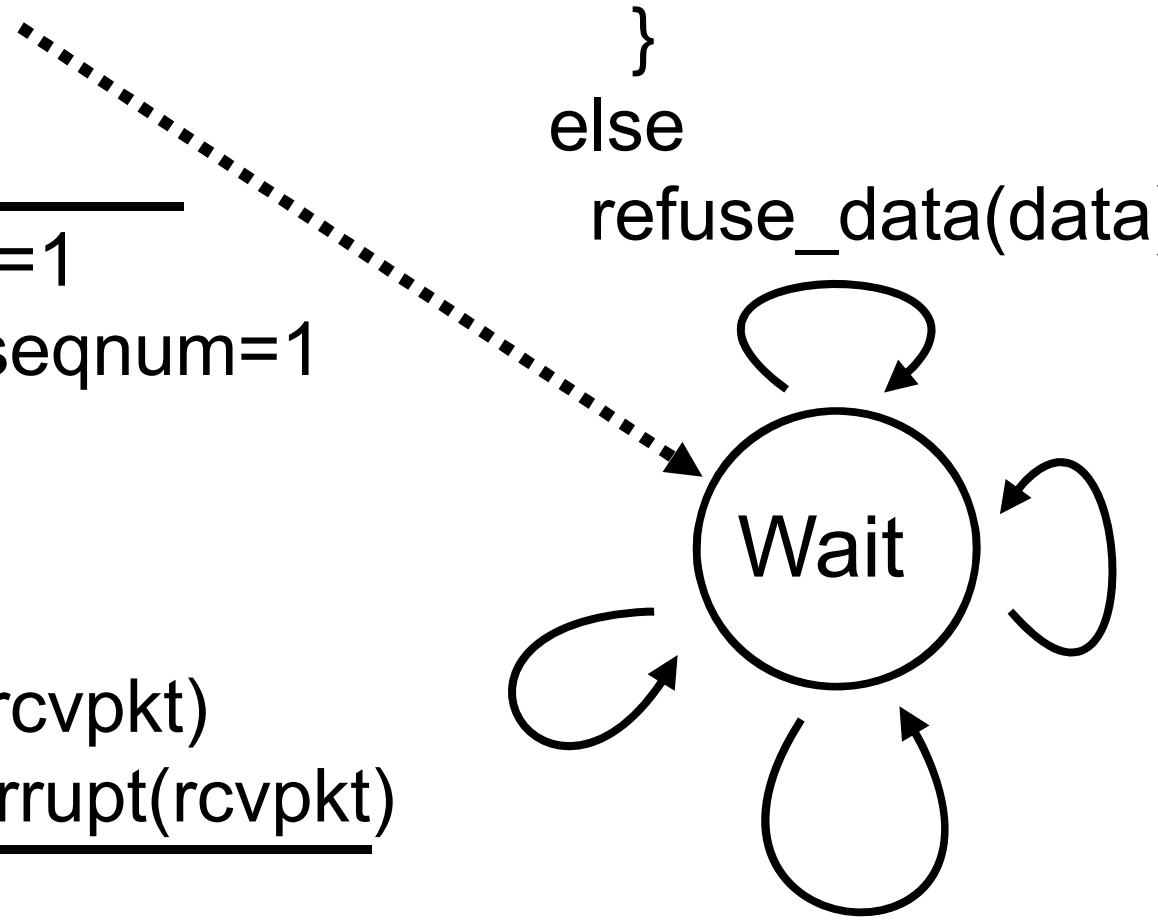

GBN: receiver extended FSM

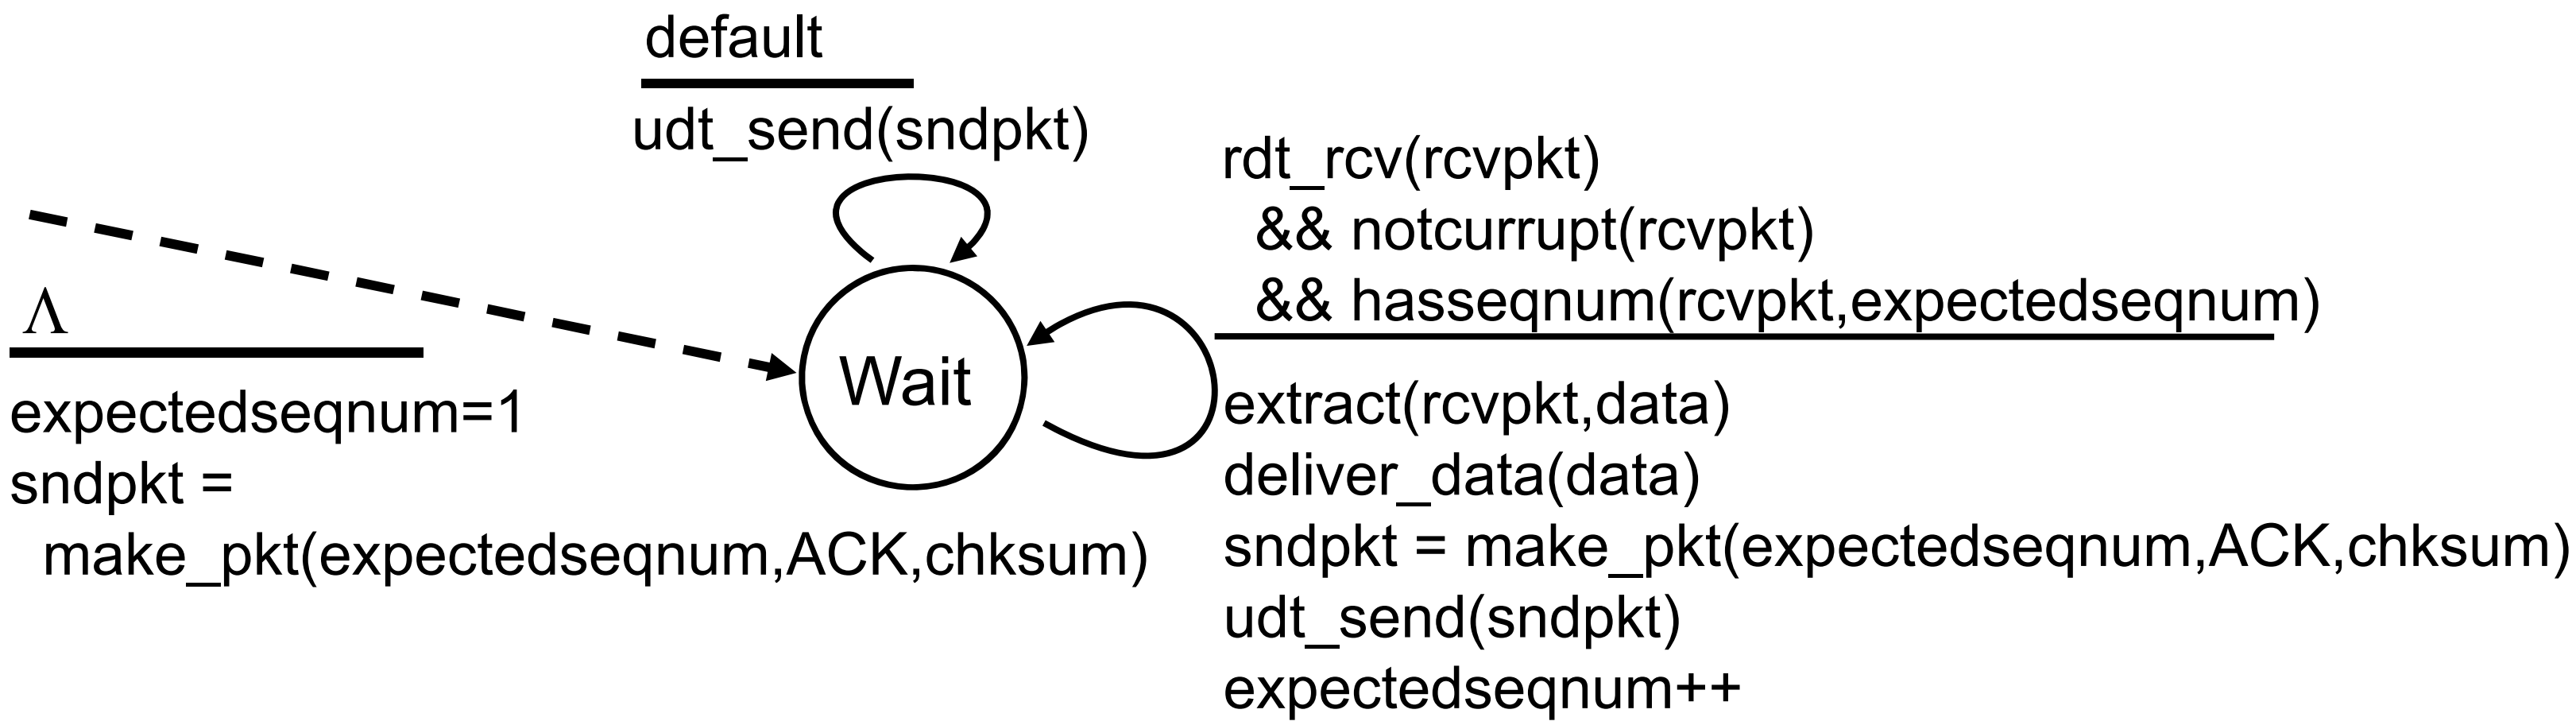

ACK-only: always send ACK for correctly-received pkt with highest *in-order* seq #
- may generate duplicate ACKs
- need only remember **expectedseqnum**

- out-of-order pkt:
  - discard (don't buffer): *no receiver buffering!*
  - re-ACK pkt with highest in-order seq #

GBN in action

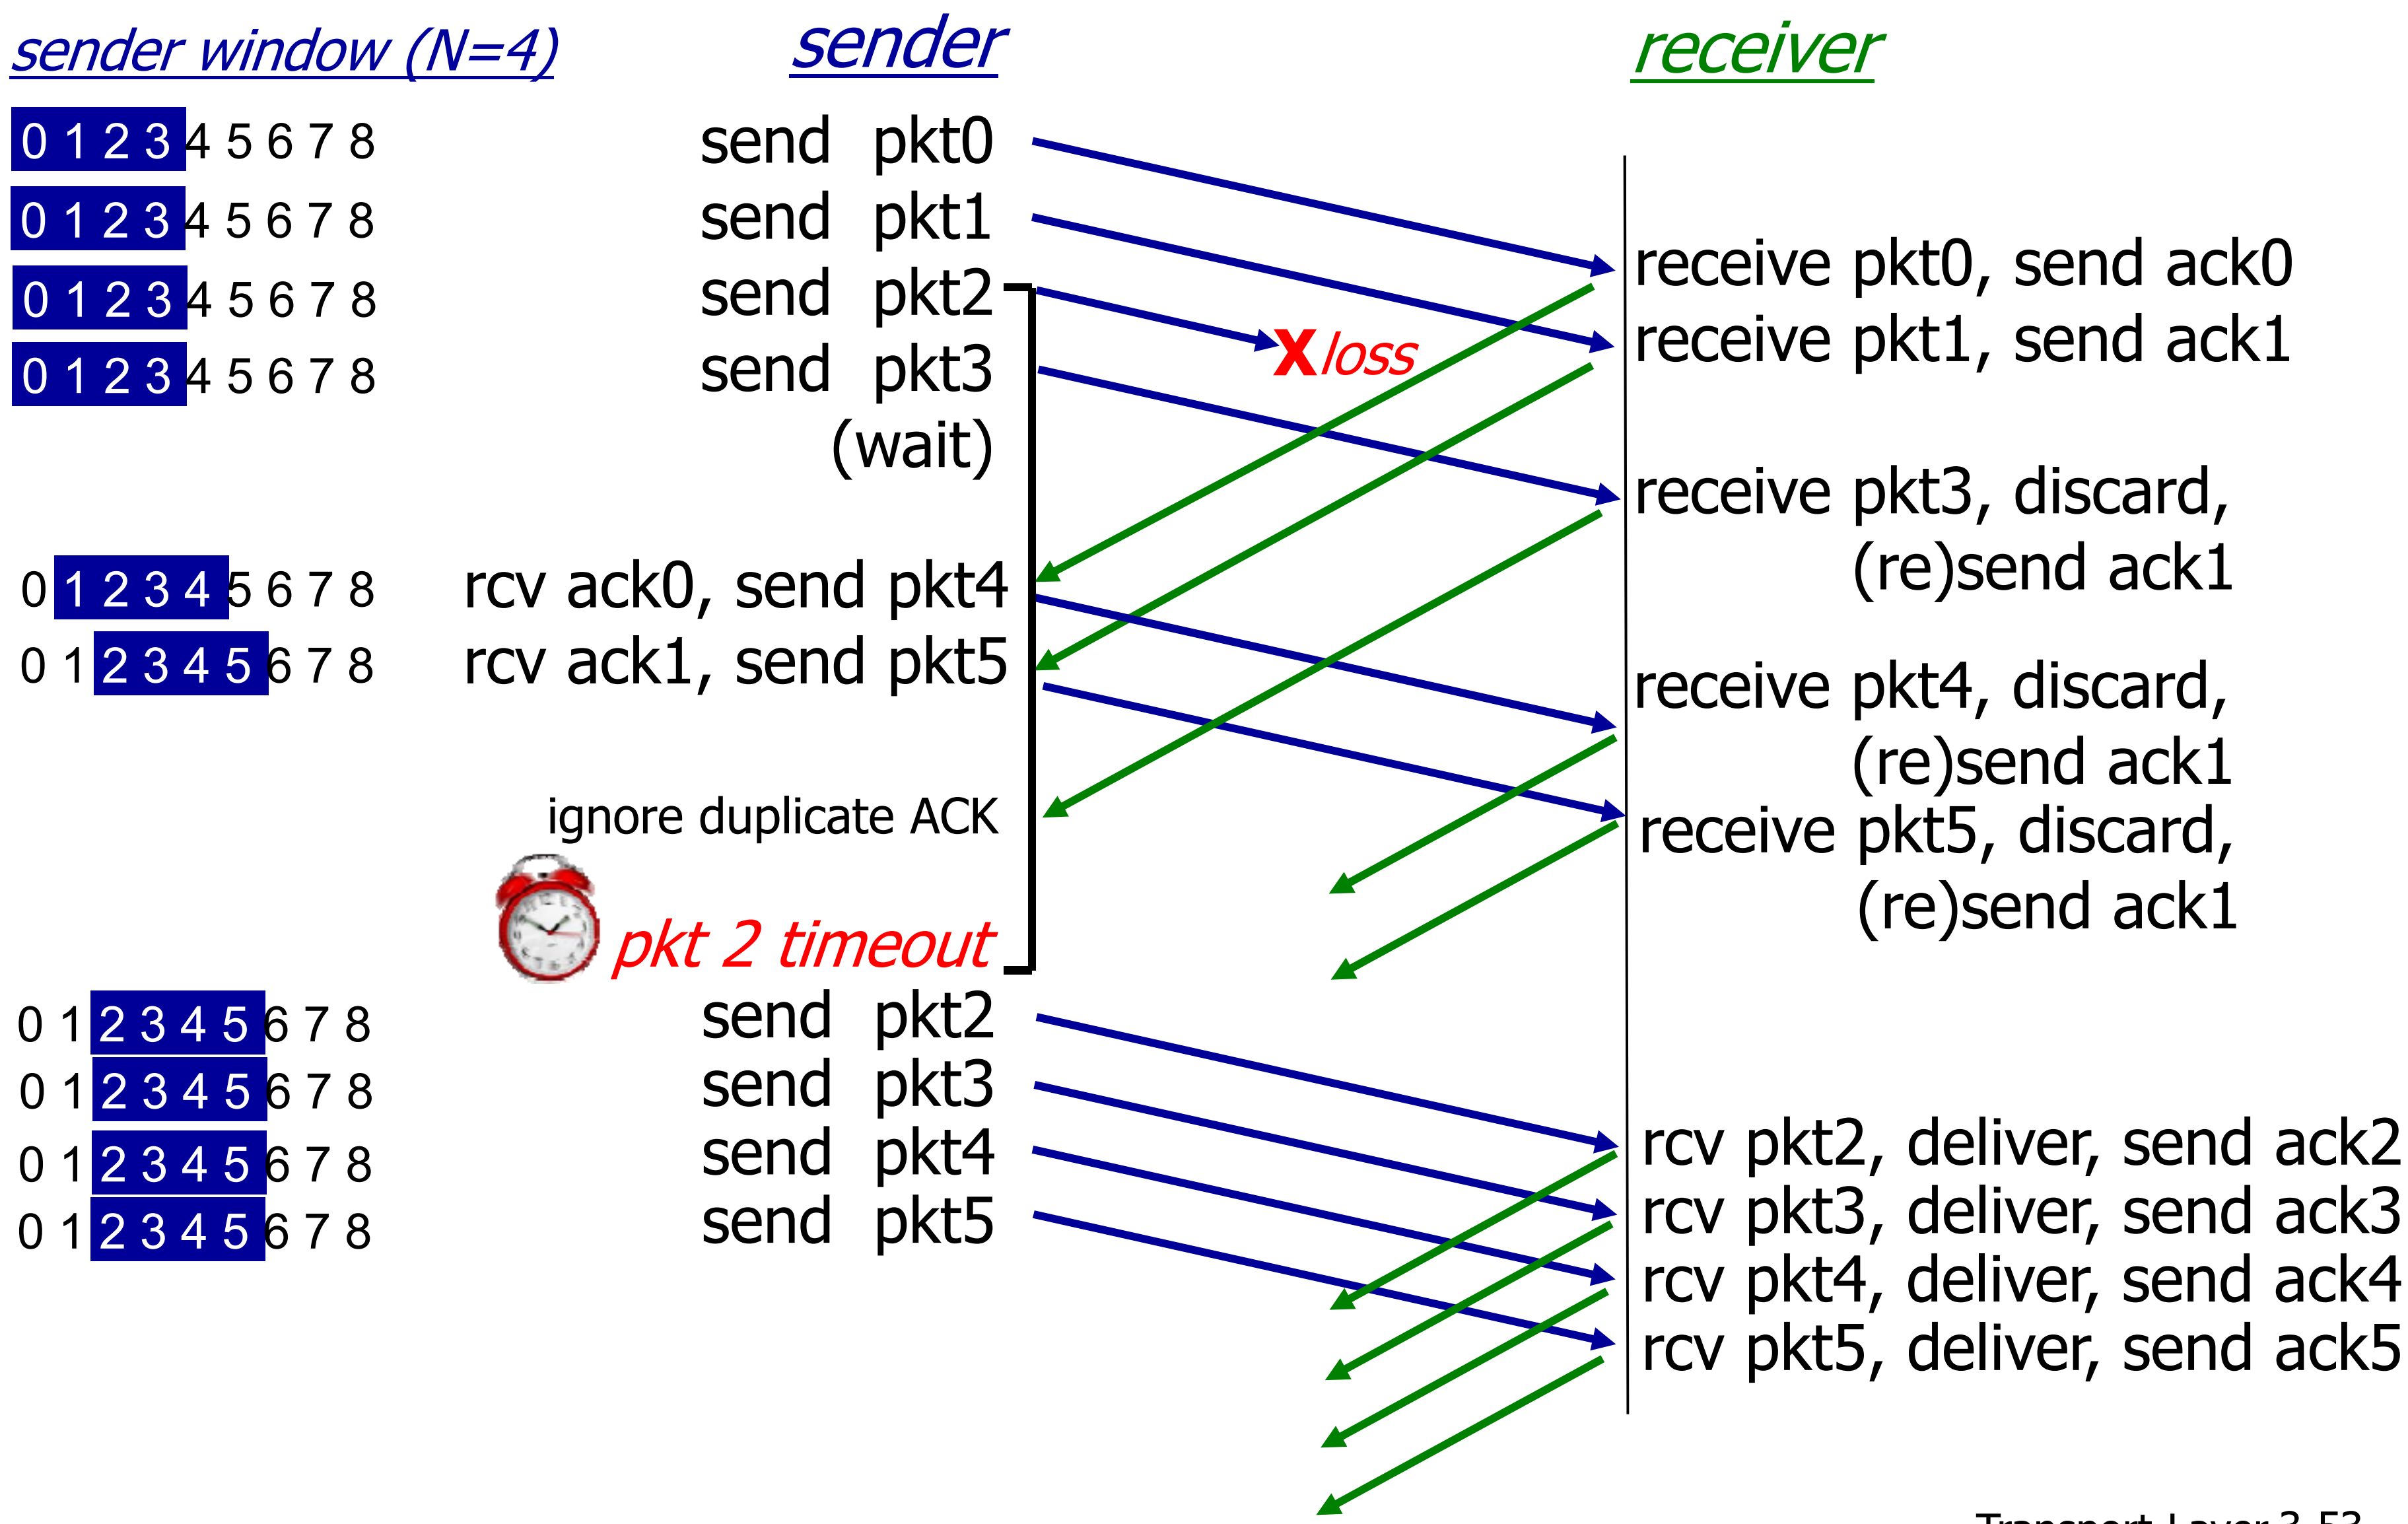

Selective repeat

- receiver *individually* acknowledges all correctly received pkts
  - buffers pkts, as needed, for eventual in-order delivery to upper layer
- sender only resends pkts for which ACK not received
  - sender timer for each unACKed pkt
- sender window
  - *N* consecutive seq #'s
  - limits seq #s of sent, unACKed pkts

Selective repeat: sender, receiver windows

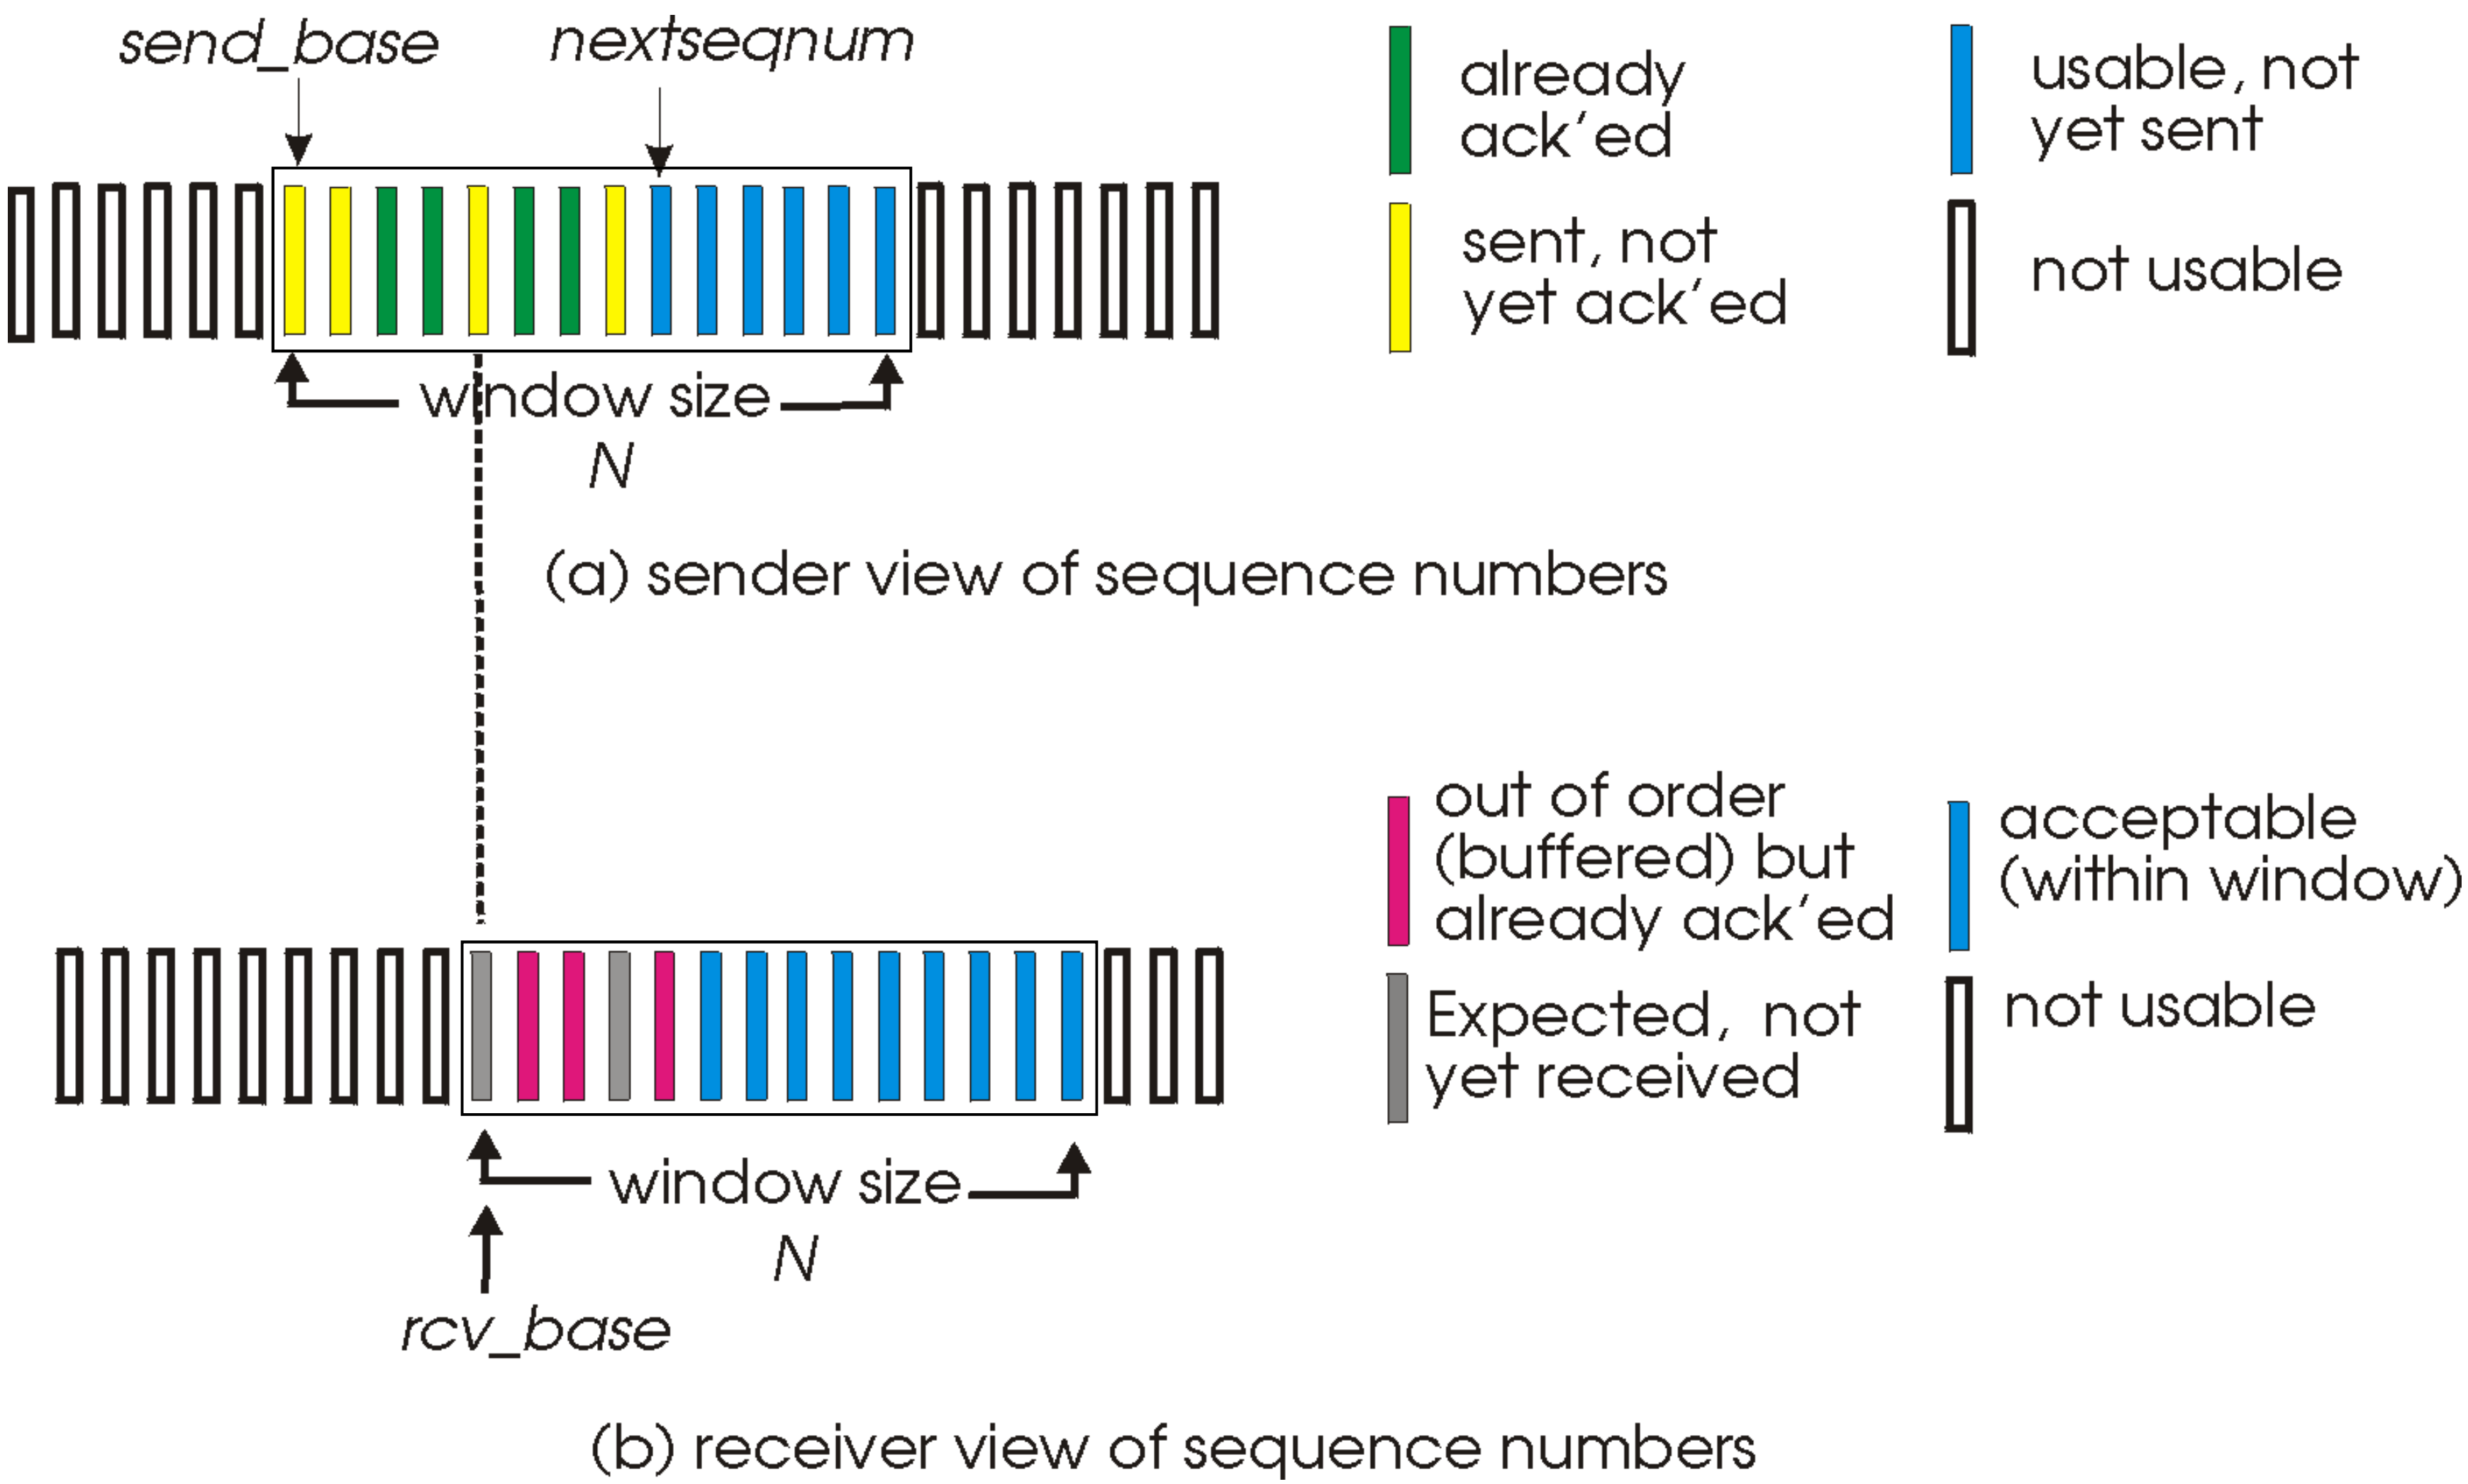

Selective repeat

sender

data from above:

- if next available seq # in window, send pkt

timeout(n):

- resend pkt n, restart timer

ACK(n) in [sendbase,sendbase+N]:

- mark pkt n as received
- if n smallest unACKed pkt, advance window base to next unACKed seq #

receiver

pkt n in [rcvbase, rcvbase+N-1]

- send ACK(n)
- out-of-order: buffer
- in-order: deliver (also deliver buffered, in-order pkts), advance window to next not-yet-received pkt

pkt n in [rcvbase-N,rcvbase-1]

- ACK(n)

otherwise:

- ignore

Selective repeat in action

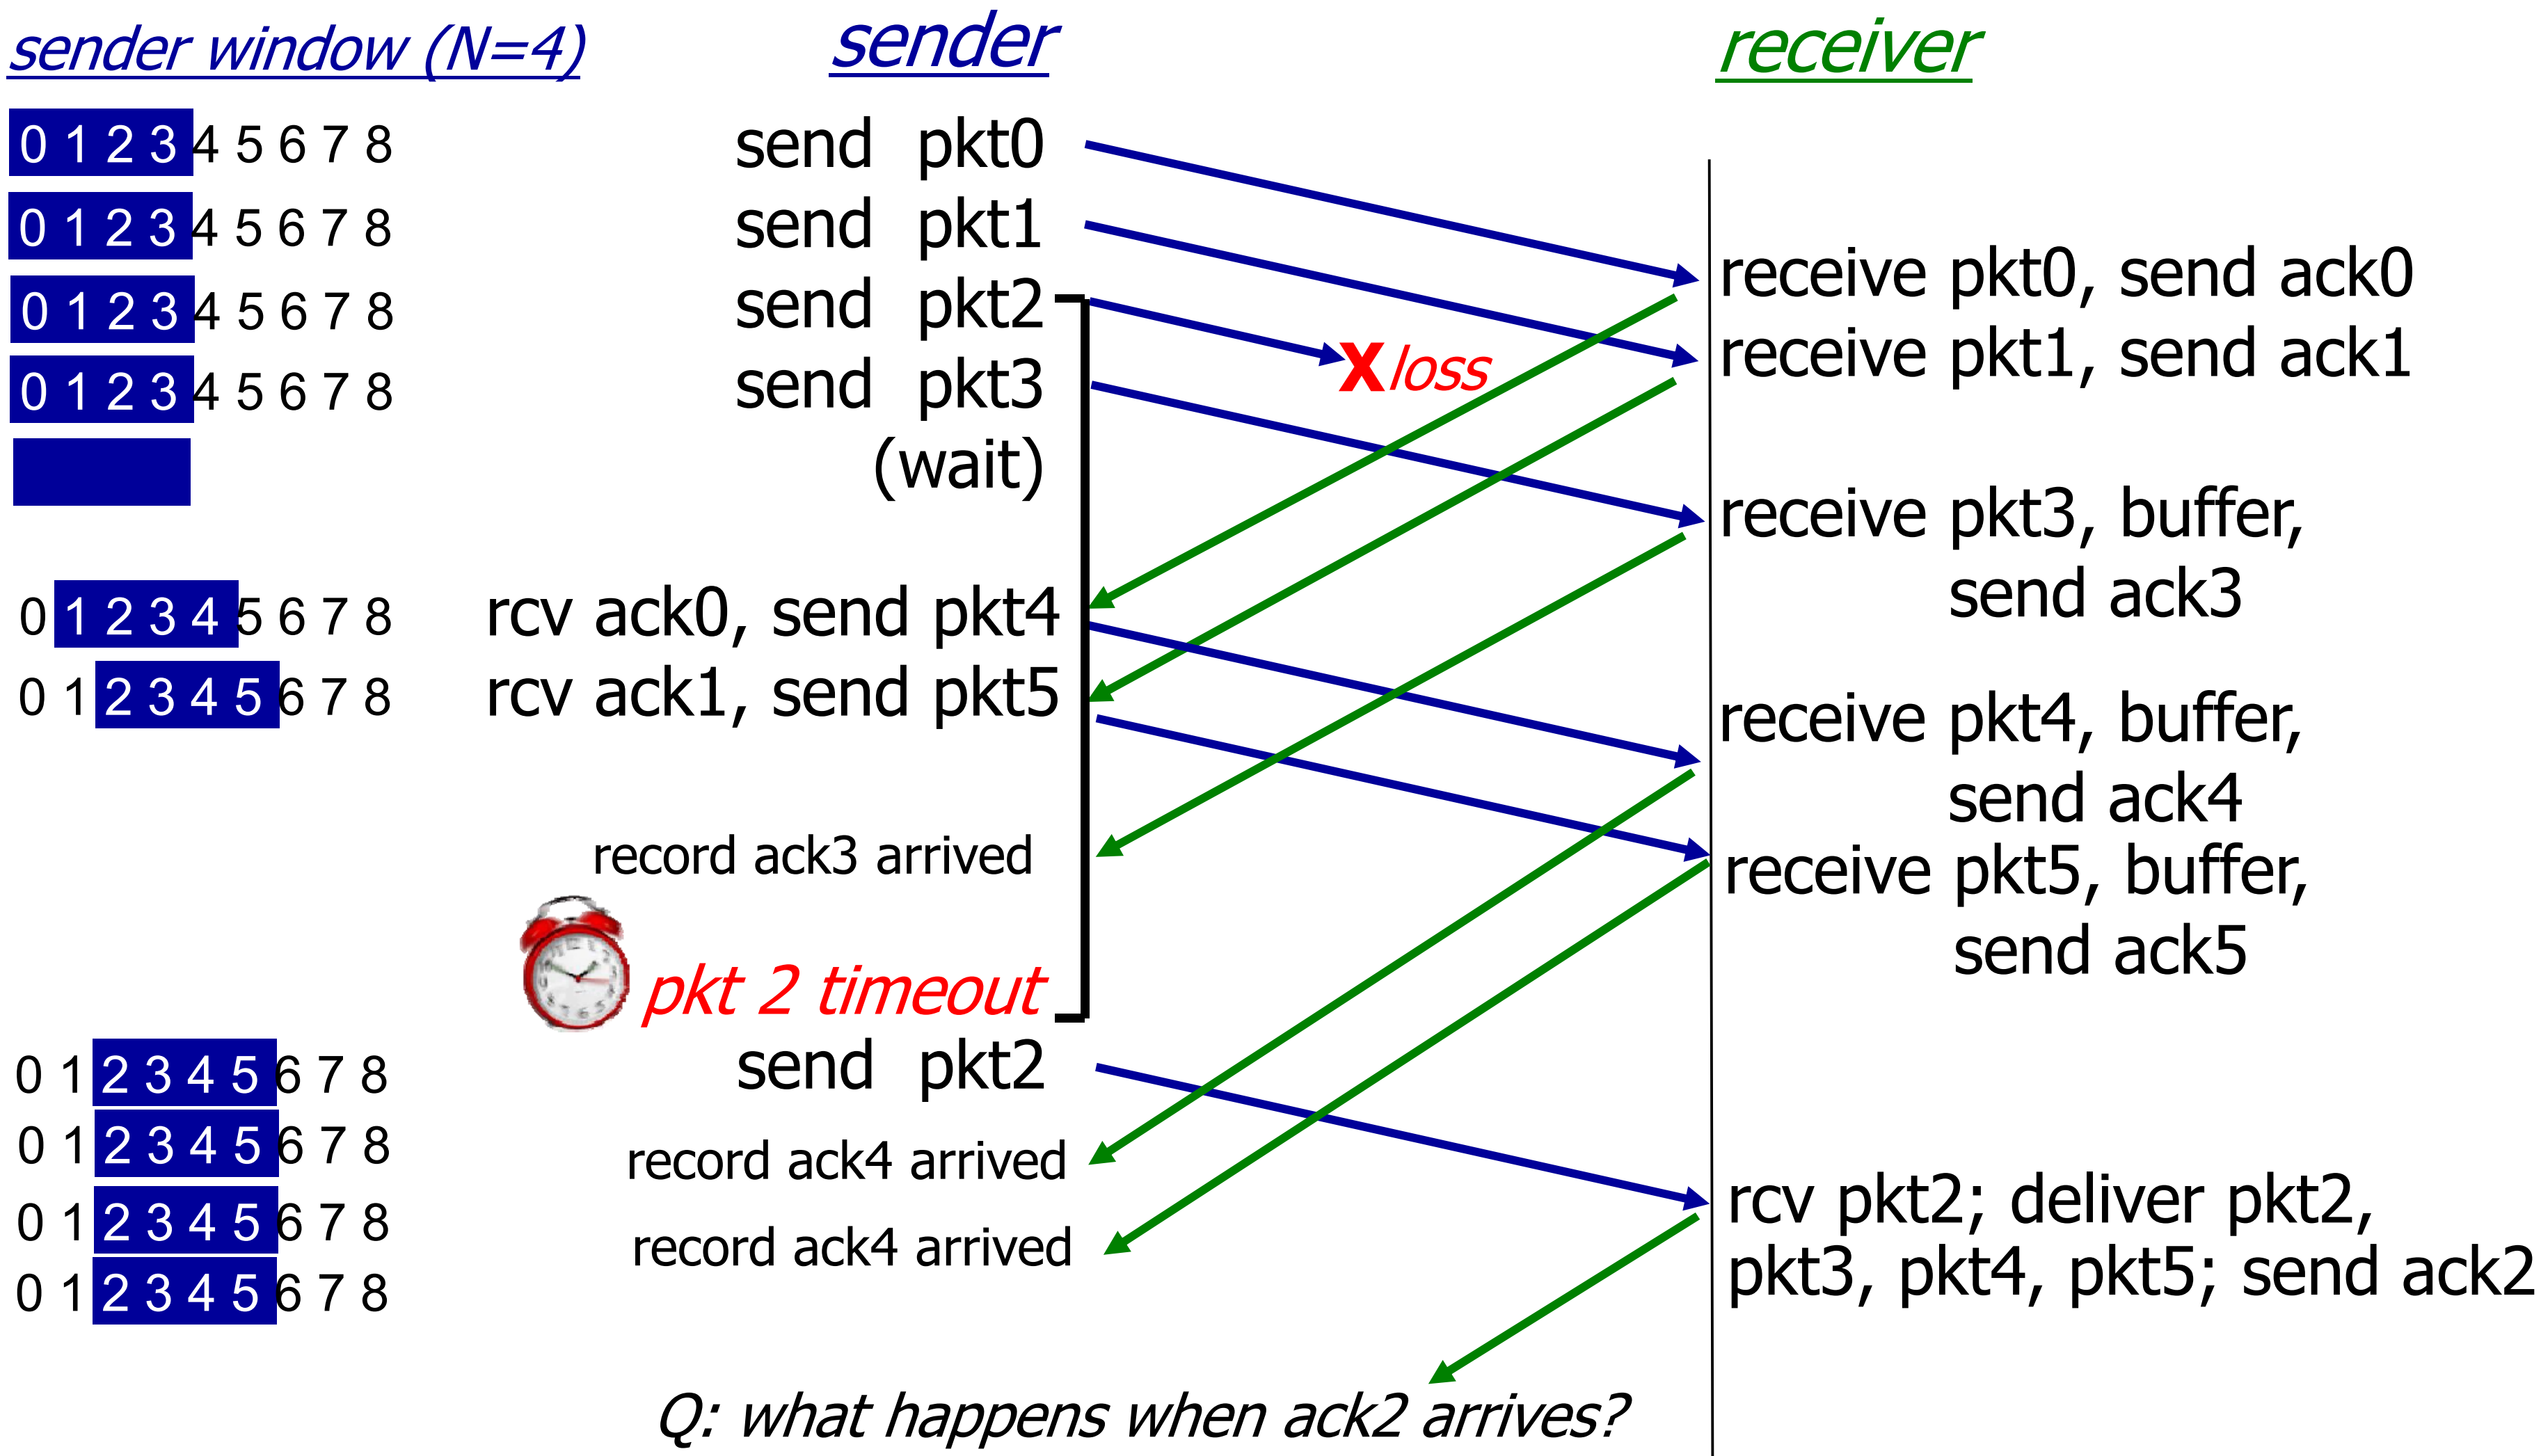

Selective repeat: dilemma

example:

- seq #'s: 0, 1, 2, 3
- window size=3

- receiver sees no difference in two scenarios!
- duplicate data accepted as new in (b)

Q: what relationship between seq # size and window size to avoid problem in (b)?

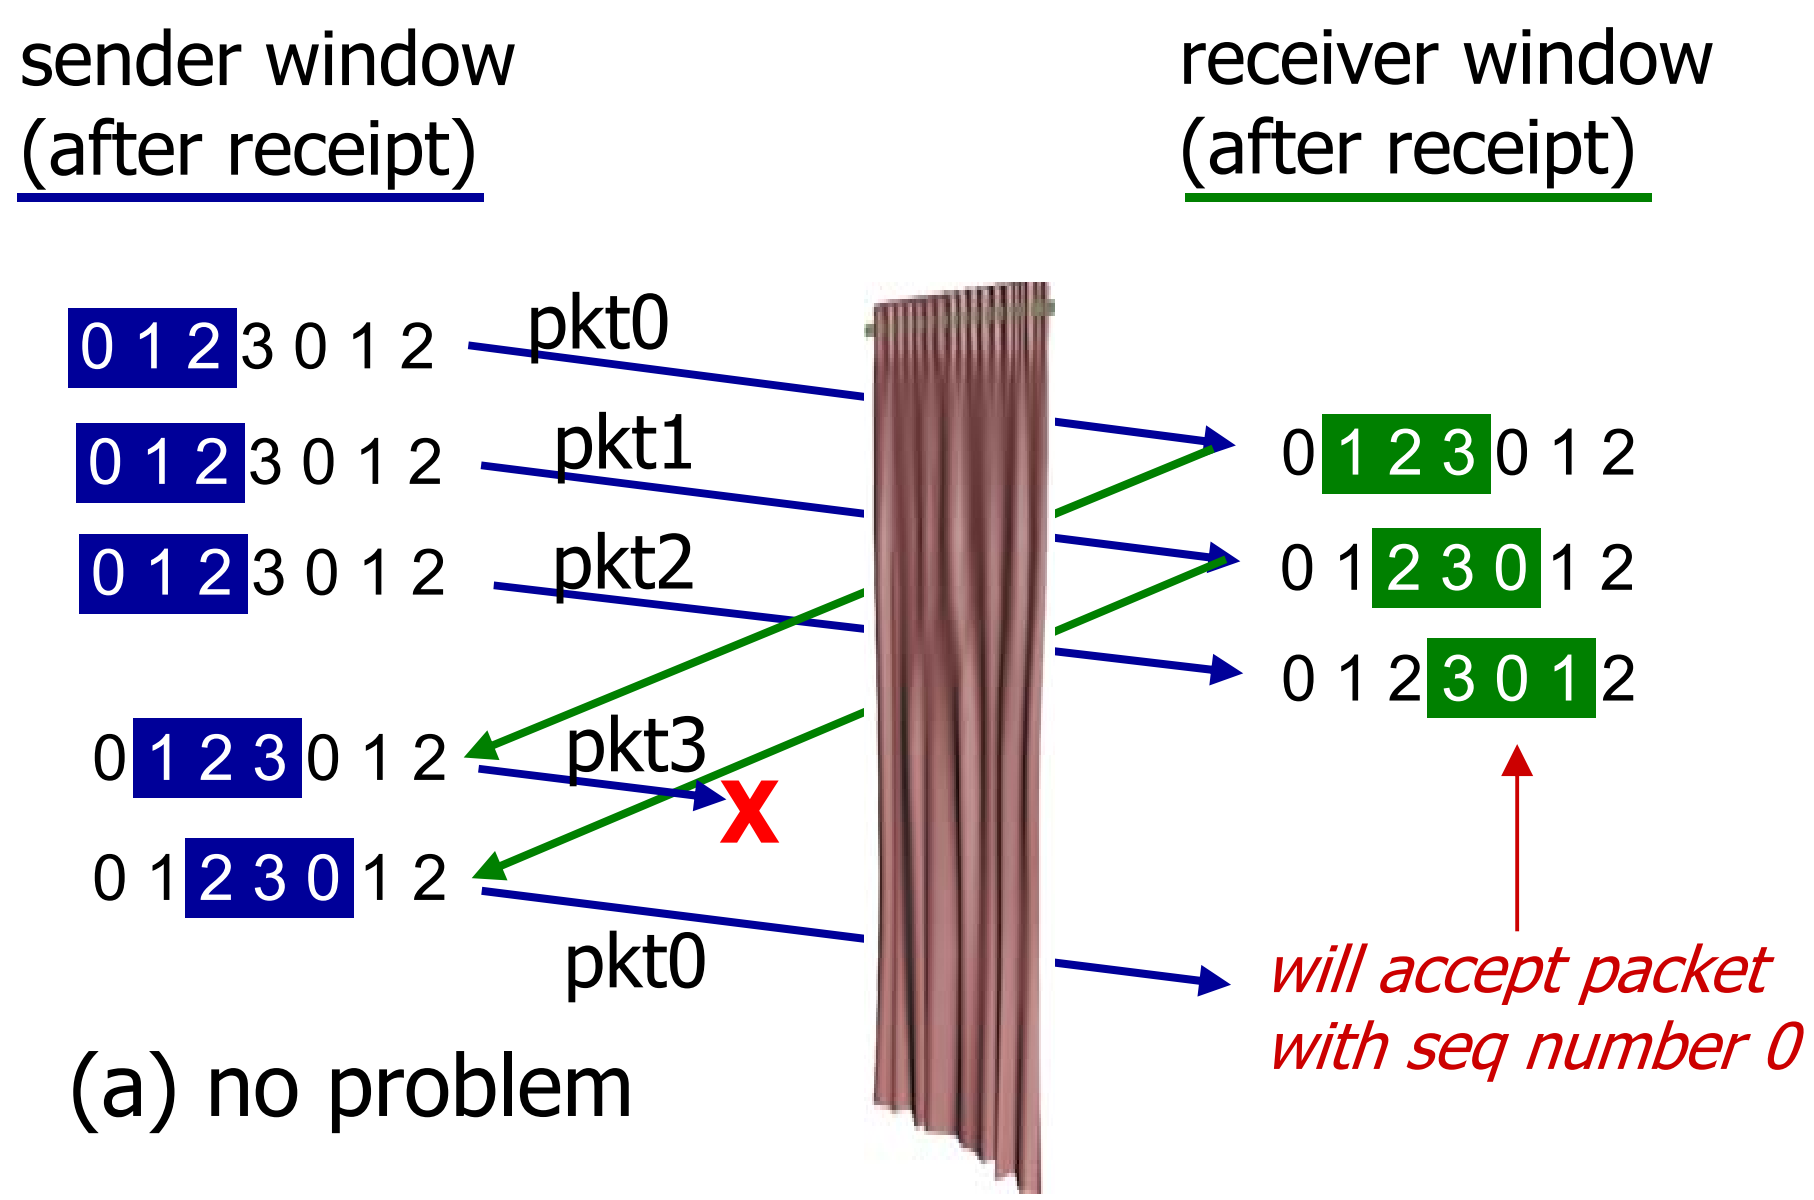

(a) no problem

receiver can't see sender side.
receiver behavior identical in both cases!
something's (very) wrong!

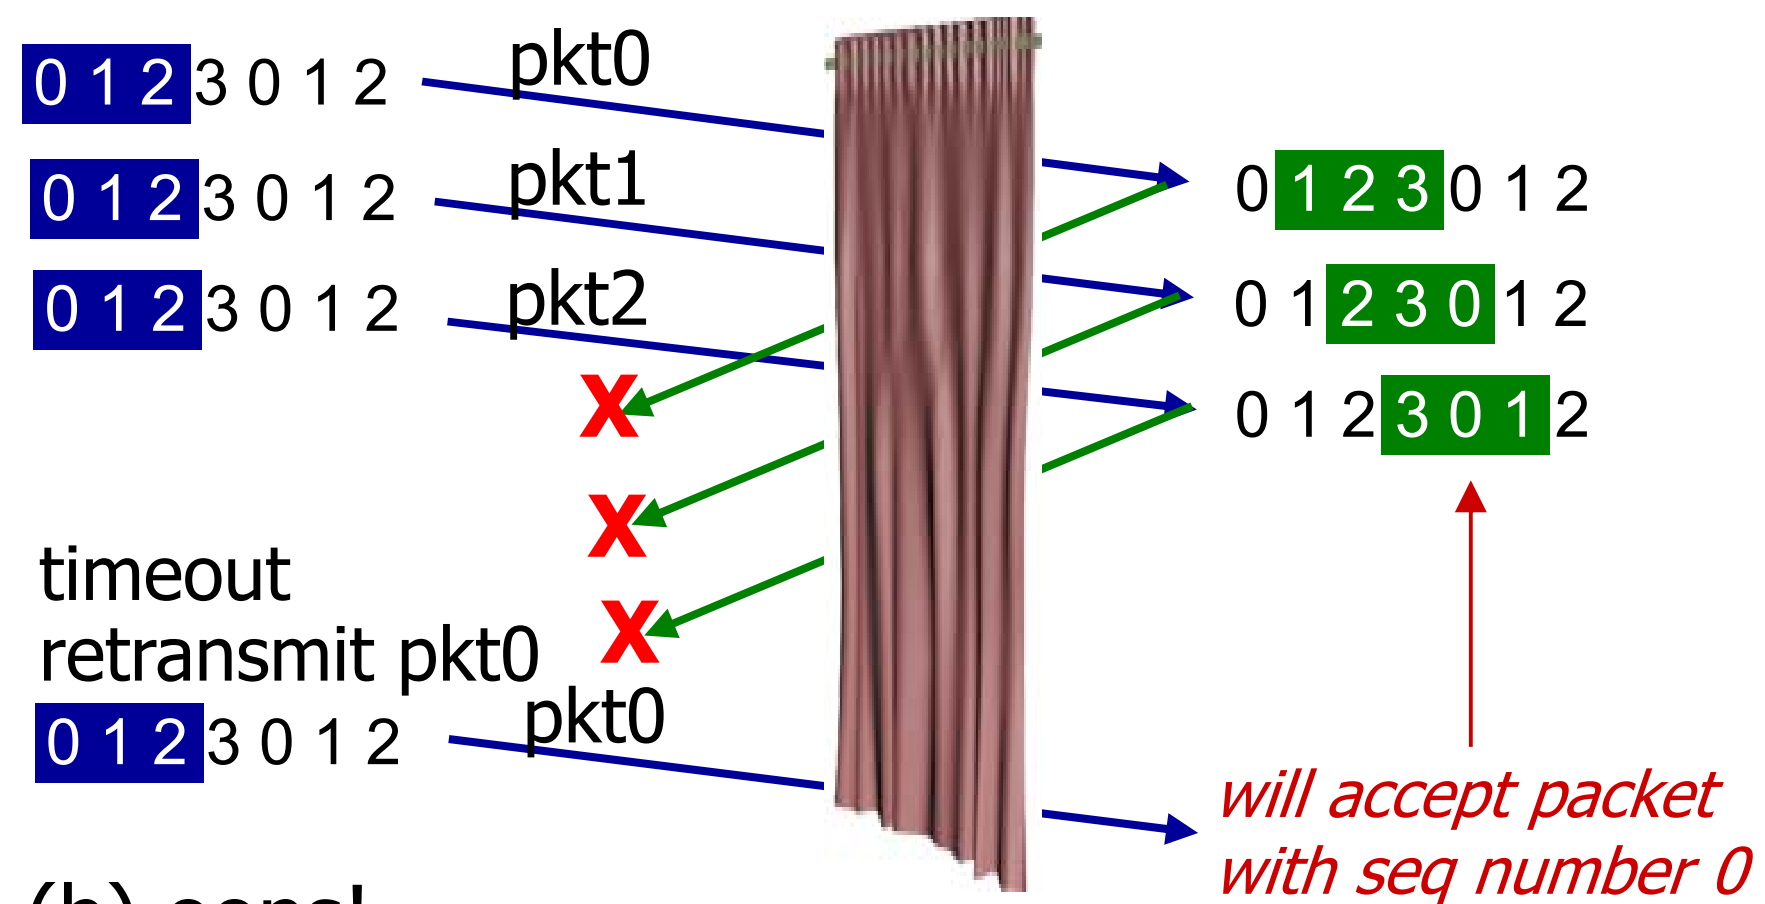

(b) oops!