

DESIGN AND ANALYSIS OF AN ACOUSTIC FIRE EXTINGUISHER

PROJECT REPORT

submitted by

| | |
|-------------------------|-------------------|
| ARJUN KRISHNA | TKM16ME022 |
| K P AMRITANAND | TKM16ME068 |
| LINJO REJOY | TKM16ME069 |
| MELVIN SEBASTIAN | TKM16ME072 |

to

*the APJ Abdul Kalam Technological University in partial fulfilment of the requirements
for the award of Bachelor of Technology in Mechanical Engineering*



Department of Mechanical Engineering

TKM College of Engineering, Kollam

May 2020

**DEPARTMENT OF MECHANICAL ENGINEERING T.K.M
COLLEGE OF ENGINEERING, KOLLAM**



CERTIFICATE

Certified that this report entitled '*Design and Analysis of an Acoustic Fire Extinguisher*' is the report of project presented by **ARJUN KRISHNA S TKM16ME022, K P AMRITANAND TKM16ME068, LINJO REJOY TKM16ME069, MELVIN SEBASTIAN TKM16ME072** during **2019-2020** in partial fulfilment of the requirements for the award of the Degree of Bachelor of Technology in Mechanical Engineering of the APJ Abdul Kalam Technological University.

Guide,

Prof Firoz N
Assistant Professor
Dept. of Mechanical Engineering
TKM College of Engineering, Kollam

Coordinator,

Dr. Mohammed Sathikh
Professor
Dept. of Mechanical Engineering
TKM College of Engineering

Dr. Mohammed Sajid N.K
Head of Department
Dept. of Mechanical
Engineering
TKM College of Engineering

DECLARATION

We, ARJUN KRISHNA S, K P AMRITANAND, LINJO REJOY, MELVIN SEBASTIAN hereby declare that, this project report entitled 'Design And Analysis Of An Acoustic Fire Extinguisher' is the bonafide work of ours carried out under the supervision of Prof. Firoz N, Assistant Professor, Dept. of Mechanical Engineering, TKM College of Engineering. We declare that, to the best of our knowledge, the work reported herein does not form part of any other project report or dissertation on the basis of which a degree or award was conferred on an earlier occasion to any other candidate. The content of this report is not being presented by any other student to this or any other University for the award of a degree.

Signatures:

Name of the Student: Arjun Krishna S

University Register TKM16ME022 of year 2016-2020

Name of the Student: K P Amritanand

University Register TKM16ME068 of year 2016-2020

Name of the Student: Linjo Rejoy

University Register TKM16ME069 of year 2016-2020

Name of the Student: Melvin Sebastian

University Register TKM16ME072 of year 2016-2020

Signature:

Name of Guide: Prof. Firoz N

Dr. Mohammed Sajid N.K

Head, Department of Mechanical Engineering

T K M College of Engineering, Kollam.

Date:...../...../.....

ACKNOWLEDGEMENTS

We, take this opportunity to express my deep sense of gratitude and sincere thanks to all who helped me to complete the project successfully.

We, are deeply indebted to my guide Prof. Firoz N, Department of Mechanical Engineering for his/her excellent guidance, positive criticism and valuable comments. We, are greatly thankful to **Dr. Mohammed Sajid N.K**, Head of Mechanical Engineering Department for his support and cooperation.

Finally, We thank our parents and friends near and dear ones who directly and indirectly contributed to the successful completion of my project.

Arjun Krishna S

K P Amritanand

Linjo Rejoy

Melvin Sebastian

Place: Kollam

Date: 28/05/2020

ABSTRACT

One of the central problem in conventional fire extinguisher is that it contains an agent that is pushed out toward a fire by the action of a driving gas pressure which is continuously present inside the tank. These agents are available only in limited supply. That make the suppressing agents to be exhaustible and not economic. This project provides a potential solution to the problem and studies are carried out on the extinguishing capacity of sound waves. A new design whose idea is based on the longitudinal propagation of sound waves for quenching fire by lowering its temperature with contacting vibration energy from low frequency sound to fire and then blocking inflow of oxygen with a sound wind. Waves are alternating regions of low and high pressure. When these series of alternating air regions encounter the flame. They are good at knocking down the fire triangle boundary between the fuel and the fire and disturb the oxygen concentration surrounding the flame. By this method, the flame or the fire cannot sustain itself which further leads to the effective dispersion of fire.

Key Words: Sound Waves, Extinguisher, Vortex Generator, Fluid Domain

CONTENTS

| | |
|---|----|
| CHAPTER 1: INTRODUCTION..... | 1 |
| CHAPTER 2: LITERATURE SURVEY | 4 |
| CHAPTER 3: DESIGN OF ACOUSTIC FIRE EXTINGUISHER | 5 |
| 3.1 Initial Design: | 5 |
| 3.2 Second design: | 6 |
| CHAPTER 4: CALCULATIONS WITH CURRENT DESIGN | 10 |
| 4.1 Power Required..... | 10 |
| 4.2 Rotational speed Calculations..... | 12 |
| 4.3 Bought Items based on Calculations..... | 12 |
| CHAPTER 5: ANALYSIS OF ACOUSTIC FIRE EXTINGUISHER | 14 |
| 5.1 Defining the UDF | 14 |
| 5.2 The parameters..... | 16 |
| 5.3 DesignModeler : Describing the fluid Domain..... | 16 |
| 5.4 Meshing | 18 |
| 5.5 Declaration of named ranges | 20 |
| 5.6 Setup for Simulation | 21 |
| 5.6.1 General | 21 |
| 5.6.2 Models..... | 21 |
| 5.6.3 Materials..... | 21 |
| 5.6.4 Cell Zone conditions | 21 |
| 5.6.5 Boundary Conditions | 22 |
| 5.6.5.1 Inlet..... | 22 |
| 5.6.5.2 Outlet | 22 |
| 5.6.5.3 Wall | 22 |
| 5.6.6 Initialization | 22 |
| 5.6.7 Running Calculation..... | 22 |
| 5.7 Results..... | 22 |
| 5.7.1 Diaphragm diameter = 300 mm, Frequency = 60 Hz, Stroke = 50 mm..... | 23 |
| 5.7.2 Diaphragm diameter = 300 mm, Frequency = 45 Hz, Stroke = 50 mm..... | 23 |
| Diaphragm diameter = 300 mm, Frequency = 30 Hz, Stroke = 50 mm..... | 24 |
| 5.7.3 Diaphragm diameter = 250 mm, Frequency = 60 Hz, Stroke = 50 mm..... | 24 |
| 5.7.4 Diaphragm diameter = 250 mm, Frequency = 45 Hz, Stroke = 50 mm..... | 25 |
| 5.7.5 Diaphragm diameter = 250 mm, Frequency = 30 Hz, Stroke = 50 mm..... | 25 |
| 5.8 Inference from Result | 26 |

| | |
|--|----|
| CHAPTER 6: WORKING | 27 |
| 6.1 ADVANTAGES AND DISADVANTAGES..... | 29 |
| 6.1.1 Water fire extinguishers | 29 |
| 6.1.2 Foam Fire Extinguishers | 29 |
| 6.1.3 Dry Powder Extinguishers | 29 |
| 6.1.4 CO ₂ Fire Extinguishers | 30 |
| 6.1.5 Wet Chemical Fire Extinguishers | 30 |
| 6.1.6 Acoustic Fire Extinguishers | 30 |
| CHAPTER 7: SUGGESTIONS AND RECOMMENDATIONS | 32 |
| CONCLUSION | 33 |
| REFERENCES | 34 |
| ANNEXURE | 35 |
| 7.1 Known Values..... | 35 |

LIST OF FIGURES

| | |
|--|----|
| Figure 3.1 Initial Design with Subwoofer | 5 |
| Figure 3.2 Crank..... | 7 |
| Figure 3.3 Motor..... | 8 |
| Figure 3.4 Gear Mechanism | 9 |
| Figure 4.1 Power required for varying frequency, radius of diaphragm | 11 |
| Figure 4.2 Power required for varying stroke, radius of diaphragm | 11 |
| Figure 4.3 Power required for varying frequency, stroke..... | 11 |
| Figure 4.4 Design of acoustic fire Extinguisher | 12 |
| Figure 5.1 Fluid Domain | 17 |
| Figure 5.2 Fluid Domain of vortex generator..... | 17 |
| Figure 5.3 Meshed Domain | 18 |
| Figure 5.4 Meshed Domain of vortex generator..... | 19 |
| Figure 5.5 Parameters of mesh | 20 |
| Figure 5.6 Named Ranges | 20 |
| Figure 5.7 Result 300x60x50 | 23 |
| Figure 5.8 Result 300x45x50 | 23 |
| Figure 5.9 Result 300x30x50 | 24 |
| Figure 5.10 Result 250x60x50 | 24 |
| Figure 5.11 Result 250x45x50 | 25 |
| Figure 5.12 Result 250x30x50 | 25 |

LIST OF TABLES

| | |
|--|----|
| Table 5.1 UDF Defining..... | 14 |
| Table 5.2 UDF Definition..... | 14 |
| Table 5.3 Mode to change various parameters | 16 |
| Table 5.4 Named Ranges Description | 21 |
| Table 7.1 Power Requirement at varying Diaphragm Radius, Frequency and Stroke... | 35 |

LIST OF EQUATIONS

| | |
|-----------------------------------|----|
| Eq 1 Average Velocity | 10 |
| Eq 2 Viscous Force..... | 10 |
| Eq 3 Power Required..... | 10 |
| Eq 4 Frequency | 12 |
| Eq 5 Minimum Power required | 12 |

CHAPTER 1: INTRODUCTION

Fire is an important process that affects ecological systems around the globe. It is the rapid oxidation of a material in the exothermic chemical process of combustion, releasing heat, light, and various reaction products. The positive effects of fire include stimulating growth and maintaining various ecological systems. Fire in its most common form can result in conflagration, which has the potential to cause physical damage through burning. The negative effects of fire include hazard to life and property, atmospheric pollution, and water contamination. When the risk of an uncontrollable fire is around, firefighting devices are used for containing the fire. Several methods are employed to contain the fire.

A fire extinguisher is an active fire protection device used to extinguish or control small fires, often in emergency situations. It is not intended for use on an out-of-control fire, such as one which has reached the ceiling, endangers the user (i.e., no escape route, smoke, explosion hazard, etc.), or otherwise requires the expertise of a fire brigade. Typically, a fire extinguisher consists of a hand-held cylindrical pressure vessel containing an agent that can be discharged to extinguish a fire.

Fire requires three main elements to sustain itself. Heat, fuel and oxygen are the elements that allow fire to keep burning. Without the sufficient supply of these elements it would be hard for the fire to sustain itself. Thus, extinguishing fire means blocking the availability of any three elements. Water is commonly used as the fire extinguishing agent from the olden times. However, water cannot be used for all kinds of fire. Fires due to flammable liquids or due to electric failures cannot be extinguished by using water. Water when used to extinguish these fires tend to go down due to higher specific gravity than most of the flammable liquids. Water when used to extinguish fires due to electrical failures can pose the risk of electrocution, due to exposed live wires. So, firefighting agents other than water are used to extinguish these kinds of fire.

There are several classes of fire, which are differentiated based on the fuel that the fire is burning on. These classes are different for different countries. According to the Bureau of Indian Standards, the fire is classified as:

1. Class A fire - Fires involving solid combustible materials of organic nature such as wood, paper, rubber, plastics, etc. where the cooling effect of water is essential for extinction of fires.
2. Class B fire - Fires involving flammable liquids or liquefiable solids or the like where a blanketing effect is essential.
3. Class C fire - Fires involving flammable gases under pressure including liquefied gases, where it is necessary to inhibit the burning gas at a fast rate with an inert gas, powder or vaporizing liquid for extinguishment.
4. Class D fire - Fires involving combustible metals, such as magnesium, aluminum, zinc, sodium, potassium, etc., when the burning metals are reactive to water and water containing agents and in certain cases carbon dioxide, halogenated hydrocarbons and ordinary dry powders. These fires require special media and techniques to extinguish.

In addition to these classes there exists two other classes of fire,

1. Class K (formerly Class E – European Standard, Class C – US Standard, Class E – Australian Standard) – Fires involving potentially energized electrical equipment. This sort of fire may be caused by short-circuiting machinery or overloaded electrical cables. Where energized electrical equipment is involved in a fire, non-conductivity of the extinguishing media is of utmost importance, and only extinguishers expelling dry powder, carbon dioxide (without metal horn) or clean agent should be used. Once the electrical equipment is de-energized, extinguishers suitable for the class of the fire risk involved can be used safely.
2. Class F – Fires that involve unsaturated cooking oils in well-insulated cooking appliances located in commercial kitchens. Though such fires are technically a subclass of the flammable liquid/gas class, the special characteristics of these types of fires, namely the higher flash point, are considered important enough to recognize separately.

It is suppressed by removal of oxygen or water mist.

For the above-mentioned classes of fire, there are different extinguishers that can be used to suppress them. Below given are the types of fire extinguishers used for the particular type of fire.

1. Class A fires—Water, foam, ABC dry powder and halocarbons.
2. Class B fires—Foam, dry powder, clean agent and carbon dioxide extinguishers.
3. Class C fires—Dry powder, clean agent and carbon dioxide extinguishers.
4. Class D fires—Extinguishers with special dry powder for metal fires.
5. Class E fires – Non conducting extinguishing agents, CO₂, PKP
6. Class F fires - Wet chemicals

In this project we aim to introduce a new kind of fire extinguisher that suppresses fire using sound or pressure waves. Using an amplifier and a speaker, emitting a bass sound with a frequency of around 30 Hz the sound waves when directed at the interface of the fire, the concentration of oxygen in the vicinity of the fire gets disturbed. The fire which requires oxygen to sustain also gets affected. Following this, the motion of the pressure waves disturbs the fuel - fire interface thereby acting as the second reason for the fire to extinguish. The earlier design used an amplifier and a speaker to achieve sound. In this project, based on a new design, we use a piston and connecting rod arrangement, to obtain the pressure waves. Since sound waves are actually a series of compressions and rarefactions, these are also called pressure waves because of alternating high pressure and low-pressure regions. So, pressure waves and sound waves can be used interchangeably in this scenario.

CHAPTER 2: LITERATURE SURVEY

In this part, the origin of the idea of sound being a medium to extinguish fires, and the study conducted by various people using different methods is being discussed. One of the first published articles was done by Snyder A (2008), in one of his non-technical articles "When fire stops, drop and sing?". Here he noted that a sub-woofer placed in a closed room could extinguish a candle in a large topless chamber, when certain notes of the song was played. Here the intake of the experiment was that the sound waves of a particular frequency range could be used to extinguish a flame. Further experiments conducted by various researchers in the following years concluded that the golden range is in between 30-60 Hz.

Studies by Zinni Y. et al (2011) found out the four methods of extinguishing fire in which the effectiveness in removing oxygen in order to extinguish a fire is taken into the construction of the acoustic fire extinguisher. The types of fires according to their origin and source of combustion are taken into consideration from their work. Fire Safety Part I (2014) where the specialties of different kinds of the existing fire extinguishers are studied in detail. The new type of fire extinguishing using acoustic means could only be used for small scale fires have been established.

The research works done by Eryn Beisner et.al (2015) focused on the acoustic flame suppression mechanics in microgravity environment. The experiments were taken from the measurements taken from an Arduino based sensor system and the paper further deals with validation of the technique. The analysis of the data collected shows that the acoustic flame suppression measurement techniques are effective to finding quantitative differences in extinguishing in microgravity and normal gravity. Further the results suggest that the suppression may be more effective in a microgravity environment than a normal environment and may be a viable method of extinguishing fires during space flight.

CHAPTER 3: DESIGN OF ACOUSTIC FIRE EXTINGUISHER

In this project the firefighting method is based on the use of sound waves to extinguish the fire. In the design phase, the initial idea consisted of using a subwoofer to produce the sound waves of the required frequency. The literature survey conducted showed that the optimal frequency to extinguish the fire was around 30Hz. A 3-D CAD software, SolidWorks was used to design the model of the acoustic fire extinguisher. Ansys was used for the detailed studies and simulation of the model.

3.1 Initial Design:

The design consisted of a subwoofer, frequency generator, an amplifier and a vortex tube. The frequency generator was used to produce a low frequency of 30Hz, and the amplifier was used to amplify the signal. Using a subwoofer, the sound waves were produced in the region of 30Hz. The components were arranged and connected in the following order:

Frequency Generator -> Amplifier -> Subwoofer -> Vortex tube

The produced sound waves then travelled from the subwoofer, along the vortex tube. The end of the vortex that is exposed to the fire, consisted of a hole of the required diameter. It was designed to produce a vortex wave that would be aimed at the fire. As discussed earlier, the wave would disrupt the oxygen concentration and the flame – fuel interface, preventing the fire to sustain itself. A brief description of the components and their corresponding functions is given below:

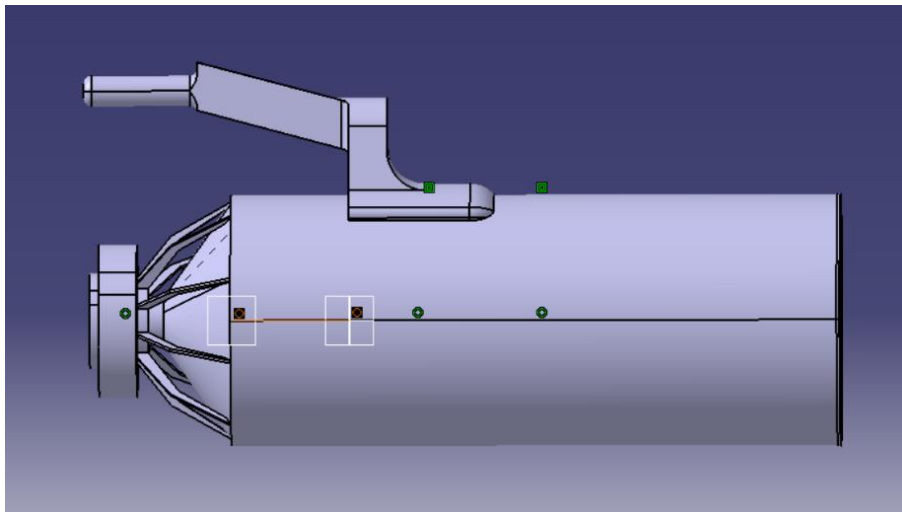


Figure 3.1 Initial Design with Subwoofer

1. Frequency Generator:

A frequency generator is a class of electronic devices that is used to produce a signal of the required frequency. In this project, the use of a frequency generator is to produce a sound wave having a frequency of 30Hz.

2. Amplifier:

An amplifier is an electronic device that can increase the power of a signal (time varying voltage or current) It is a two-port electronic circuit that uses electric power from a power supply to increase the amplitude of a signal applied to its input terminals, producing a proportionally greater amplitude signal at its output. This is used to prevent the loss of the signal which is obtained from the frequency generator.

3. Subwoofer:

A subwoofer (or sub) is a loudspeaker designed to reproduce low-pitched audio frequencies known as bass and sub-bass, lower in frequency than those which can be (optimally) generated by a woofer. The typical frequency range for a subwoofer is about 20–200 Hz for consumer products, below 100 Hz for professional live sound, and below 80 Hz in THX-approved systems. The subwoofer emits the sound that acts as the firefighting agent.

4. Vortex Tube:

This is a cylindrical tube whose one end is connected to the subwoofer and the other end is exposed to fire. The side exposed to the fire, also known as fire-side contains a hole, of a particular diameter. This hole helps in producing vortex waves, which extinguishes the fire.

3.2 Second design:

The earlier design consisted of electronic components that were used in the production of sound waves. Sound waves being pressure waves, and replacing those electronic components with mechanical ones one can obtain the same result. Here, an inversion from the slider crank mechanism is used in designing the mechanical system. The piston and connecting rod arrangement is used to produce the alternating pressure regions. Instead

of the piston a suitable material that can fit and move easily inside the vortex tube is used as a diaphragm. The forward movement of the diaphragm produces a high-pressure region called the compression and the backward stroke produces a low-pressure region called the rarefaction. So, an alternating propagation of these regions gives us a moving pressure wave. The design of the fire extinguisher in this way, gave the opportunity to control the amplitude of the pressure wave, the frequency, which in turn allowed to control the velocity of the pressure wave. This acts in the same principle as the above design. A brief description of the above components are given below:

1. Connecting rod:

A stainless steel connecting rod is used for converting the rotational motion of the steel disc into the reciprocating motion of the diaphragm.

2. Steel disc:

The steel disc performs the function of the crank. It contains a rectangular groove, onto which one end of the connecting rod is bolted. The distance of the bolted joint from the centre of the steel disc, allows to control the stroke of the movement of the connecting rod, thereby controlling the amplitude of the pressure wave.

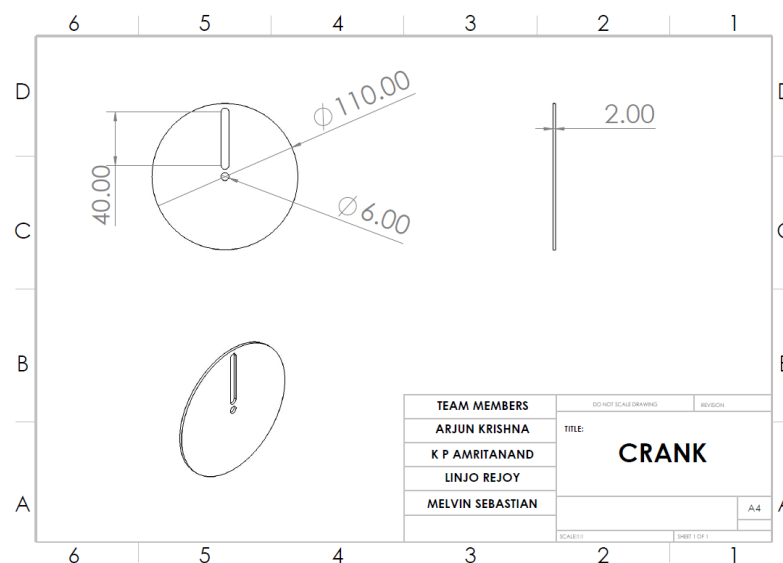


Figure 3.2 Crank

3. Electric motor:

This is used for providing the system of the slider crank arrangement motion. The rotary motion of the motor shaft is converted to reciprocating linear motion using a connecting rod. The motor selected for the above application must have high torque, with a decent amount of speed. We selected the RS-775 DC motor with rated voltage of 12-24 Volts and rated current of 2.6 Ampere which has a maximum rotational speed of 7000rpm.

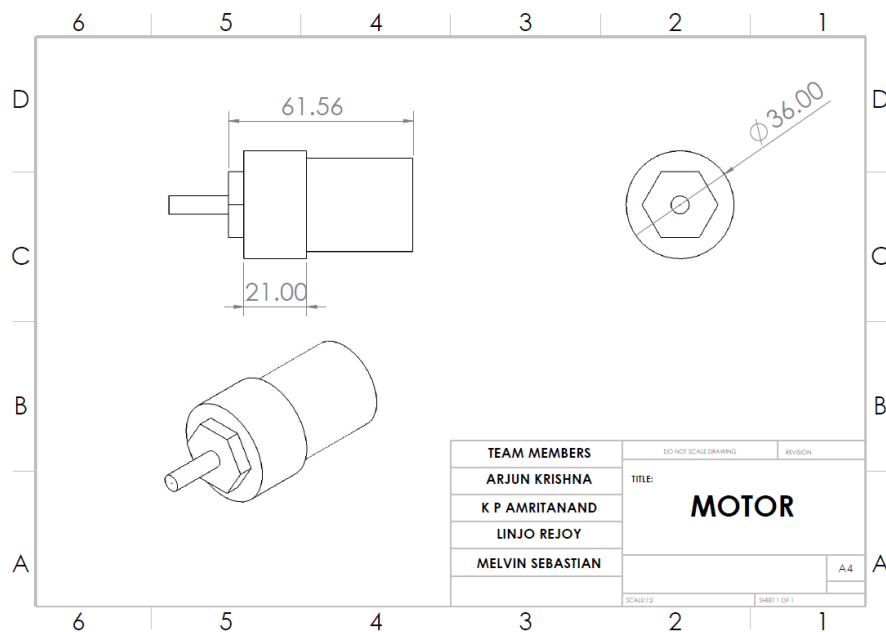


Figure 3.3 Motor

4. Battery:

Used to provide power to the electric motor. A 12V battery was only required for this situation

5. Vortex Tube:

This is a cylindrical tube whose one end is connected to the reciprocating diaphragm and the other end is pointed to the fire. The side exposed to the fire, also known as fire-side contains a hole, of a particular diameter. This hole helps in producing vortex waves, which extinguishes the fire.

5. Gear arrangement:

The gear arrangement used in the project was for reducing the speed of the motor to the required values. The motor selected for the above application had high speed at a no load condition, higher than the required amount. So a reduction gear setup was used to reduce the speed to the required levels.

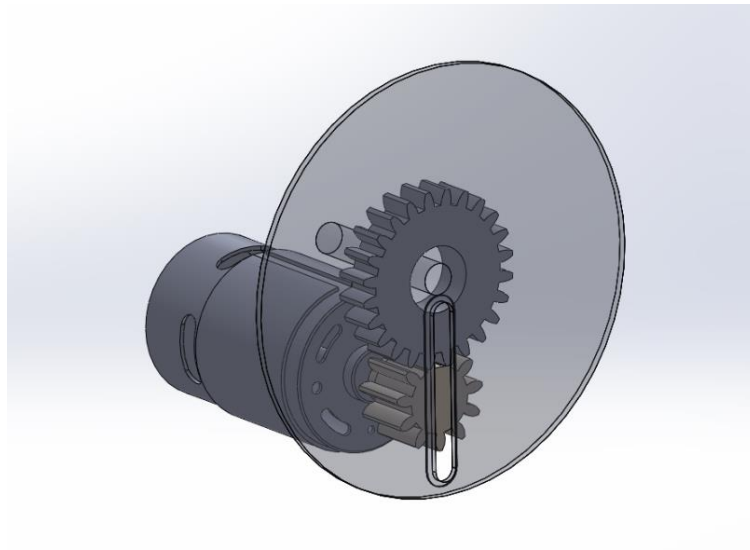


Figure 3.4 Gear Mechanism

CHAPTER 4: CALCULATIONS WITH CURRENT DESIGN

4.1 Power Required

With the current finalised design, we calculated the velocity of diaphragm, force acting on diaphragm, power required by the motor for the different values of frequency, diameter of diaphragm and amplitude.

$$\text{Average Velocity } V_a = \frac{2 \times \text{Stroke} \times \text{Rotating Speed}}{60} \quad \text{Eq 1 Average Velocity}$$

The average velocity of the diaphragm is found out by considering the stroke length of diaphragm and rotational speed of the crank.

$$\text{Viscous Force} = \frac{\rho C_d A V_a^2}{2} \quad \text{Eq 2 Viscous Force}$$

After finding the velocity of the diaphragm we can compute the viscous force acting on the diaphragm using the equation

$$\text{Power Required} = \text{Viscous Force} \times \text{Stroke} \quad \text{Eq 3 Power Required}$$

By using this we can find the power required to produce the pressure waves at the required rpm using the equation,

So there are three variables we can change - Rotational Speed, Stroke, Radius of Diaphragm- to alter the pressure waves produced by it. Now keeping Separately one of them a constant, we can plot a 3-Dimensional Graph to plot the power requirement for all the cases.

By Keeping the Stroke, a constant value of 0.05m, we varied the Radius of Diaphragm and frequency and found out the required power and plotted it on a graph. As expected we can see that with increasing frequency we would be requiring more power.

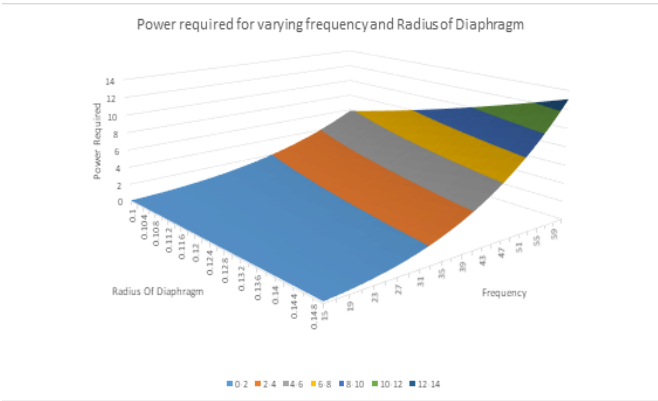


Figure 4.1 Power required for varying frequency, radius of diaphragm

Next we plotted the variation of power with varying Stroke and Frequency. Also we checked the variation in power with varying Stroke and Radius. Both these showed similar results.

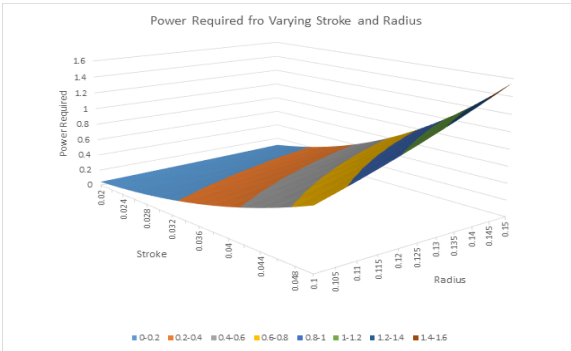


Figure 4.2 Power required for varying stroke, radius of diaphragm

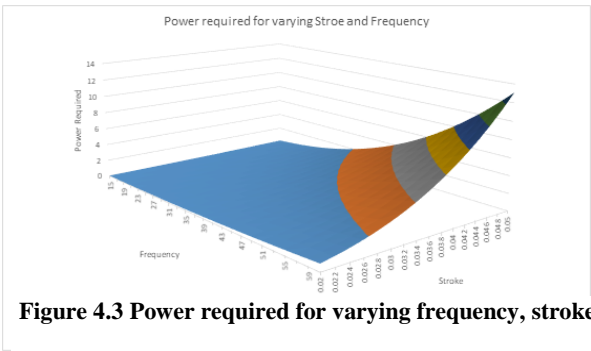


Figure 4.3 Power required for varying frequency, stroke

We understand that frequency has the most effect and the maximum power required is approximately 13.5 Watt at its peak frequency, stroke and radius of diaphragm.

4.2 Rotational speed Calculations

From the figure we can easily see that the design is similar to the crank and piston mechanism in an engine.

So we find the direct correlation between frequency of pressure waves and rotational speed of the crank.

$$\text{Frequency} = \frac{\text{Crank Speed (rpm)}}{60} \quad \text{Eq 4 Frequency}$$

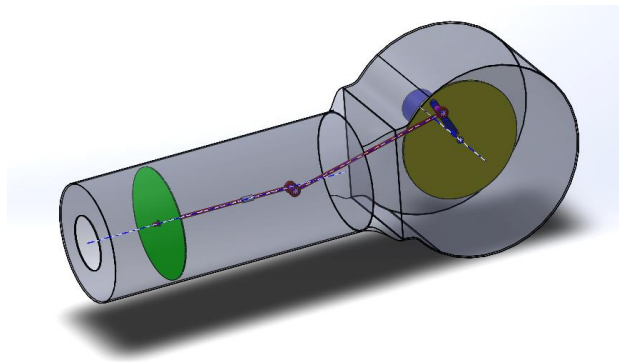


Figure 4.4 Design of acoustic fire Extinguisher

Based on this we can estimate that at the maximum frequency required of 60Hz we need the crank to rotate at 3600rpm.

4.3 Bought Items based on Calculations

The motor required to produce the pressure waves should produce a minimum of 14 Watt for smooth operation under optimum conditions subjected to maximum value of different parameters.

$$\text{Min power required by motor} = 14 \text{ Watt} \quad \text{Eq 5 Minimum Power required}$$

Also we have concluded that the crank should rotate at a maximum rpm of at least 3600 rpm. Frequency range required for the motor will be from 1800 rpm(30Hz) to 3600rpm(60Hz).

So based on the requirements we used the RS-775 DC motor with rated voltage of 12-24 Volts and rated current of 2.6 Ampere which has a maximum rotational speed of 7000rpm. The speed can be stepped down to required rpm with a small gearbox. We selected a gearbox with gears of 11 and 24 teeth which produces a reduction of 2.18:1. This will help produce rotational speed of upto 3211rpm($\approx 55Hz$). This is good enough for our experiment.

CHAPTER 5: ANALYSIS OF ACOUSTIC FIRE EXTINGUISHER

The analysis of the acoustic fire extinguisher was done by introducing a User Defined Function(UDF) to produce the transient flow because of the varying direction and magnitude of the flow of air in the vortex generator. Since we achieved this reciprocating motion with the help of a rotating crank which is at a predefined rpm, the UDF was also defined as a sinusoidal wave. This will help produce the most accurate results. The UDF used is as follows:

Table 5.1 UDF Defining

```
#include "udf.h"

DEFINE_PROFILE(unsteady_velocity,thread,position)
{
    face_t f;
    real t=CURRENT_TIME;

    begin_f_loop(f,thread)
    {
        F_PROFILE(f,thread,position)=6*sin(30*t);
    }

    end_f_loop(f,thread)
}
```

5.1 Defining the UDF

Here the code shown is written in C Programming Language. The parameters such as frequency, Velocity of flow are adjusted here during the compiling of this code.

Table 5.2 UDF Definition

| Sl No. | Code | Definition | Remark |
|--------|------------------|--------------------------|---|
| 1 | #include "udf.h" | file inclusion directive | will cause the udf.h file to be included with |

| | | | |
|---|---|-----------------------------|--|
| | | | your source code. |
| 2 | DEFINE_PROFILE(unsteady_velocity,thread,position) | Custom Boundary Profile | define a custom boundary profile that varies as a function of spatial coordinates or time. |
| | unsteady_velocity | Parameter of DEFINE_PROFILE | Generates profile for X velocity |
| 3 | face_t f | Data Type | face_t is an integer data type that identifies a particular face within a face thread. |
| 4 | real t=CURRENT_TIME | To look up real flow time | Finds real flow time and stores it in variable t |
| 5 | begin_f_loop(f,thread) | face looping macro | loops over all interior and boundary zone faces in a compute node |
| 6 | F_PROFILE(f,thread,position) = | Define the face for UDF | Uses integer position to set X velocity face value in memory |
| 7 | 6*sin(30*t) | Parameters definition | 6: Maximum Velocity in sinusoidal flow(m/s) 30: Frequency of Oscillation(Hz) |
| 8 | end_f_loop(f,thread) | face looping macro | Ends the loop |

Using this UDF, we can use Ansys to simulate the flow in an acoustic fire extinguisher with varying parameters with ease.

5.2 The parameters

The parameters we are focussing on are the stroke length, frequency and the area of diaphragm. Variation was made by:

Table 5.3 Mode to change various parameters

| Sl No | Parameter | Mode to change |
|-------|----------------------|---|
| 1 | Stroke Length(s) | The maximum velocity of the reciprocating parts can be found by $V = \pi S f $ which can be varied in the UDF. |
| 2 | Frequency(f) | |
| 3 | Area of Diaphragm(A) | Area, $A = \pi \frac{d^2}{4}$, d can be changed by changing the model dimensions used for the simulation. |

5.3 DesignModeler : Describing the fluid Domain

The analysis was done in Ansys Fluent, and the design was done in DesignModeler, which is a parametric geometry creation tool as part of the Ansys software. For getting the most accurate result with the least amount of computation, only the modelling of the fluid domain was done and the rest of the design were excluded. For further simplification of the computation, only a single slice in 2D was used for the computation. This was possible due to the radially symmetric structure of the vortex generator.

The 2D representation of the fluid domain is shown below:

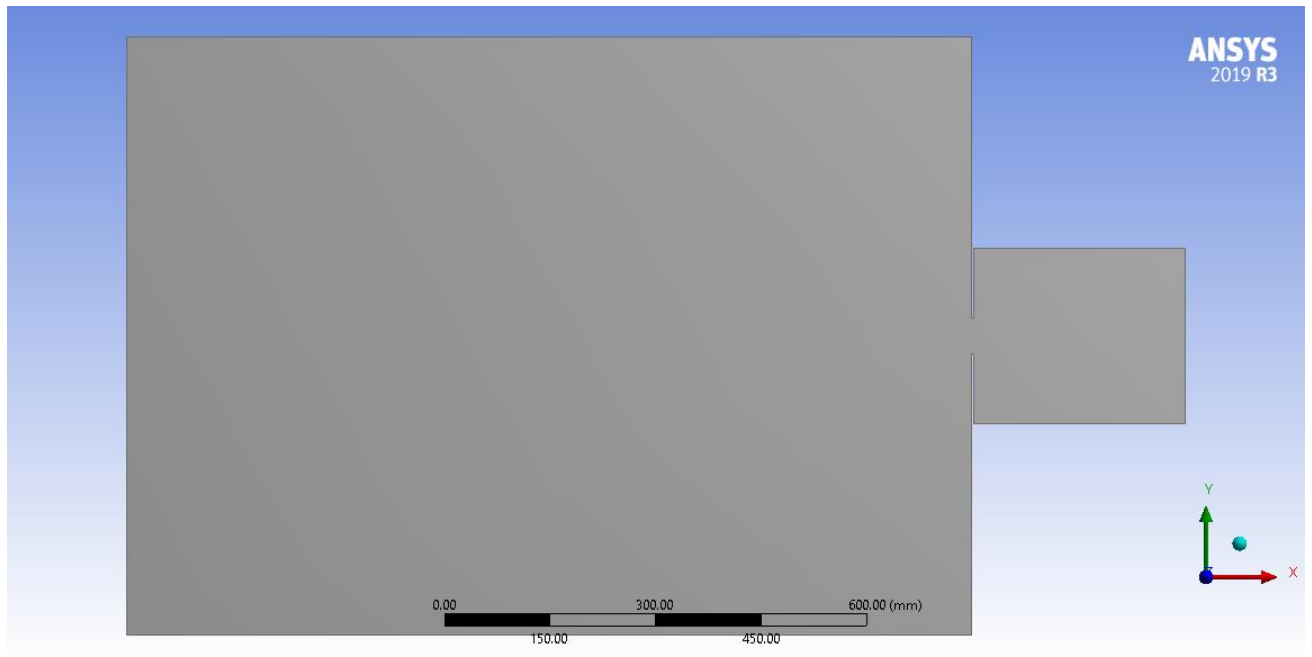


Figure 5.1 Fluid Domain

The overall dimension of the fluid domain is as shown and for analysing the path followed by the vortex generated, an additional fluid domain which is 1200 mm in length and 700 mm in height is also created.

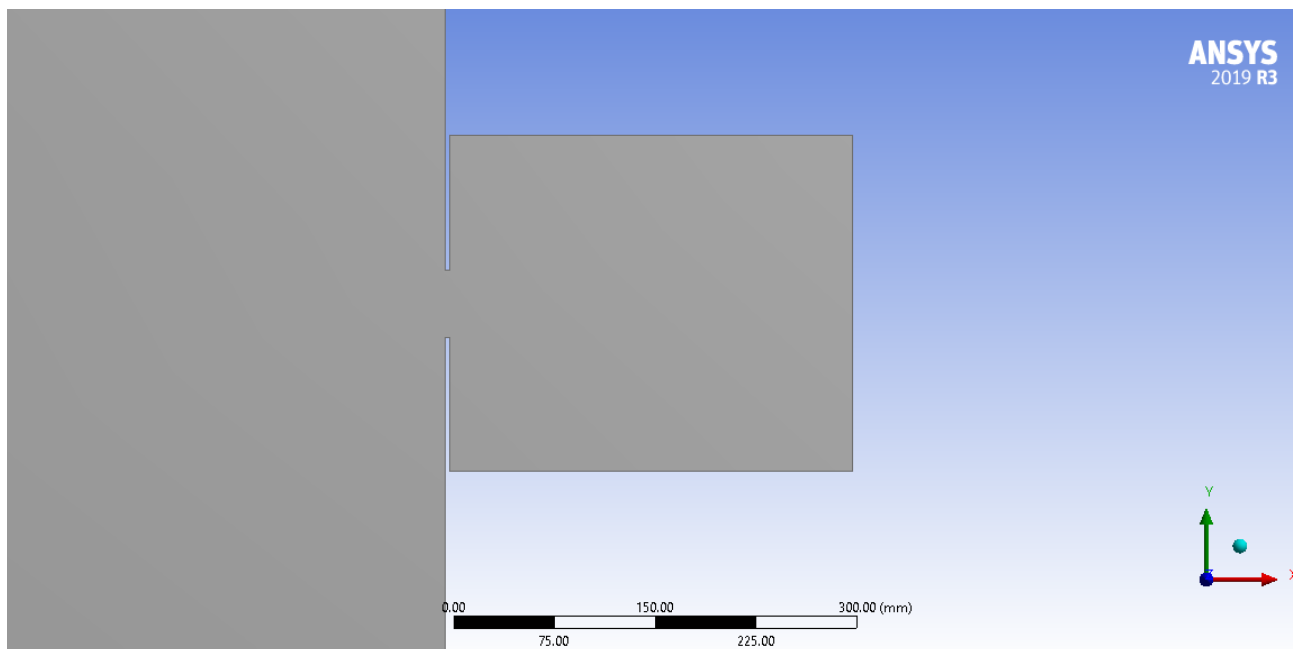


Figure 5.2 Fluid Domain of vortex generator

The eyelet in the vortex generator is made by creating a slit at the end of the vortex tube. This will prevent the Ansys solver from creating unpredictable values.

5.4 Meshing

Proper meshing is a definite requirement for any simulation. A solver with fluent was chosen and an element size of 12 mm was taken as the default element size. This will allow for enough clarity in visualizing the streamlines developed from the created vortex.

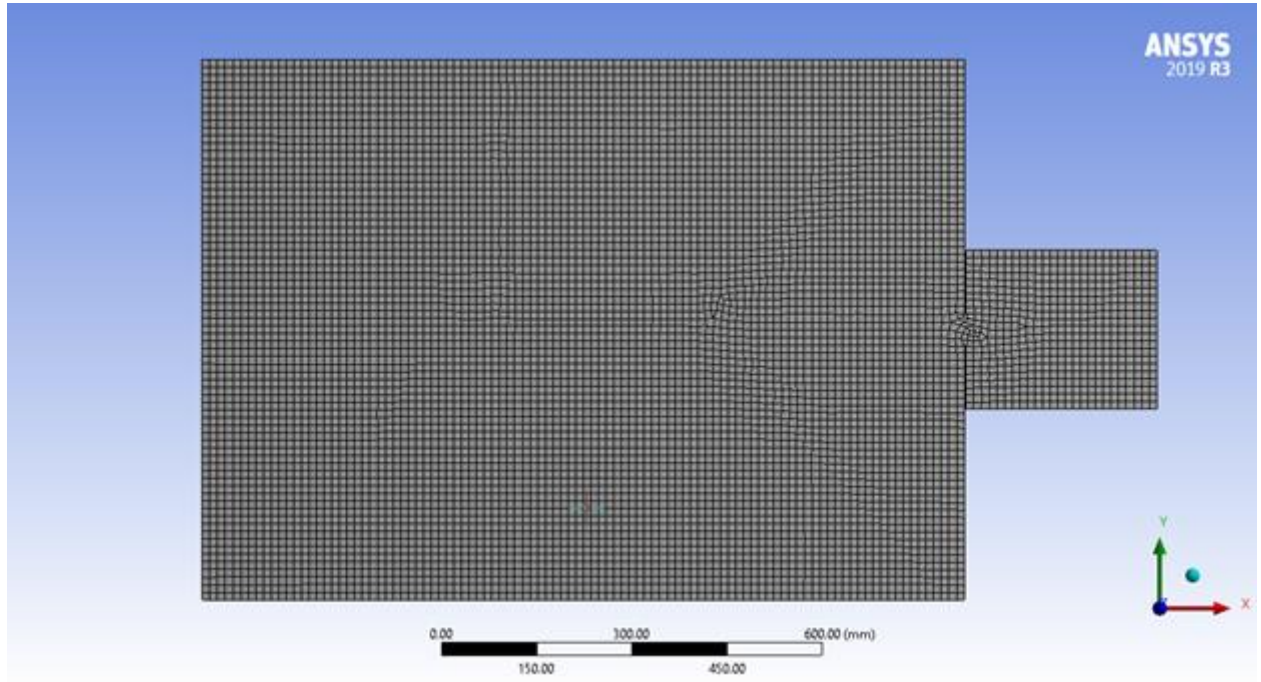


Figure 5.3 Meshed Domain

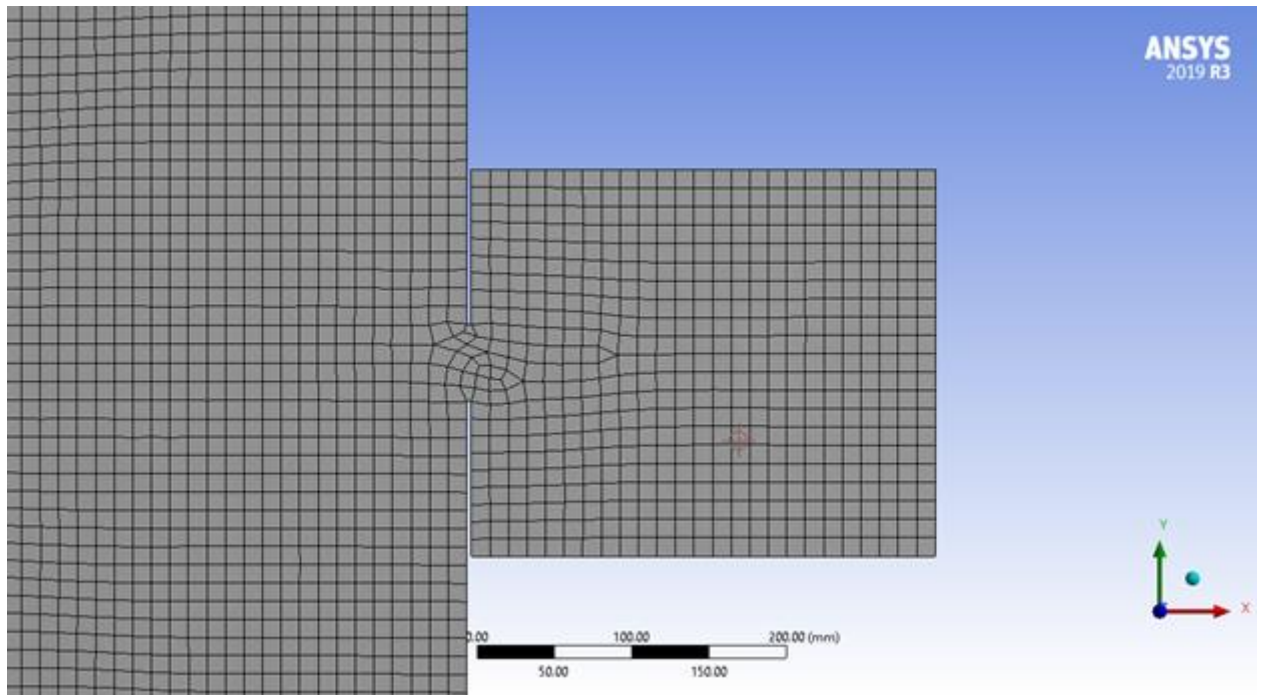


Figure 5.4 Meshed Domain of vortex generator

Other parameters of the mesh are shown here. Since the geometry is not a complex one, most of the default values were perfect for the analysis done.

| Details of "Mesh" | |
|---|-----------------------------|
| Defaults | |
| Physics Preference | CFD |
| Solver Preference | Fluent |
| Element Order | Linear |
| <input type="checkbox"/> Element Size | 12.0 mm |
| Export Format | Standard |
| Export Preview Surface Mesh | No |
| Sizing | |
| Use Adaptive Sizing | Yes |
| Resolution | Default (2) |
| Mesh Defeaturing | Yes |
| <input type="checkbox"/> Defeature Size | Default |
| Transition | Slow |
| Span Angle Center | Fine |
| Initial Size Seed | Assembly |
| Bounding Box Diagonal | 1726.7 mm |
| Average Surface Area | 1.0951e+006 mm ² |
| Minimum Edge Length | 3.0 mm |
| Quality | |
| Check Mesh Quality | Yes, Errors |
| <input type="checkbox"/> Target Skewness | Default (0.900000) |
| Smoothing | Medium |
| Mesh Metric | None |
| Inflation | |
| Use Automatic Inflation | None |
| Inflation Option | Smooth Transition |
| <input type="checkbox"/> Transition Ratio | 0.272 |
| <input type="checkbox"/> Maximum Layers | 2 |
| <input type="checkbox"/> Growth Rate | 1.2 |
| Inflation Algorithm | Pre |
| View Advanced Options | No |

5.5 Declaration of named ranges

Named Ranges are a great way of tagging a particular body, face or an edge so that while computing and declaring the boundary conditions, we can easily reference the required element to the required condition.

So the naming of the elements was done as shown below.

Figure 5.5 Parameters of mesh

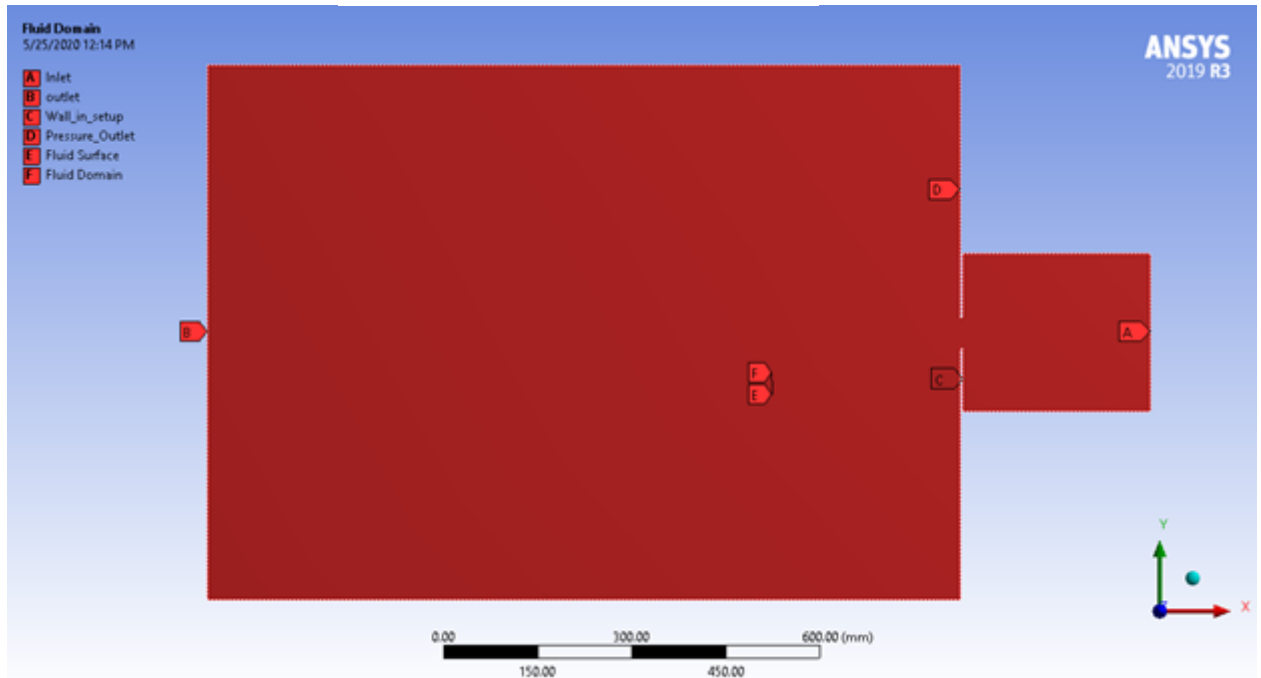


Figure 5.6 Named Ranges

Table 5.4 Named Ranges Description

| Sl No. | Named Ranges | Denotation | Description |
|--------|-----------------|------------|---|
| 1 | Inlet | A | Used for inputting the boundary condition of variable flow from the UDF |
| 2 | Outlet | B | Zero gauge pressure Outlet |
| 3 | Wall_in_Setup | C | Used for denoting physical boundaries of vortex generator |
| 4 | Pressure_outlet | D | Zero gauge pressure Outlet |
| 5 | Fluid Surface | E | The surface of the fluid domain |
| 6 | Fluid Domain | F | Fluid Domain(Air) |

5.6 Setup for Simulation

For maximum precision, the Double precision mode was switched on and the analysis type was set to 2D.

5.6.1 General

Since analysis is a time dependent, the transient solver is used and since the change in density is negligible, the pressure based solver was used.

5.6.2 Models

The k-epsilon model was chosen with all the default parameters. All other models were turned off as they were not necessary

5.6.3 Materials

Since only the fluid domain is designed, air was taken as the material which was taken from the fluent database. All other parameters were set to the default value.

5.6.4 Cell Zone conditions

From the named ranges, the element named Fluid Domain was declared as the domain of air.

5.6.5 Boundary Conditions

5.6.5.1 Inlet

This is the position where the created User Defined Function(UDF) has to be implemented and the x- velocity was declared as the UDF. Y-Velocity was left at 0 as it is negligible.

5.6.5.2 Outlet

The Named ranges specified as the “Outlet” and the “Pressure Outlet” were declared under the outlet boundary condition as these are regions of zero-gauge pressure i.e. the atmosphere.

5.6.5.3 Wall

The named range specified as the “wall-in-setup” was taken as the wall and no exchange of matter will take place along this boundary.

5.6.6 Initialization

The standard initialization which was computed from the inlet was used for the initialization of the solution.

5.6.7 Running Calculation

For calculation, the time-step size was determined from the frequency of oscillation of the diaphragm. If the frequency was f . then every seconds, the diaphragm oscillates f times. So if we need to split this oscillation into n steps for better resolution, then the time step size has to be “ $f * n$ ”. The number of time steps was taken to be any multiple of n .

5.7 Results

For better understanding of the vortex and the dependency it has with the parameters under consideration, 6 simulations were done with varying parameters.

5.7.1 Diaphragm diameter = 300 mm, Frequency = 60 Hz, Stroke = 50 mm

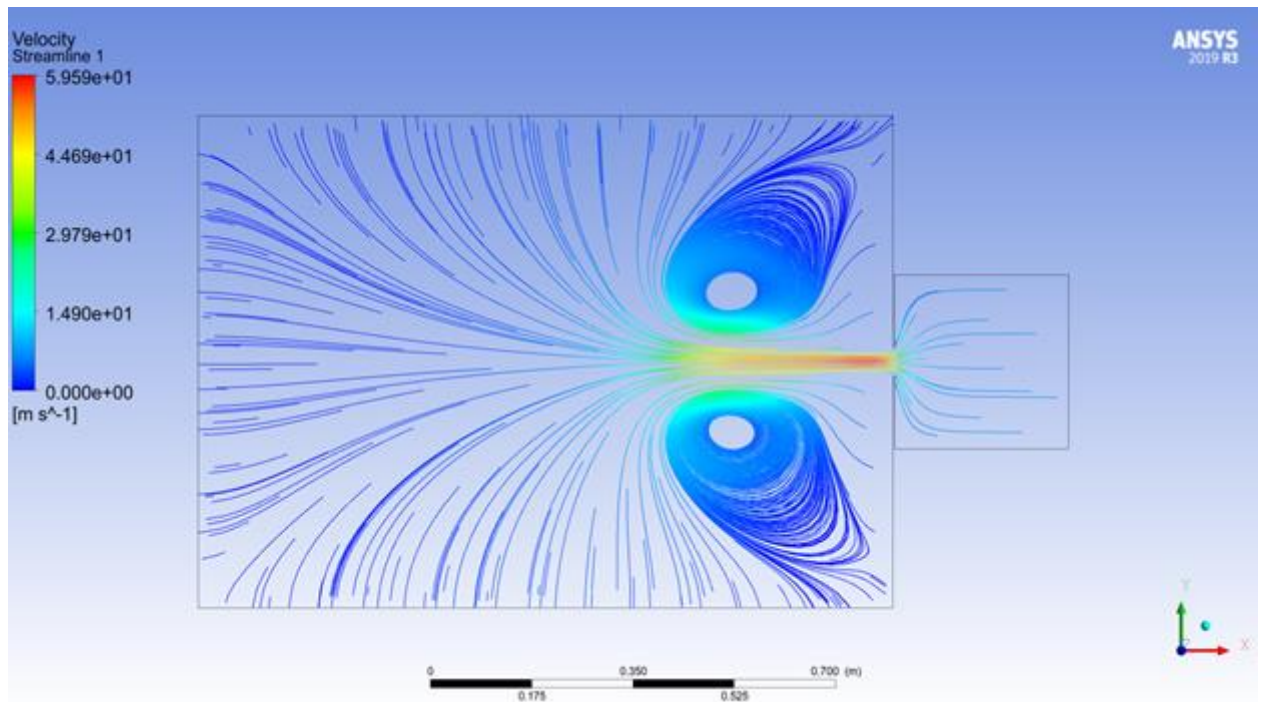


Figure 5.7 Result 300x60x50

5.7.2 Diaphragm diameter = 300 mm, Frequency = 45 Hz, Stroke = 50 mm

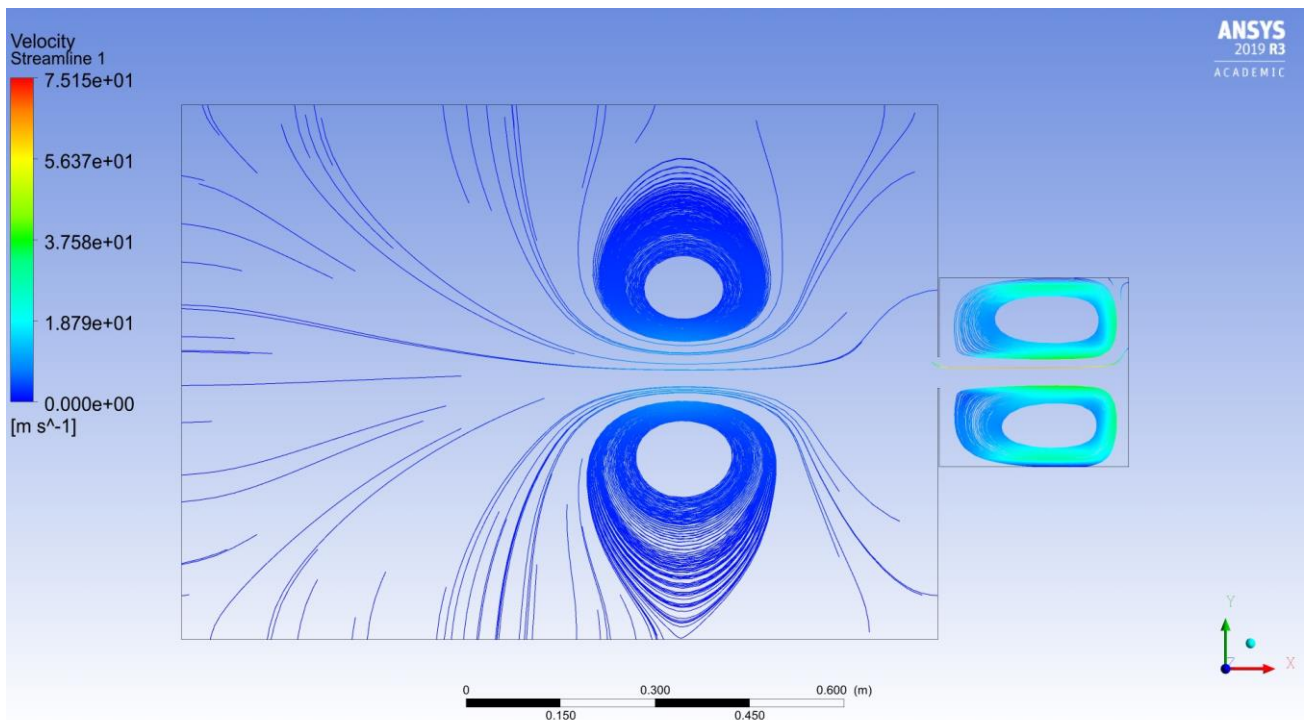


Figure 5.8 Result 300x45x50

Diaphragm diameter = 300 mm, Frequency = 30 Hz, Stroke = 50 mm

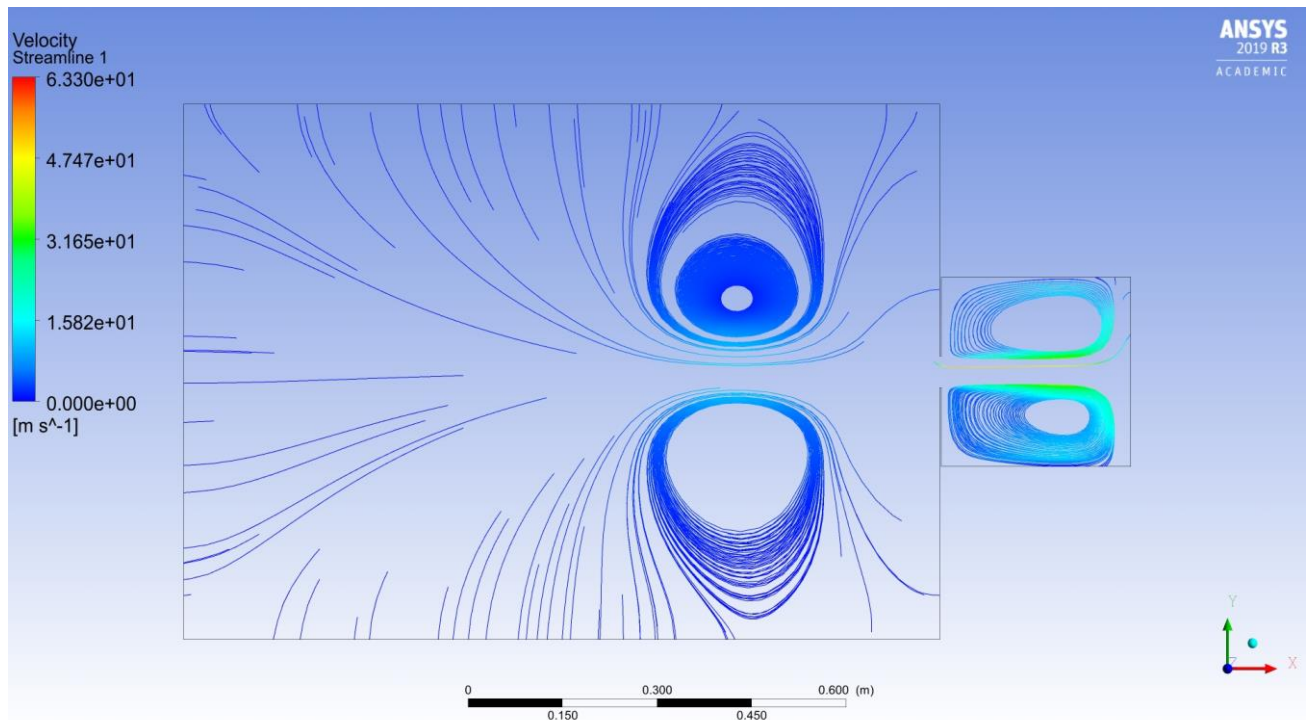


Figure 5.9 Result 300x30x50

5.7.3 Diaphragm diameter = 250 mm, Frequency = 60 Hz, Stroke = 50 mm

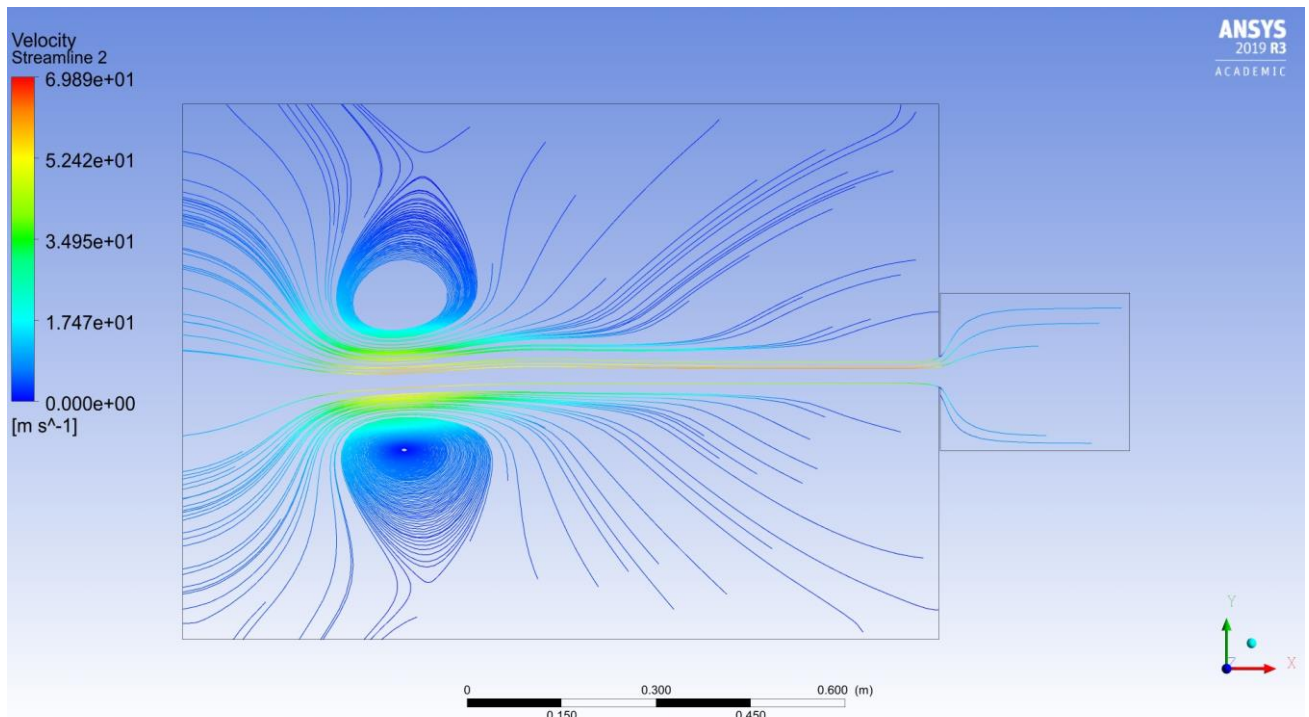


Figure 5.10 Result 250x60x50

5.7.4 Diaphragm diameter = 250 mm, Frequency = 45 Hz, Stroke = 50 mm

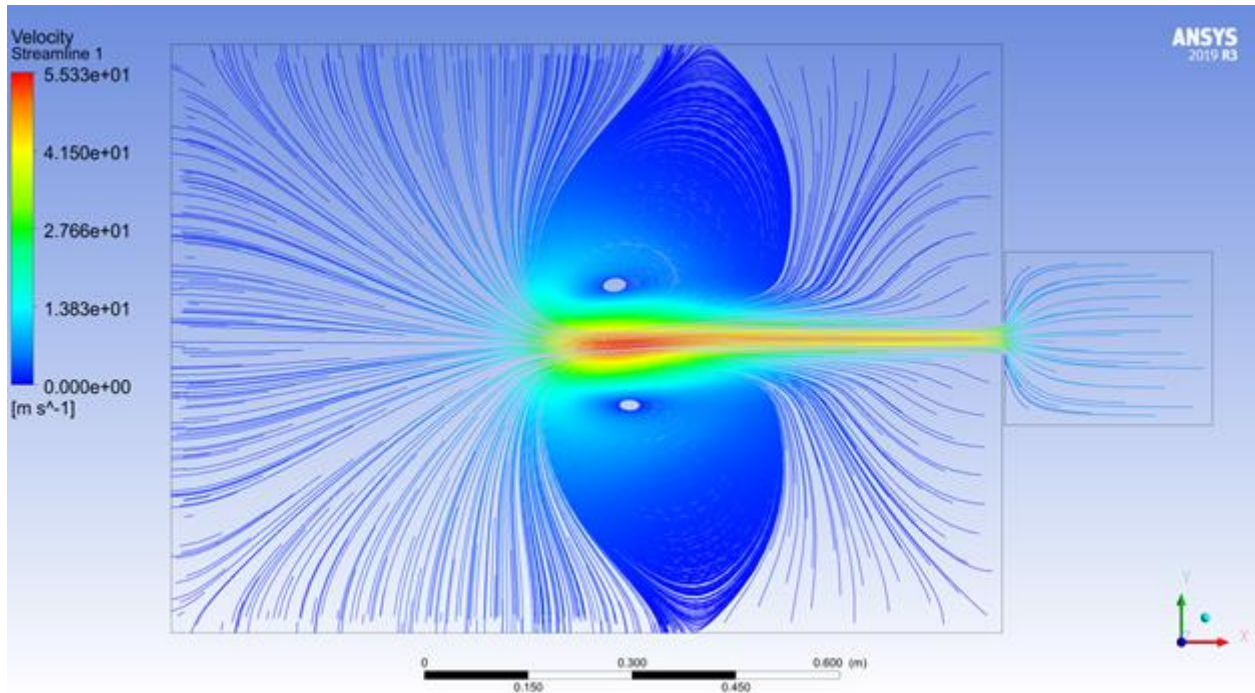


Figure 5.11 Result 250x45x50

5.7.5 Diaphragm diameter = 250 mm, Frequency = 30 Hz, Stroke = 50 mm

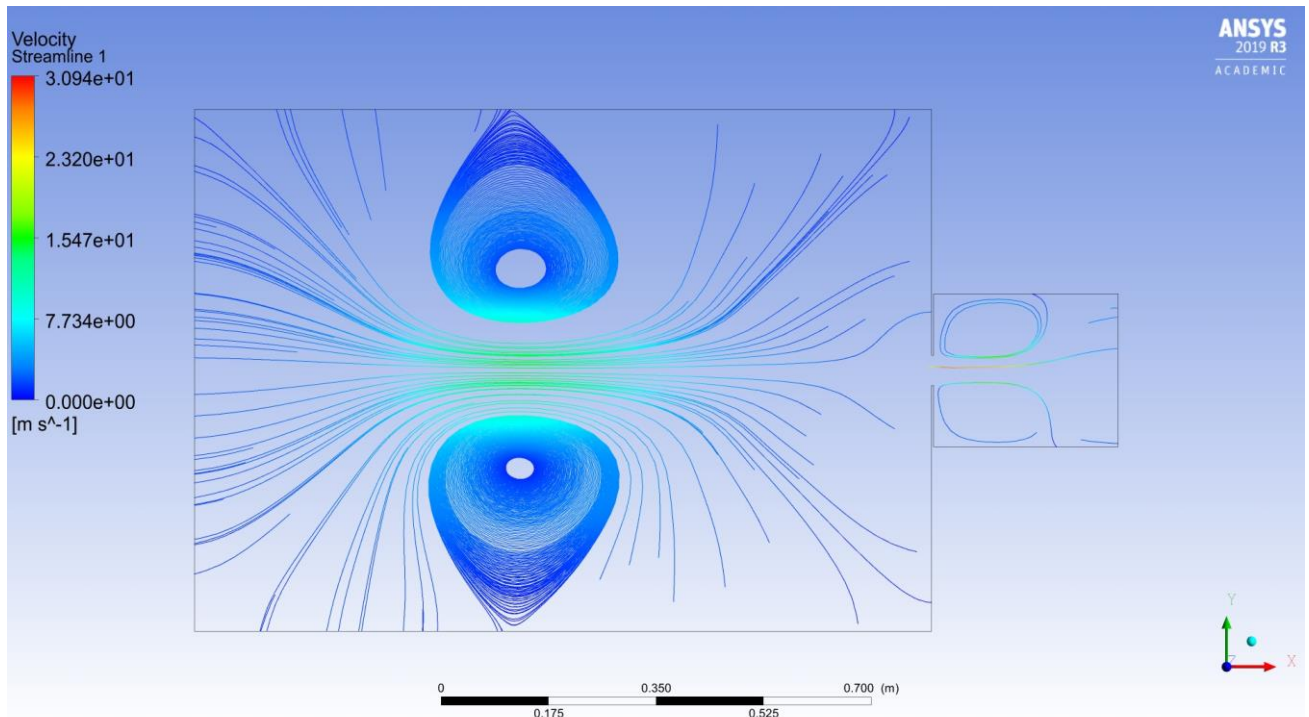


Figure 5.12 Result 250x30x50

5.8 Inference from Result

From the above conducted analysis, we find that the optimum condition for the best vortex is at 45Hz. Moreover, we also find that as the diaphragm diameter increases, there is also an increase in volume of air being pushed out of the vortex generator. But from “CHAPTER 4: CALCULATIONS WITH CURRENT DESIGN “it was concluded that with increasing diameter of diaphragm, the power required also increases. So with our current design an optimal size of 250 mm diameter with a frequency of 45 Hz.

CHAPTER 6: WORKING

The extinguisher uses mechanical components to produce the fire extinguishing action. A diaphragm, steel plate, connecting rod, electric motor and a gearbox are the major components of this extinguisher. The entire mechanism is based on the crank and slotted lever mechanism. The quick return action of the above mechanism is not incorporated in this extinguisher.

In this mechanism, the rotary motion is converted into reciprocating motion of the connecting rod. The mechanism consists of an arm attached to a rotating disc that moves at a controlled uniform speed. Unlike the crank, the arm of the mechanism runs at a different rate than the disc. Here, in this project a steel disc acts as the crank. Instead of a slotted lever, the steel disc crank contains a rectangular slot onto which one end of the connecting rod is bolted. Now on varying the position of the bolted end of the connecting rod, one can vary the stroke length thus changing the amplitude of the pressure waves.

The power required to run the apparatus is provided by a motor of specifications, 12-24 Volts and rated current of 2.6 Ampere which has a maximum rotational speed of 7000rpm. This motor is powered by a 12V battery. The reason we chose this particular motor was based on the calculations performed on the previous page. The power required to operate was calculated using the standard power equation and from it the required power of the motor to be operated was obtained. Since the motor we selected had a velocity higher than the recommended value, a gear arrangement was attached to reduce the rotational speed of the motor to required values. The gear arrangement was a reduction gear arrangement, consisting of two gears, each having eleven and twenty-four teeth. With these gears the obtained gear reduction ratio was 2.18: 1, which reduced the speed to 3112 rpm, from which we can obtain 55Hz frequency. How we obtained 55hz from the reduced velocity is shown in the calculations section.

Now, on obtaining such a frequency, this meant that the reciprocating motion of the piston undertook, the number of strokes equal to the obtained frequency per minute. This reciprocating diaphragm is fit inside a vortex generator. The vortex generator is a

cylindrical tube, where on the fire side a hole is present through which vortex pulses come out and through the other end, the diaphragm - connecting rod attachment is provided. The reciprocating motion of the diaphragm that is the alternating forward and backward movements of the diaphragm produces regions of high and low pressure. While these regions are pushed out through the hole in the fire side, vortex pulses are produced. The analysis of the above said mechanism was carried out using Ansys Fluent and vortex waves were observed coming out from the hole. The vortex waves being stable could travel distances. The vortex waves consist of regions of high oxygen concentration and a region of low oxygen concentration. When the vortex wave travels towards the fire, it disturbs the stable burning and extinguishes it. In order to understand how the fire is put off, we have to understand how the fire burning mechanism works.

Fire needs three basic elements for it to burn, which are heat, fuel and oxygen. Fire extinguishers work by preventing the supply of any one above said elements. Carbon dioxide extinguishers reduce the concentration of oxygen around the fire and provide a blanketing effect over the fire, while water suppresses fire by reducing the heat along with various other effects.

In the acoustic wave extinguisher, when the vortex wave approaches the fire, it contains regions of low oxygen concentration. This vortex when it hits the fire, disturbs the concentration of the oxygen around the fire and also the fire - fuel interface. This disturbance prevents the sustained burning of fire. And this effect is depicted for a single vortex. Now when this vortex is provided at a particular frequency then the sustained burning of the fire cannot be achieved, thereby reducing the burning effect. Now as the flames are disturbed by the pulsating vortex waves, the temperature around the area also reduces, which further reduces the fire's ability to sustain. When these factors combine together they have a drastic effect on the burning of fire. This extinguishes therefore achieving safety.

6.1 ADVANTAGES AND DISADVANTAGES

6.1.1 Water fire extinguishers

ADVANTAGES

- Cheap and easy to refill
- Environment friendly
- It has excellent cooling properties helping to extinguish the fire

DISADVANTAGES

- Can only be used on solid combustibles
- It is liable to freeze at low temperatures
- Conducts electricity and also highly volatile on flammable liquid fires

6.1.2 Foam Fire Extinguishers

ADVANTAGES

- A lot smaller than their water extinguisher equivalents
- Does not impair visibility of the operator when used
- These extinguishers are non-toxic and non-damaging to most materials

DISADVANTAGES

- The extinguisher is liable to freeze at lower temperatures
- The cost of refilling and purchasing are higher than standard water equivalents

6.1.3 Dry Powder Extinguishers

ADVANTAGES

- Ability to ensure an initial quick knockdown of the fire
- Nonconductor of electricity
- Wide range of use and applicable to wide range of temperatures

DISADVANTAGES

- Can cause visibility and breathing problems
- Dry powder can leave residue and can contaminate places
- Poor post fire security

6.1.4 CO₂ Fire Extinguishers

ADVANTAGES

- They have the longest service life of most extinguishers, 10 years before an extended service will need to be carried out
- Non corrosive gas and a very clean extinguishing agent

DISADVANTAGES

- CO₂ is the most toxic gas when it comes to human health
- No post fire security so flammable liquids could burst back into flames
- Very loud when used and needs a trained person to operate

6.1.5 Wet Chemical Fire Extinguishers

ADVANTAGES

- Best firefighting medium for fire involving fats
- Water content provides the oil extinguisher mixture saponifies becoming soapy like in texture
- Operator is always at a safe distance from the burning oil and fats due to the lance

DISADVANTAGES

- Expensive to buy and refill
- Must not be used on Class D fires

6.1.6 Acoustic Fire Extinguishers

ADVANTAGES

- Leaves no residue and does not contaminate the environment
- No need of refilling and thus can be used continuously

- Does not impair the visibility of the operator
- Requires very less maintenance
- Does not require a trained person to operate

DISADVANTAGES

- Applicable for only small scale fires
- Post fire security is less

CHAPTER 7: SUGGESTIONS AND RECOMMENDATIONS

1. These acoustic fire extinguishers can be used in modular manner and can be used for extinguishing bigger fires
2. The analysis of the acoustic fire extinguisher only considered the ideal conditions with zero wind speed and uniform temperature. But in real life the parameters like pressure, wind speed, Temperature, Humidity and density of air may vary. These complex models can be created in a simulation software for more accurate results similar to real scenario.
3. Installation of these Fire Extinguishers coupled with sensors to find the presence of a fire can help in automation of the same.
4. A swarm of drones in which these acoustic fire extinguishers are attached can be used for extinguishing bigger fires.
5. The sound waves can be produced more effectively if instead of the mechanical linkage, we use electrical actuators. This will help in better control of the frequency and amplitude of sound waves produced.

CONCLUSION

To sum up the usage of sound as a firefighting agent is a new technique that yet needs to be explored. Initially the outbreak of small-scale fires can be controlled by the application of sound interface. Further research in this domain helps us to understand the various parameters that can influence the firefighting property and help in improving the performance of fire suppression.

On the initial literature review conducted, the principle behind the fire suppression was studied in detail and the initial design using a PVC pipe and a balloon diaphragm helped in observing the actual fire suppression action.

Scaling this model to actual size, and with the combination of the advanced design, small fires can be controlled. It requires radical change in techniques followed and usage of sound waves as firefighting agents is something that is new and this technique is yet to be explored in large extend.

Usually agents come only in a limited supply per fire extinguisher. That is these firefighting agents are exhaustible and economically viable. Through this project studies are carried out on the extinguishing capacity of sound waves. A new design whose idea is based on the longitudinal propagation of sound waves are employed and instead of using other means to achieve this, mechanical system is used for the above said process by this method, the flame or the fire cannot sustain itself which further leads to the extinguish of fire.

To summarize, despite a few exceptions' experiences have led to the conviction that this conventional method would enhance sustainable development. Since the number of potential applications of using sound or pressure waves will keep increasing, we should see in the future a renewed interest in further study and usage of this technique in extinguishing fire.

REFERENCES

1. Zinni, Y. (2011, March 27). “*The Methods of Extinguishing Fires*”. ehow. Retrieved October 16, 2014, from http://www.ehow.com/info_8119438_methods-extinguishing-fires.html
2. “*Fire Safety, Part 1: About Fires and Fire Types*”. (n.d.). About Fires, Part 1. Retrieved October 16, 2014, from <http://chemlabsuoregon.edu/Safety/Fire1>.
3. Snyder, A. (2008, January 24). “*When Fire Strikes, Stop, Drop and... Sing?*” (Scientific American) Retrieved March 16, 2015, from <http://www.scientificamerican.com/article/whenfire-strikes-stop-drop-and-sing>
4. Beisner E., Wiggins N.D., Yue K.-B., Rosales M., Penny J., Lockridge J., Page R., Smith A. Guerrero L., “*Acoustic Flame Suppression Mechanics in a Microgravity Environment*”, Microgravity Sci. Technol., 27, 141144, 2015, doi: 10.1007/s12217-015-9422-4.
5. <https://law.resource.org/pub/in/bis/S03/is.2190.2010.html>
6. https://en.wikipedia.org/wiki/Fire_class
7. https://en.wikipedia.org/wiki/Active_fire_protection
8. https://en.wikipedia.org/wiki/Fire_extinguisher
9. FLUENT 6.1 UDF Manual February 2019

ANNEXURE

7.1 Known Values

- Density of air, $\rho = 1.2754 \text{ kg/m}^3$
- Coefficient of Drag for flat plate, $C_d = 1.28$

Table 7.1 Power Requirement at varying Diaphragm Radius, Frequency and Stroke

| Radius | Frequency | Stroke | Velocity | Drag Force | Work Done | Power Required |
|--------|-----------|--------|----------|------------|-----------|----------------|
| 0.100 | 15 | 0.020 | 0.60 | 0.009 | 0.0002 | 0.006 |
| 0.100 | 15 | 0.030 | 0.90 | 0.021 | 0.001 | 0.019 |
| 0.100 | 15 | 0.040 | 1.20 | 0.037 | 0.001 | 0.044 |
| 0.100 | 15 | 0.050 | 1.50 | 0.058 | 0.003 | 0.087 |
| 0.100 | 20 | 0.020 | 0.80 | 0.016 | 0.000 | 0.013 |
| 0.100 | 20 | 0.030 | 1.20 | 0.037 | 0.001 | 0.044 |
| 0.100 | 20 | 0.040 | 1.60 | 0.066 | 0.003 | 0.105 |
| 0.100 | 20 | 0.050 | 2.00 | 0.103 | 0.005 | 0.205 |
| 0.100 | 25 | 0.020 | 1.00 | 0.026 | 0.001 | 0.026 |
| 0.100 | 25 | 0.030 | 1.50 | 0.058 | 0.002 | 0.087 |
| 0.100 | 25 | 0.040 | 2.00 | 0.103 | 0.004 | 0.205 |
| 0.100 | 25 | 0.050 | 2.50 | 0.160 | 0.008 | 0.401 |
| 0.100 | 30 | 0.020 | 1.20 | 0.037 | 0.001 | 0.044 |
| 0.100 | 30 | 0.030 | 1.80 | 0.083 | 0.002 | 0.150 |
| 0.100 | 30 | 0.040 | 2.40 | 0.148 | 0.006 | 0.354 |
| 0.100 | 30 | 0.050 | 3.00 | 0.231 | 0.012 | 0.692 |
| 0.100 | 35 | 0.020 | 1.40 | 0.050 | 0.001 | 0.070 |
| 0.100 | 35 | 0.030 | 2.10 | 0.113 | 0.003 | 0.237 |
| 0.100 | 35 | 0.040 | 2.80 | 0.201 | 0.008 | 0.563 |
| 0.100 | 35 | 0.050 | 3.50 | 0.314 | 0.016 | 1.099 |
| 0.100 | 40 | 0.020 | 1.60 | 0.066 | 0.001 | 0.105 |
| 0.100 | 40 | 0.030 | 2.40 | 0.148 | 0.004 | 0.354 |
| 0.100 | 40 | 0.040 | 3.20 | 0.263 | 0.011 | 0.840 |
| 0.100 | 40 | 0.050 | 4.00 | 0.410 | 0.021 | 1.641 |
| 0.100 | 45 | 0.020 | 1.80 | 0.083 | 0.002 | 0.150 |
| 0.100 | 45 | 0.030 | 2.70 | 0.187 | 0.006 | 0.505 |
| 0.100 | 45 | 0.040 | 3.60 | 0.332 | 0.013 | 1.196 |
| 0.100 | 45 | 0.050 | 4.50 | 0.519 | 0.026 | 2.337 |
| 0.100 | 50 | 0.020 | 2.00 | 0.103 | 0.002 | 0.205 |
| 0.100 | 50 | 0.030 | 3.00 | 0.231 | 0.007 | 0.692 |
| 0.100 | 50 | 0.040 | 4.00 | 0.410 | 0.016 | 1.641 |
| 0.100 | 50 | 0.050 | 5.00 | 0.641 | 0.032 | 3.205 |
| 0.100 | 55 | 0.020 | 2.20 | 0.124 | 0.002 | 0.273 |
| 0.100 | 55 | 0.030 | 3.30 | 0.279 | 0.008 | 0.922 |
| 0.100 | 55 | 0.040 | 4.40 | 0.496 | 0.020 | 2.184 |
| 0.100 | 55 | 0.050 | 5.50 | 0.776 | 0.039 | 4.266 |
| 0.100 | 60 | 0.020 | 2.40 | 0.148 | 0.003 | 0.354 |

| Radius | Frequency | Stroke | Velocity | Drag Force | Work Done | Power Required |
|--------|-----------|--------|----------|------------|-----------|----------------|
| 0.100 | 60 | 0.030 | 3.60 | 0.332 | 0.010 | 1.196 |
| 0.100 | 60 | 0.040 | 4.80 | 0.591 | 0.024 | 2.836 |
| 0.100 | 60 | 0.050 | 6.00 | 0.923 | 0.046 | 5.539 |
| 0.105 | 15 | 0.020 | 0.60 | 0.010 | 0.000 | 0.006 |
| 0.105 | 15 | 0.030 | 0.90 | 0.023 | 0.001 | 0.021 |
| 0.105 | 15 | 0.040 | 1.20 | 0.041 | 0.002 | 0.049 |
| 0.105 | 15 | 0.050 | 1.50 | 0.064 | 0.003 | 0.095 |
| 0.105 | 20 | 0.020 | 0.80 | 0.018 | 0.000 | 0.014 |
| 0.105 | 20 | 0.030 | 1.20 | 0.041 | 0.001 | 0.049 |
| 0.105 | 20 | 0.040 | 1.60 | 0.072 | 0.003 | 0.116 |
| 0.105 | 20 | 0.050 | 2.00 | 0.113 | 0.006 | 0.226 |
| 0.105 | 25 | 0.020 | 1.00 | 0.028 | 0.001 | 0.028 |
| 0.105 | 25 | 0.030 | 1.50 | 0.064 | 0.002 | 0.095 |
| 0.105 | 25 | 0.040 | 2.00 | 0.113 | 0.005 | 0.226 |
| 0.105 | 25 | 0.050 | 2.50 | 0.177 | 0.009 | 0.442 |
| 0.105 | 30 | 0.020 | 1.20 | 0.041 | 0.001 | 0.049 |
| 0.105 | 30 | 0.030 | 1.80 | 0.092 | 0.003 | 0.165 |
| 0.105 | 30 | 0.040 | 2.40 | 0.163 | 0.007 | 0.391 |
| 0.105 | 30 | 0.050 | 3.00 | 0.254 | 0.013 | 0.763 |
| 0.105 | 35 | 0.020 | 1.40 | 0.055 | 0.001 | 0.078 |
| 0.105 | 35 | 0.030 | 2.10 | 0.125 | 0.004 | 0.262 |
| 0.105 | 35 | 0.040 | 2.80 | 0.222 | 0.009 | 0.621 |
| 0.105 | 35 | 0.050 | 3.50 | 0.346 | 0.017 | 1.212 |
| 0.105 | 40 | 0.020 | 1.60 | 0.072 | 0.001 | 0.116 |
| 0.105 | 40 | 0.030 | 2.40 | 0.163 | 0.005 | 0.391 |
| 0.105 | 40 | 0.040 | 3.20 | 0.290 | 0.012 | 0.926 |
| 0.105 | 40 | 0.050 | 4.00 | 0.452 | 0.023 | 1.809 |
| 0.105 | 45 | 0.020 | 1.80 | 0.092 | 0.002 | 0.165 |
| 0.105 | 45 | 0.030 | 2.70 | 0.206 | 0.006 | 0.556 |
| 0.105 | 45 | 0.040 | 3.60 | 0.366 | 0.015 | 1.319 |
| 0.105 | 45 | 0.050 | 4.50 | 0.573 | 0.029 | 2.576 |
| 0.105 | 50 | 0.020 | 2.00 | 0.113 | 0.002 | 0.226 |
| 0.105 | 50 | 0.030 | 3.00 | 0.254 | 0.008 | 0.763 |
| 0.105 | 50 | 0.040 | 4.00 | 0.452 | 0.018 | 1.809 |
| 0.105 | 50 | 0.050 | 5.00 | 0.707 | 0.035 | 3.534 |
| 0.105 | 55 | 0.020 | 2.20 | 0.137 | 0.003 | 0.301 |
| 0.105 | 55 | 0.030 | 3.30 | 0.308 | 0.009 | 1.016 |
| 0.105 | 55 | 0.040 | 4.40 | 0.547 | 0.022 | 2.408 |
| 0.105 | 55 | 0.050 | 5.50 | 0.855 | 0.043 | 4.704 |
| 0.105 | 60 | 0.020 | 2.40 | 0.163 | 0.003 | 0.391 |
| 0.105 | 60 | 0.030 | 3.60 | 0.366 | 0.011 | 1.319 |
| 0.105 | 60 | 0.040 | 4.80 | 0.651 | 0.026 | 3.127 |
| 0.105 | 60 | 0.050 | 6.00 | 1.018 | 0.051 | 6.107 |
| 0.110 | 15 | 0.020 | 0.60 | 0.011 | 0.000 | 0.007 |
| 0.110 | 15 | 0.030 | 0.90 | 0.025 | 0.001 | 0.023 |

| Radius | Frequency | Stroke | Velocity | Drag Force | Work Done | Power Required |
|--------|-----------|--------|----------|------------|-----------|----------------|
| 0.110 | 15 | 0.040 | 1.20 | 0.045 | 0.002 | 0.054 |
| 0.110 | 15 | 0.050 | 1.50 | 0.070 | 0.003 | 0.105 |
| 0.110 | 20 | 0.020 | 0.80 | 0.020 | 0.000 | 0.016 |
| 0.110 | 20 | 0.030 | 1.20 | 0.045 | 0.001 | 0.054 |
| 0.110 | 20 | 0.040 | 1.60 | 0.079 | 0.003 | 0.127 |
| 0.110 | 20 | 0.050 | 2.00 | 0.124 | 0.006 | 0.248 |
| 0.110 | 25 | 0.020 | 1.00 | 0.031 | 0.001 | 0.031 |
| 0.110 | 25 | 0.030 | 1.50 | 0.070 | 0.002 | 0.105 |
| 0.110 | 25 | 0.040 | 2.00 | 0.124 | 0.005 | 0.248 |
| 0.110 | 25 | 0.050 | 2.50 | 0.194 | 0.010 | 0.485 |
| 0.110 | 30 | 0.020 | 1.20 | 0.045 | 0.001 | 0.054 |
| 0.110 | 30 | 0.030 | 1.80 | 0.101 | 0.003 | 0.181 |
| 0.110 | 30 | 0.040 | 2.40 | 0.179 | 0.007 | 0.429 |
| 0.110 | 30 | 0.050 | 3.00 | 0.279 | 0.014 | 0.838 |
| 0.110 | 35 | 0.020 | 1.40 | 0.061 | 0.001 | 0.085 |
| 0.110 | 35 | 0.030 | 2.10 | 0.137 | 0.004 | 0.287 |
| 0.110 | 35 | 0.040 | 2.80 | 0.243 | 0.010 | 0.681 |
| 0.110 | 35 | 0.050 | 3.50 | 0.380 | 0.019 | 1.330 |
| 0.110 | 40 | 0.020 | 1.60 | 0.079 | 0.002 | 0.127 |
| 0.110 | 40 | 0.030 | 2.40 | 0.179 | 0.005 | 0.429 |
| 0.110 | 40 | 0.040 | 3.20 | 0.318 | 0.013 | 1.017 |
| 0.110 | 40 | 0.050 | 4.00 | 0.496 | 0.025 | 1.986 |
| 0.110 | 45 | 0.020 | 1.80 | 0.101 | 0.002 | 0.181 |
| 0.110 | 45 | 0.030 | 2.70 | 0.226 | 0.007 | 0.611 |
| 0.110 | 45 | 0.040 | 3.60 | 0.402 | 0.016 | 1.448 |
| 0.110 | 45 | 0.050 | 4.50 | 0.628 | 0.031 | 2.827 |
| 0.110 | 50 | 0.020 | 2.00 | 0.124 | 0.002 | 0.248 |
| 0.110 | 50 | 0.030 | 3.00 | 0.279 | 0.008 | 0.838 |
| 0.110 | 50 | 0.040 | 4.00 | 0.496 | 0.020 | 1.986 |
| 0.110 | 50 | 0.050 | 5.00 | 0.776 | 0.039 | 3.879 |
| 0.110 | 55 | 0.020 | 2.20 | 0.150 | 0.003 | 0.330 |
| 0.110 | 55 | 0.030 | 3.30 | 0.338 | 0.010 | 1.115 |
| 0.110 | 55 | 0.040 | 4.40 | 0.601 | 0.024 | 2.643 |
| 0.110 | 55 | 0.050 | 5.50 | 0.939 | 0.047 | 5.162 |
| 0.110 | 60 | 0.020 | 2.40 | 0.179 | 0.004 | 0.429 |
| 0.110 | 60 | 0.030 | 3.60 | 0.402 | 0.012 | 1.448 |
| 0.110 | 60 | 0.040 | 4.80 | 0.715 | 0.029 | 3.432 |
| 0.110 | 60 | 0.050 | 6.00 | 1.117 | 0.056 | 6.702 |
| 0.115 | 15 | 0.020 | 0.60 | 0.012 | 0.000 | 0.007 |
| 0.115 | 15 | 0.030 | 0.90 | 0.027 | 0.001 | 0.025 |
| 0.115 | 15 | 0.040 | 1.20 | 0.049 | 0.002 | 0.059 |
| 0.115 | 15 | 0.050 | 1.50 | 0.076 | 0.004 | 0.114 |
| 0.115 | 20 | 0.020 | 0.80 | 0.022 | 0.000 | 0.017 |
| 0.115 | 20 | 0.030 | 1.20 | 0.049 | 0.001 | 0.059 |
| 0.115 | 20 | 0.040 | 1.60 | 0.087 | 0.003 | 0.139 |

| Radius | Frequency | Stroke | Velocity | Drag Force | Work Done | Power Required |
|--------|-----------|--------|----------|------------|-----------|----------------|
| 0.115 | 20 | 0.050 | 2.00 | 0.136 | 0.007 | 0.271 |
| 0.115 | 25 | 0.020 | 1.00 | 0.034 | 0.001 | 0.034 |
| 0.115 | 25 | 0.030 | 1.50 | 0.076 | 0.002 | 0.114 |
| 0.115 | 25 | 0.040 | 2.00 | 0.136 | 0.005 | 0.271 |
| 0.115 | 25 | 0.050 | 2.50 | 0.212 | 0.011 | 0.530 |
| 0.115 | 30 | 0.020 | 1.20 | 0.049 | 0.001 | 0.059 |
| 0.115 | 30 | 0.030 | 1.80 | 0.110 | 0.003 | 0.198 |
| 0.115 | 30 | 0.040 | 2.40 | 0.195 | 0.008 | 0.469 |
| 0.115 | 30 | 0.050 | 3.00 | 0.305 | 0.015 | 0.916 |
| 0.115 | 35 | 0.020 | 1.40 | 0.066 | 0.001 | 0.093 |
| 0.115 | 35 | 0.030 | 2.10 | 0.150 | 0.004 | 0.314 |
| 0.115 | 35 | 0.040 | 2.80 | 0.266 | 0.011 | 0.744 |
| 0.115 | 35 | 0.050 | 3.50 | 0.415 | 0.021 | 1.454 |
| 0.115 | 40 | 0.020 | 1.60 | 0.087 | 0.002 | 0.139 |
| 0.115 | 40 | 0.030 | 2.40 | 0.195 | 0.006 | 0.469 |
| 0.115 | 40 | 0.040 | 3.20 | 0.347 | 0.014 | 1.111 |
| 0.115 | 40 | 0.050 | 4.00 | 0.543 | 0.027 | 2.170 |
| 0.115 | 45 | 0.020 | 1.80 | 0.110 | 0.002 | 0.198 |
| 0.115 | 45 | 0.030 | 2.70 | 0.247 | 0.007 | 0.668 |
| 0.115 | 45 | 0.040 | 3.60 | 0.440 | 0.018 | 1.582 |
| 0.115 | 45 | 0.050 | 4.50 | 0.687 | 0.034 | 3.090 |
| 0.115 | 50 | 0.020 | 2.00 | 0.136 | 0.003 | 0.271 |
| 0.115 | 50 | 0.030 | 3.00 | 0.305 | 0.009 | 0.916 |
| 0.115 | 50 | 0.040 | 4.00 | 0.543 | 0.022 | 2.170 |
| 0.115 | 50 | 0.050 | 5.00 | 0.848 | 0.042 | 4.239 |
| 0.115 | 55 | 0.020 | 2.20 | 0.164 | 0.003 | 0.361 |
| 0.115 | 55 | 0.030 | 3.30 | 0.369 | 0.011 | 1.219 |
| 0.115 | 55 | 0.040 | 4.40 | 0.657 | 0.026 | 2.889 |
| 0.115 | 55 | 0.050 | 5.50 | 1.026 | 0.051 | 5.642 |
| 0.115 | 60 | 0.020 | 2.40 | 0.195 | 0.004 | 0.469 |
| 0.115 | 60 | 0.030 | 3.60 | 0.440 | 0.013 | 1.582 |
| 0.115 | 60 | 0.040 | 4.80 | 0.781 | 0.031 | 3.751 |
| 0.115 | 60 | 0.050 | 6.00 | 1.221 | 0.061 | 7.325 |
| 0.120 | 15 | 0.020 | 0.60 | 0.013 | 0.000 | 0.008 |
| 0.120 | 15 | 0.030 | 0.90 | 0.030 | 0.001 | 0.027 |
| 0.120 | 15 | 0.040 | 1.20 | 0.053 | 0.002 | 0.064 |
| 0.120 | 15 | 0.050 | 1.50 | 0.083 | 0.004 | 0.125 |
| 0.120 | 20 | 0.020 | 0.80 | 0.024 | 0.000 | 0.019 |
| 0.120 | 20 | 0.030 | 1.20 | 0.053 | 0.002 | 0.064 |
| 0.120 | 20 | 0.040 | 1.60 | 0.095 | 0.004 | 0.151 |
| 0.120 | 20 | 0.050 | 2.00 | 0.148 | 0.007 | 0.295 |
| 0.120 | 25 | 0.020 | 1.00 | 0.037 | 0.001 | 0.037 |
| 0.120 | 25 | 0.030 | 1.50 | 0.083 | 0.002 | 0.125 |
| 0.120 | 25 | 0.040 | 2.00 | 0.148 | 0.006 | 0.295 |
| 0.120 | 25 | 0.050 | 2.50 | 0.231 | 0.012 | 0.577 |

| Radius | Frequency | Stroke | Velocity | Drag Force | Work Done | Power Required |
|--------|-----------|--------|----------|------------|-----------|----------------|
| 0.120 | 30 | 0.020 | 1.20 | 0.053 | 0.001 | 0.064 |
| 0.120 | 30 | 0.030 | 1.80 | 0.120 | 0.004 | 0.215 |
| 0.120 | 30 | 0.040 | 2.40 | 0.213 | 0.009 | 0.510 |
| 0.120 | 30 | 0.050 | 3.00 | 0.332 | 0.017 | 0.997 |
| 0.120 | 35 | 0.020 | 1.40 | 0.072 | 0.001 | 0.101 |
| 0.120 | 35 | 0.030 | 2.10 | 0.163 | 0.005 | 0.342 |
| 0.120 | 35 | 0.040 | 2.80 | 0.290 | 0.012 | 0.811 |
| 0.120 | 35 | 0.050 | 3.50 | 0.452 | 0.023 | 1.583 |
| 0.120 | 40 | 0.020 | 1.60 | 0.095 | 0.002 | 0.151 |
| 0.120 | 40 | 0.030 | 2.40 | 0.213 | 0.006 | 0.510 |
| 0.120 | 40 | 0.040 | 3.20 | 0.378 | 0.015 | 1.210 |
| 0.120 | 40 | 0.050 | 4.00 | 0.591 | 0.030 | 2.363 |
| 0.120 | 45 | 0.020 | 1.80 | 0.120 | 0.002 | 0.215 |
| 0.120 | 45 | 0.030 | 2.70 | 0.269 | 0.008 | 0.727 |
| 0.120 | 45 | 0.040 | 3.60 | 0.479 | 0.019 | 1.723 |
| 0.120 | 45 | 0.050 | 4.50 | 0.748 | 0.037 | 3.365 |
| 0.120 | 50 | 0.020 | 2.00 | 0.148 | 0.003 | 0.295 |
| 0.120 | 50 | 0.030 | 3.00 | 0.332 | 0.010 | 0.997 |
| 0.120 | 50 | 0.040 | 4.00 | 0.591 | 0.024 | 2.363 |
| 0.120 | 50 | 0.050 | 5.00 | 0.923 | 0.046 | 4.616 |
| 0.120 | 55 | 0.020 | 2.20 | 0.179 | 0.004 | 0.393 |
| 0.120 | 55 | 0.030 | 3.30 | 0.402 | 0.012 | 1.327 |
| 0.120 | 55 | 0.040 | 4.40 | 0.715 | 0.029 | 3.146 |
| 0.120 | 55 | 0.050 | 5.50 | 1.117 | 0.056 | 6.144 |
| 0.120 | 60 | 0.020 | 2.40 | 0.213 | 0.004 | 0.510 |
| 0.120 | 60 | 0.030 | 3.60 | 0.479 | 0.014 | 1.723 |
| 0.120 | 60 | 0.040 | 4.80 | 0.851 | 0.034 | 4.084 |
| 0.120 | 60 | 0.050 | 6.00 | 1.329 | 0.066 | 7.976 |
| 0.125 | 15 | 0.020 | 0.60 | 0.014 | 0.000 | 0.009 |
| 0.125 | 15 | 0.030 | 0.90 | 0.032 | 0.001 | 0.029 |
| 0.125 | 15 | 0.040 | 1.20 | 0.058 | 0.002 | 0.069 |
| 0.125 | 15 | 0.050 | 1.50 | 0.090 | 0.005 | 0.135 |
| 0.125 | 20 | 0.020 | 0.80 | 0.026 | 0.001 | 0.021 |
| 0.125 | 20 | 0.030 | 1.20 | 0.058 | 0.002 | 0.069 |
| 0.125 | 20 | 0.040 | 1.60 | 0.103 | 0.004 | 0.164 |
| 0.125 | 20 | 0.050 | 2.00 | 0.160 | 0.008 | 0.321 |
| 0.125 | 25 | 0.020 | 1.00 | 0.040 | 0.001 | 0.040 |
| 0.125 | 25 | 0.030 | 1.50 | 0.090 | 0.003 | 0.135 |
| 0.125 | 25 | 0.040 | 2.00 | 0.160 | 0.006 | 0.321 |
| 0.125 | 25 | 0.050 | 2.50 | 0.250 | 0.013 | 0.626 |
| 0.125 | 30 | 0.020 | 1.20 | 0.058 | 0.001 | 0.069 |
| 0.125 | 30 | 0.030 | 1.80 | 0.130 | 0.004 | 0.234 |
| 0.125 | 30 | 0.040 | 2.40 | 0.231 | 0.009 | 0.554 |
| 0.125 | 30 | 0.050 | 3.00 | 0.361 | 0.018 | 1.082 |
| 0.125 | 35 | 0.020 | 1.40 | 0.079 | 0.002 | 0.110 |

| Radius | Frequency | Stroke | Velocity | Drag Force | Work Done | Power Required |
|--------|-----------|--------|----------|------------|-----------|----------------|
| 0.125 | 35 | 0.030 | 2.10 | 0.177 | 0.005 | 0.371 |
| 0.125 | 35 | 0.040 | 2.80 | 0.314 | 0.013 | 0.880 |
| 0.125 | 35 | 0.050 | 3.50 | 0.491 | 0.025 | 1.718 |
| 0.125 | 40 | 0.020 | 1.60 | 0.103 | 0.002 | 0.164 |
| 0.125 | 40 | 0.030 | 2.40 | 0.231 | 0.007 | 0.554 |
| 0.125 | 40 | 0.040 | 3.20 | 0.410 | 0.016 | 1.313 |
| 0.125 | 40 | 0.050 | 4.00 | 0.641 | 0.032 | 2.564 |
| 0.125 | 45 | 0.020 | 1.80 | 0.130 | 0.003 | 0.234 |
| 0.125 | 45 | 0.030 | 2.70 | 0.292 | 0.009 | 0.789 |
| 0.125 | 45 | 0.040 | 3.60 | 0.519 | 0.021 | 1.869 |
| 0.125 | 45 | 0.050 | 4.50 | 0.811 | 0.041 | 3.651 |
| 0.125 | 50 | 0.020 | 2.00 | 0.160 | 0.003 | 0.321 |
| 0.125 | 50 | 0.030 | 3.00 | 0.361 | 0.011 | 1.082 |
| 0.125 | 50 | 0.040 | 4.00 | 0.641 | 0.026 | 2.564 |
| 0.125 | 50 | 0.050 | 5.00 | 1.002 | 0.050 | 5.008 |
| 0.125 | 55 | 0.020 | 2.20 | 0.194 | 0.004 | 0.427 |
| 0.125 | 55 | 0.030 | 3.30 | 0.436 | 0.013 | 1.440 |
| 0.125 | 55 | 0.040 | 4.40 | 0.776 | 0.031 | 3.413 |
| 0.125 | 55 | 0.050 | 5.50 | 1.212 | 0.061 | 6.666 |
| 0.125 | 60 | 0.020 | 2.40 | 0.231 | 0.005 | 0.554 |
| 0.125 | 60 | 0.030 | 3.60 | 0.519 | 0.016 | 1.869 |
| 0.125 | 60 | 0.040 | 4.80 | 0.923 | 0.037 | 4.431 |
| 0.125 | 60 | 0.050 | 6.00 | 1.442 | 0.072 | 8.655 |
| 0.130 | 15 | 0.020 | 0.60 | 0.016 | 0.000 | 0.009 |
| 0.130 | 15 | 0.030 | 0.90 | 0.035 | 0.001 | 0.032 |
| 0.130 | 15 | 0.040 | 1.20 | 0.062 | 0.002 | 0.075 |
| 0.130 | 15 | 0.050 | 1.50 | 0.098 | 0.005 | 0.146 |
| 0.130 | 20 | 0.020 | 0.80 | 0.028 | 0.001 | 0.022 |
| 0.130 | 20 | 0.030 | 1.20 | 0.062 | 0.002 | 0.075 |
| 0.130 | 20 | 0.040 | 1.60 | 0.111 | 0.004 | 0.178 |
| 0.130 | 20 | 0.050 | 2.00 | 0.173 | 0.009 | 0.347 |
| 0.130 | 25 | 0.020 | 1.00 | 0.043 | 0.001 | 0.043 |
| 0.130 | 25 | 0.030 | 1.50 | 0.098 | 0.003 | 0.146 |
| 0.130 | 25 | 0.040 | 2.00 | 0.173 | 0.007 | 0.347 |
| 0.130 | 25 | 0.050 | 2.50 | 0.271 | 0.014 | 0.677 |
| 0.130 | 30 | 0.020 | 1.20 | 0.062 | 0.001 | 0.075 |
| 0.130 | 30 | 0.030 | 1.80 | 0.140 | 0.004 | 0.253 |
| 0.130 | 30 | 0.040 | 2.40 | 0.250 | 0.010 | 0.599 |
| 0.130 | 30 | 0.050 | 3.00 | 0.390 | 0.020 | 1.170 |
| 0.130 | 35 | 0.020 | 1.40 | 0.085 | 0.002 | 0.119 |
| 0.130 | 35 | 0.030 | 2.10 | 0.191 | 0.006 | 0.401 |
| 0.130 | 35 | 0.040 | 2.80 | 0.340 | 0.014 | 0.951 |
| 0.130 | 35 | 0.050 | 3.50 | 0.531 | 0.027 | 1.858 |
| 0.130 | 40 | 0.020 | 1.60 | 0.111 | 0.002 | 0.178 |
| 0.130 | 40 | 0.030 | 2.40 | 0.250 | 0.007 | 0.599 |

| Radius | Frequency | Stroke | Velocity | Drag Force | Work Done | Power Required |
|--------|-----------|--------|----------|------------|-----------|----------------|
| 0.130 | 40 | 0.040 | 3.20 | 0.444 | 0.018 | 1.420 |
| 0.130 | 40 | 0.050 | 4.00 | 0.693 | 0.035 | 2.774 |
| 0.130 | 45 | 0.020 | 1.80 | 0.140 | 0.003 | 0.253 |
| 0.130 | 45 | 0.030 | 2.70 | 0.316 | 0.009 | 0.853 |
| 0.130 | 45 | 0.040 | 3.60 | 0.562 | 0.022 | 2.022 |
| 0.130 | 45 | 0.050 | 4.50 | 0.878 | 0.044 | 3.949 |
| 0.130 | 50 | 0.020 | 2.00 | 0.173 | 0.003 | 0.347 |
| 0.130 | 50 | 0.030 | 3.00 | 0.390 | 0.012 | 1.170 |
| 0.130 | 50 | 0.040 | 4.00 | 0.693 | 0.028 | 2.774 |
| 0.130 | 50 | 0.050 | 5.00 | 1.083 | 0.054 | 5.417 |
| 0.130 | 55 | 0.020 | 2.20 | 0.210 | 0.004 | 0.461 |
| 0.130 | 55 | 0.030 | 3.30 | 0.472 | 0.014 | 1.557 |
| 0.130 | 55 | 0.040 | 4.40 | 0.839 | 0.034 | 3.692 |
| 0.130 | 55 | 0.050 | 5.50 | 1.311 | 0.066 | 7.210 |
| 0.130 | 60 | 0.020 | 2.40 | 0.250 | 0.005 | 0.599 |
| 0.130 | 60 | 0.030 | 3.60 | 0.562 | 0.017 | 2.022 |
| 0.130 | 60 | 0.040 | 4.80 | 0.998 | 0.040 | 4.793 |
| 0.130 | 60 | 0.050 | 6.00 | 1.560 | 0.078 | 9.361 |
| 0.135 | 15 | 0.020 | 0.60 | 0.017 | 0.000 | 0.010 |
| 0.135 | 15 | 0.030 | 0.90 | 0.038 | 0.001 | 0.034 |
| 0.135 | 15 | 0.040 | 1.20 | 0.067 | 0.003 | 0.081 |
| 0.135 | 15 | 0.050 | 1.50 | 0.105 | 0.005 | 0.158 |
| 0.135 | 20 | 0.020 | 0.80 | 0.030 | 0.001 | 0.024 |
| 0.135 | 20 | 0.030 | 1.20 | 0.067 | 0.002 | 0.081 |
| 0.135 | 20 | 0.040 | 1.60 | 0.120 | 0.005 | 0.191 |
| 0.135 | 20 | 0.050 | 2.00 | 0.187 | 0.009 | 0.374 |
| 0.135 | 25 | 0.020 | 1.00 | 0.047 | 0.001 | 0.047 |
| 0.135 | 25 | 0.030 | 1.50 | 0.105 | 0.003 | 0.158 |
| 0.135 | 25 | 0.040 | 2.00 | 0.187 | 0.007 | 0.374 |
| 0.135 | 25 | 0.050 | 2.50 | 0.292 | 0.015 | 0.730 |
| 0.135 | 30 | 0.020 | 1.20 | 0.067 | 0.001 | 0.081 |
| 0.135 | 30 | 0.030 | 1.80 | 0.151 | 0.005 | 0.273 |
| 0.135 | 30 | 0.040 | 2.40 | 0.269 | 0.011 | 0.646 |
| 0.135 | 30 | 0.050 | 3.00 | 0.421 | 0.021 | 1.262 |
| 0.135 | 35 | 0.020 | 1.40 | 0.092 | 0.002 | 0.128 |
| 0.135 | 35 | 0.030 | 2.10 | 0.206 | 0.006 | 0.433 |
| 0.135 | 35 | 0.040 | 2.80 | 0.366 | 0.015 | 1.026 |
| 0.135 | 35 | 0.050 | 3.50 | 0.573 | 0.029 | 2.004 |
| 0.135 | 40 | 0.020 | 1.60 | 0.120 | 0.002 | 0.191 |
| 0.135 | 40 | 0.030 | 2.40 | 0.269 | 0.008 | 0.646 |
| 0.135 | 40 | 0.040 | 3.20 | 0.479 | 0.019 | 1.531 |
| 0.135 | 40 | 0.050 | 4.00 | 0.748 | 0.037 | 2.991 |
| 0.135 | 45 | 0.020 | 1.80 | 0.151 | 0.003 | 0.273 |
| 0.135 | 45 | 0.030 | 2.70 | 0.341 | 0.010 | 0.920 |
| 0.135 | 45 | 0.040 | 3.60 | 0.606 | 0.024 | 2.180 |

| Radius | Frequency | Stroke | Velocity | Drag Force | Work Done | Power Required |
|--------|-----------|--------|----------|------------|-----------|----------------|
| 0.135 | 45 | 0.050 | 4.50 | 0.946 | 0.047 | 4.259 |
| 0.135 | 50 | 0.020 | 2.00 | 0.187 | 0.004 | 0.374 |
| 0.135 | 50 | 0.030 | 3.00 | 0.421 | 0.013 | 1.262 |
| 0.135 | 50 | 0.040 | 4.00 | 0.748 | 0.030 | 2.991 |
| 0.135 | 50 | 0.050 | 5.00 | 1.168 | 0.058 | 5.842 |
| 0.135 | 55 | 0.020 | 2.20 | 0.226 | 0.005 | 0.498 |
| 0.135 | 55 | 0.030 | 3.30 | 0.509 | 0.015 | 1.680 |
| 0.135 | 55 | 0.040 | 4.40 | 0.905 | 0.036 | 3.981 |
| 0.135 | 55 | 0.050 | 5.50 | 1.414 | 0.071 | 7.776 |
| 0.135 | 60 | 0.020 | 2.40 | 0.269 | 0.005 | 0.646 |
| 0.135 | 60 | 0.030 | 3.60 | 0.606 | 0.018 | 2.180 |
| 0.135 | 60 | 0.040 | 4.80 | 1.077 | 0.043 | 5.169 |
| 0.135 | 60 | 0.050 | 6.00 | 1.682 | 0.084 | 10.095 |
| 0.140 | 15 | 0.020 | 0.60 | 0.018 | 0.000 | 0.011 |
| 0.140 | 15 | 0.030 | 0.90 | 0.041 | 0.001 | 0.037 |
| 0.140 | 15 | 0.040 | 1.20 | 0.072 | 0.003 | 0.087 |
| 0.140 | 15 | 0.050 | 1.50 | 0.113 | 0.006 | 0.170 |
| 0.140 | 20 | 0.020 | 0.80 | 0.032 | 0.001 | 0.026 |
| 0.140 | 20 | 0.030 | 1.20 | 0.072 | 0.002 | 0.087 |
| 0.140 | 20 | 0.040 | 1.60 | 0.129 | 0.005 | 0.206 |
| 0.140 | 20 | 0.050 | 2.00 | 0.201 | 0.010 | 0.402 |
| 0.140 | 25 | 0.020 | 1.00 | 0.050 | 0.001 | 0.050 |
| 0.140 | 25 | 0.030 | 1.50 | 0.113 | 0.003 | 0.170 |
| 0.140 | 25 | 0.040 | 2.00 | 0.201 | 0.008 | 0.402 |
| 0.140 | 25 | 0.050 | 2.50 | 0.314 | 0.016 | 0.785 |
| 0.140 | 30 | 0.020 | 1.20 | 0.072 | 0.001 | 0.087 |
| 0.140 | 30 | 0.030 | 1.80 | 0.163 | 0.005 | 0.293 |
| 0.140 | 30 | 0.040 | 2.40 | 0.290 | 0.012 | 0.695 |
| 0.140 | 30 | 0.050 | 3.00 | 0.452 | 0.023 | 1.357 |
| 0.140 | 35 | 0.020 | 1.40 | 0.099 | 0.002 | 0.138 |
| 0.140 | 35 | 0.030 | 2.10 | 0.222 | 0.007 | 0.465 |
| 0.140 | 35 | 0.040 | 2.80 | 0.394 | 0.016 | 1.103 |
| 0.140 | 35 | 0.050 | 3.50 | 0.616 | 0.031 | 2.155 |
| 0.140 | 40 | 0.020 | 1.60 | 0.129 | 0.003 | 0.206 |
| 0.140 | 40 | 0.030 | 2.40 | 0.290 | 0.009 | 0.695 |
| 0.140 | 40 | 0.040 | 3.20 | 0.515 | 0.021 | 1.647 |
| 0.140 | 40 | 0.050 | 4.00 | 0.804 | 0.040 | 3.217 |
| 0.140 | 45 | 0.020 | 1.80 | 0.163 | 0.003 | 0.293 |
| 0.140 | 45 | 0.030 | 2.70 | 0.366 | 0.011 | 0.989 |
| 0.140 | 45 | 0.040 | 3.60 | 0.651 | 0.026 | 2.345 |
| 0.140 | 45 | 0.050 | 4.50 | 1.018 | 0.051 | 4.580 |
| 0.140 | 50 | 0.020 | 2.00 | 0.201 | 0.004 | 0.402 |
| 0.140 | 50 | 0.030 | 3.00 | 0.452 | 0.014 | 1.357 |
| 0.140 | 50 | 0.040 | 4.00 | 0.804 | 0.032 | 3.217 |
| 0.140 | 50 | 0.050 | 5.00 | 1.257 | 0.063 | 6.283 |

| Radius | Frequency | Stroke | Velocity | Drag Force | Work Done | Power Required |
|--------|-----------|--------|----------|------------|-----------|----------------|
| 0.140 | 55 | 0.020 | 2.20 | 0.243 | 0.005 | 0.535 |
| 0.140 | 55 | 0.030 | 3.30 | 0.547 | 0.016 | 1.806 |
| 0.140 | 55 | 0.040 | 4.40 | 0.973 | 0.039 | 4.281 |
| 0.140 | 55 | 0.050 | 5.50 | 1.520 | 0.076 | 8.362 |
| 0.140 | 60 | 0.020 | 2.40 | 0.290 | 0.006 | 0.695 |
| 0.140 | 60 | 0.030 | 3.60 | 0.651 | 0.020 | 2.345 |
| 0.140 | 60 | 0.040 | 4.80 | 1.158 | 0.046 | 5.558 |
| 0.140 | 60 | 0.050 | 6.00 | 1.809 | 0.090 | 10.856 |
| 0.145 | 15 | 0.020 | 0.60 | 0.019 | 0.000 | 0.012 |
| 0.145 | 15 | 0.030 | 0.90 | 0.044 | 0.001 | 0.039 |
| 0.145 | 15 | 0.040 | 1.20 | 0.078 | 0.003 | 0.093 |
| 0.145 | 15 | 0.050 | 1.50 | 0.121 | 0.006 | 0.182 |
| 0.145 | 20 | 0.020 | 0.80 | 0.035 | 0.001 | 0.028 |
| 0.145 | 20 | 0.030 | 1.20 | 0.078 | 0.002 | 0.093 |
| 0.145 | 20 | 0.040 | 1.60 | 0.138 | 0.006 | 0.221 |
| 0.145 | 20 | 0.050 | 2.00 | 0.216 | 0.011 | 0.431 |
| 0.145 | 25 | 0.020 | 1.00 | 0.054 | 0.001 | 0.054 |
| 0.145 | 25 | 0.030 | 1.50 | 0.121 | 0.004 | 0.182 |
| 0.145 | 25 | 0.040 | 2.00 | 0.216 | 0.009 | 0.431 |
| 0.145 | 25 | 0.050 | 2.50 | 0.337 | 0.017 | 0.842 |
| 0.145 | 30 | 0.020 | 1.20 | 0.078 | 0.002 | 0.093 |
| 0.145 | 30 | 0.030 | 1.80 | 0.175 | 0.005 | 0.314 |
| 0.145 | 30 | 0.040 | 2.40 | 0.311 | 0.012 | 0.745 |
| 0.145 | 30 | 0.050 | 3.00 | 0.485 | 0.024 | 1.456 |
| 0.145 | 35 | 0.020 | 1.40 | 0.106 | 0.002 | 0.148 |
| 0.145 | 35 | 0.030 | 2.10 | 0.238 | 0.007 | 0.499 |
| 0.145 | 35 | 0.040 | 2.80 | 0.423 | 0.017 | 1.184 |
| 0.145 | 35 | 0.050 | 3.50 | 0.660 | 0.033 | 2.312 |
| 0.145 | 40 | 0.020 | 1.60 | 0.138 | 0.003 | 0.221 |
| 0.145 | 40 | 0.030 | 2.40 | 0.311 | 0.009 | 0.745 |
| 0.145 | 40 | 0.040 | 3.20 | 0.552 | 0.022 | 1.767 |
| 0.145 | 40 | 0.050 | 4.00 | 0.863 | 0.043 | 3.451 |
| 0.145 | 45 | 0.020 | 1.80 | 0.175 | 0.003 | 0.314 |
| 0.145 | 45 | 0.030 | 2.70 | 0.393 | 0.012 | 1.061 |
| 0.145 | 45 | 0.040 | 3.60 | 0.699 | 0.028 | 2.515 |
| 0.145 | 45 | 0.050 | 4.50 | 1.092 | 0.055 | 4.913 |
| 0.145 | 50 | 0.020 | 2.00 | 0.216 | 0.004 | 0.431 |
| 0.145 | 50 | 0.030 | 3.00 | 0.485 | 0.015 | 1.456 |
| 0.145 | 50 | 0.040 | 4.00 | 0.863 | 0.035 | 3.451 |
| 0.145 | 50 | 0.050 | 5.00 | 1.348 | 0.067 | 6.739 |
| 0.145 | 55 | 0.020 | 2.20 | 0.261 | 0.005 | 0.574 |
| 0.145 | 55 | 0.030 | 3.30 | 0.587 | 0.018 | 1.938 |
| 0.145 | 55 | 0.040 | 4.40 | 1.044 | 0.042 | 4.593 |
| 0.145 | 55 | 0.050 | 5.50 | 1.631 | 0.082 | 8.970 |
| 0.145 | 60 | 0.020 | 2.40 | 0.311 | 0.006 | 0.745 |

| Radius | Frequency | Stroke | Velocity | Drag Force | Work Done | Power Required |
|--------|-----------|--------|----------|------------|-----------|----------------|
| 0.145 | 60 | 0.030 | 3.60 | 0.699 | 0.021 | 2.515 |
| 0.145 | 60 | 0.040 | 4.80 | 1.242 | 0.050 | 5.963 |
| 0.145 | 60 | 0.050 | 6.00 | 1.941 | 0.097 | 11.646 |
| 0.150 | 15 | 0.020 | 0.60 | 0.021 | 0.000 | 0.012 |
| 0.150 | 15 | 0.030 | 0.90 | 0.047 | 0.001 | 0.042 |
| 0.150 | 15 | 0.040 | 1.20 | 0.083 | 0.003 | 0.100 |
| 0.150 | 15 | 0.050 | 1.50 | 0.130 | 0.006 | 0.195 |
| 0.150 | 20 | 0.020 | 0.80 | 0.037 | 0.001 | 0.030 |
| 0.150 | 20 | 0.030 | 1.20 | 0.083 | 0.002 | 0.100 |
| 0.150 | 20 | 0.040 | 1.60 | 0.148 | 0.006 | 0.236 |
| 0.150 | 20 | 0.050 | 2.00 | 0.231 | 0.012 | 0.462 |
| 0.150 | 25 | 0.020 | 1.00 | 0.058 | 0.001 | 0.058 |
| 0.150 | 25 | 0.030 | 1.50 | 0.130 | 0.004 | 0.195 |
| 0.150 | 25 | 0.040 | 2.00 | 0.231 | 0.009 | 0.462 |
| 0.150 | 25 | 0.050 | 2.50 | 0.361 | 0.018 | 0.902 |
| 0.150 | 30 | 0.020 | 1.20 | 0.083 | 0.002 | 0.100 |
| 0.150 | 30 | 0.030 | 1.80 | 0.187 | 0.006 | 0.336 |
| 0.150 | 30 | 0.040 | 2.40 | 0.332 | 0.013 | 0.798 |
| 0.150 | 30 | 0.050 | 3.00 | 0.519 | 0.026 | 1.558 |
| 0.150 | 35 | 0.020 | 1.40 | 0.113 | 0.002 | 0.158 |
| 0.150 | 35 | 0.030 | 2.10 | 0.254 | 0.008 | 0.534 |
| 0.150 | 35 | 0.040 | 2.80 | 0.452 | 0.018 | 1.267 |
| 0.150 | 35 | 0.050 | 3.50 | 0.707 | 0.035 | 2.474 |
| 0.150 | 40 | 0.020 | 1.60 | 0.148 | 0.003 | 0.236 |
| 0.150 | 40 | 0.030 | 2.40 | 0.332 | 0.010 | 0.798 |
| 0.150 | 40 | 0.040 | 3.20 | 0.591 | 0.024 | 1.891 |
| 0.150 | 40 | 0.050 | 4.00 | 0.923 | 0.046 | 3.693 |
| 0.150 | 45 | 0.020 | 1.80 | 0.187 | 0.004 | 0.336 |
| 0.150 | 45 | 0.030 | 2.70 | 0.421 | 0.013 | 1.136 |
| 0.150 | 45 | 0.040 | 3.60 | 0.748 | 0.030 | 2.692 |
| 0.150 | 45 | 0.050 | 4.50 | 1.168 | 0.058 | 5.258 |
| 0.150 | 50 | 0.020 | 2.00 | 0.231 | 0.005 | 0.462 |
| 0.150 | 50 | 0.030 | 3.00 | 0.519 | 0.016 | 1.558 |
| 0.150 | 50 | 0.040 | 4.00 | 0.923 | 0.037 | 3.693 |
| 0.150 | 50 | 0.050 | 5.00 | 1.442 | 0.072 | 7.212 |
| 0.150 | 55 | 0.020 | 2.20 | 0.279 | 0.006 | 0.614 |
| 0.150 | 55 | 0.030 | 3.30 | 0.628 | 0.019 | 2.073 |
| 0.150 | 55 | 0.040 | 4.40 | 1.117 | 0.045 | 4.915 |
| 0.150 | 55 | 0.050 | 5.50 | 1.745 | 0.087 | 9.599 |
| 0.150 | 60 | 0.020 | 2.40 | 0.332 | 0.007 | 0.798 |
| 0.150 | 60 | 0.030 | 3.60 | 0.748 | 0.022 | 2.692 |
| 0.150 | 60 | 0.040 | 4.80 | 1.329 | 0.053 | 6.381 |
| 0.150 | 60 | 0.050 | 6.00 | 2.077 | 0.104 | 12.463 |