

# ROS2 RIEGL-VZ Package API

## 1. Coordinate Systems

**SOCS** (Scanner's Own Coordinate System):

Angle data and range data are the base for calculation of the data in the Scanner's Own Coordinate System (SOCS).



Figure 1: SOCS (Scanner's Own Coordinate System)

**PRCS** (Project Coordinate System):

A number of scan positions and the data acquired therein make up a scan project. The center of the project's coordinate system (PRCS) coincides horizontally with the center of the first scan position. The axes of PRCS are strictly pointing to east (x-axis, red), north (y-axis, green) and up (z-axis, blue), respectively.

The SOP transforms SOCS into PRCS.



Figure 2: PRCS (Project Coordinate System)

**GLCS** (Global Coordinate System):

A global coordinate system like WGS84.

The POP transforms GLCS into PRCS

**VOCS** (Voxel Coordinate System):

Automatic registration does not estimate the SOP with every new scan position, but the SOPV pose, which does not transform to PRCS, but to another cartesian coordinate system, the so called VOCS (Voxel Coordinate System). A once determined SOPV pose stays unchanged. What changes is the VOP. The VOP pose is determined via compensation of a fixed block of registered scan positions against all further measurements. Further measurements are the scanners inclination, northing from internal magnitude sensor, which is fraught with great uncertainty, and GNSS position if available.

After first scan:  $VOP = eye(4)$

After each consecutive scan:  $VOP \neq eye(4)$

If the user is only interested in relative registration of scan positions to each other, the VOP and the POP can be ignored.

## 2. RIEGL Interfaces

### 2.1 Messages

**riegl\_vz\_interfaces/ScanPose:**

```
uint32 seq    # Scan position number within a project
geometry_msgs/PoseStamped pose
```

‘seq’ is the scan position number.

See PoseStamped definition: geometry\_msgs/PoseStamped

### 2.2 Services

**riegl\_vz\_interfaces/GetPointCloud:**

```
uint32 seq      # Scan position number within a project, starting with 1, 0 refers to last scan
---
sensor_msgs/PointCloud2 pointcloud
bool success    # indicate successful run of service
string message  # informational, e.g. for error messages
```

See PointCloud2 definition: sensor\_msgs/PointCloud2

‘seq’ is the scan position number, 0 implicitly refers to the last scan position, 1 is the first scan position.

The ‘frame\_id’ in the header is ‘riegl\_vz\_socs’.

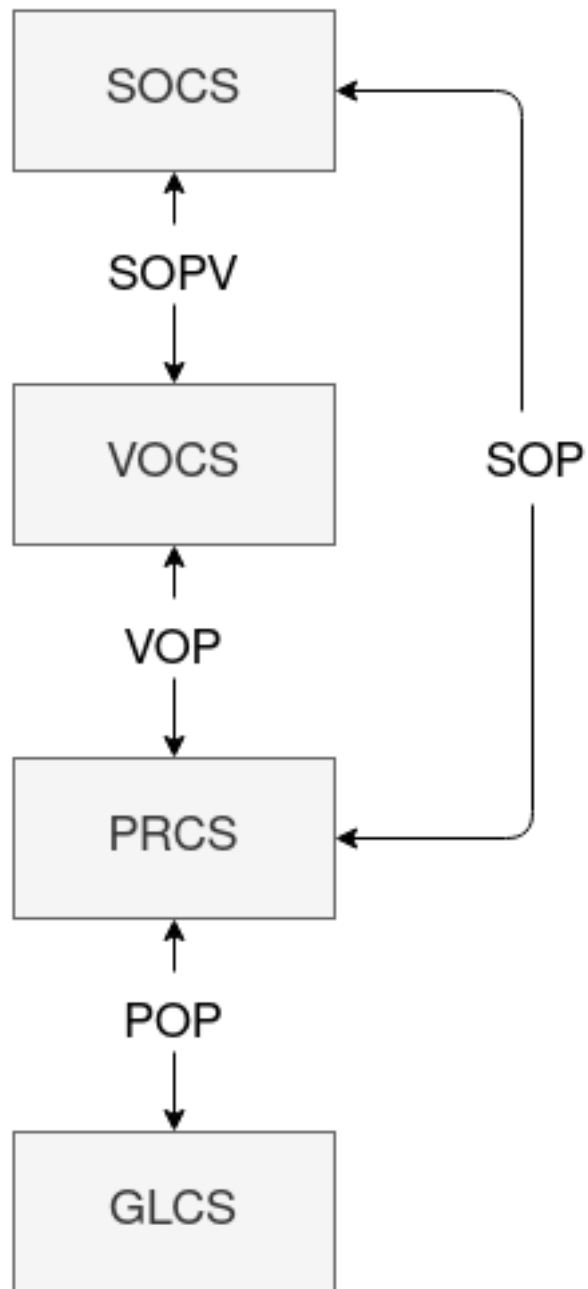


Figure 3: RIEGL Coordinate Systems

**riegl\_vz\_interfaces/GetScanPoses:**

```
---
string project           # Scan project name
ScanPose[] scanposes
geometry_msgs/PoseStamped vop # position and orientation of VOCS in PRCS
geometry_msgs/PoseStamped pop # position and orientation of PRCS in GLCS
bool success             # indicate successful run of service
string message           # informational, e.g. for error messages
```

The 'frame\_id' in the scanposes[n].header is 'riegl\_vz\_vocs'.

The 'frame\_id' in the vop.header is 'riegl\_vz\_prcs'.

The 'frame\_id' in the pop.header is the name of the global coordinate system (e.g. EPSG::4328)

**riegl\_vz\_interfaces/GetPose:**

```
---
geometry_msgs/PoseStamped pose
bool success # indicate successful run of service
string message # informational, e.g. for error messages
```

See PoseStamped definition: geometry\_msgs/PoseStamped

The 'frame\_id' in the pose.header is either 'riegl\_vz\_prcs' or 'riegl\_vz\_vocs'.

**riegl\_vz\_interfaces/SetPosition:**

```
geometry_msgs/PointStamped position
---
bool success # indicate successful run of service
string message # informational, e.g. for error messages
```

See PointStamped definition: geometry\_msgs/PoseStamped The 'frame\_id' in the position.header is the name of the global coordinate system (e.g. EPSG::4328)

### 3. Nodes

#### 3.1 rieg1\_vz

##### 3.1.1 Parameters

**~hostname** (string, default: "") :

The scanners hostname or IP address.

**~working\_dir** (string, default: "/tmp/ros\_riegl\_vz") :

The root working directory for runtime execution.

**~ssh\_user** (string, default: "user") :

The linux user name for SSH login on the scanner.

**~ssh\_password** (string, default: “user”) :

The linux user password for SSH login on the scanner.

**~project\_name** (integer, default: “”) :

The name of the project to be loaded or created.

**~storage\_media** (integer, default: 2) :

The active storage media for scan data recording (1: AUTO, 2: INTERNAL SSD, 3: USB).

**~scan\_pattern** (double[], default: {30.0,130.0,0.04,0.0,360.0,0.04})

Specifies the field of view (FOV) for scanning and the scan increments.

[0]: Line Start Angle

[1]: Line Stop Angle

[2]: Line Angle Increment

[3]: Frame Start Angle

[4]: Frame Stop Angle

[5]: Frame Angle Increment

**~meas\_program** (integer, default: 3) :

This is the laser scanner measurement program, which specifies the laser scanner frequency.

**~scan\_publish** (bool, default: “True”) :

Enable publishing of point cloud data on topic ‘pointcloud’ after scan acquisition has finished.

**~scan\_publish\_filter** (string, default: “”) :

Filter string for published point cloud data, e.g. “(riegl.xyz[2] > 5) && (riegl.reflectance > 35)”

**~scan\_publish\_lod** (integer, default: 0) :

Level of detail (LOD) for published point cloud. This is to reduce the number of measurements.

lod=0 : no reduction

lod=1 : reduce measurements by factor 2 ( $2^1$ )

lod=2 : reduce point cloud by factor 4 ( $2^2$ )

lod=3 : reduce point cloud by factor 8 ( $2^3$ )

...

**~scan\_register** (bool, default: “True”) :

Enable automatic scan position registration in current project after scan data acquisition has finished.

### 3.1.2 Published Topics

**pointcloud** (sensor\_msgs/PointCloud2) :

Point cloud with scan data from the laser scanner. Included are xyz cartesian coordinates in SOCS and reflectance in dB. Data will be published only if parameter ‘~scan\_publish’ is enabled.

**pose** (geometry\_msgs/PoseStamped):

Topic provides SOPV (Scan Position and Orientation in VOCS) of the currently registered scan position.

**diagnostics** (diagnostic\_msgs/DiagnosticArray.msg):

Riegl VZ status information, published once per second:

```
opstate      : operating state ("unavailable", "waiting", "scanning", "processing")
progress     : scan progress in percent
```

### 3.1.3 Services

**set\_project** (std\_srvs/Trigger) :

Load an existing project on the scanner with name from parameter ‘~project\_name’. If the project name is empty or the project can not be loaded, a new project will be created automatically.

Response:

success = True -> message: Project Name

**set\_position** (riegl\_vz\_interfaces/SetPosition) :

Set position of the scanner origin in a global coordinate system (GLCS) supported by RIEGL GeoSys Manager. The position must be set before the scan. This allows transformation of scans into a global coordinate system and furthermore the position is an initial guess for scan registration.

**scan** (std\_srvs/Trigger) :

Start a background task for laser scan data acquisition

The execution state will be published in ‘opstate’ field of ‘diagnostics’ topic. The node is locked until all background tasks have finished and the operating state is ‘waiting’ again.

If parameter ‘~scan\_publish’ is enabled, acquired data will be published on ‘pointcloud’ topic soon after scanning has finished.

The parameter ‘~scan\_register’ enables automatic scan position registration after scanning. The registration result is published on topic ‘pose’ or it can be requested by separate service calls (see ‘get\_sopv’, ‘get\_vop’, ‘get\_pop’ and ‘get\_scan\_poses’) after processing, if operating state is ‘waiting’ again.

Response:

success = True -> message: "success"

success = False -> message: "operation not available"

**get\_\_sopv** (riegl\_vz\_interfaces/GetPose) :

Request a single SOPV of the previously registered scan position in actual project.

Response:

success = True -> message: "success", pose: Last SOPV Pose

success = False -> message: "data not available"

**get\_\_vop** (riegl\_vz\_interfaces/GetPose) :

Get current VOP, which is a single position and orientation of the VOXEL coordinate system (VOCS) origin based on the project coordinate system (PRCS).

Response:

success = True -> message: "success", pose: VOP Pose

success = False -> message: "data not available"

**get\_\_pop** (riegl\_vz\_interfaces/GetPose) :

Get current POP, which is a single position and orientation of the project coordinate system (PRCS) origin based on the global coordinate system (GLCS).

Response:

success = True -> message: "success", pose: POP Pose

success = False -> message: "data not available"

**get\_\_scan\_poses** (riegl\_vz\_interfaces/GetScanPoses) :

Request all SOPVs of previously registered scan positions in actual project.

Response:

success = True -> message: "success", project: Project Name, scanposes: All

Scan Poses, vop: VOP Pose, pop: POP Pose success = False -> message: "data not available"

**get\_\_pointcloud** (riegl\_vz\_interfaces/GetPointCloud) :

Get point cloud of a previously acquired scan position in actual project.

Response:

success = True -> message: "success", pointcloud: Scan Data

success = False -> message: "data not available"

**stop** (std\_srvs/Trigger) :

Stop laser scan data acquisition and registration background tasks.

Response:

success = True -> message: "success"

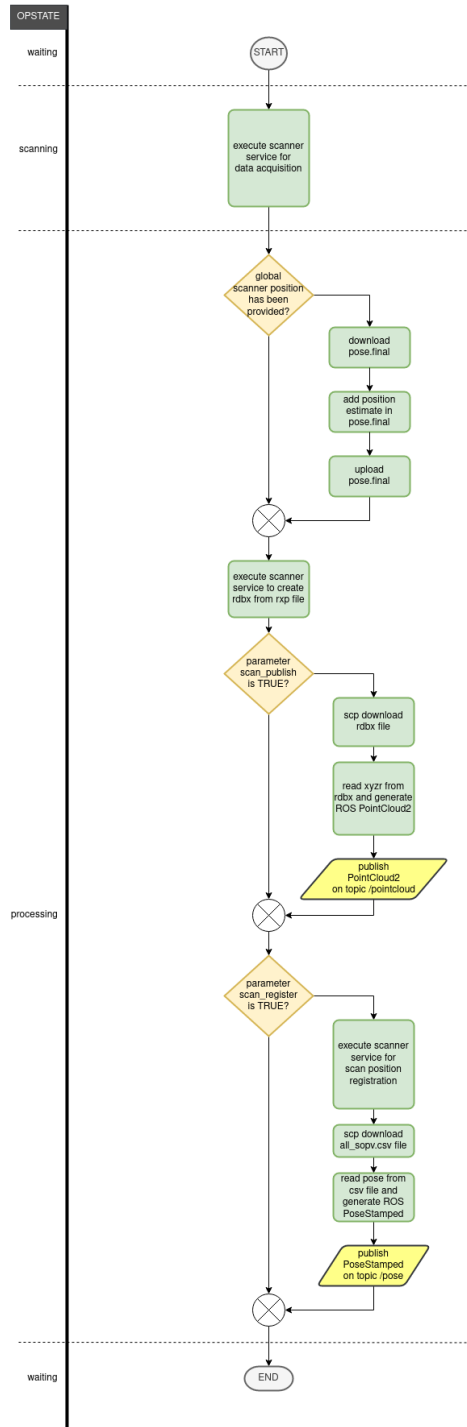


Figure 4: ROS Scan Service



**shutdown** (std\_srvs/Trigger) :

Stop data acquisition and power down the laser scanner device.

Response:

success = True -> message: "success"

### 3.1.4 Extensions

Not available in first implementation but for further extension:

- Providing covariance of pose (see sensor\_msgs/PoseWithCovarianceStamped)
- More diagnostic status information, e.g. memory usage, scanner errors
- Additional parameters:

**~capture\_images** (bool, default: False) : Enable capturing of camera images.

- Additional services:

**get\_voxel** (riegl\_vz\_interfaces/GetPointcloud) : Get voxel data of a previous scan data acquisition.

**get\_image** (riegl\_vz\_interfaces/GetImage) : Get camera image for scan position.

**get\_projectmap** (riegl\_vz\_interfaces/GetImage) : Get the project map overview image.