Component List

1/4W Fixed Resistors		
R1,R6,R11,R16,R29	1K	
R2,R7,R9,R14,R17, R20, R2	47K	
R3,R27,R28	270	
R4,R8,R10,R15,R22	10K	
R5,R18	100K	
R12	1M	
R13	33K	
R19	4.7K	
R23,R25,R26,R21	10	
W1,W2,W3	10K	
Beads, Inductors, Transformers		
T1	7X7-10.7MHz	
Z1,Z2	Inline Magnetic Beads	
Porcelain Chip Capacitors		
C1,C16,C21,C22,C23,C24, C25,C26,C27,C28	0.1uF(104)	
C2,C5,C6,C13,C17	1000pF(102)	
C3,C4	2pF	
C7,C8,C9	43p	
C10,C14	27pF	
C11	10pF	
C12,C15,C18,C19,C20	0.01uF(103)	
C29	0.47uF(474)	
Electrolytic Capacitor		
CP1,CP2,CP5,CP8	100uF /25V	
CP3,CP4,CP7,CP9,CP10,CP1	10uF /25V	

CP6	10uF	
Transistors		
D1	BB910	Insert the board in the direction of the silkscreen
D2,D4	AS119	
D3	1N4001	
Q1,Q2	2SC3355	
IC		
U1	78L08（TO92）	
U2	NE602（DIP8）	Mating IC Socket
U3	MC1350（DIP8）	Mating IC Socket
U4,U5	LM358（DIP8）	Mating IC Socket
U6	LM386（DIP8）	Mating IC Socket
Ceramic Filters		
Y1	10.7MHz	Please note the pin orientation: the printed word on the surface of the device faces the reader, and pin 1 is on the right side.
Other components		
J1	BNC (Q9) Socket	
J2	Electric Socket	
J3	3.5mm stereo socket	SPK (plug in headset)
PCB circuit board × 1 piece		

R29 / 1K

R29 in LM386 3 between foot and ground,
Can improve the response speed of noise,
Please welding on the back of the PCB.

CT has been welded in T1 weeks inside, no need to install.

Circuit Board Assembly Diagram

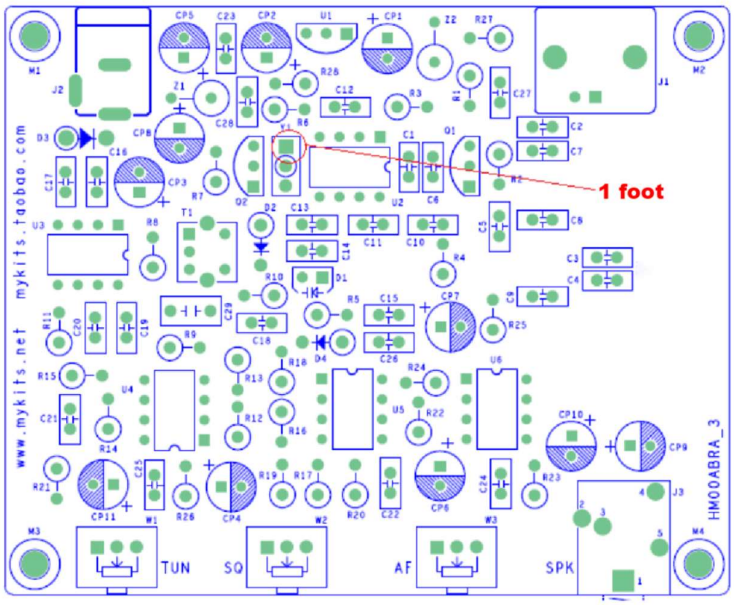
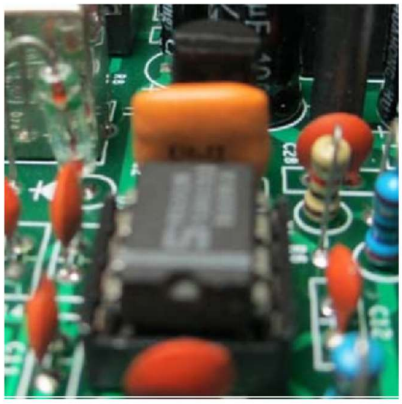
Please note that Y1 1 foot，can not install error!