


Minimal NFC and LED Circuit

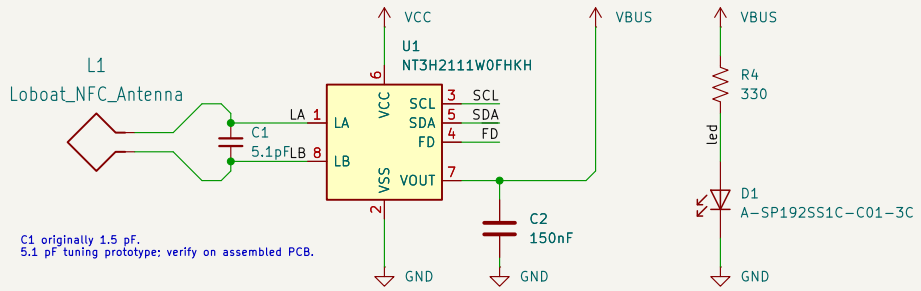

Disabled I2C TestPoints



Tag-Connect I2C for Hika FTDI

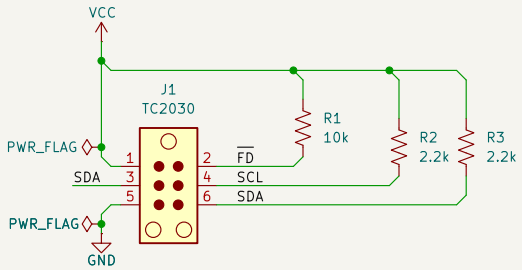

Wired for the following devices:
* Tag-Connect TC2030 3.3V FT232H No-legs
* Tag-Connect TC2030 3.3V FT232H Legs

Tag-Connect pin	FT232H/Hika signal and function	Target
1	+3V3	VCC
2	AD3 / CTS / TMS – UART clear-to-send input	$\overline{FD}$
3	AD1 / RXD / TDI – UART receive input	SDA OUT
4	AD0 / TXD / TCLK – UART transmit output	SCL
5	GND	GND
6	AD2 / RTS / TDO – UART request-to-send output	SDA IN

INFO1

CONTACT INFO

Your Name

Your Company

Your Role

you@example.com

+1 202-555-0123

example.com

LOGO1

ART1

SIGN1

CJH '26

Author: Craig Hesling

Sheet: /

File: business-card.kicad_sch

Title: Business Card

Size: A	Date: 2026-10-05	**Rev: 1**
KiCad E.D.A. 10.0.6		Id: 1/1