


## Minimal NFC and LED Circuit

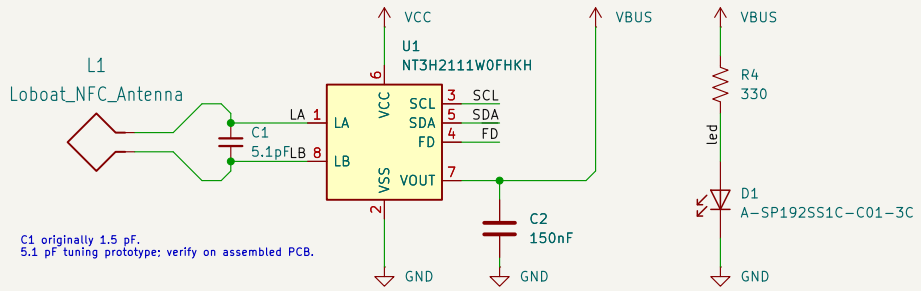


## Disabled I2C TestPoints




## Tag-Connect I2C for Hika FTDI

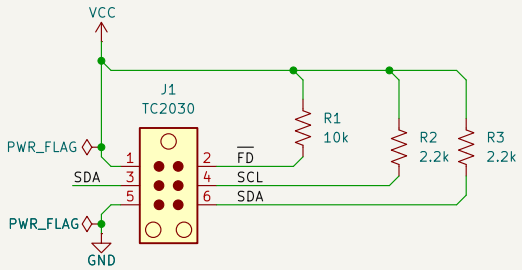


Wired for the following devices:
* Tag-Connect TC2030 3.3V FT232H No-legs
* Tag-Connect TC2030 3.3V FT232H Legs

| Tag-Connect pin | FT232H/Hika signal and function | Target |
|---|---|---|
| 1 | +3V3 | VCC |
| 2 | AD3 / CTS / TMS – UART clear-to-send input | $\overline{FD}$ |
| 3 | AD1 / RXD / TDI – UART receive input | SDA OUT |
| 4 | AD0 / TXD / TCLK – UART transmit output | SCL |
| 5 | GND | GND |
| 6 | AD2 / RTS / TDO – UART request-to-send output | SDA IN |

INFO1


CONTACT INFO

Your Name

Your Company

Your Role

you@example.com

+1 202-555-0123

example.com


LOGO1

ART1

SIGN1

CJH '26

Author: Craig Hesling

Sheet: /

File: business-card.kicad_sch

**Title: Business Card**

| Size: A | Date: 2026-10-05 | **Rev: 1** |
|---|---|---|
| KiCad E.D.A. 10.0.6 | | Id: 1/1 |