



8.1.1

BC182B

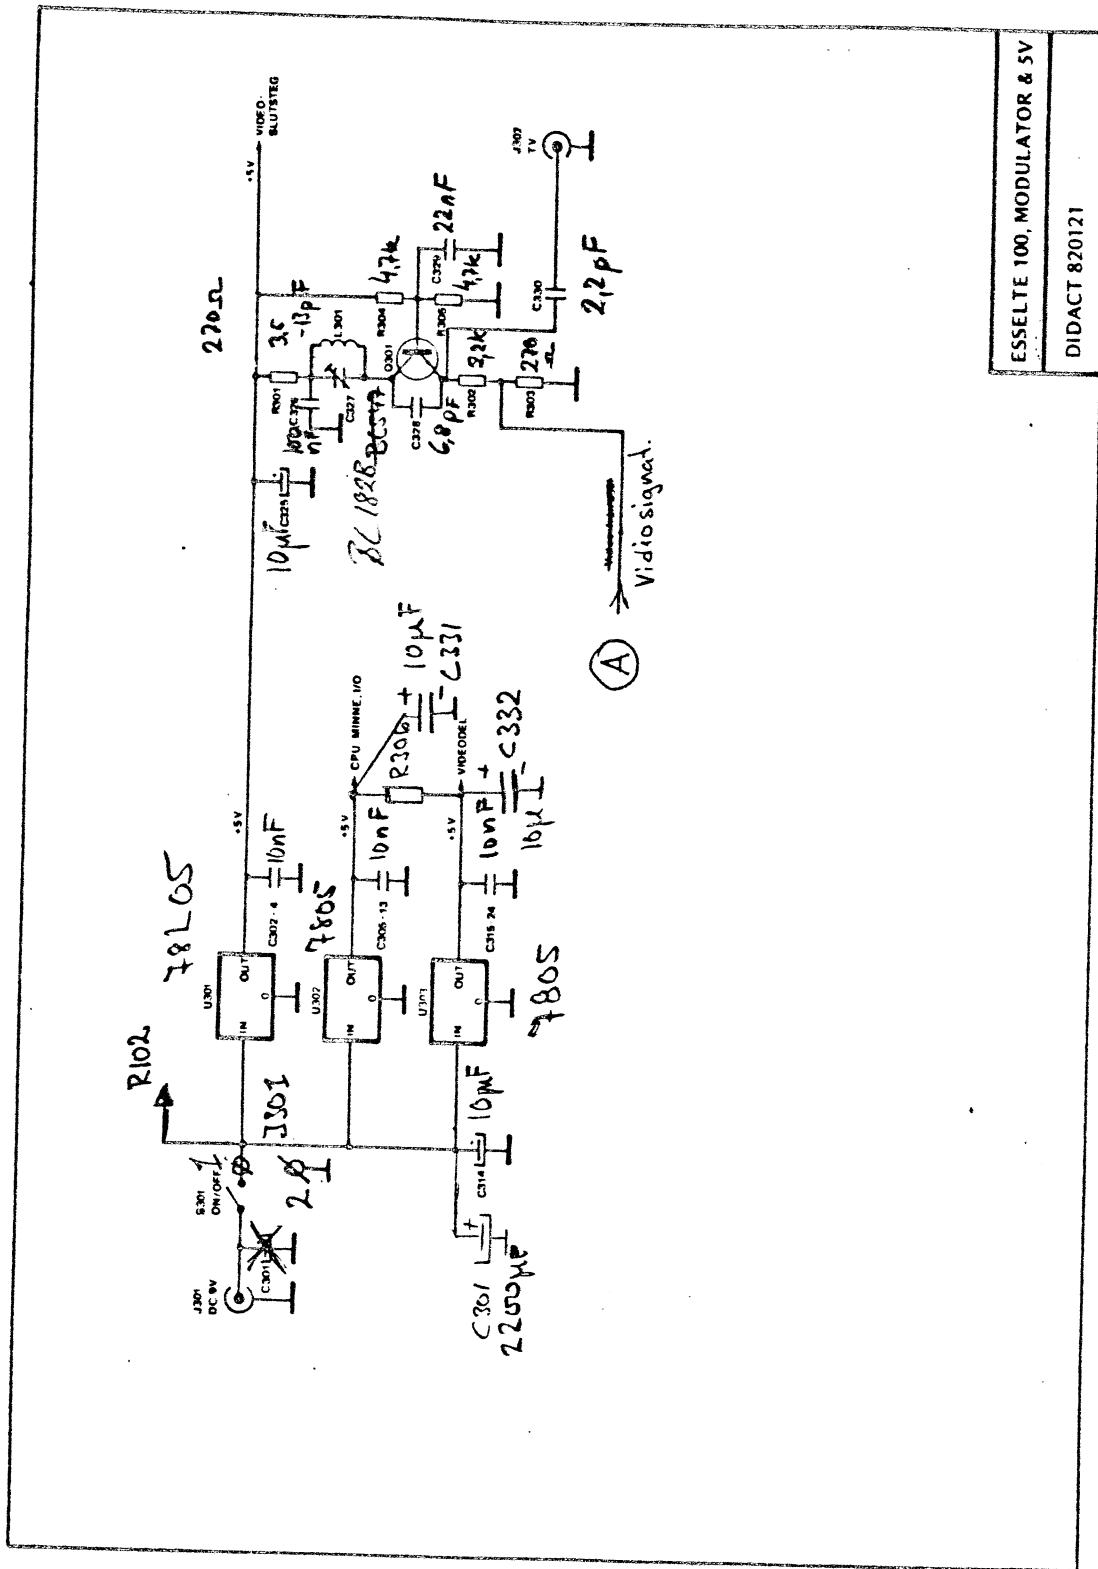

ESSELTE 100, MODULATOR & 5V


DIDACT 820121

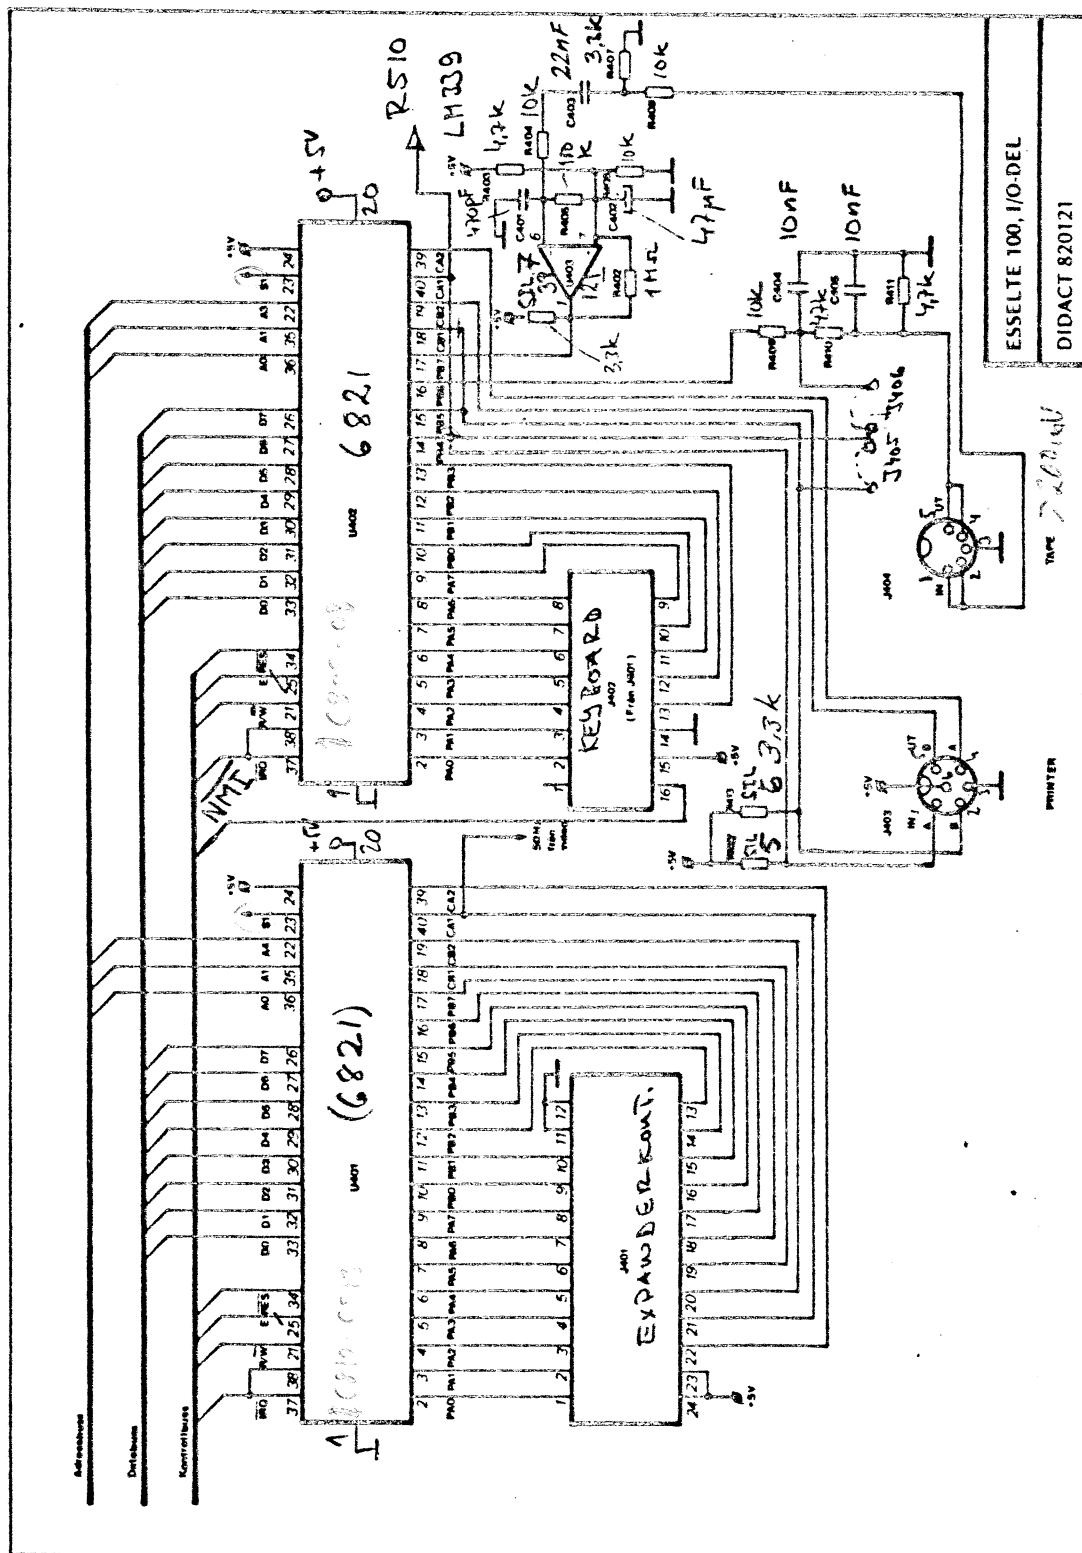



8000-9000

Data buses, Address bus

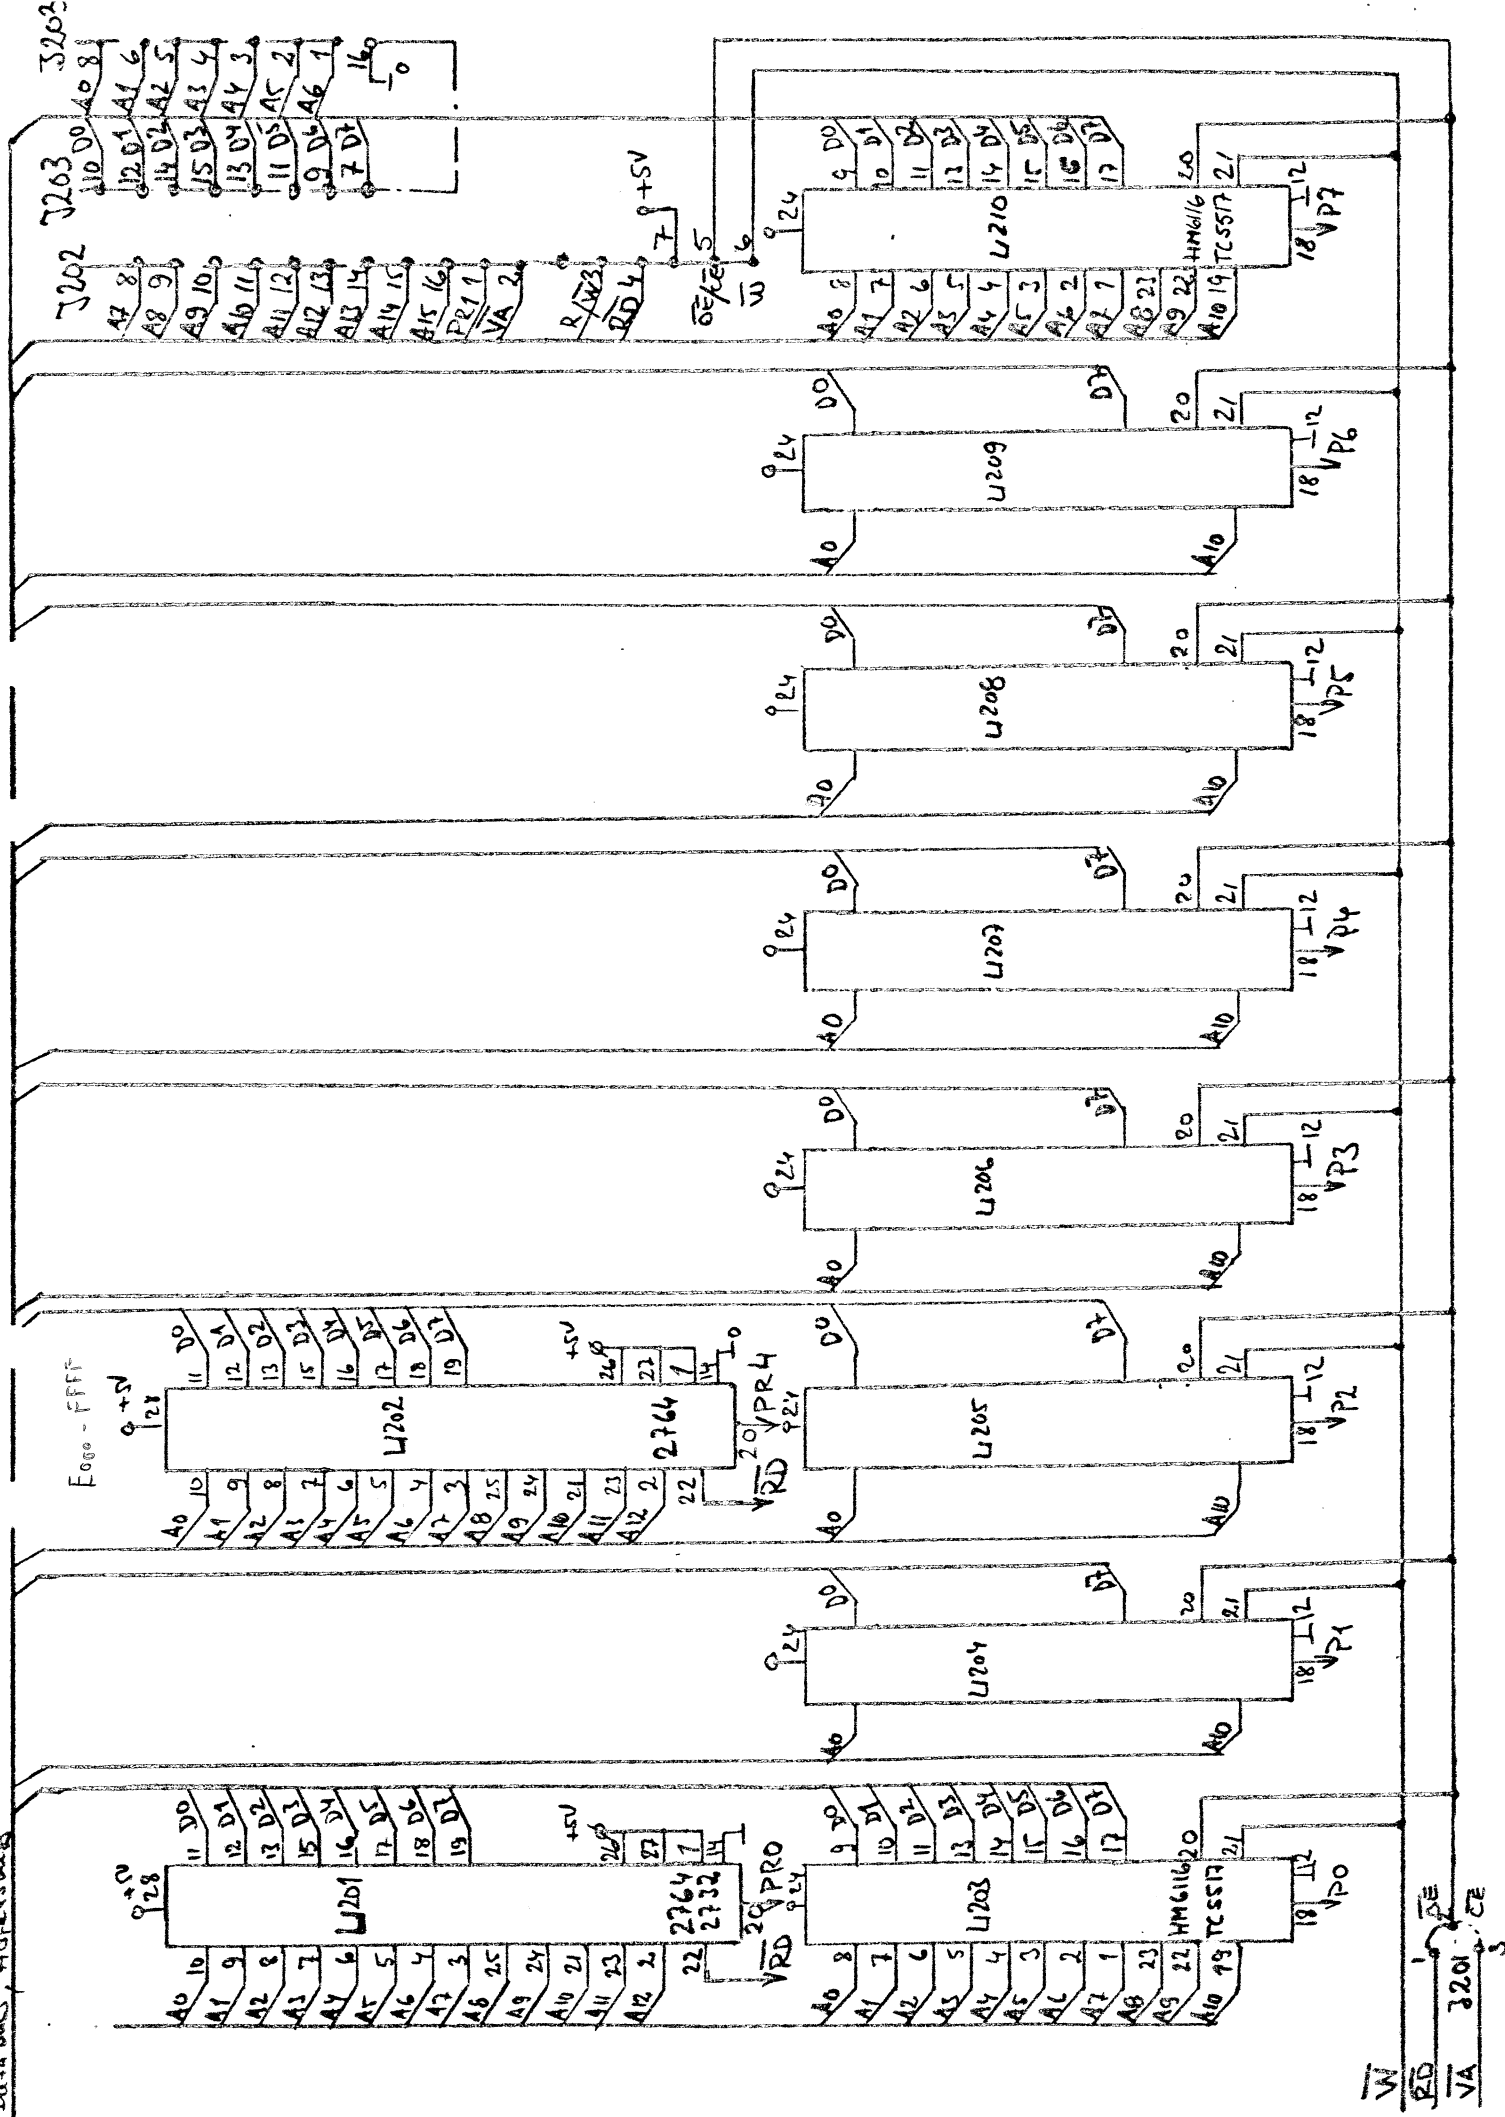

KOMPONENTE LISTA ESSELTE 100. CPU.

BETECKN.	TYP	AWT.	AWM.
U101	MC 6802	1	
U102, U103	SN74LS138	2	
U104	SN74LS08	1	
U106, U512	SN74LS00	2	
U201	EPROM 2732 (2764)	1	
U202	... 2764	1	
U203 - U210, U505	RAM HM6116P all. TC5517	9	
U301	MC78L05	1	
U302, U303	MC7805	2	
U401	MC6821 Option	(1)	
U402	MC6821	1	
U403	LM339N	1	
U501, 502, 503	SN74LS157	3	
U504	SN74LS245	1	
U506	EPROM 2716	1	
U507	SN74LS165	1	
U508, U510	SN74LS393	2	
U509	SN74LS93	1	
U511	SN7403	1	
U513	SN74LS132	1	
U514	SN74LS04	1	
U515	SN74LS10	1	

Bauteile:

R101

R102, 104, 404, 406, 408

R103, 502, 507, 512

R301, 303, 508

R302

R304, 305, 403, 411

R402

R405

R407

R409, 506, 516

R410

R501

R503

R504

R505, 513

R508

R514

R515

SIL

J302

J501

J404

J403

J402

J401

U303, U302

MÖNSTER KART

Typ

56k Ω 0,25W

10k Ω

1k.

270 Ω

2,2k

4,7k

1M Ω

100k

3,3k

10k

47k

10 Ω

Trim. 2k Ω .

150 Ω

27 Ω

Trim 200 Ω

82 Ω

7x 3,3k Ω

TU - KONTAKT

VIDEO - KONTAKT

TAPE - - -

PRINTER - - -

IC-SOCKEL 16 Pin

- - - 24 Pin

KYL FLÄNS TB-220

CPU 100

Anz.

1.

1

1

1

(1)

1

1

1

1

1

1

1

1

1

1

1

1

2

1

Anz.

5

BEZEICHN.

Typ

Ans.

HW.M.

Q 301, Q 501

D 101

Kristall X 101

BC 547 B

Z-Diod 3,3V 5% 0,4W

4 MHz HC-18

2

1

1

C 101, 102

C 301

C 302-304

C 305-313

C 315-324, 333-347

C 502

C 503, C 326

C 501

C 404, 405

C 401

C 328

C 329, 403

C 327

C 330

C 402

C 314, 331, 332, 325

27 pF keramisch

2200 μ F/16V ellyt.

10 nF keram. auk.

10 nF - v -

10 nF Keram. auk.

68 pF keram.

100 nF keram.

220 pF keram.

10 nF keram.

470 pF keram.

6,8 pF keram.

22 nF keram.

3,5 - 13 pF trim

2,2 pF

47 μ F/16V ellyt.

10 μ F/16V - v -

2

1

3

9

10 + 15

1

2

1

2

1

1

2

1

1

1

4